


A.3 SAR Measurement Data

A.3.1 Left Head

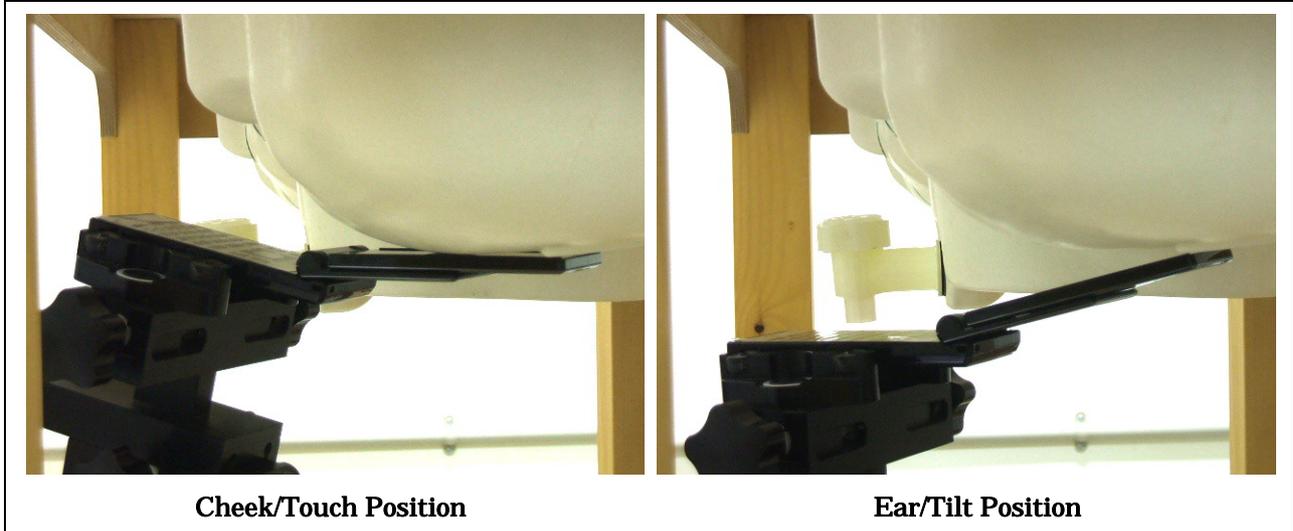


GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)							Date : August 19, 2008
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.024		0.101	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.008		0.069	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

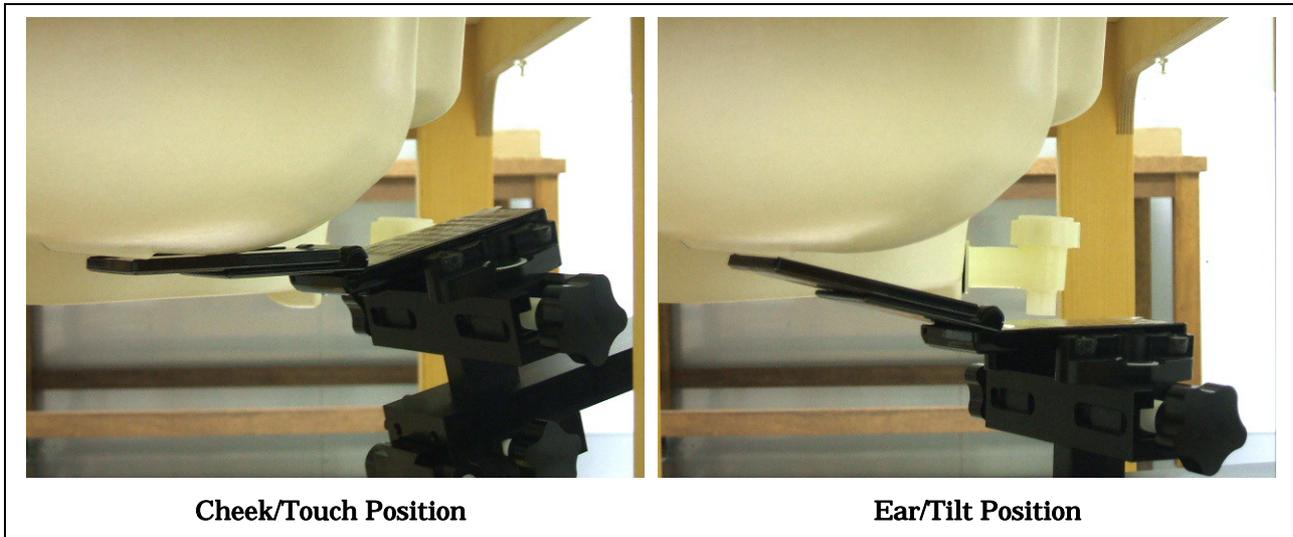


Cheek/Touch Position **Ear/Tilt Position**

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)					Date : August 19, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	28.70	-0.085	1.6	0.137	22.0
	0661	1880.00	28.68	-0.039		0.135	22.0
	0810	1909.80	28.73	-0.023		0.141	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	28.68	-0.071		0.062	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

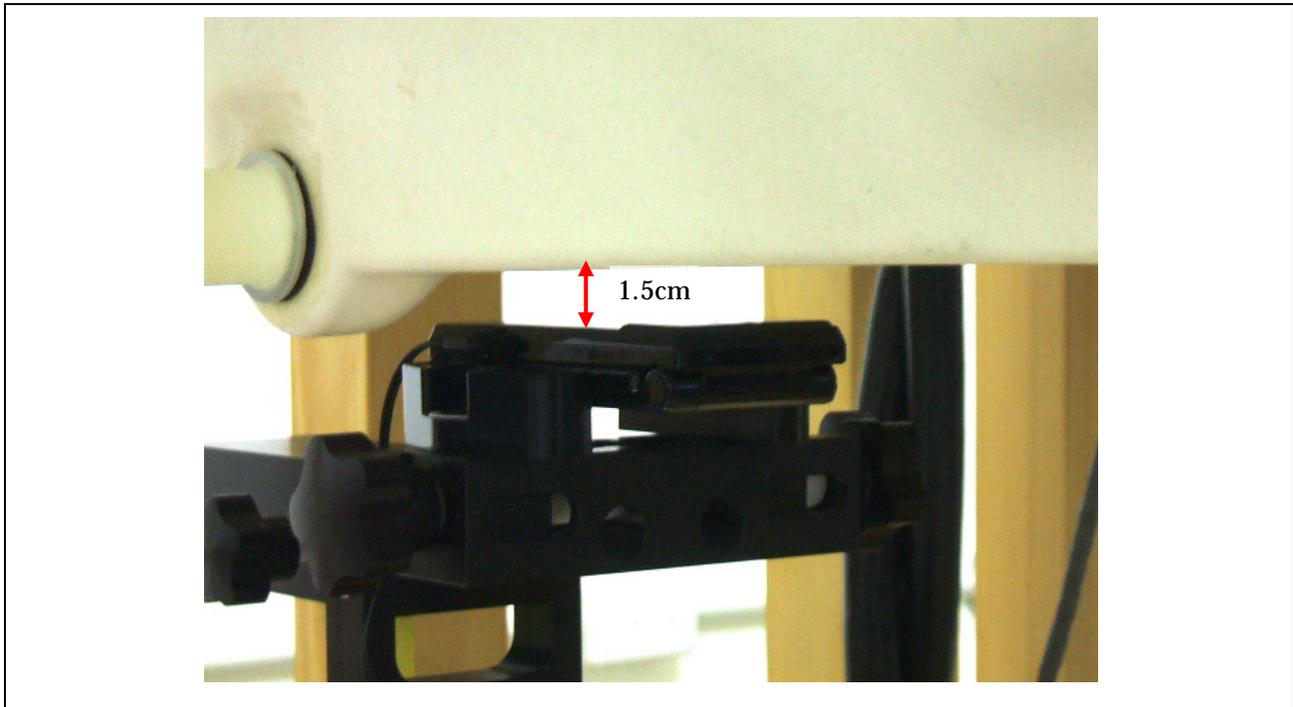

GSM 1900 (Duty Cycle: 12.5 %, Crest Factor: 8)							Date : August 20, 2008	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]	
	Channel	MHz						
1.5 cm	0512	1850.20	--	--	1.6	**	--	
	0661	1880.00	28.68	-0.048		0.182	22.0	
	0810	1909.80	--	--		**	--	
GSM 1900 GSM+GPRS (Duty Cycle: 25.0 %, Crest Factor: 4)								
1.5 cm	0512	1850.20	28.61	-0.051	1.6	0.411	22.0	
	0661	1880.00	28.57	-0.055		0.334	22.0	
	0810	1909.80	28.62	-0.020		0.290	22.0	
GSM 1900 GSM+EGPRS (Duty Cycle: 25.0 %, Crest Factor: 4)								
1.5 cm	0512	1850.20	--	--	1.6	**	--	
	0661	1880.00	24.62	-0.013		0.135	22.0	
	0810	1909.80	--	--		**	--	
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.								
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.								
5. Please refer to attachment for the result presentation in plot format.								