



RADIO TEST REPORT

Test Report No. : 29AE0094-HO

Applicant : Sharp Corporation, Communication Systems Group.
Type of Equipment : Cellular Phone
Model No. : WX-T923
FCC ID : APYHRO00081
Test regulation : FCC Part 15 Subpart C 2008
Section 15.207, Section 15.247
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: August 28 and 29, 2008

Tested by:


Kazuya Yoshioka
EMC Services


Takumi Shimada
EMC Services

Approved by :


Mitsuru Fujimura
Assistant Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.htm>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (09.01.08)

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Conducted Emission	10
SECTION 6: Spurious Emission.....	11
SECTION 7: Bandwidth.....	12
SECTION 8: Maximum Peak Output Power	13
SECTION 9: Carrier Frequency Separation.....	13
SECTION 10: Number of Hopping Frequency	14
SECTION 11: Dwell time	14
APPENDIX 1: Photographs of test setup.....	15
Conducted Emission	15
Spurious Emission (Radiated)	16
Worst Case Position (Horizontal: Y-axis/ Vertical:Z-axis).....	17
APPENDIX 2: Data of EMI test	18
Conducted Emission	18
Carrier Frequency Separation	22
20dB Bandwidth.....	24
Number of Hopping Frequency.....	26
Dwell time	28
Maximum Peak Output Power	32
Radiated Spurious Emission (below 1GHz)	33
Radiated Spurious Emission (above 1GHz)	37
Conducted Spurious Emission	42
99% Occupied Bandwidth	47
APPENDIX 3:Test instruments	48

SECTION 1: Customer information

Company Name : Sharp Corporation, Communication Systems Group.
Address : 2-13-1 Iida Hachihonmatsu, Higashihiroshima-City, Hiroshima, 739-0192,
Japan
Telephone Number : +81-82-420-1837
Facsimile Number : +81-82-420-1654
Contact Person : Tetsuya Maekawa

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153259/0 (Antenna Terminal conducted tests)
004401/11/153258/2 (Conducted Emission and Radiated Emission tests)
Rating : AC 120V/60Hz, DC4.0V
Receipt Date of Sample : August 28, 2008
Country of Mass-production : Japan
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model No: WX-T923 (referred to as the EUT in this report) is the Cellular Phone.

Clock frequency(ies) in the system : 26MHz
[Bluetooth (Ver. 2.0 without EDR function)]
Equipment Type : Transceiver
Frequency of Operation : 2402-2480MHz
Bandwidth & Channel Spacing : 1MHz & 1MHz / CH
Modulation : FHSS
Power Supply (inner) : DC 2.75V
Antenna Type : Internal Antenna
Antenna Gain : 0dBi
Operating temperature range : -10 to +55 deg. C.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C: 2008, final revised on May 19, 2008

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

FCC 15.31 (e)

This EUT provides stable voltage(DC2.75V) constantly to RF Module regardless of input voltage and Radiated Emission test was performed with the New Battery. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst Margin	Results			
1	Conducted emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements	FCC: Section 15.207	-	N/A	[Tx] QP 16.6dB, 1.74400MHz, N AV 25.0dB, 1.74400MHz, N [Rx] QP 31.6dB, 0.24970MHz, L AV 40.1dB, 0.27550MHz, N	Complied			
		IC: RSS-Gen 7.2.2	IC: RSS-Gen 7.2.2							
2	Carrier Frequency Separation	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)	Conducted	N/A	See data.	Complied			
		IC: -	IC: RSS-210 A8.1 (b)							
3	20dB Bandwidth	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)	Conducted	N/A		See data.	Complied		
		IC: -	IC: RSS-210 A8.1 (a)							
4	Number of Hopping Frequency	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)(iii)	Conducted	N/A			See data.	Complied	
		IC: -	IC: RSS-210 A8.1 (d)							
5	Dwell time	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(a)(1)(iii)	Conducted	N/A				See data.	Complied
		IC: -	IC: RSS-210 A8.1 (d)							
6	Maximum Peak Output Power	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(b)(1)	Conducted	N/A	See data.				Complied
		IC: RSS-Gen 4.8	IC: RSS-210 A8.4 (2)							
7	Band Edge Compliance	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(d)	Conducted	N/A		See data.			Complied
		IC: -	IC: RSS-210 A8.5							
8	Spurious Emission	FCC: FCC Public Notice DA 00-705	FCC: Section 15.247(d)	Conducted/ Radiated	N/A			See data.		Complied
		IC: RSS-Gen 4.9 RSS-Gen 4.10	IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3							

Note: UL Japan, Inc.'s EMI Work Procedures No. QPM05 and QPM15.

*These tests were performed without any deviations from test procedure except for additions or exclusions.

* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.3 Addition to standards

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	Conducted	N/A	N/A	N/A

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission	Radiated emission (10m*)			Radiated emission (3m*)			Radiated emission (3m*)	
	150kHz-30MHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz	18GHz-40GHz
No.1 semi-anechoic chamber (±)	3.7dB	3.1dB	4.4dB	4.2dB	3.2dB	3.8dB	3.9dB	5.9dB	6.1dB
No.2 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.4dB	4.0dB	5.9dB	6.1dB
No.3 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.6dB	4.0dB	5.9dB	6.1dB
No.4 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	3.9dB	3.9dB	5.9dB	6.1dB

*10m/3m = Measurement distance

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty for this test is 3.0dB.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Test instruments and Data of EMI

Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test	Mode	Tested frequency
Conducted Emission	Bluetooth(BT), Transmitting (Tx), Payload: PRBS9 -DH5	2402MHz 2441MHz 2480MHz
	Bluetooth(BT), Receiving (Rx)	2441MHz
Carrier Frequency Separation	Bluetooth(BT), Transmitting (Tx) (Hopping ON)/Inquiry, Payload: PRBS9 -DH5	2402MHz 2441MHz 2480MHz
20dB Bandwidth	Bluetooth(BT), Transmitting (Tx) (Hopping Off)/Inquiry, Payload: PRBS9 -DH5	2402MHz 2441MHz 2480MHz
Number of Hopping Frequency	Bluetooth(BT), Transmitting (Tx) (Hopping ON)/Inquiry, Payload: PRBS9 -DH5	-
Dwell time	Bluetooth(BT), Transmitting (Tx) (Hopping ON)/Inquiry, Payload: PRBS9 -DH1 -DH3 -DH5	-
Maximum Peak Output Power	Bluetooth(BT), Transmitting (Tx) (Hopping Off)/Inquiry, Payload: PRBS9 -DH5	2402MHz 2441MHz 2480MHz
Spurious Emission (Conducted/Radiated)	Bluetooth(BT), Transmitting (Tx), Payload: PRBS9 -DH5	2402MHz 2441MHz 2480MHz
	Bluetooth(BT), Receiving (Rx)	2441MHz
Band Edge Compliance (Conducted)	Bluetooth(BT), Transmitting (Tx), (Hopping ON)/(Hopping Off) Payload: PRBS9 -DH5	2402MHz 2480MHz
99% Occupied Bandwidth	Bluetooth(BT), Transmitting (Tx), (Hopping ON)/(Hopping Off)/Inquiry Payload: PRBS9 -DH5	2402MHz 2441MHz 2480MHz

*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload (except Dwell time test)

Remarks: Test was not performed at AFH mode, because the decrease of number of channel (min: 20ch) at AFH mode does not influence on the output power and bandwidth of the EUT.
However, the limit level 125mW of AFH mode was used for the test.

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

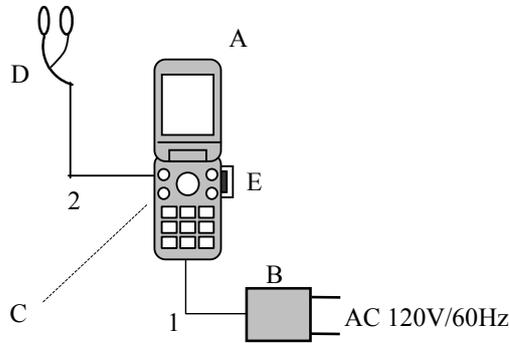

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Cellular Phone	WX-T923	004401/11/153259/0 *1) 004401/11/153258/2 *2)	SHARP	EUT
B	AC Charger	ZTDAA1	QEA	KYUSHU MITSUMI	EUT
C	Rechargeable Lithium-ion Battery	XN-1BT93	RHA	SANYO	-
D	Stereo Handsfree	RPHOHA018AF	01	HOSIDEN	-
E	microSD Memory Card	SDSDQ-128	01	SanDisk	-

*1) Used for Antenna Terminal conducted tests

*2) Used for Conducted Emission and Radiated Emission tests

List of cables used

No.	Name	Length (m)	Shield	
			Cable	Connector
1	AC Charger Cable	1.5	Unshielded	Unshielded
2	Stereo Handsfree Cable	1.7	Unshielded	Unshielded

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

AC cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber or a Measurement Room.

The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

Detector : quasi-peak and average detector (IF BW 9 kHz)
Measurement range : 0.15-30MHz
Test data : APPENDIX 2
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Spurious Emission

[Conducted]

Test Procedure

The Out of Band Emission was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

[Radiated]

Test Procedure

EUT was placed on urethane platform of nominal size, 0.5m by 1.0m, raised 80cm above the conducting ground plane.
The Radiated Electric Field Strength intensity has been measured in a Semi Anechoic Chamber with a ground plane and at a distance of 3m(Below 10GHz) and 1m(above 10GHz).

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

The result also satisfied with the general limits specified in section FCC 15.209(a) / RSS-210 2.7 (IC).

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
Detector	QP: BW 120kHz	PK: RBW:1MHz/VBW: 1MHz
IF Bandwidth		AV: RBW:1MHz/VBW:10Hz or RBW:1MHz/VBW:270Hz *1)

*1) Used for the band edge of the carrier and the harmonics that can be measured. The VBW is based on the inverse of the duty cycle (see page 41).

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Test data : APPENDIX 2
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 7: Bandwidth

20dB Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: 3MHz
- RBW: 30kHz
- VBW: 100kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

99% Occupied Bandwidth

Test Procedure

The bandwidth was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: Enough width to display 20dB Bandwidth
- RBW: 1 to 3% of Span
- VBW: Three times of RBW
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Maximum Peak Output Power

Test Procedure

The Maximum Peak Output Power was measured with a power meter (tested bandwidth: 50MHz) connected to the antenna port.

Test data : APPENDIX 2
Test result : Pass

SECTION 9: Carrier Frequency Separation

Test Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna port. The following spectrum analyzer setting was used:

- Span: 3MHz and 5MHz
- RBW: 100kHz
- VBW: 300kHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 10: Number of Hopping Frequency

Test Procedure

The Number of Hopping Frequency was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: 30MHz
- RBW: 300kHz
- VBW: 1MHz
- Sweep: Auto
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

SECTION 11: Dwell time

Test Procedure

The Dwell time was measured with a spectrum analyzer connected to the antenna port.
The following spectrum analyzer setting was used:

- Span: Zero Span
- RBW: 1MHz
- VBW: 3MHz
- Sweep: as necessary to capture the entire dwell time per hopping channel
- Detector: Peak
- Trace: Max Hold

Test data : APPENDIX 2
Test result : Pass

APPENDIX 1: Photographs of test setup

Conducted Emission

This page has been submitted for a separate exhibit.

Spurious Emission (Radiated)

This page has been submitted for a separate exhibit.

Worst Case Position (Horizontal: Y-axis/ Vertical:Z-axis)

This page has been submitted for a separate exhibit.

APPENDIX 2: Data of EMI test

Conducted Emission
Tx, Ch:Low (DH5)


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/08/28

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153258/2
Report No. : 29AE0094-HO
Power : DC 4.0V (AC Charger 120V / 60Hz)
Temp./Humi. : 22deg.C / 60%
Engineer : Kazuya Yoshioka

Mode / Remarks : Transmitting 2402MHz

LIMIT : FCC15.207 QP
FCC15.207 AV

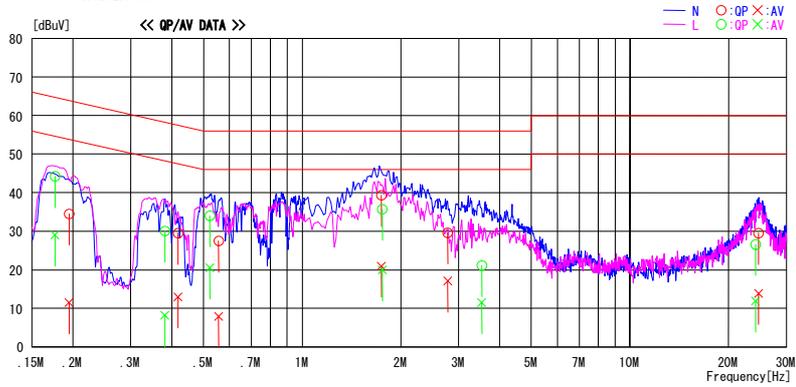

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.17634	43.9	28.8	0.3	44.2	29.1	64.7	54.7	20.5	25.6	L
0.19440	34.2	11.2	0.3	34.5	11.5	63.8	53.8	29.3	42.3	N
0.38120	29.7	7.6	0.4	30.1	8.2	58.3	48.3	28.2	40.1	L
0.41825	29.1	12.6	0.4	29.5	13.0	57.5	47.5	28.0	34.5	N
0.52300	33.6	20.1	0.4	34.0	20.5	56.0	46.0	22.0	25.5	L
0.55600	27.1	7.5	0.4	27.5	7.9	56.0	46.0	28.5	38.1	N
1.74400	38.7	20.3	0.7	39.4	21.0	56.0	46.0	16.6	25.0	N
1.75740	35.0	19.3	0.7	35.7	20.0	56.0	46.0	20.3	26.0	L
2.78200	28.7	16.2	0.9	29.6	17.1	56.0	46.0	26.4	28.9	N
3.53372	20.0	10.4	1.1	21.1	11.5	56.0	46.0	34.9	34.5	L
24.64975	23.8	8.2	5.7	29.5	13.9	60.0	50.0	30.5	36.1	N
24.14715	21.0	6.3	5.6	26.6	11.9	60.0	50.0	33.4	38.1	L

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Conducted Emission
Tx, Ch:Mid (DH5)

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2008/08/28

Company	: Sharp Corporation	Report No.	: 29AE0094-HO
Kind of EUT	: Cellular Phone	Power	: DC 4.0V (AC Charger 120V / 60Hz)
Model No.	: WX-T923	Temp./Humi.	: 22deg. C / 60%
Serial No.	: 004401/11/153258/2	Engineer	: Kazuya Yoshioka
Mode / Remarks	: Transmitting 2441MHz		

LIMIT : FCC15.207 QP
 FCC15.207 AV

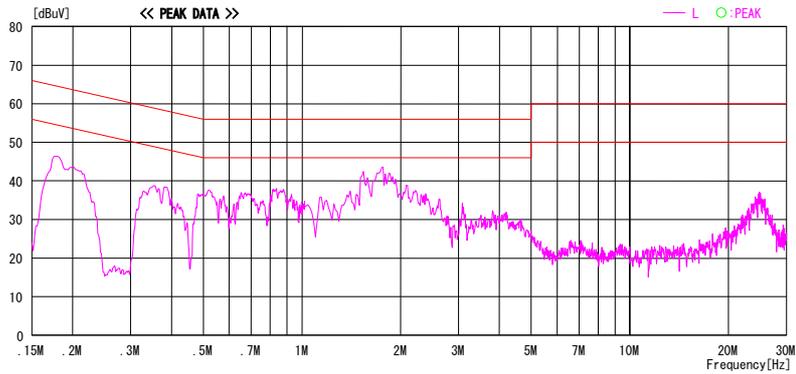
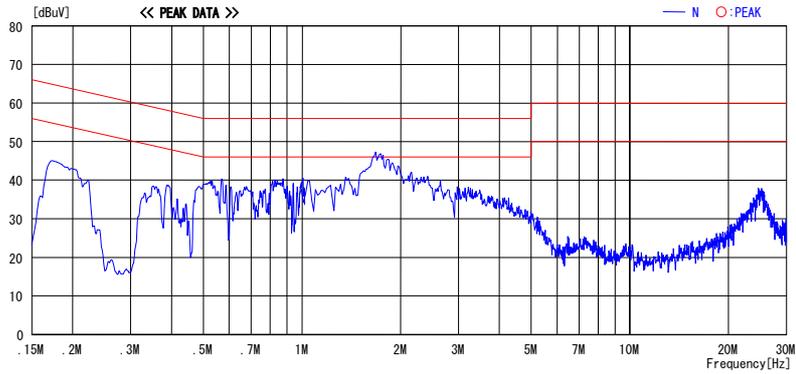


CHART: WITH FACTOR, Peak hold data. CALCURATION: RESULT[dBuV]=READING[dBuV]+C.F[db] (LISN LOSS+CABLE LOSS)
 Except for the above table : adequate margin data below the limits.

Conducted Emission
Tx, Ch:High (DH5)

DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/08/28

Company	: Sharp Corporation	Report No.	: 29AE0094-HO
Kind of EUT	: Cellular Phone	Power	: DC 4.0V (AC Charger 120V / 60Hz)
Model No.	: WX-T923	Temp./Humi.	: 22deg. C / 60%
Serial No.	: 004401/11/153258/2	Engineer	: Kazuya Yoshioka
Mode / Remarks	: Transmitting 2480MHz		

LIMIT : FCC15.207 QP
FCC15.207 AV

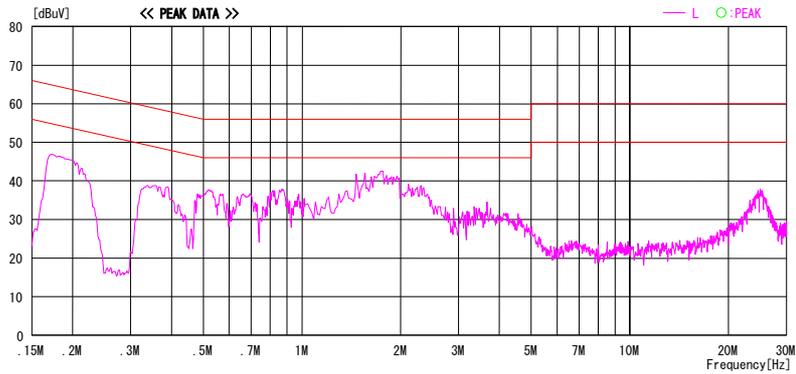
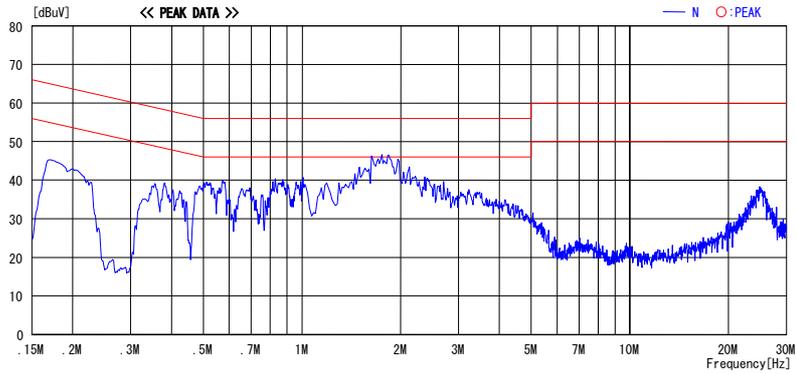


CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[db] (LISN LOSS+CABLE LOSS)
Except for the above table : adequate margin data below the limits.

Conducted Emission

Rx, Ch:Mid


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
 Date : 2008/08/28

Company : Sharp Corporation
 Kind of EUT : Cellular Phone
 Model No. : WX-T923
 Serial No. : 004401/11/153258/2
 Report No. : 29AE0094-HO
 Power : DC 4.0V (AC Charger 120V / 60Hz)
 Temp./Humi. : 22deg. C / 60%
 Engineer : Kazuya Yoshioka

Mode / Remarks : Receiving 2441MHz

LIMIT : FCC15.207 OP
FCC15.207 AV

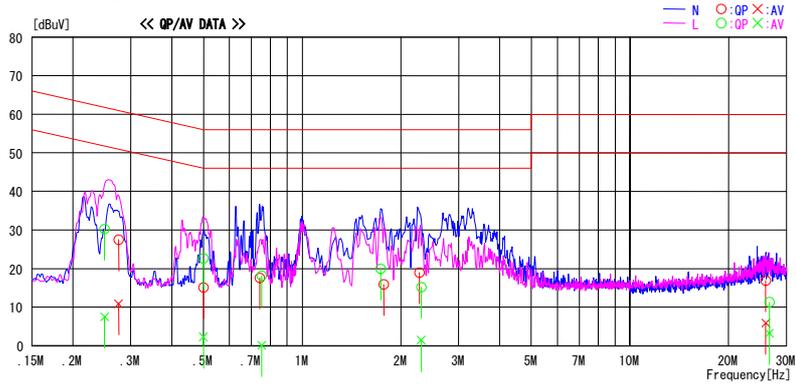

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase
	OP [dBuV]	AV [dBuV]		OP [dBuV]	AV [dBuV]	OP [dBuV]	AV [dBuV]	OP [dB]	AV [dB]	
0.27550	27.1	10.5	0.4	27.5	10.9	61.0	51.0	33.5	40.1	N
0.49990	14.7	-3.1	0.4	15.1	-2.7	56.0	46.0	40.9	48.7	N
0.74300	17.1	-3.2	0.5	17.6	-2.7	56.0	46.0	38.4	48.7	N
1.77600	15.2	-3.3	0.7	15.9	-2.6	56.0	46.0	40.1	48.6	N
2.27600	18.2	-2.3	0.8	19.0	-1.5	56.0	46.0	37.0	47.5	N
25.95400	10.8	-0.2	6.1	16.9	5.9	60.0	50.0	43.1	44.1	N
0.24970	29.8	7.1	0.4	30.2	7.5	61.8	51.8	31.6	44.3	L
0.50020	22.2	1.9	0.4	22.6	2.3	56.0	46.0	33.4	43.7	L
0.75320	17.7	-0.4	0.5	18.2	0.1	56.0	46.0	37.8	45.9	L
1.73600	19.3	-1.8	0.7	20.0	-1.1	56.0	46.0	36.0	47.1	L
2.30740	14.4	0.6	0.8	15.2	1.4	56.0	46.0	40.8	44.6	L
26.61200	5.1	-3.0	6.2	11.3	3.2	60.0	50.0	48.7	46.8	L

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT[dBuV]=READING[dBuV]+C.F[dB] (L1SN LOSS+CABLE LOSS)
 Except for the above table: adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

UL Japan, Inc.
Head Office EMC Lab.
 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
 Telephone : +81 596 24 8116
 Facsimile : +81 596 24 8124

Carrier Frequency Separation
(DH5 / Inquiry)

UL Japan, Inc.

Head Office EMC Lab. No.2 Semi Anechoic Chamber

Company : Sharp Corporation
 Equipment : Cellular Phone
 Model No. : WX-T923
 Serial No. : 004401/11/153259/0
 Power : DC4.0V (AC Charger 120V/60Hz)
 MODE : BT DH5, Tx(Hopping on)/Inquiry

Test Report No. : 29AE0094-HO
 REGULATION : FCC15.247(a)(1)/RSS-210A8.1(b)
 TEST DISTANCE : -
 DATE : 08/28/2008
 TEMPERATURE : 25 deg.C.
 HUMIDITY : 60 %
 ENGINEER : Kazuya Yoshioka

Ch	Freq. [MHz]	Channel separation [MHz]	Limit
Low	2402.0	1.000	0.632 [MHz] (two-thirds of 20dB Bandwidth (0.948 [MHz])) or 25[kHz] (whichever is grater)
Mid	2441.0	1.000	0.632 [MHz] (two-thirds of 20dB Bandwidth (0.948 [MHz])) or 25[kHz] (whichever is grater)
High	2480.0	1.000	0.635 [MHz] (two-thirds of 20dB Bandwidth (0.953 [MHz])) or 25[kHz] (whichever is grater)
Inquiry	2441.0	2.000	0.550 [MHz] (two-thirds of 20dB Bandwidth (0.825 [MHz])) or 25[kHz] (whichever is grater)

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Carrier Frequency Separation
(DH5 / Inquiry)

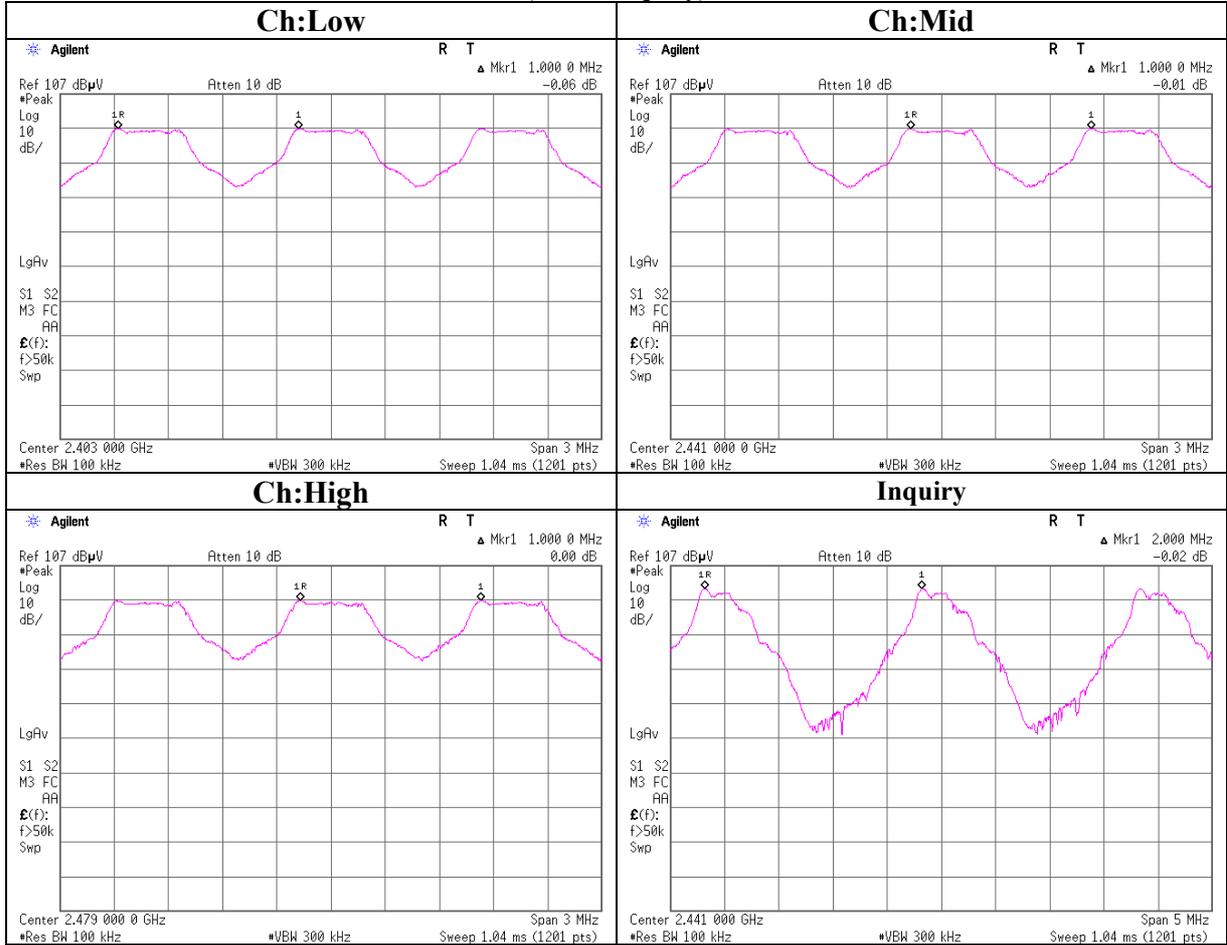


20dB Bandwidth
(DH5 / Inquiry)

Company : Sharp Corporation
Equipment : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153259/0
Power : DC4.0V (AC Charger 120V/60Hz)
Mode : BT DH5, Tx (Hopping off) /Inquiry

UL Japan, Inc.
Head Office EMC Lab. No.2 Semi Anechoic Chamber
Test Report No. : 29AE0094-HO
Regulation : FCC15.247(a)(1)/RSS-210A8.1(a)
Test distance : -
Date : 08/28/2008
Temperature : 25 deg.C.
Humidity : 60 %
Engineer : Kazuya Yoshioka

Ch	Freq. [MHz]	20dB Bandwidth [MHz]	Limit [MHz]
Low	2402.0	0.948	-
Mid	2441.0	0.948	-
High	2480.0	0.953	-
Inquiry	2441.0	0.825	-

20dB Bandwidth
(DH5 / Inquiry)

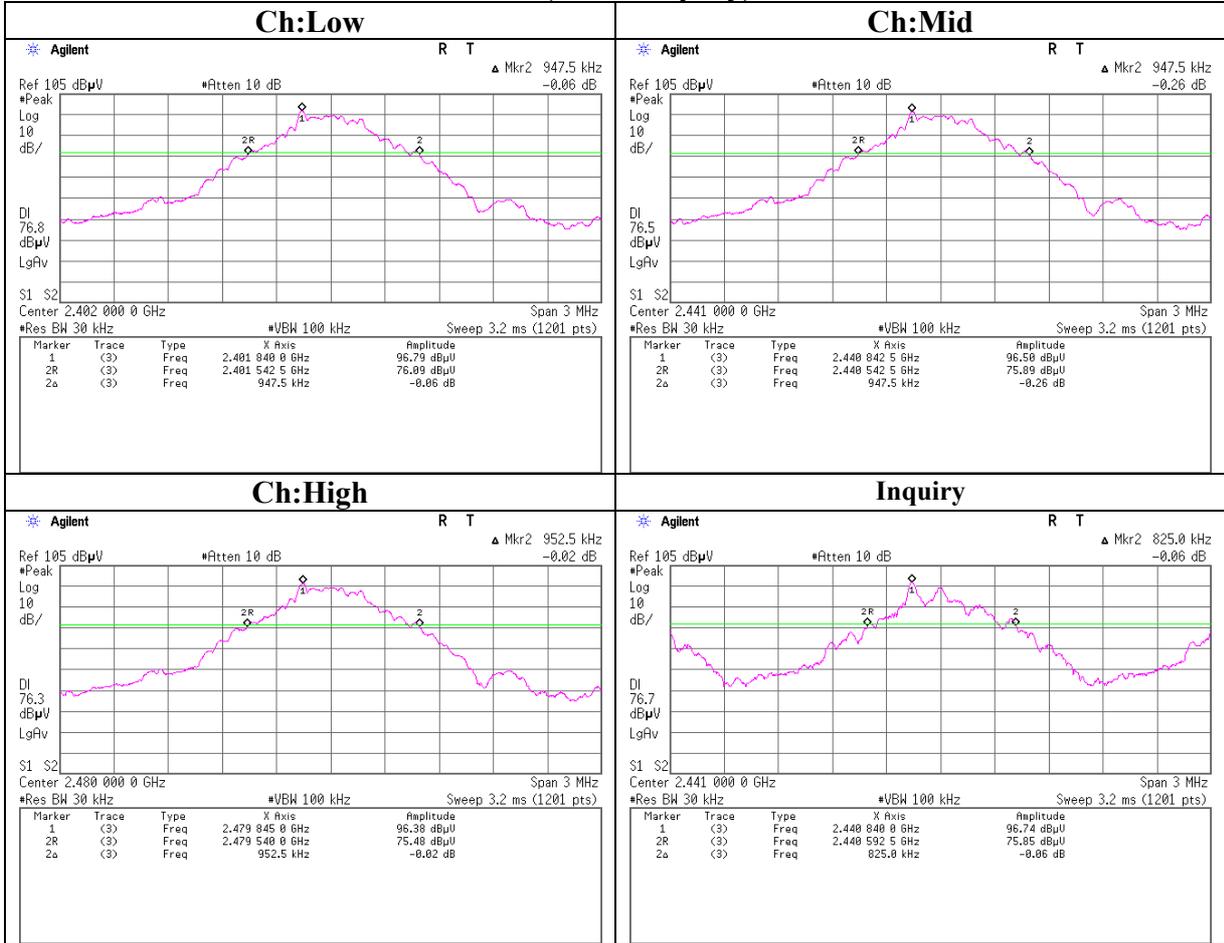

Number of Hopping Frequency
(DH5 / Inquiry)


Company : Sharp Corporation
Equipment : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153259/0
Power : DC4.0V (AC Charger 120V/60Hz)
Mode : BT DH5, Tx (Hopping on)/Inquiry

UL Japan, Inc.
Head Office EMC Lab. No.2 Semi Anechoic Chamber
Test Report No. : 29AE0094-HO
Regulation : FCC15.247(a)(1)(iii)/RSS-210A8.1(d)
Test distance : -
Date : 08/28/2008
Temperature : 25 deg.C.
Humidity : 60 %
Engineer : Kazuya Yoshioka

Mode	Number of channel [number]	Limit [number]
DH5	79	≥ 15

Mode	Number of channel [number]	Limit [number]
Inquiry	32	≥ 15

**Number of Hopping Frequency
(DH5/Inquiry)**

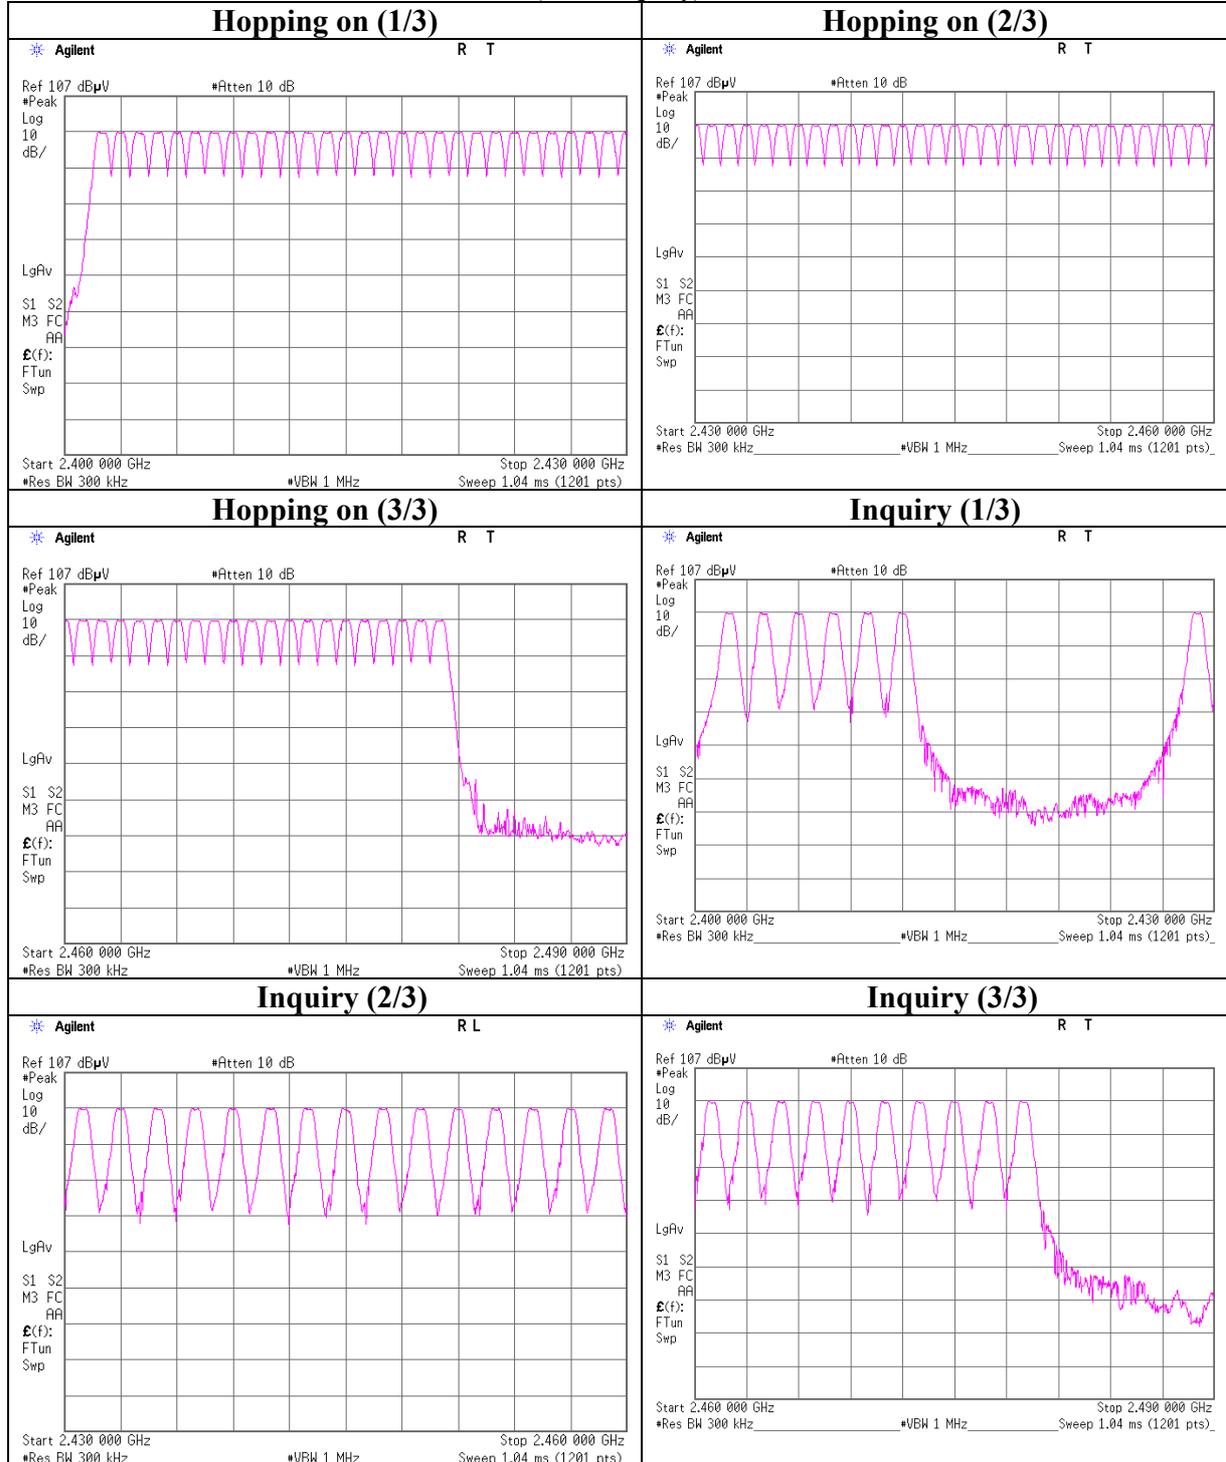

Dwell time

<p>Company : Sharp Corporation Equipment : Cellular Phone Model No. : WX-T923 Serial No. : 004401/11/153259/0 Power : DC4.0V (AC Charger 120V/60Hz) Mode : BT, Tx (Hopping on)/Inquiry</p>	<p>UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber Test Report No. : 29AE0094-HO Regulation : FCC15.247(a)(1)(iii)/RSS-210A8.1(d) Test distance : - Date : 08/28/2008 Temperature : 25 deg.C. Humidity : 60 % Engineer : Kazuya Yoshioka</p>
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Mode	Number of transmission in a 31.6(79 Hopping x 0.4) / 12.8(32 Hopping x 0.4)second period	Length of transmission time [msec]	Result [msec]	Limit [msec]
DH1	51.6 times / 5 sec. x 31.6 sec. = 327 times	0.412	135	400
DH3	28.8 times / 5 sec. x 31.6 sec. = 183 times	1.680	307	400
DH5	19.0 times / 5 sec. x 31.6 sec. = 121 times	2.926	354	400
Inquiry	100.0 times / 1 sec. x 12.8 sec. = 1280 times	0.119	152	400


* Average data of 5 tests.(except Inquiry)

*DH1 / 1:51, 2:52, 3:52, 4:51, 5:52 = 51.6 times


*DH3 / 1:29, 2:28, 3:28, 4:30, 5:29 = 28.8 times

*DH5 / 1:19, 2:20, 3:18, 4:20, 5:18 = 19.0 times


Dwell time

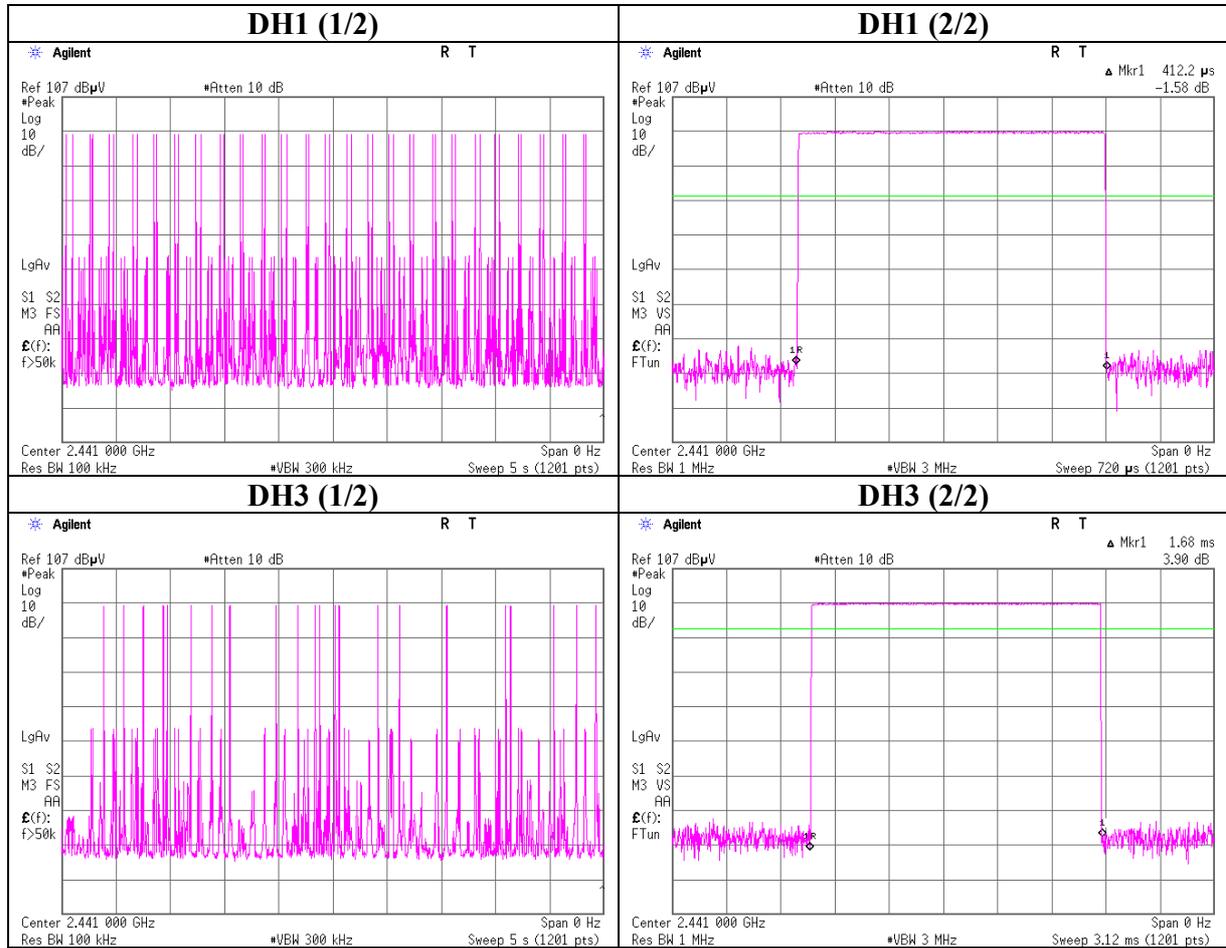

Dwell time

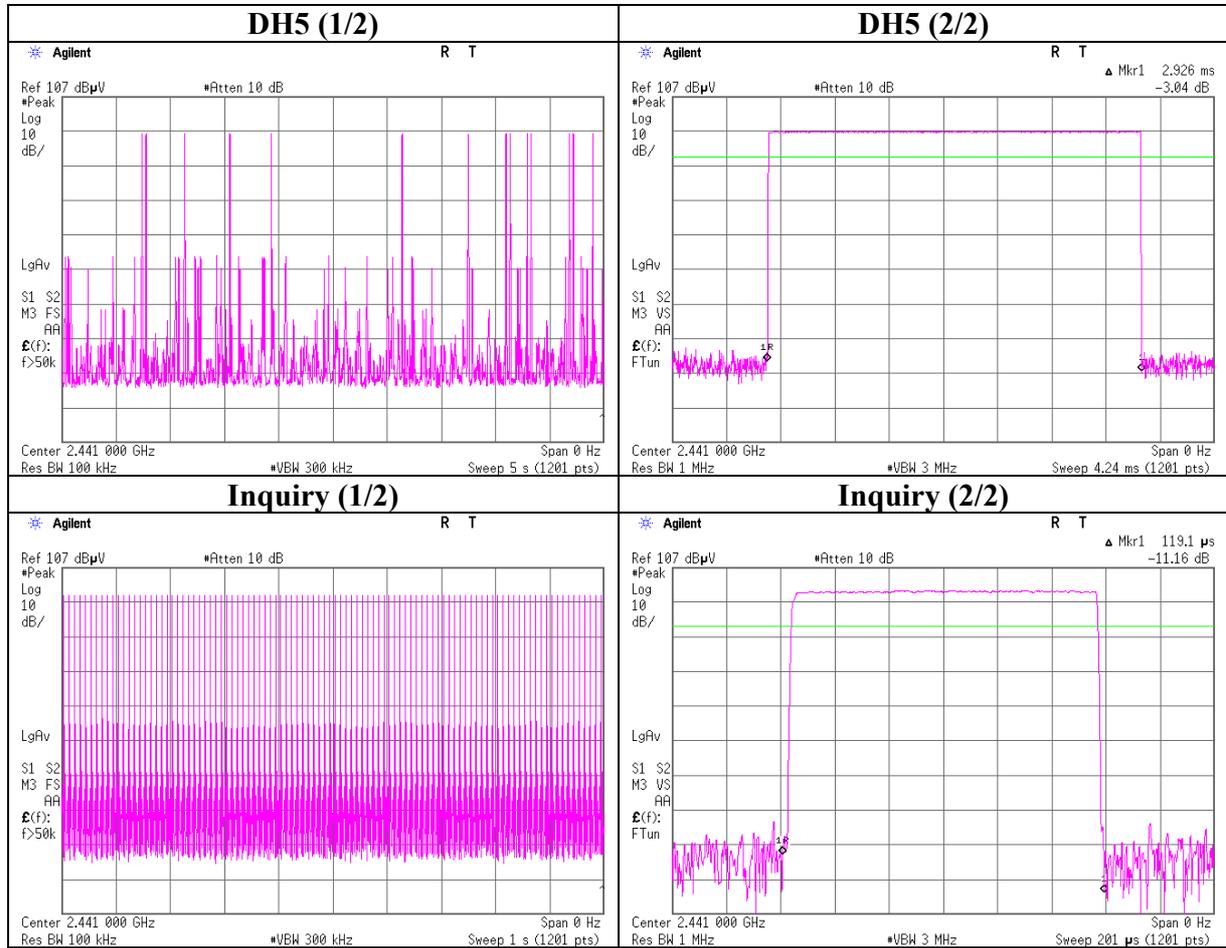

**Dwell time factor
(DH5)**

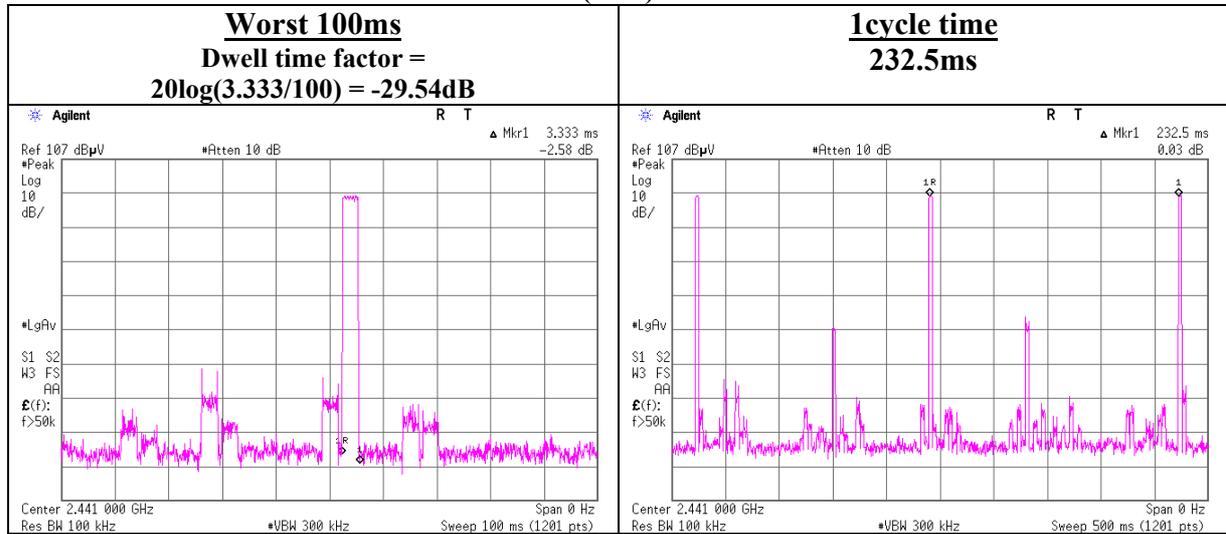

**Maximum Peak Output Power
(DH5 / Inquiry)**

UL Japan, Inc.

Head Office EMC Lab. No.2 Semi Anechoic Chamber

Company : Sharp Corporation
Equipment : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153259/0
Power : DC4.0V (AC Charger 120V/60Hz)
Mode : BT DH5, Tx(Hopping Off)/Inquiry

Test Report No. : 29AE0094-HO
Regulation : FCC15.247(b)(1)/RSS-210A8.4(2)
Test distance : -
Date : 08/28/2008
Temperature : 25 deg.C.
Humidity : 60 %
Engineer : Kazuya Yoshioka

Ch	Freq. [MHz]	P/M Reading [dBm]	Cable Loss [dB]	Atten. [dB]	Result		Limit		Margin [dB]
					[dBm]	[mW]	[dBm]	[mW]	
Low	2402.0	-8.68	0.15	10.09	1.56	1.43	20.97	125	19.41
Mid	2441.0	-8.68	0.15	10.09	1.56	1.43	20.97	125	19.41
High	2480.0	-8.71	0.15	10.09	1.53	1.42	20.97	125	19.44
Inquiry	2441.0	-8.70	0.15	10.09	1.54	1.43	20.97	125	19.43

Sample Calculation:

Result = Reading + Cable Loss (supplied by customer)+ Attenuator

* In the above table, factor 0.0dB represents no use of Atten. and/or Filter.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

Radiated Spurious Emission (below 1GHz)
Tx, Ch:Low (DH5)

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/08/29

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153258/2

Report No. : 29AE0094-HO
Power : DC 4.0V (AC Charger 120V / 60Hz)
Temp./Humi. : 22deg.C / 67%
Engineer : Takumi Shimada

Mode / Remarks : Transmitting 2402MHz, Max-axis (Hor:Y Ver:Z)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK
FCC15.209 3m, below 1GHz:QP, above 1GHz:AV

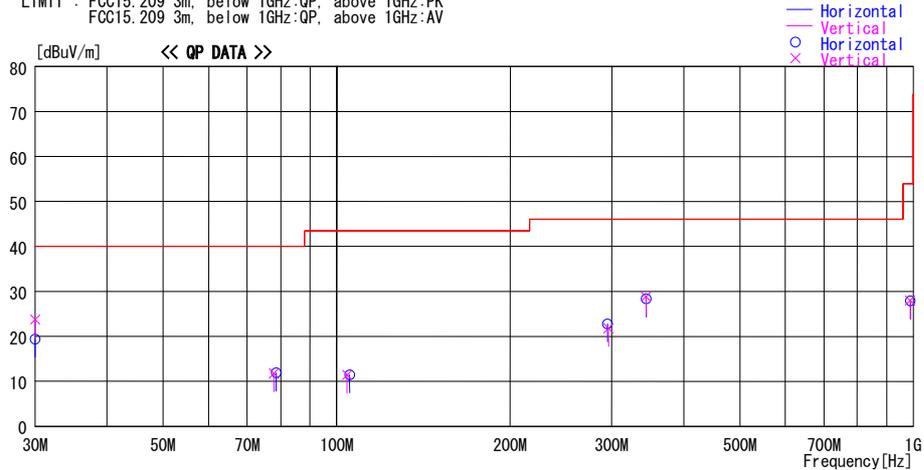

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
30.000	22.5	QP	18.9	-22.0	19.4	0	265	Hori.	40.0	20.6	
30.000	26.8	QP	18.9	-22.0	23.7	27	100	Vert.	40.0	16.3	
78.539	26.8	QP	6.4	-21.3	11.9	90	224	Hori.	40.0	28.1	
77.853	26.6	QP	6.4	-21.3	11.7	217	100	Vert.	40.0	28.3	
104.275	22.0	QP	10.4	-21.0	11.4	332	100	Vert.	43.5	32.1	
105.313	22.0	QP	10.5	-21.0	11.5	158	300	Hori.	43.5	32.0	
294.908	22.0	QP	19.8	-19.0	22.8	70	110	Hori.	46.0	23.2	
296.128	21.0	QP	19.8	-19.0	21.8	203	100	Vert.	46.0	24.2	
344.254	32.1	QP	15.8	-19.1	28.8	61	148	Vert.	46.0	17.2	
344.256	31.7	QP	15.8	-19.1	28.4	61	100	Hori.	46.0	17.6	
988.000	21.1	QP	22.9	-16.1	27.9	0	100	Hori.	53.9	26.0	
988.000	21.1	QP	22.9	-16.1	27.9	359	100	Vert.	53.9	26.0	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)
Tx, Ch:Mid (DH5)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/08/29

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153258/2
Report No. : 29AE0094-HO
Power : DC 4.0V (AC Charger 120V / 60Hz)
Temp./Humi. : 22deg.C / 67%
Engineer : Takumi Shimada

Mode / Remarks : Transmitting 2441MHz, Max-axis (Hor:Y Ver:Z)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK
FCC15.209 3m, below 1GHz:QP, above 1GHz:AV

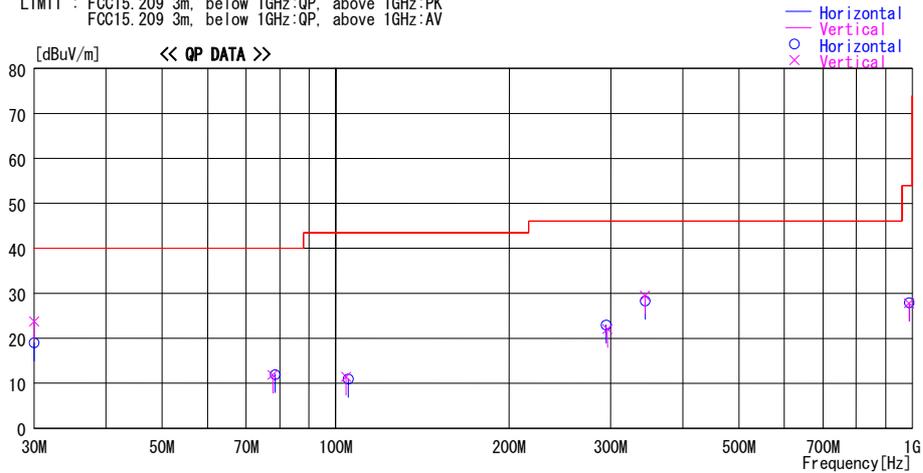

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
30.002	22.1	QP	18.9	-22.0	19.0	0	270	Hori.	40.0	21.0	
30.002	26.8	QP	18.9	-22.0	23.7	34	100	Vert.	40.0	16.3	
78.544	26.9	QP	6.4	-21.3	12.0	90	225	Hori.	40.0	28.0	
77.838	26.7	QP	6.4	-21.3	11.8	220	100	Vert.	40.0	28.2	
104.291	22.0	QP	10.4	-21.0	11.4	330	100	Vert.	43.5	32.1	
105.221	21.4	QP	10.5	-21.0	10.9	172	300	Hori.	43.5	32.6	
294.332	22.3	QP	19.7	-19.0	23.0	67	115	Hori.	46.0	23.0	
296.017	21.2	QP	19.8	-19.0	22.0	195	100	Vert.	46.0	24.0	
344.252	32.8	QP	15.8	-19.1	29.5	58	150	Vert.	46.0	16.5	
344.243	31.6	QP	15.8	-19.1	28.3	60	100	Hori.	46.0	17.7	
988.000	21.1	QP	22.9	-16.1	27.9	0	100	Hori.	53.9	26.0	
988.000	21.0	QP	22.9	-16.1	27.8	359	100	Vert.	53.9	26.1	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)

Tx, Ch:High (DH5)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/08/29

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153258/2
Report No. : 29AE0094-HO
Power : DC 4.0V (AC Charger 120V / 60Hz)
Temp./Humi. : 22deg.C / 67%
Engineer : Takumi Shimada

Mode / Remarks : Transmitting 2480MHz, Max-axis (Hor:Y Ver:Z)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK
FCC15.209 3m, below 1GHz:QP, above 1GHz:AV

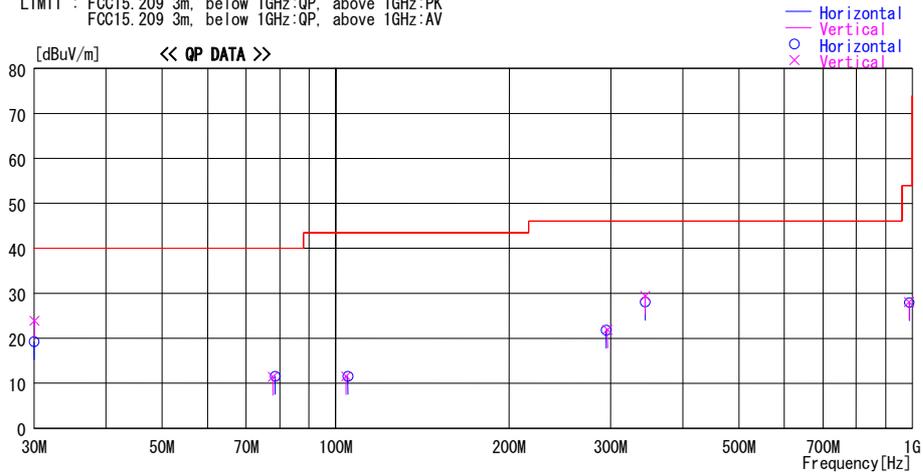

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
30.003	22.4	QP	18.9	-22.0	19.3	0	300	Hori.	40.0	20.7	
30.042	27.0	QP	18.9	-22.0	23.9	72	100	Vert.	40.0	16.1	
78.501	26.5	QP	6.4	-21.3	11.6	80	200	Hori.	40.0	28.4	
77.845	26.3	QP	6.4	-21.3	11.4	220	100	Vert.	40.0	28.6	
104.295	22.1	QP	10.4	-21.0	11.5	0	100	Vert.	43.5	32.0	
104.992	22.0	QP	10.5	-21.0	11.5	232	253	Hori.	43.5	32.0	
294.349	21.2	QP	19.7	-19.0	21.9	60	100	Hori.	46.0	24.2	
295.979	21.1	QP	19.8	-19.0	21.9	180	100	Vert.	46.0	24.1	
344.349	32.7	QP	15.8	-19.1	29.4	57	150	Vert.	46.0	16.6	
344.243	31.4	QP	15.8	-19.1	28.1	57	100	Hori.	46.0	17.9	
988.000	21.2	QP	22.9	-16.1	28.0	0	100	Hori.	53.9	25.9	
988.000	21.2	QP	22.9	-16.1	28.0	359	100	Vert.	53.9	25.9	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (below 1GHz)

Rx, Ch:Mid

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.2 Semi Anechoic Chamber
Date : 2008/08/29

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T923
Serial No. : 004401/11/153258/2

Report No. : 29AE0094-HO
Power : DC 4.0V (AC Charger 120V / 60Hz)
Temp./Humi. : 22deg.C / 67%
Engineer : Takumi Shimada

Mode / Remarks : Receiving 2441MHz, Max-axis (Hor:Y Ver:Z)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK
FCC15.209 3m, below 1GHz:QP, above 1GHz:AV

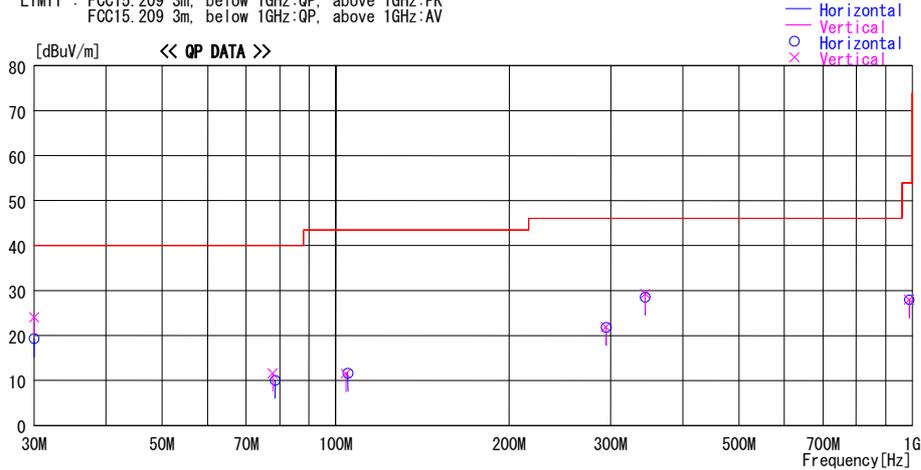

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
30.013	22.4	QP	18.9	-22.0	19.3	0	300	Hori.	40.0	20.7	
30.000	27.2	QP	18.9	-22.0	24.1	36	100	Vert.	40.0	15.9	
78.535	24.9	QP	6.4	-21.3	10.0	86	237	Hori.	40.0	30.0	
77.838	26.5	QP	6.4	-21.3	11.6	185	100	Vert.	40.0	28.4	
104.185	22.1	QP	10.4	-21.0	11.5	0	100	Vert.	43.5	32.0	
104.967	22.1	QP	10.5	-21.0	11.6	212	248	Hori.	43.5	31.9	
294.349	21.2	QP	19.7	-19.0	21.9	115	100	Hori.	46.0	24.2	
294.421	21.2	QP	19.7	-19.0	21.9	0	100	Vert.	46.0	24.1	
344.349	32.6	QP	15.8	-19.1	29.3	64	158	Vert.	46.0	16.8	
344.253	31.8	QP	15.8	-19.1	28.5	61	100	Hori.	46.0	17.5	
988.000	21.2	QP	22.9	-16.1	28.0	0	100	Hori.	53.9	25.9	
988.000	21.1	QP	22.9	-16.1	27.9	359	100	Vert.	53.9	26.0	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Spurious Emission (above 1GHz)
Tx, Ch: Low

Company	: Sharp Corporation	UL Japan, Inc.
Equipmen	: Cellular Phone	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	: WX-T923	Regulation : FCC15.247(d) / RSS-210 A8.5
S/N	: 004401/11/153258/2	Test Distance : 3m (1G-10GHz) / 1m (above10GHz)
Power	: DC 4.0V (AC Charger 120 V / 60 Hz)	Date : August 28, 2008
Mode	: Transmitting 2402 MHz	Temperature : 22 deg.C.
Position	: Hor Y-axis, Ver Z-axis	Humidity : 67 %
		Engineer : Takumi Shimada

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]		RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss													
1	2390.00	42.6	42.4	26.8	32.5	2.6	0.0	-	39.5	39.3	73.9	34.4	34.6
2	2400.00	70.3	69.5	26.8	32.5	2.6	0.0	-	67.2	66.4	73.9	6.7	7.5
3	4804.00	51.2	55.1	31.2	31.4	4.1	0.7	-	55.8	59.7	73.9	18.1	14.2
4	7206.00	41.7	42.4	35.5	31.0	4.4	0.6	-	51.2	51.9	73.9	22.7	22.0
5	9608.00	40.9	40.9	38.6	31.4	5.1	0.9	-	54.1	54.1	73.9	19.8	19.8
Test distance 1meter RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac													
6	12010.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
7	14412.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
8	16814.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
9	19216.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
10	21618.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
11	24020.00	47.1	47.0	39.8	29.9	7.7	0.0	-	55.2	55.1	73.9	18.7	18.8

AV DETECT (RBW: 1MHz, VBW: 270Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	Dwell Factor [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss													
1	2390.00	29.9	30.7	26.8	32.5	2.6	0.0	-	26.8	27.6	53.9	27.1	26.3
2	2400.00	45.8	45.0	26.8	32.5	2.6	0.0	-29.5	13.2	12.4	53.9	40.7	41.5
3	4804.00	44.4	46.7	31.2	31.4	4.1	0.7	-29.5	19.5	21.8	53.9	34.4	32.1
4	7206.00	28.7	28.9	35.5	31.0	4.4	0.6	-29.5	8.7	8.9	53.9	45.2	45.0
5	9608.00	28.1	28.0	38.6	31.4	5.1	0.9	-29.5	11.8	11.7	53.9	42.1	42.2
Test distance 1meter RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac													
6	12010.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
7	14412.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
8	16814.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
9	19216.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
10	21618.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
11	24020.00	34.4	34.2	39.8	29.9	7.7	0.0	-29.5	13.0	12.8	53.9	40.9	41.1

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB
*Except for the above table : All other spurious emissions were less than 20dB for the limit.
*Hi-Pass Fiter was not used for factor 0.0dB of the above table.
*Dwell time factor = 20log (Dwell time / 100ms) = 20log (3.333*10^-3 / 100*10^-3) = -29.5 dB (Refer to dwell time data sheet)
*In the frequency over the 6th harmonic, the noise from the EUT was not seen.The data above is its base noise.
*The test result is rounded off to one or two decimal places, so some differences might be observed.
*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)
Tx, Ch: Mid

Company	: Sharp Corporation	UL Japan, Inc.
Equipmen	: Cellular Phone	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	: WX-T923	Regulation : FCC15.247(d) / RSS-210 A8.5
S/N	: 004401/11/153258/2	Test Distance : 3m (1G-10GHz) / 1m (above10GHz)
Power	: DC 4.0V (AC Charger 120 V / 60 Hz)	Date : August 28, 2008
Mode	: Transmitting 2441 MHz	Temperature : 22 deg.C.
Position	: Hor Y-axis, Ver Z-axis	Humidity : 67 %
		Engineer : Takumi Shimada

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING [dBuV]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT HOR VER [dBuV/m]	Limit PK [dBuV/m]	MARGIN [dB]			
		HOR	VER							HOR	VER		
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss													
1	4882.00	51.1	52.2	31.4	31.4	4.1	0.7	-	55.9	57.0	73.9	18.0	16.9
2	7323.00	41.6	42.1	35.7	31.0	4.5	0.6	-	51.4	51.9	73.9	22.5	22.0
3	9764.00	41.2	41.5	38.7	31.4	5.2	0.9	-	54.6	54.9	73.9	19.3	19.0
Test distance 1meter RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac													
4	12205.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
5	14646.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
6	17087.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
7	19528.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
8	21969.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
9	24410.00	47.2	47.0	40.1	30.0	7.9	0.0	-	55.7	55.5	73.9	18.2	18.4

AV DETECT (RBW: 1MHz, VBW: 270Hz)

No.	FREQ [MHz]	S/A READING [dBuV]		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	Dwell Factor [dB]	RESULT HOR VER [dBuV/m]	Limit AV [dBuV/m]	MARGIN [dB]		
		HOR	VER								HOR	VER	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss													
1	4882.00	43.5	44.8	31.4	31.4	4.1	0.7	-29.5	18.8	20.1	53.9	35.1	33.8
2	7323.00	29.5	28.9	35.7	31.0	4.5	0.6	-29.5	9.8	9.2	53.9	44.1	44.7
3	9764.00	28.4	27.8	38.7	31.4	5.2	0.9	-29.5	12.3	11.7	53.9	41.6	42.2
Test distance 1meter RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac													
4	12205.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
5	14646.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
6	17087.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
7	19528.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
8	21969.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
9	24410.00	33.6	33.6	40.1	30.0	7.9	0.0	-29.5	12.6	12.6	53.9	41.3	41.3

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB
*Except for the above table : All other spurious emissions were less than 20dB for the limit.
*Hi-Pass Fiter was not used for factor 0.0dB of the above table.
*Dwell time factor = 20log (Dwell time / 100ms) = 20log (3.333*10^-3 / 100*10^-3) = -29.5 dB (Refer to dwell time data sheet)
*In the frequency over the 6th harmonic, the noise from the EUT was not seen.The data above is its base noise.
*The test result is rounded off to one or two decimal places, so some differences might be observed.
*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)
Tx, Ch: High

Company	: Sharp Corporation	UL Japan, Inc.
Equipmen	: Cellular Phone	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	: WX-T923	Regulation : FCC15.247(d) / RSS-210 A8.5
S/N	: 004401/11/153258/2	Test Distance : 3m (1G-10GHz) / 1m (above10GHz)
Power	: DC 4.0V (AC Charger 120 V / 60 Hz)	Date : August 28, 2008
Mode	: Transmitting 2480 MHz	Temperature : 22 deg.C.
Position	: Hor Y-axis, Ver Z-axis	Humidity : 67 %
		Engineer : Takumi Shimada

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	/	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss													
1	2483.50	56.2	55.4	27.0	32.5	2.6	0.0	-	53.3	52.5	73.9	20.6	21.4
2	4960.00	47.1	49.7	31.5	31.4	4.2	0.7	-	52.1	54.7	73.9	21.8	19.2
3	7440.00	41.3	41.5	36.0	31.0	4.6	0.6	-	51.5	51.7	73.9	22.4	22.2
4	9920.00	41.8	41.7	38.9	31.4	5.2	0.9	-	55.4	55.3	73.9	18.5	18.6
Test distance 1meter RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac													
5	12400.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
6	14880.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
7	17360.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
8	19840.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
9	22320.00	NS	NS	-	-	-	-	-	-	-	73.9	-	-
10	24800.00	46.9	46.9	40.4	30.1	8.0	0.0	-	55.7	55.7	73.9	18.2	18.2

AV DETECT (RBW: 1MHz, VBW: 270Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	Dwell Factor [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss													
1	2483.50	35.7	34.8	27.0	32.5	2.6	0.0	-29.5	3.3	2.4	53.9	50.6	51.5
2	4960.00	38.0	41.3	31.5	31.4	4.2	0.7	-29.5	13.5	16.8	53.9	40.4	37.1
3	7440.00	28.5	28.6	36.0	31.0	4.6	0.6	-29.5	9.2	9.3	53.9	44.7	44.6
4	9920.00	28.0	28.1	38.9	31.4	5.2	0.9	-29.5	12.1	12.2	53.9	41.8	41.7
Test distance 1meter RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss - Dfac													
5	12400.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
6	14880.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
7	17360.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
8	19840.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
9	22320.00	NS	NS	-	-	-	-	-29.5	-	-	53.9	-	-
10	24800.00	34.0	34.0	40.4	30.1	8.0	0.0	-29.5	13.3	13.3	53.9	40.6	40.6

Test Distance 1.0m : Distance Factor(Dfac) = 20log(3.0/1.0) = 9.5 dB
*Except for the above table : All other spurious emissions were less than 20dB for the limit.
*Hi-Pass Fiter was not used for factor 0.0dB of the above table.
*Dwell time factor = 20log (Dwell time / 100ms) = 20log (3.333*10^-3 / 100*10^-3) = -29.5 dB (Refer to dwell time data sheet)
*In the frequency over the 6th harmonic, the noise from the EUT was not seen. The data above is its base noise.
*The test result is rounded off to one or two decimal places, so some differences might be observed.
*NS: No detect Signal.

Radiated Spurious Emission (above 1GHz)
Rx, Ch:Mid

Company	: Sharp Corporation	UL Japan, Inc.
Equipmen	: Cellular Phone	Head Office EMC Lab. No.2 Semi Anechoic Chamber
Model	: WX-T923	Regulation : FCC15.247(d) / RSS-210 A8.5
S/N	: 004401/11/153258/2	Test Distance : 3m
Power	: DC 4.0V (AC Charger 120 V / 60 Hz)	Date : August 28, 2008
Mode	: Receiving 2441 MHz	Temperature : 22 deg.C.
Position	: Hor Y-axis, Ver Z-axis	Humidity : 67 %
		Engineer : Takumi Shimada

PK DETECT (RBW: 1MHz, VBW: 1MHz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2441.0	43.1	43.2	26.9	32.5	2.6	0.0	40.1	40.2	73.9	33.8	33.7
2	7323.0	41.8	42.0	35.7	31.0	3.9	0.0	50.4	50.6	73.9	23.5	23.3

AV DETECT (RBW: 1MHz, VBW: 10Hz)

No.	FREQ [MHz]	S/A READING		ANT Factor [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	Hi-Pass Filter [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + Cable Loss + Filter Loss												
1	2441.0	30.5	31.2	26.9	32.5	2.6	0.0	27.5	28.2	53.9	26.4	25.7
2	7323.0	29.4	29.6	35.7	31.0	3.9	0.0	38.0	38.2	53.9	15.9	15.7


* Reference data

*Except for the above table : All other spurious emissions were less than 20dB for the limit.


*The test result is rounded off to one or two decimal places, so some differences might be observed.

*Hi-Pass Fiter was not used for factor 0.0dB of the above table.


VBW (AV) Calculation

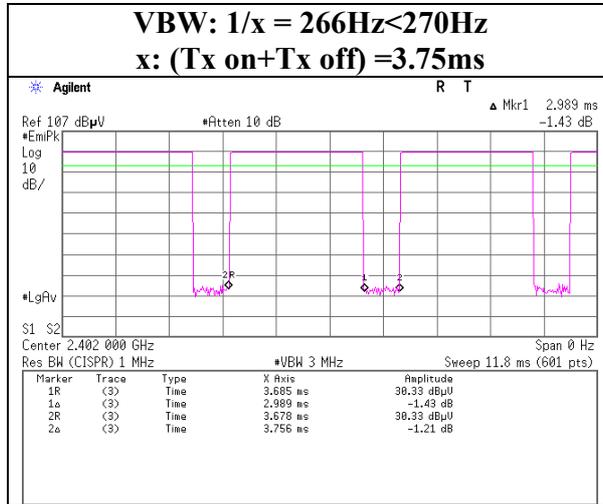


Conducted Spurious Emission
Tx, Ch:Low (DH5)

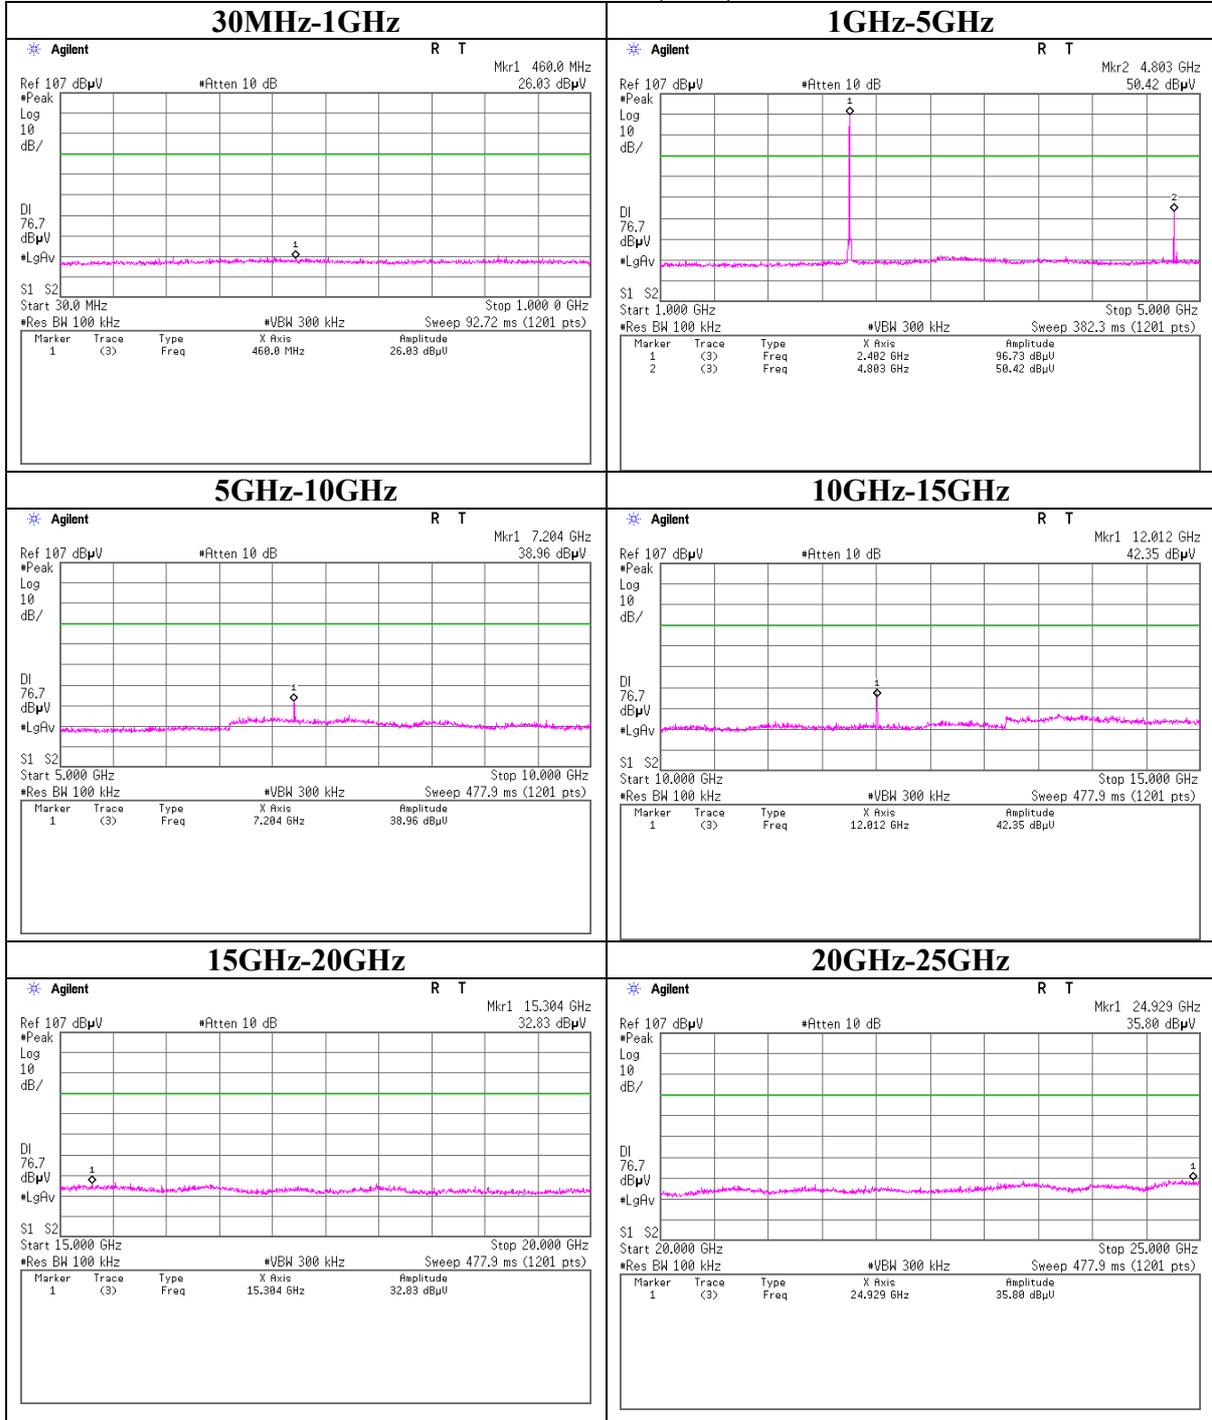


Conducted Spurious Emission
Tx, Ch:Mid (DH5)

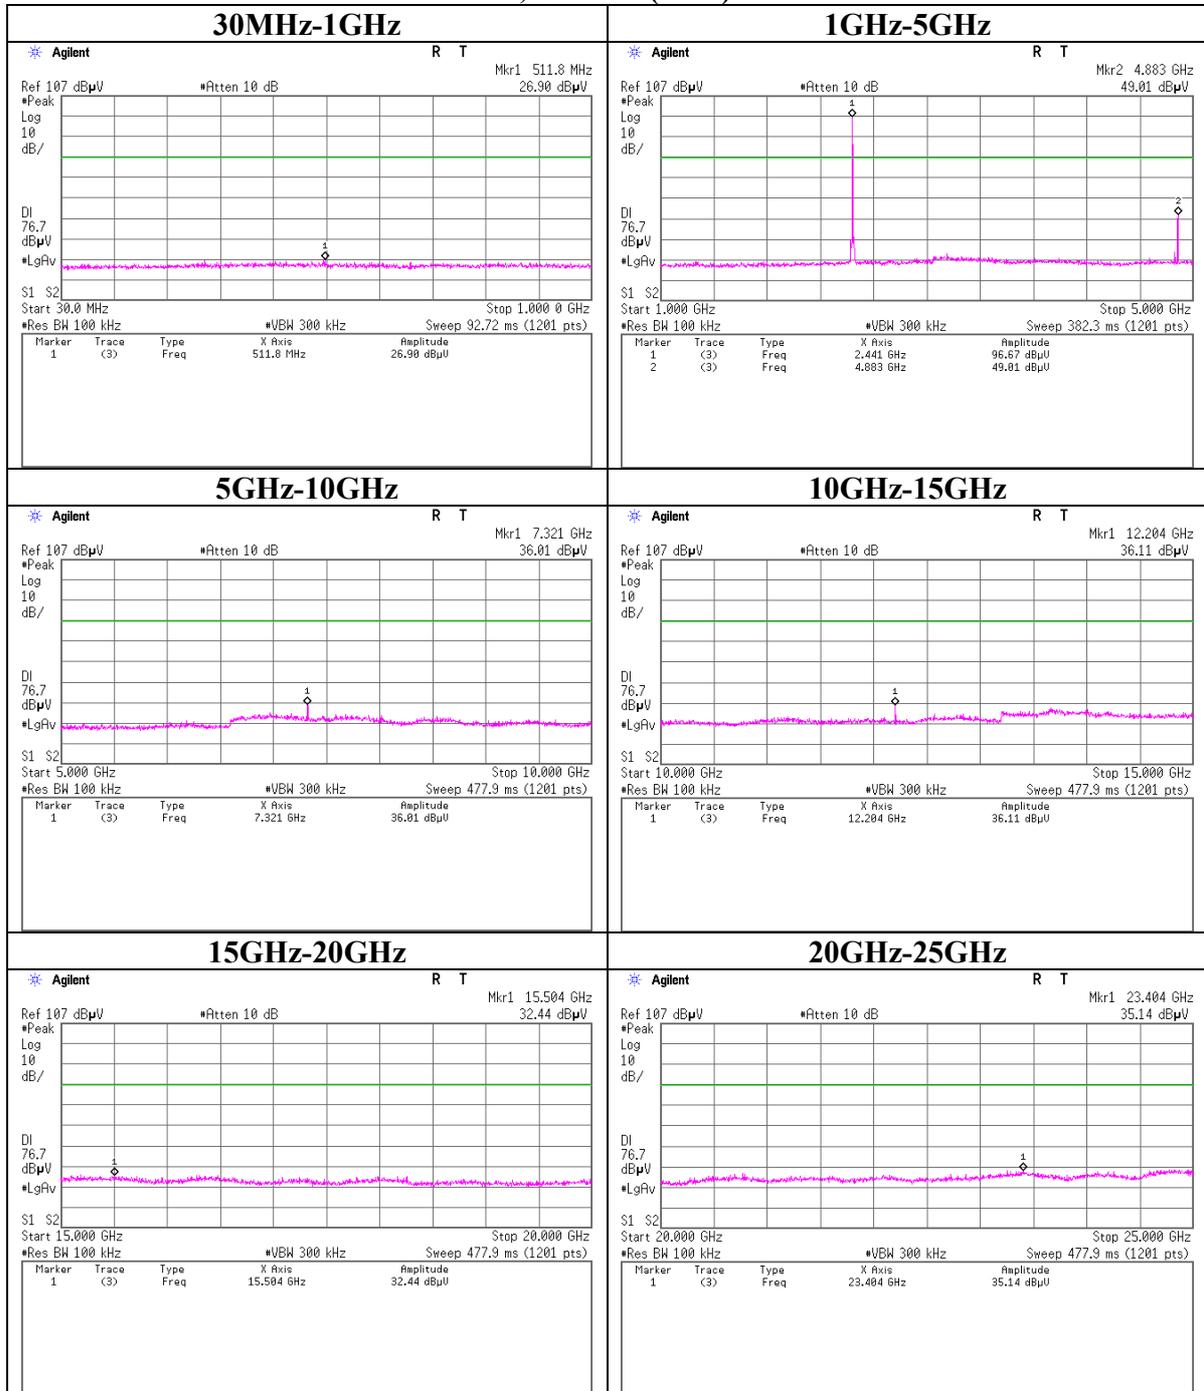


Conducted Spurious Emission
Tx, Ch:High (DH5)

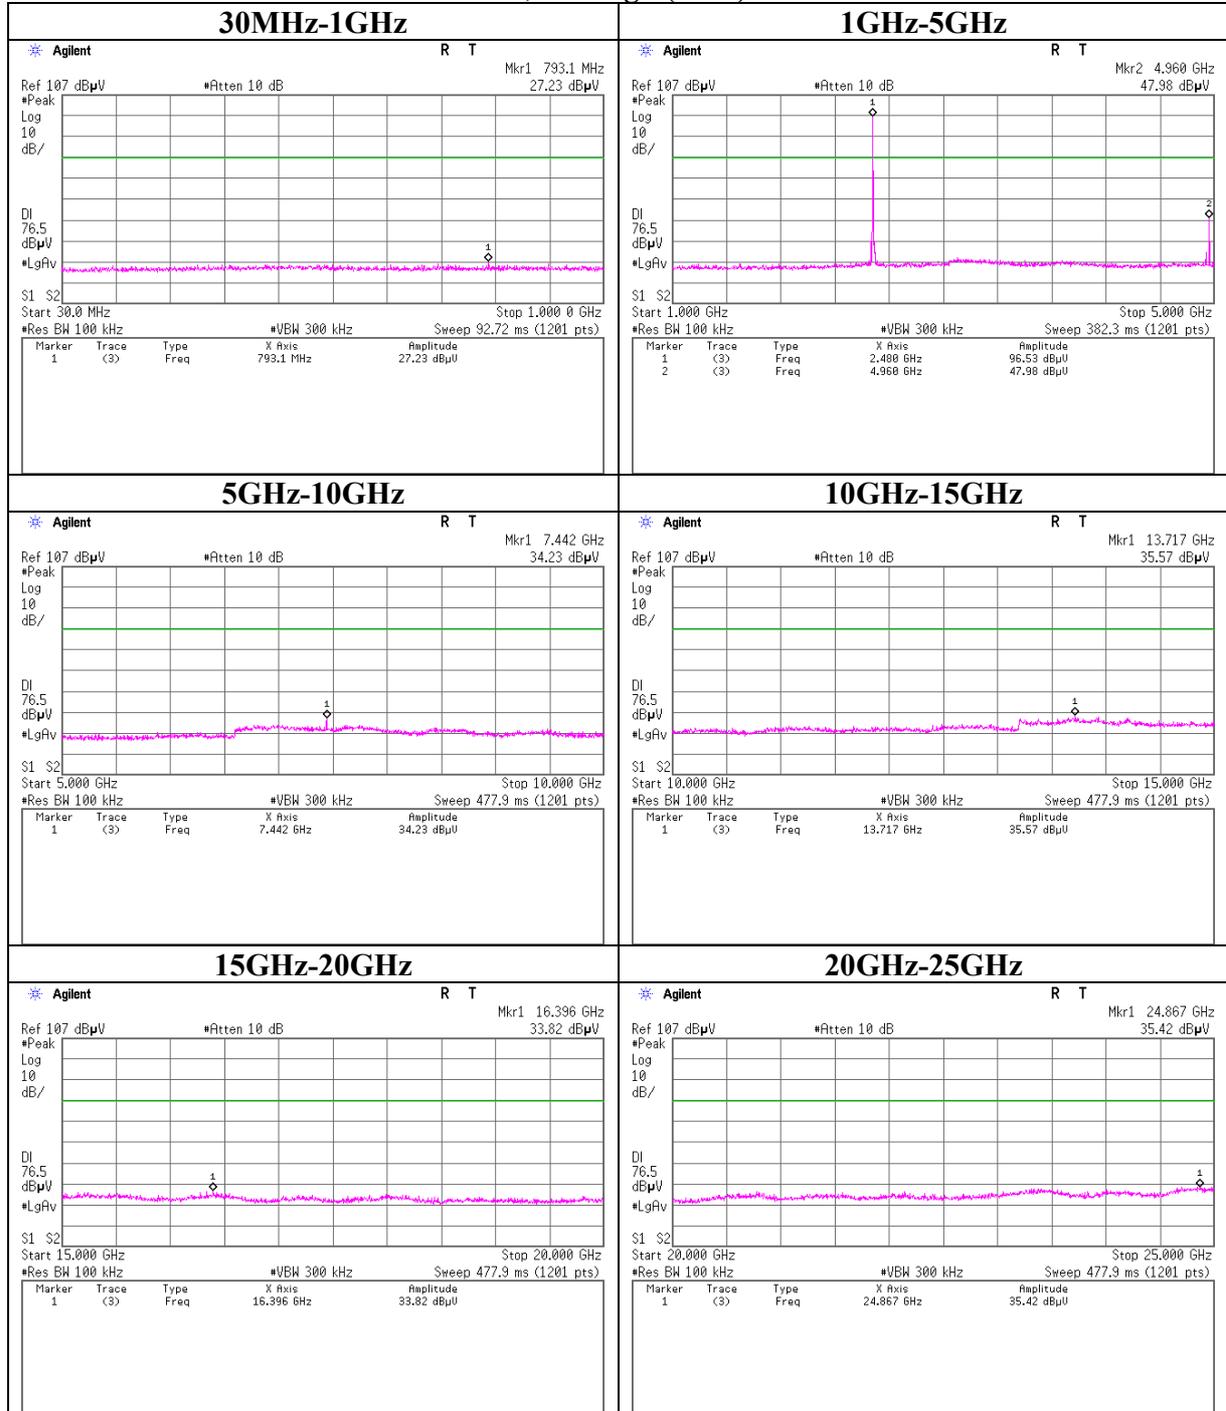


Conducted Spurious Emission
Rx, Ch:Mid

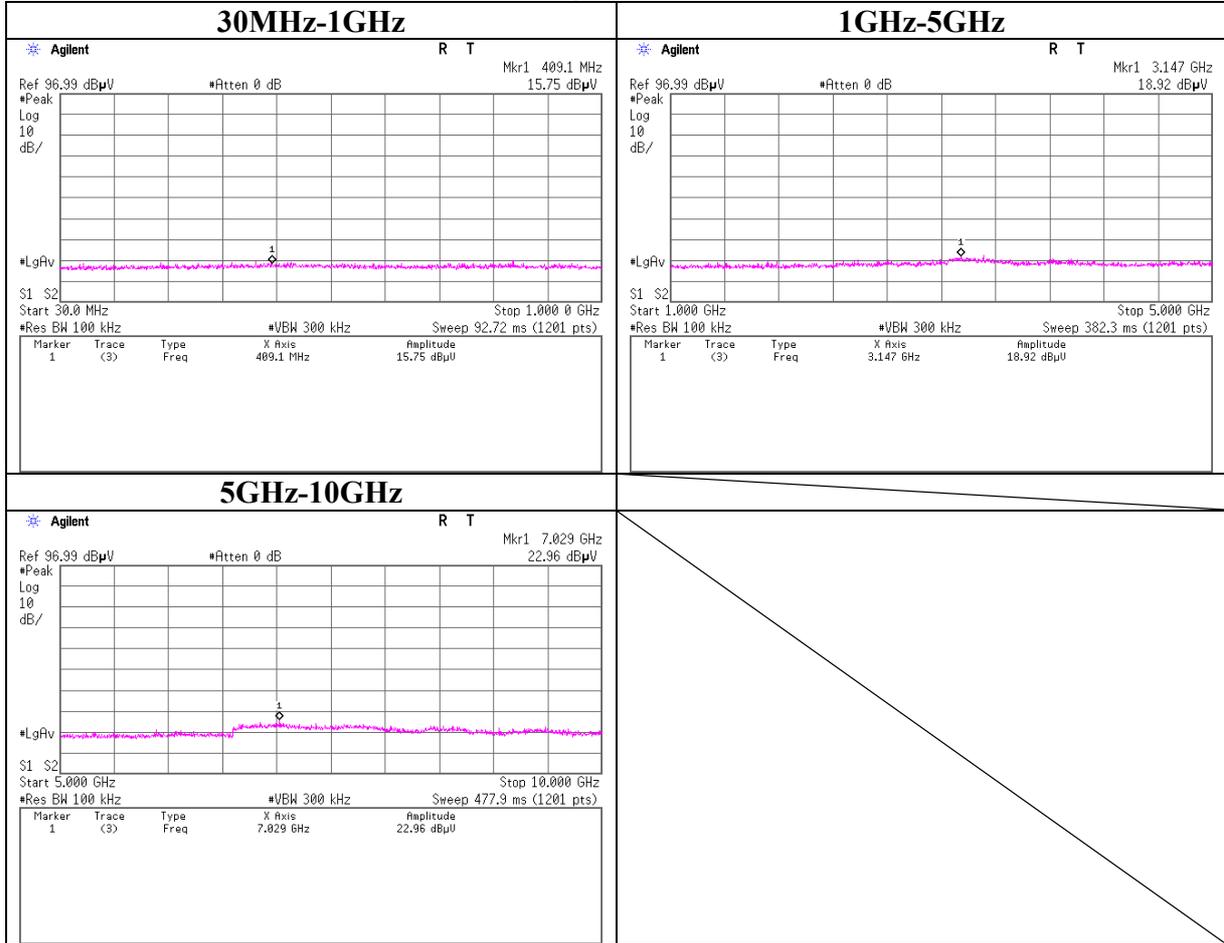

Conducted Spurious Emission
Band Edge compliance (DH5)

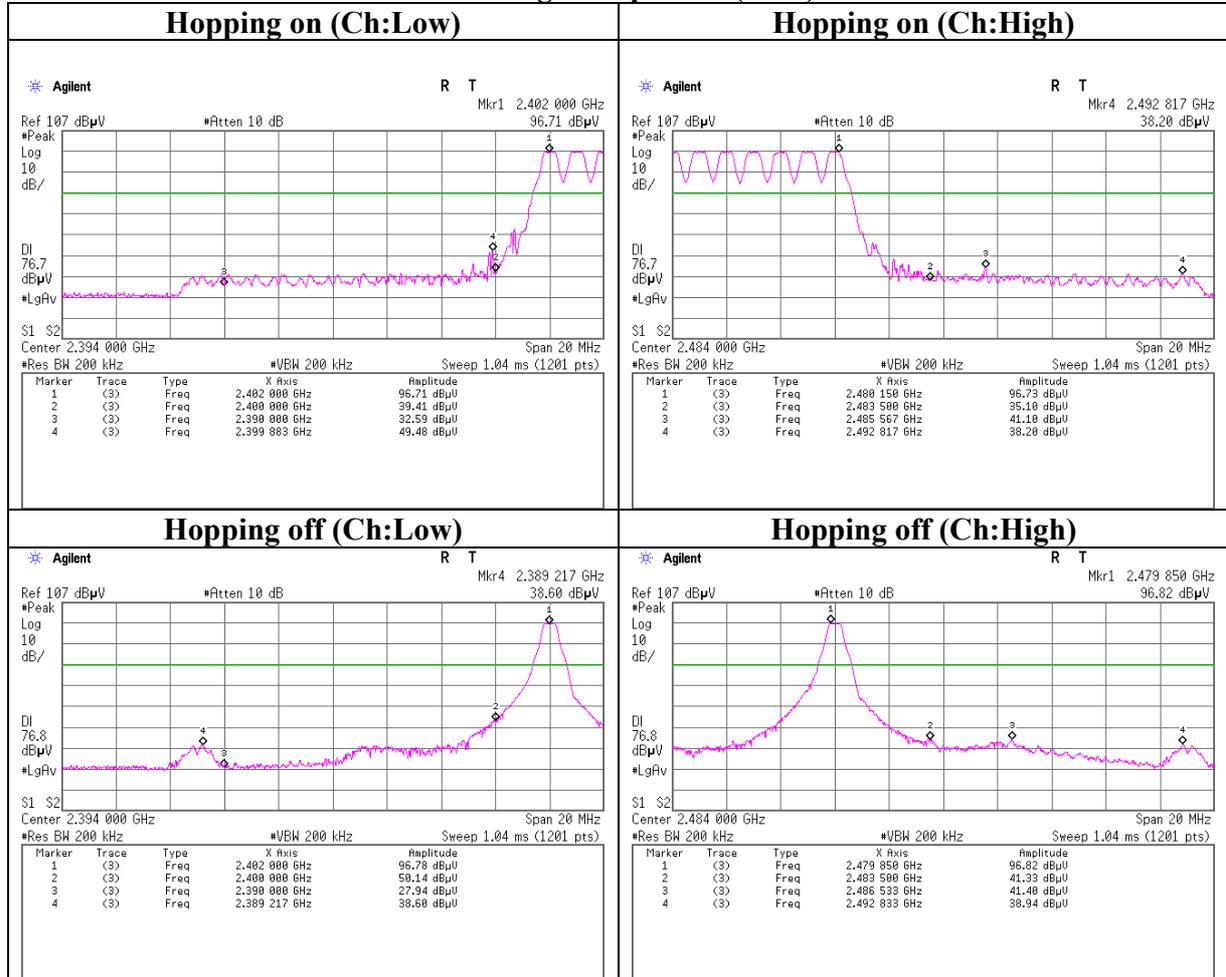

**99% Occupied Bandwidth
 (DH5 / Inquiry)**

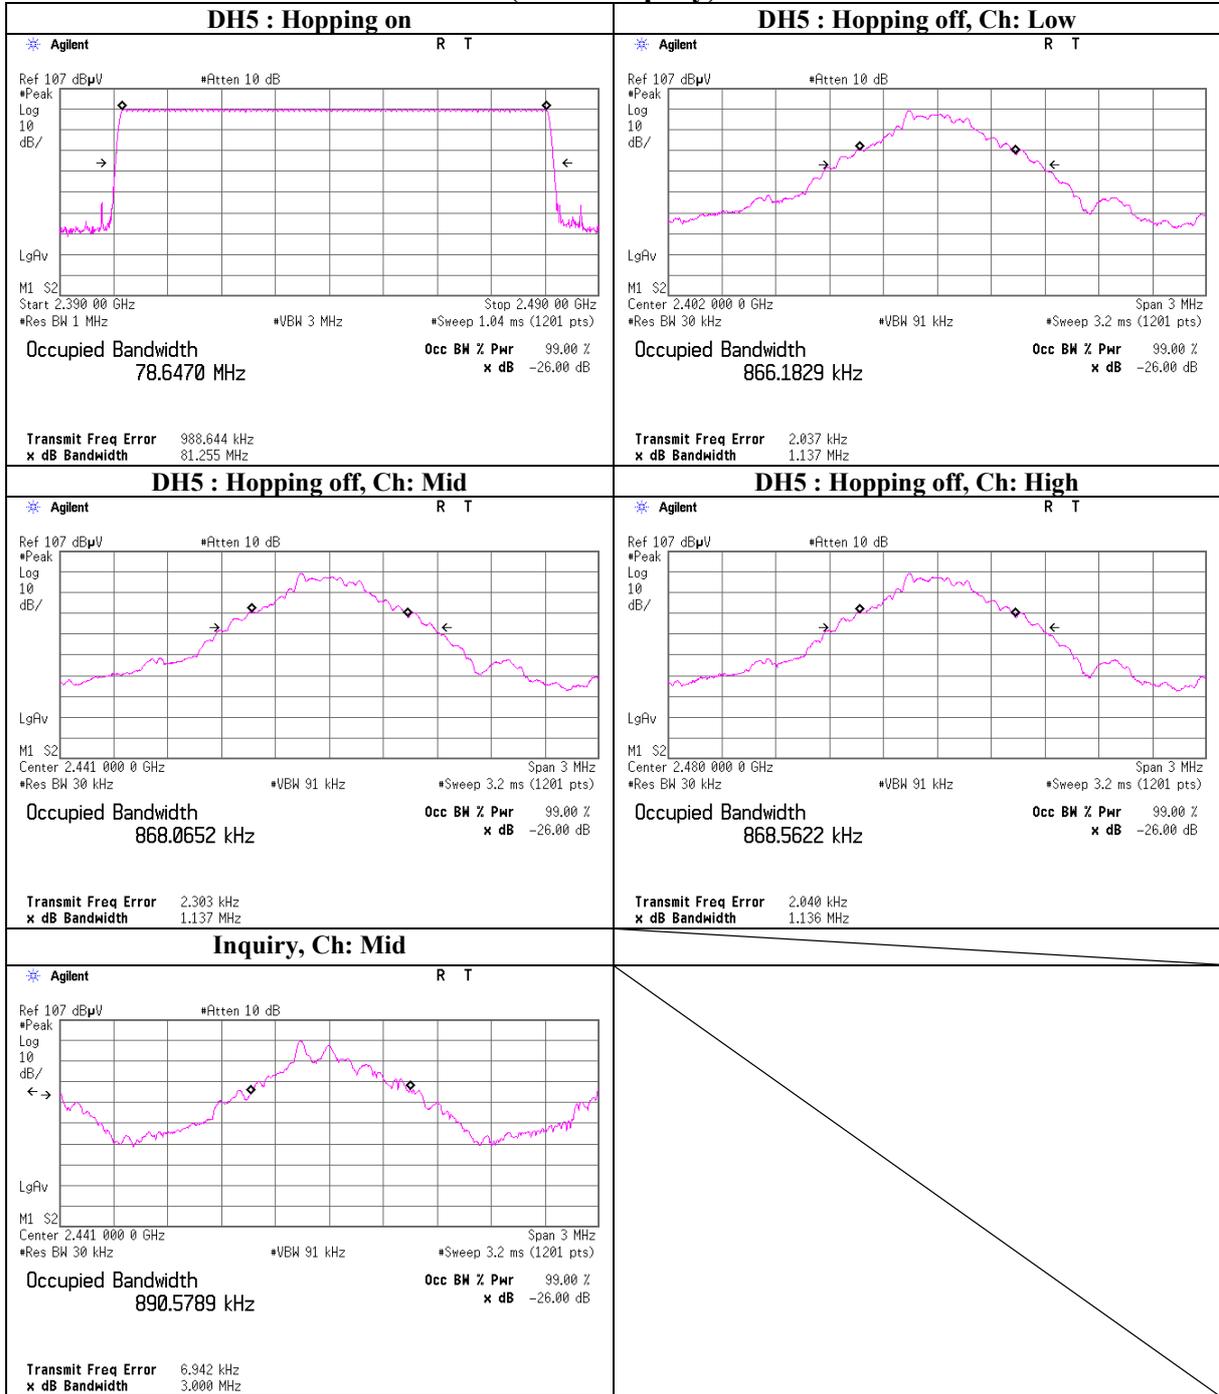

APPENDIX 3:Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-02	Anechoic Chamber	TDK	Semi Anechoic Chamber 3m	RE / CE / AT	2008/04/17 * 12
MOS-22	Thermo-Hygrometer	Custom	CTH-201	RE / CE /AT	2007/12/27 * 12
MJM-05	Measure	PROMART	SEN1955	RE / CE	-
MSTW-14	EMI measurement program	TSJ	TEPTO-DV	RE / CE	-
MRENT-62	Spectrum Analyzer	Agilent	E4448A	RE / CE	2007/11/27 * 12
MTR-03	Test Receiver	Rohde & Schwarz	ESCI	RE / CE	2008/04/02 * 12
MBA-02	Biconical Antenna	Schwarzbeck	BBA9106	RE	2007/10/21 * 12
MLA-02	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2007/10/21 * 12
MCC-12	Coaxial Cable	Fujikura/Agilent	-	RE	2008/02/15 * 12
MAT-07	Attenuator(6dB)	Weinschel Corp	2	RE	2007/11/13 * 12
MPA-09	Pre Amplifier	Agilent	8447D	RE	2007/09/13 * 12
MHA-06	Horn Antenna	Schwarzbeck	BBHA9120D	RE	2008/01/19 * 12
MCC-47	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	2008/05/12 * 12
MPA-10	Pre Amplifier	Agilent	8449B	RE	2007/09/27 * 12
MHA-02	Horn Antenna	EMCO	3160-09	RE	2008/01/19 * 12
MCC-77	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	RE	12/26/2007 * 12
MHF-18	High Pass Filter 3.5-18.0GHz	TOKIMEC	TF323DCA	RE	12/10/2007 * 12
MLS-07	LISN(AMN)	Schwarzbeck	NSLK8127	CE(EUT)	2008/02/20 * 12
MCC-13	Coaxial Cable	Fujikura/Agilent	-	CE	2008/02/15 * 12
MAT-22	Attenuator(10dB) DC-18GHz	Orient Microwave	BX10-0476-00	AT	2008/03/04 * 12
MCC-67	Microwave Cable 1G-40GHz	Schner	SUCOFLEX102	AT	2008/04/04 * 12
MPM-08	Power Meter	Anritsu	ML2495A	AT	2007/09/12 * 12
MPSE-11	Power sensor	Anritsu	MA2411B	AT	2007/09/12 * 12
MSA-10	Spectrum Analyzer	Agilent	E4448A	AT	2008/02/27 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

**Test Item: CE: Conducted Emission
RE: Radiated Emission
AT: Antenna Terminal Conducted test**

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124