



Attachment 2 – SAR Test Plots (WCDMA 850 MHz)

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4132ch (826.4MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

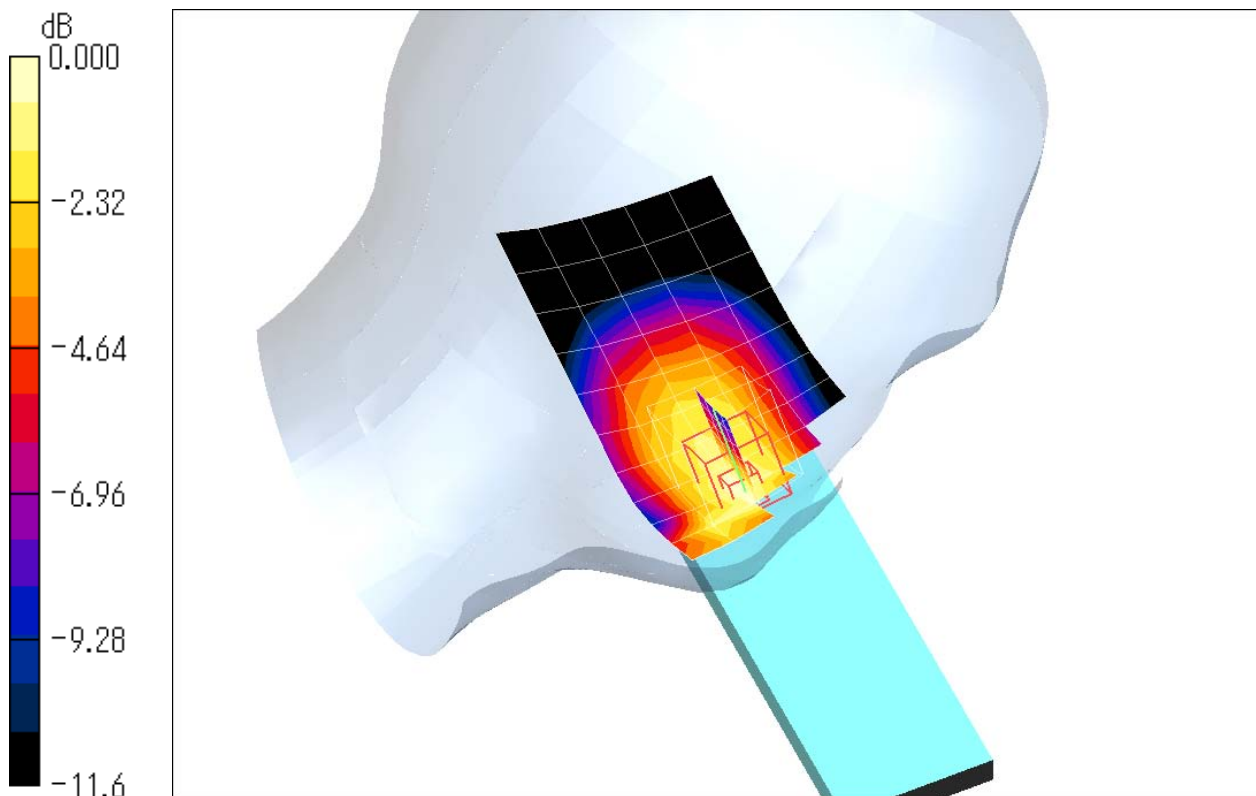
Medium: HSL900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.538 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.5 V/m ; Power Drift = -0.015 dB Peak SAR (extrapolated) = 0.729 W/kg **SAR(1 g) = 0.503 mW/g ; SAR(10 g) = 0.332 mW/g** Maximum value of SAR (measured) = 0.548 mW/g 0 dB = 0.548 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

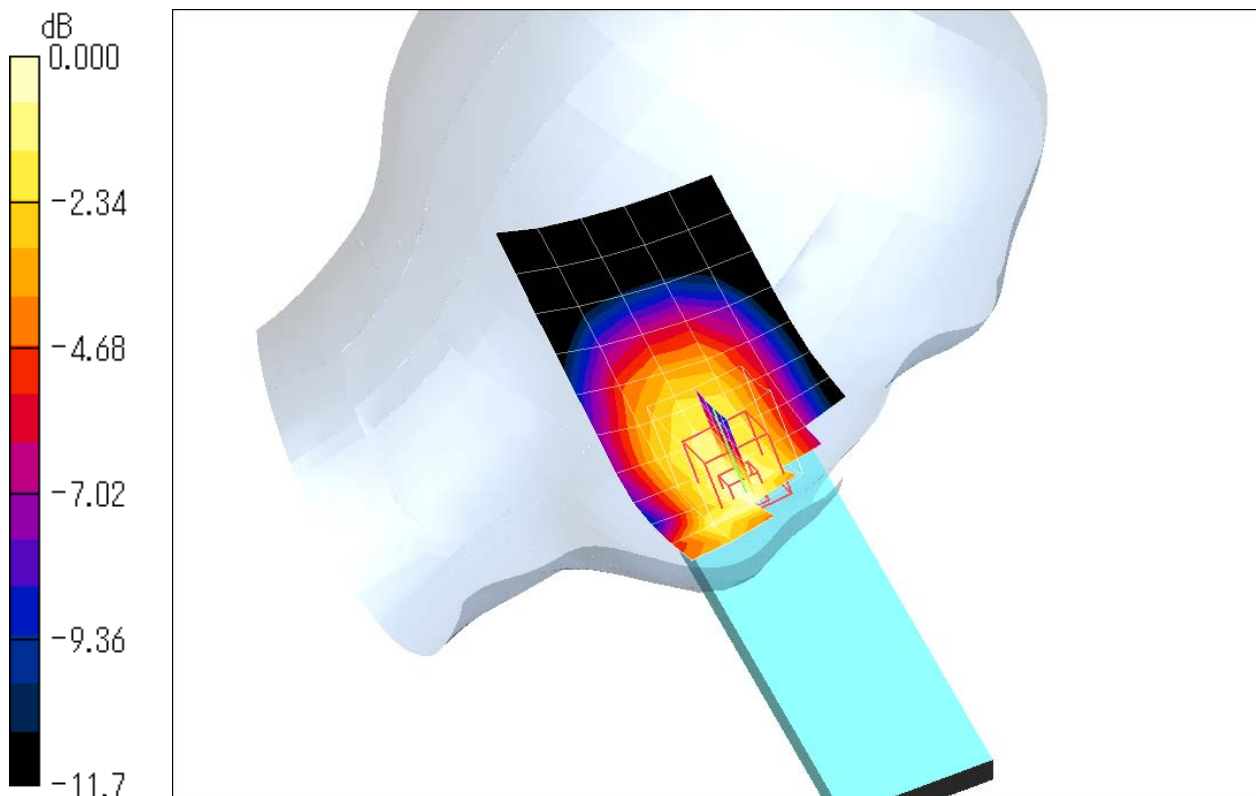
Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.434 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 19.2 V/m ; Power Drift = 0.010 dB Peak SAR (extrapolated) = 0.576 W/kg **SAR(1 g) = 0.398 mW/g ; SAR(10 g) = 0.262 mW/g** Maximum value of SAR (measured) = 0.435 mW/g 0 dB = 0.435 mW/g

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4233ch (846.6MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

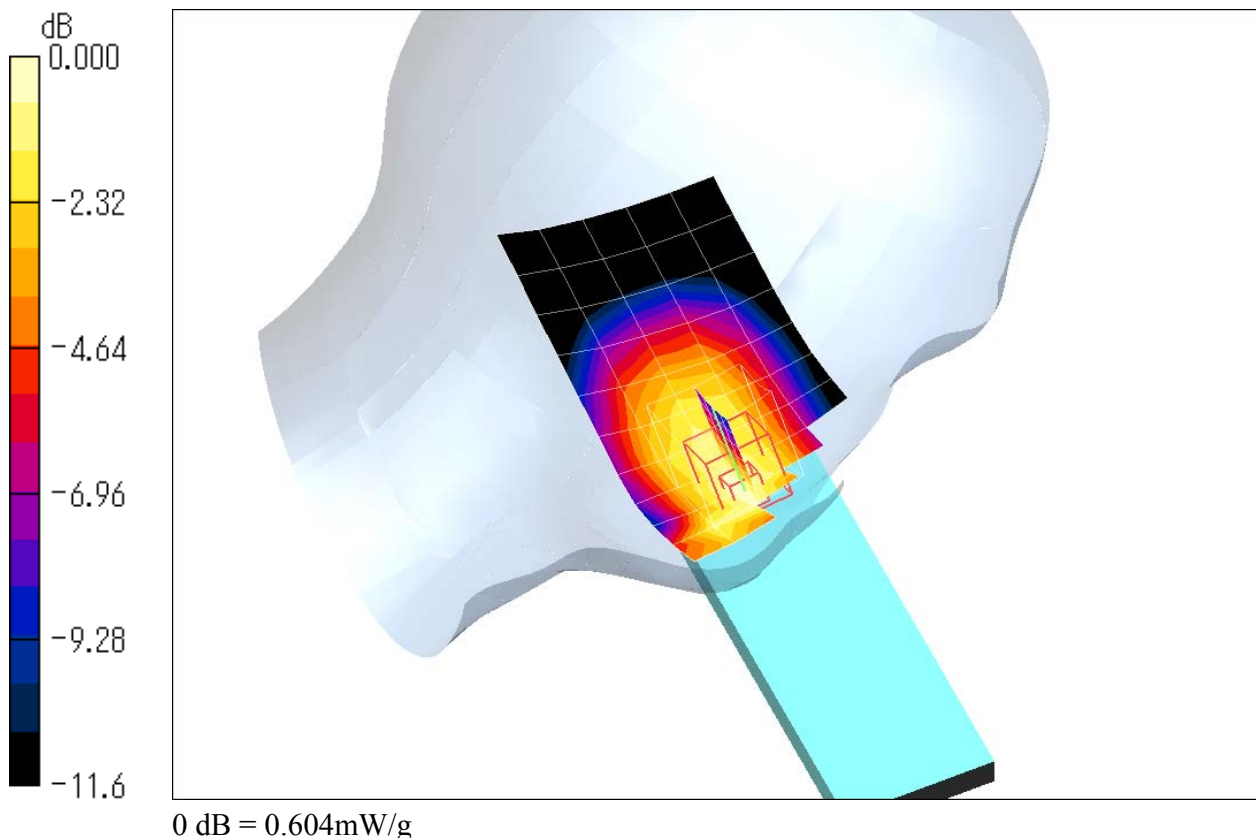
Medium: HSL900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.598 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 22.9 V/m ; Power Drift = -0.017 dB Peak SAR (extrapolated) = 0.801 W/kg **SAR(1 g) = 0.552 mW/g ; SAR(10 g) = 0.363 mW/g** Maximum value of SAR (measured) = 0.604 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4233ch (846.6MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

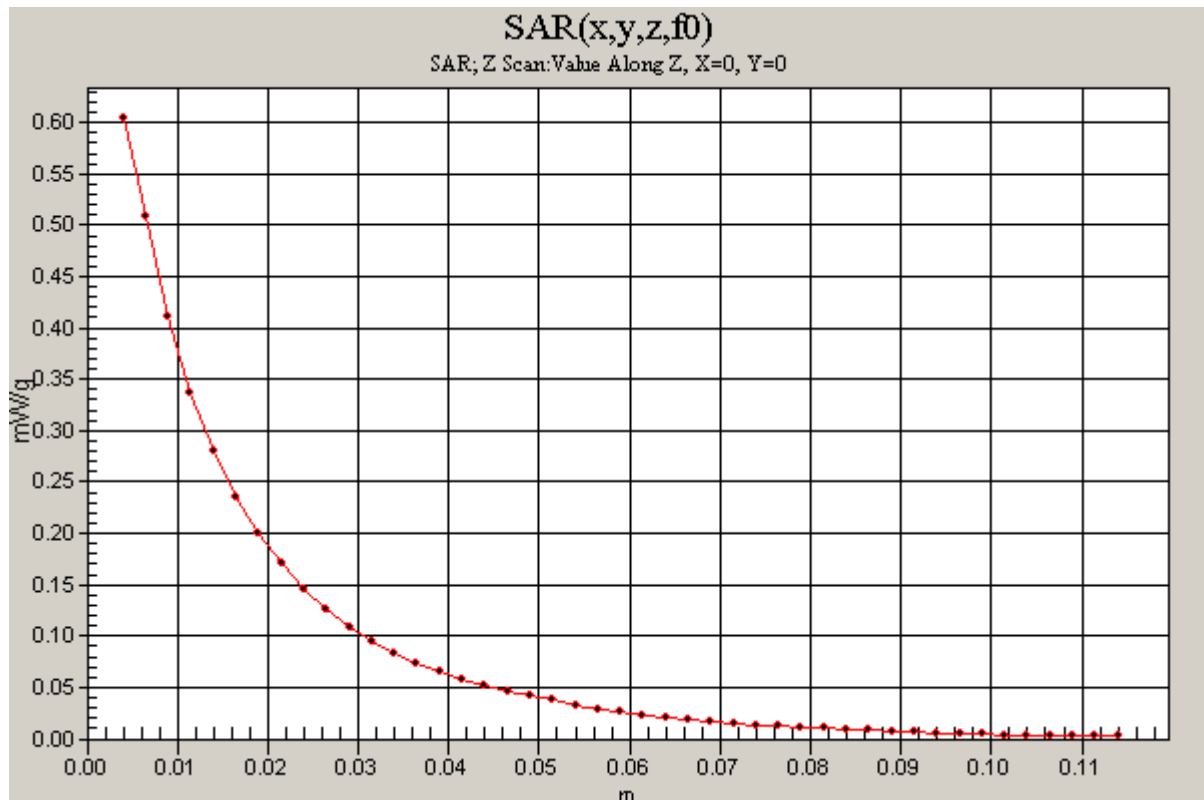
Medium: HSL900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Z Scan (1x1x45): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=2.5\text{mm}$
Maximum value of SAR (measured) = 0.604 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

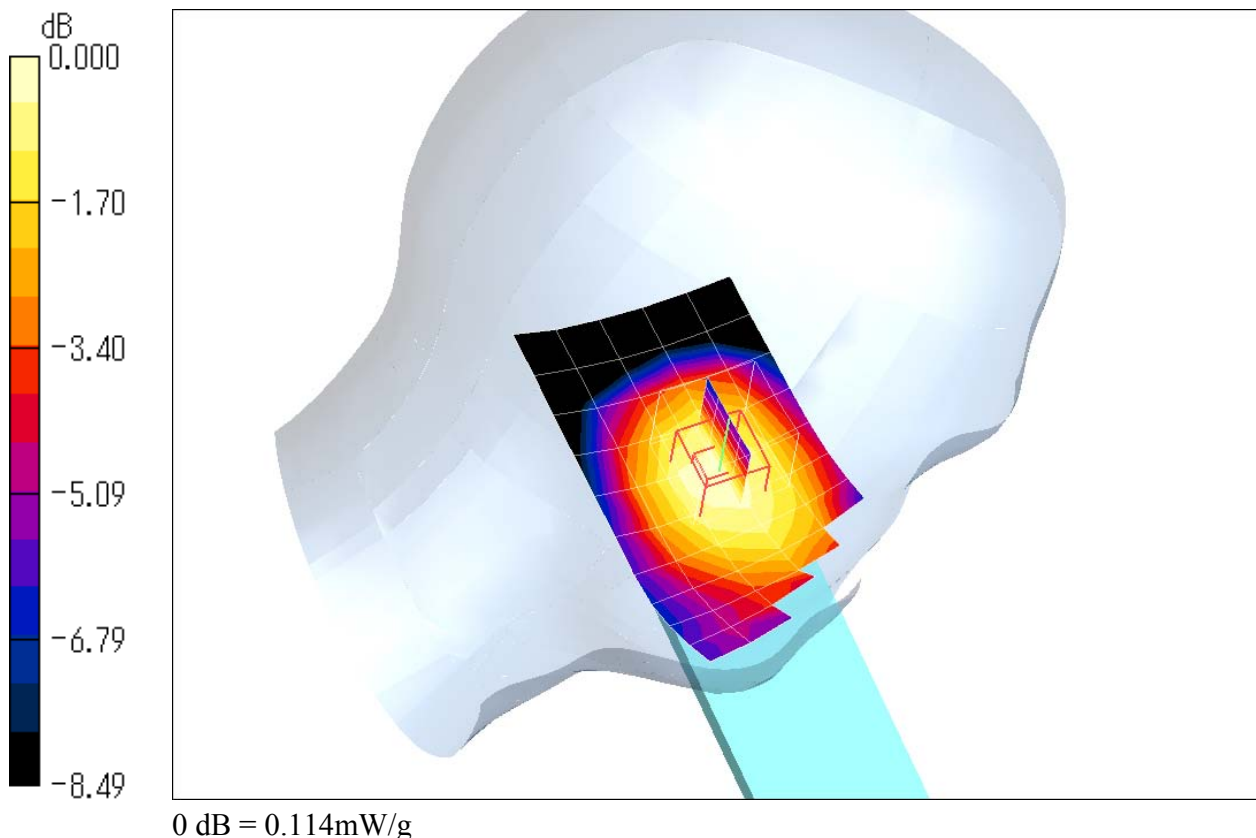
Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.112 mW/g **Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.2 V/m ; Power Drift = -0.063 dB Peak SAR (extrapolated) = 0.127 W/kg **SAR(1 g) = 0.108 mW/g ; SAR(10 g) = 0.083 mW/g** Maximum value of SAR (measured) = 0.114 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

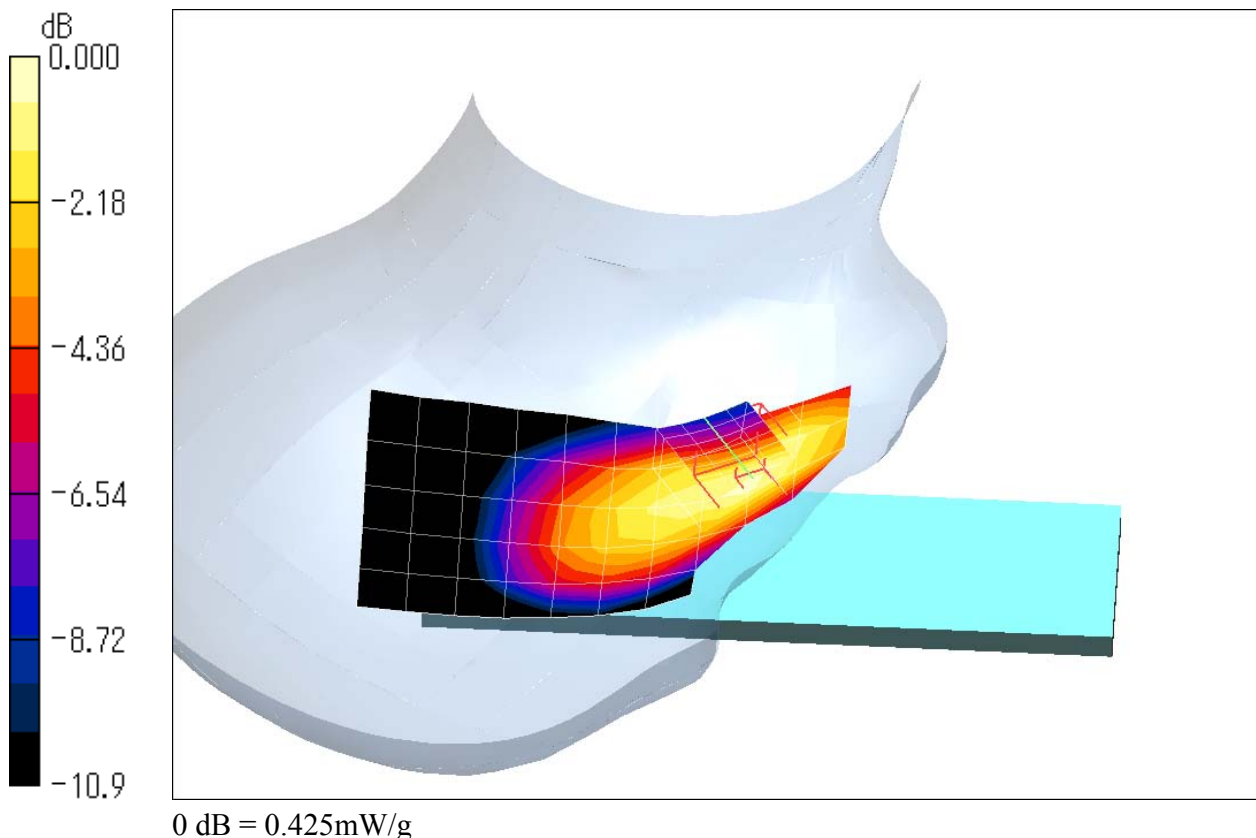
Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.375 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 18.2 V/m ; Power Drift = -0.014 dB Peak SAR (extrapolated) = 0.564 W/kg **SAR(1 g) = 0.389 mW/g ; SAR(10 g) = 0.253 mW/g** Maximum value of SAR (measured) = 0.425 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

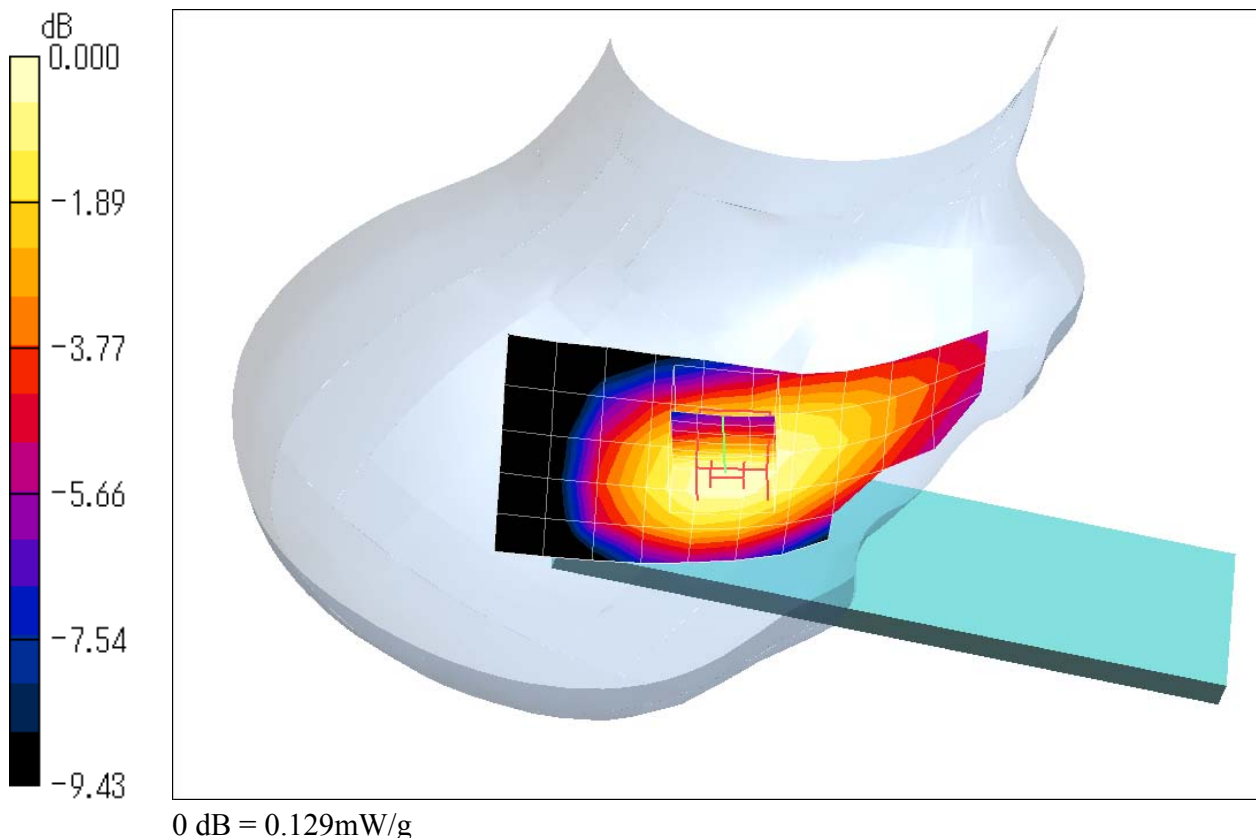
Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.901 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.69, 6.69, 6.69); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.121 mW/g **Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.3 V/m ; Power Drift = 0.008 dB Peak SAR (extrapolated) = 0.144 W/kg **SAR(1 g) = 0.123 mW/g ; SAR(10 g) = 0.093 mW/g** Maximum value of SAR (measured) = 0.129 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4132ch (826.4MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.257 mW/g

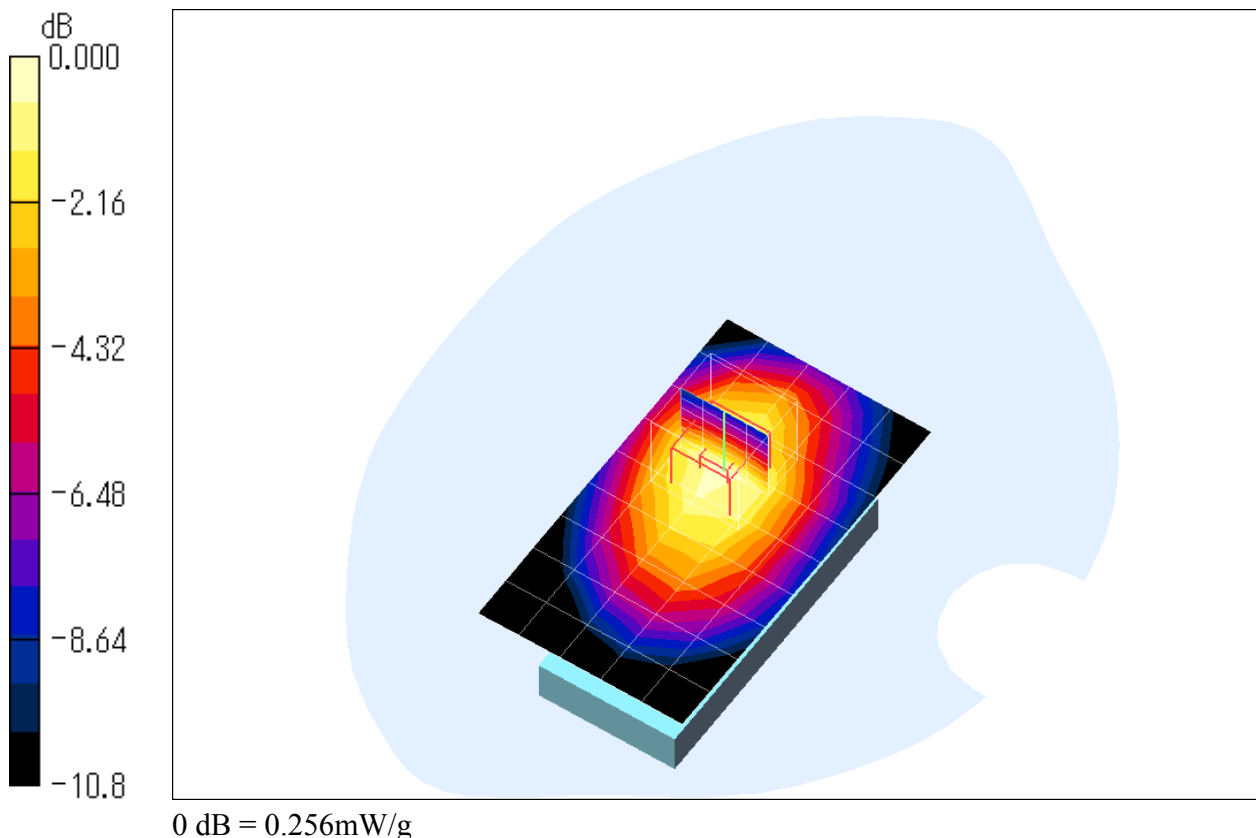
Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.4 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 0.319 W/kg

SAR(1 g) = 0.238 mW/g; SAR(10 g) = 0.164 mW/g

Maximum value of SAR (measured) = 0.256 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 54.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.271 mW/g

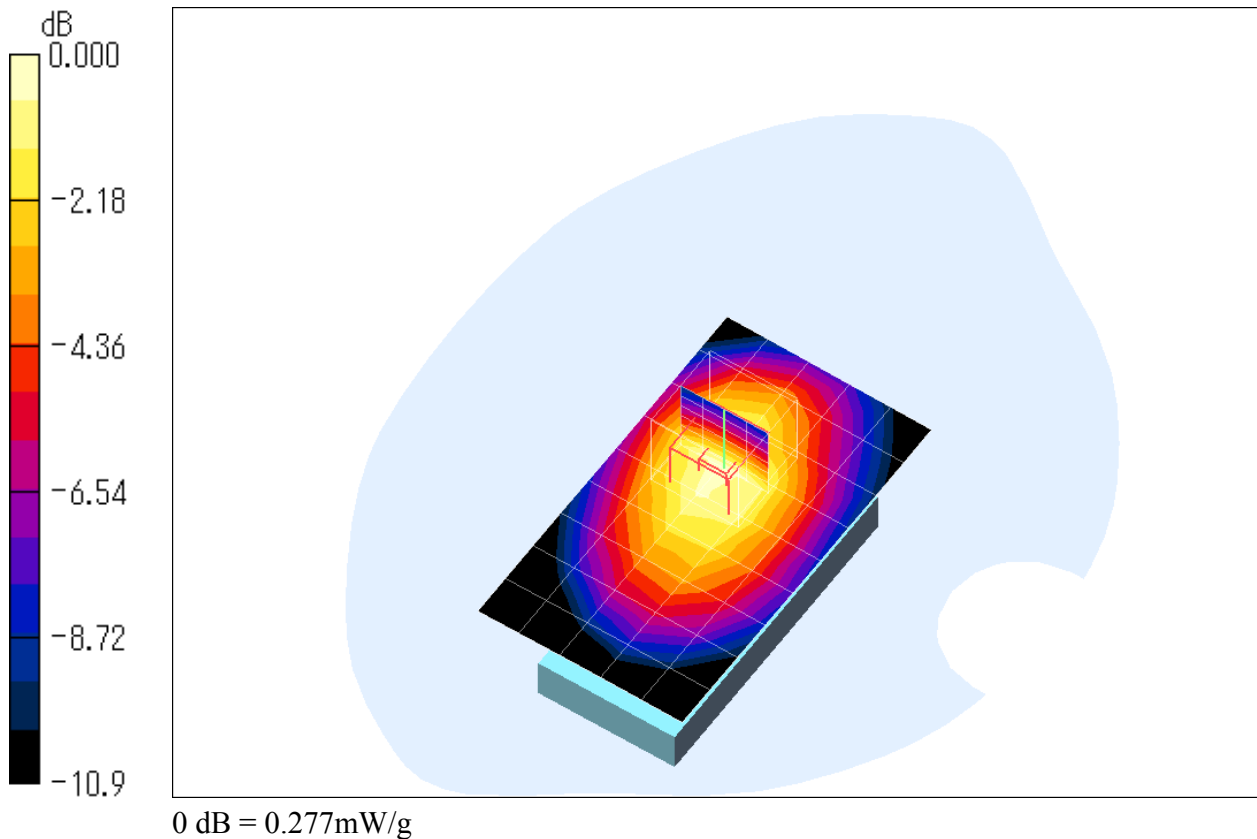
Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.343 W/kg

SAR(1 g) = 0.258 mW/g; SAR(10 g) = 0.180 mW/g

Maximum value of SAR (measured) = 0.277 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4233ch (846.6MHz)**DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

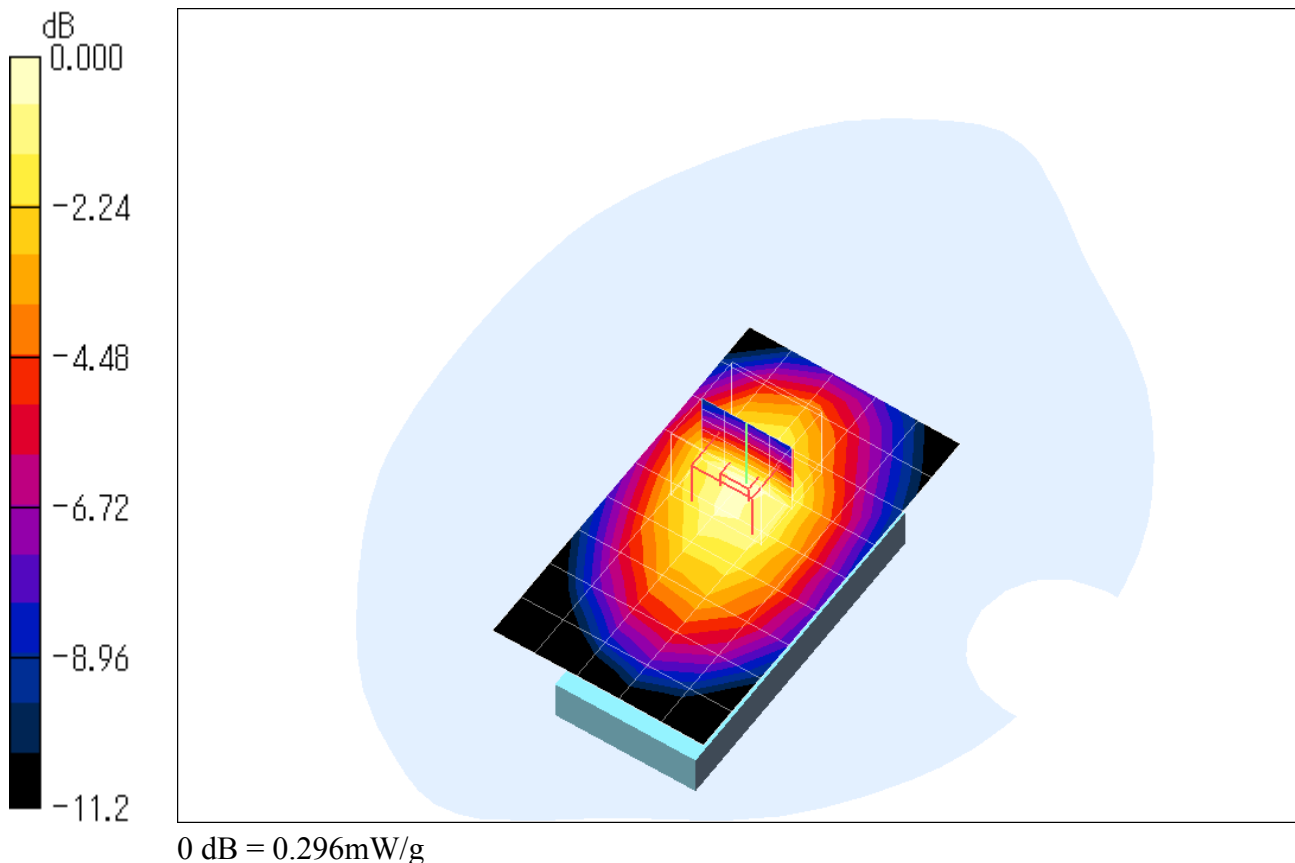
Medium: M900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.296 mW/g **Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 18.0 V/m ; Power Drift = -0.036 dB Peak SAR (extrapolated) = 0.370 W/kg **SAR(1 g) = 0.276 mW/g ; SAR(10 g) = 0.191 mW/g** 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4233ch (846.6MHz)

DUT: Cellular Phone; Type: SH-03A; Serial: 004401111635138

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.95 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.18, 6.18, 6.18); Calibrated: 2007/11/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn328; Calibrated: 2008/03/06
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Z Scan (1x1x45): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=2.5\text{mm}$

Maximum value of SAR (measured) = 0.295 mW/g

