



EMI TEST REPORT

Test Report No. : 29CE0005-HO

Applicant : **Sharp Corporation**
Type of Equipment : **Cellular Phone**
Model No. : **WX-T930**
FCC ID : **APYHRO00084**
Test regulation : **FCC Part 15 Subpart B 2008 Class B**
Test Result : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: October 15, 2008

Tested by:


Kazufumi Nakai
EMC Services

Approved by :


Minoru Yamanaka
Assistant Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://uljapan.co.jp/emc/nvlap.html>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (09.01.08)

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Conducted Emission	11
SECTION 6: Radiated Emission	12
APPENDIX 1: Photographs of test setup.....	13
Conducted Emission	13
Radiated Emission	14
Worst Case Position (Horizontal: X-axis/ Vertical:X-axis)	15
APPENDIX 2: Data of EMI test	16
Conducted Emission	16
Radiated Emission	18
APPENDIX 3: Test instruments	22

SECTION 1: Customer information

Company Name : Sharp Corporation
Address : 2-13-1 Iida Hachihonmatsu, Higashihiroshima-City, Hiroshima, 739-0192,
Japan
Telephone Number : +81-82-420-1837
Facsimile Number : +81-82-420-1654
Contact Person : Tetsuya Maekawa

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Cellular Phone
Model No. : WX-T930
Serial No. : 004401/11/166117/5
Rating : AC 120V/60Hz, DC4.0V
Receipt Date of Sample : October 15, 2008
Country of Mass-production : China
Condition of EUT : Engineering prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model No: WX-T930 (referred to as the EUT in this report) is the Cellular Phone.

Clock frequency(ies) in the system : 32.768kHz, 26MHz, 208MHz

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test Specification : FCC Part 15 Subpart B 2008, final revised on May 19, 2008
Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Class B	N/A	[QP] 14.4dB, 4.87197MHz, N 4.79444MHz, L [AV] 7.8dB, 4.51409MHz, N	Complied
Radiated emission	ANSI C63.4: 2003 8. Radiated emission measurements	Class B	N/A	10.0dB, 875.523MHz, QP Vertical	Complied

*Note: UL Japan, Inc's EMI Work Procedure QPM05.

*These tests were performed without any deviations from test procedure except for addition or exclusion.

3.3 Additions or deviations to standards

No addition, deviation, nor exclusion has been made from standards.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission	Radiated emission (10m*)				Radiated emission (3m*)			Radiated emission (3m*)	
	150kHz-30MHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz	18GHz-40GHz	
No.1 semi-anechoic chamber (±)	3.7dB	3.1dB	4.4dB	4.2dB	3.2dB	3.8dB	3.9dB	5.9dB	6.1dB	
No.2 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.4dB	4.0dB	5.9dB	6.1dB	
No.3 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.6dB	4.0dB	5.9dB	6.1dB	
No.4 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	3.9dB	3.9dB	5.9dB	6.1dB	

*10m/3m = Measurement distance

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments


Refer to APPENDIX 1 to 3.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating modes

The mode is used : 1) USB Data Com mode
2) Standby mode

4.2 Configuration and peripherals [Conducted emission test]

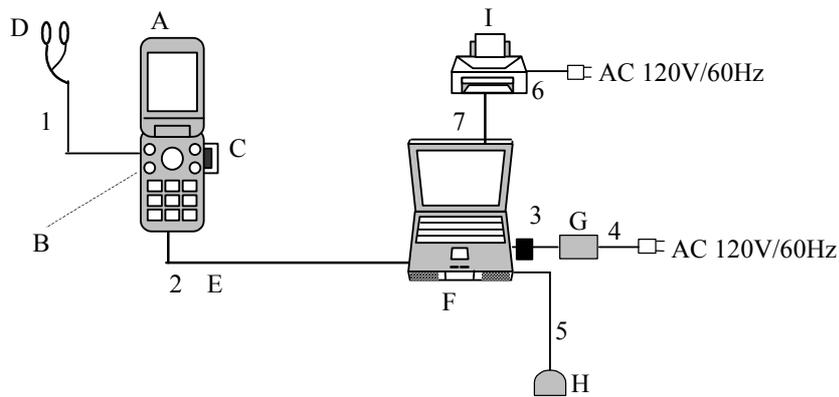

■ : Standard Ferrite Core

*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Cellular Phone	WX-T930	004401/11/166117/5	SHARP	EUT
B	Rechargeable Lithium-ion Battery	XN-1BT21	RIA	SANYO	EUT
C	microSD Memory Card	SDSQ-128	01	SanDisk	EUT
D	Stereo Handsfree	RPHOHA018AF	01	HOSIDEN	EUT
E	USB Data Cable	XN-1DC30	-	HOSIDEN	Peripheral(cable)
F	Personal Computer	PP01L	CN-04P240-48643-32M-3708	Dell	DOC
G	AC Adapter (PC)	ADP-90FB	CN-06G356-48661-32H-OBJ9	Dell	-
H	Mouse	X06-08477	63618-OEM-1245101-5	Microsoft	DOC
I	Printer	BJF860	K10201	Canon	DOC

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Stereo Handsfree	1.7	Unshielded	Unshielded	-
2	USB Data Cable	0.8	Shielded	Unshielded	-
3	AC Adapter Cable (Dell PC)	1.8	Unshielded	Unshielded	-
4	AC Power Cable (Dell PC)	1.8	Unshielded	Unshielded	-
5	Mouse Cable	1.8	Unshielded	Unshielded	-
6	AC Cable	1.8	Unshielded	Unshielded	-
7	Parallel Cable	2.0	Shielded	Shielded	-

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

[Radiated emission test]

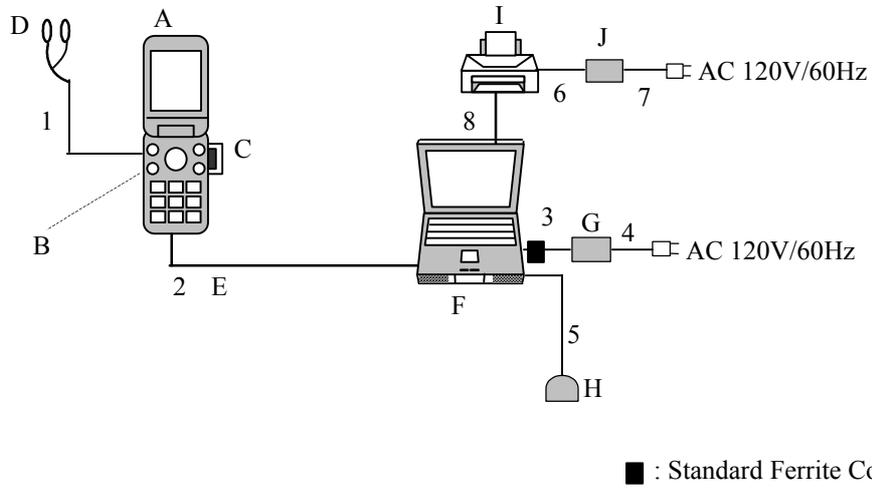

*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remark
A	Cellular Phone	WX-T930	004401/11/166117/5	SHARP	EUT
B	Rechargeable Lithium-ion Battery	XN-1BT21	RIA	SANYO	EUT
C	microSD Memory Card	SDDSQ-128	01	SanDisk	EUT
D	Stereo Handsfree	RPHOHA018AF	01	HOSIDEN	EUT
E	USB Data Cable	XN-1DC30	-	HOSIDEN	Peripheral(cable)
F	Personal Computer	PP01L	CN-04P240-48643-32M-3708	Dell	DOC
G	AC Adapter (PC)	ADP-90FB	CN-06G356-48661-32H-OBJ9	Dell	-
H	Mouse	X06-08477	63618-OEM-1245101-5	Microsoft	DOC
I	Printer	K10190	XADP01190	Canon	DOC
J	AC Adapter (Printer)	AD-360U	01729379	Canon	-

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	Stereo Handsfree	1.7	Unshielded	Unshielded	-
2	USB Data Cable	0.8	Shielded	Unshielded	-
3	AC Adapter Cable (Dell PC)	1.8	Unshielded	Unshielded	-
4	AC Power Cable (Dell PC)	1.8	Unshielded	Unshielded	-
5	Mouse Cable	1.8	Unshielded	Unshielded	-
6	AC Adapter Cable (Printer)	1.0	Unshielded	Unshielded	-
7	AC Power Cable (Printer)	1.5	Unshielded	Unshielded	-
8	Printer Cable	0.8	Shielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

5.1 Operating environment

Test place : No.1 semi anechoic chamber.
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from the LISN/AMN and excess AC cable was bundled in center. I/O cables that were connected to the other peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/AMN to the input power source. All unused 50 ohm connectors of the LISN/AMN were resistivity terminated in 50 ohm when not connected to the measuring equipment. Photographs of the set up are shown in Appendix 1.

Frequency range : 0.15 MHz-30MHz
EUT position : Table top
EUT operation mode : See Clause 4.1

5.3 Test procedure

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT within a semi anechoic chamber. The EUT was connected to a Line Impedance Stabilization Network (LISN)/ Artificial Mains network (AMN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector.

The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : Quasi-Peak and Average
IF Bandwidth : 9 kHz

5.4 Test result

Summary of the test results: Pass

Date: October 15, 2008

Test engineer: Kazufumi Nakai

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Radiated Emission

6.1 Operating environment

Test place : No.1 semi anechoic chamber
Temperature : See data
Humidity : See data

6.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The EUT was set on the edge of the tabletop.
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

6.3 Test conditions

Frequency range : 30MHz-300MHz (Biconical antenna) / 300MHz-1000MHz (Logperiodic antenna)
1000MHz -2000MHz (Horn antenna)
Test distance : 3m
EUT position : Table top
EUT operation mode : See Clause 4.1

6.4 Test procedure

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.
The test was made with the detector (RBW/VBW) in the following table.
When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
IF Bandwidth	QP: BW 120kHz	PK: RBW:1MHz/VBW: 1MHz AV: RBW:1MHz/VBW:10Hz

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

6.5 Test result

Summary of the test results: Pass

Date: October 15, 2008

Test engineer: Kazufumi Nakai

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

APPENDIX 1: Photographs of test setup

Conducted Emission

This page has been submitted for a separate exhibit.

Radiated Emission

This page has been submitted for a separate exhibit.

Worst Case Position (Horizontal: X-axis/ Vertical:X-axis)

This page has been submitted for a separate exhibit.

APPENDIX 2: Data of EMI test

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2008/10/15

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T930
Serial No. : 004401/11/166117/5

Report No. : 29CE0005-HO
Power : AC120V / 60Hz
Temp./Humi. : 23deg. C / 61%
Engineer : Kazufumi Nakai

Mode / Remarks : USB Data Com Mode

LIMIT : FCC15.107(a) QP
FCC15.107(a) AV

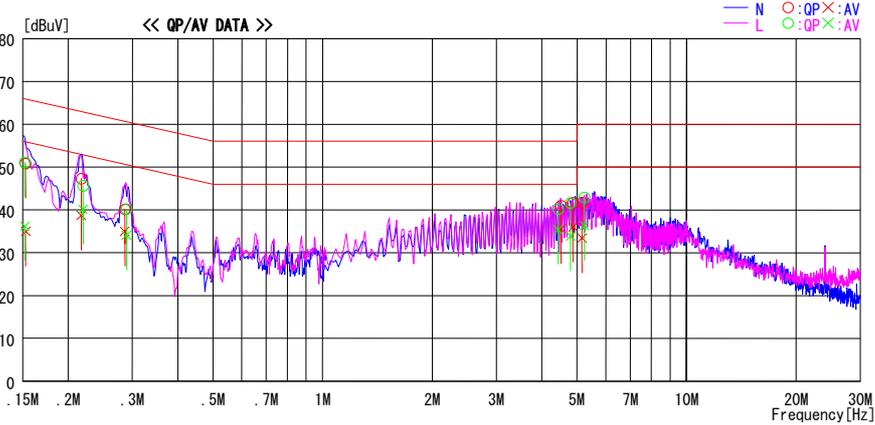

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15271	50.6	34.8	0.2	50.8	35.0	65.9	55.9	15.1	20.9	N	
0.21709	47.1	38.5	0.2	47.3	38.7	62.9	52.9	15.6	14.2	N	
0.28603	39.9	34.7	0.3	40.2	35.0	60.6	50.6	20.4	15.6	N	
4.51208	40.1	34.7	0.9	41.0	35.6	56.0	46.0	15.0	10.4	N	
4.87197	40.6	35.0	1.0	41.6	36.0	56.0	46.0	14.4	10.0	N	
5.16062	40.7	32.4	1.0	41.7	33.4	60.0	50.0	18.3	16.6	N	
0.15200	50.9	36.0	0.2	51.1	36.2	65.9	55.9	14.8	19.7	L	
0.21945	45.5	39.9	0.2	45.7	40.1	62.8	52.8	17.1	12.7	L	
0.28937	39.9	33.8	0.3	40.2	34.1	60.5	50.5	20.3	16.4	L	
4.43281	39.3	34.5	0.9	40.2	35.4	56.0	46.0	15.8	10.6	L	
4.79444	40.7	33.0	0.9	41.6	33.9	56.0	46.0	14.4	12.1	L	
5.23553	41.9	35.3	1.0	42.9	36.3	60.0	50.0	17.1	13.7	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV]=READING [dBuV]+C.F [dB] (LISN factor+CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2008/10/15

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T930
Serial No. : 004401/11/166117/5

Report No. : 29CE0005-HO
Power : AC120V / 60Hz
Temp./Humi. : 23deg. C / 61%
Engineer : Kazufumi Nakai

Mode / Remarks : Standby Mode

LIMIT : FCC15.107(a) QP
FCC15.107(a) AV

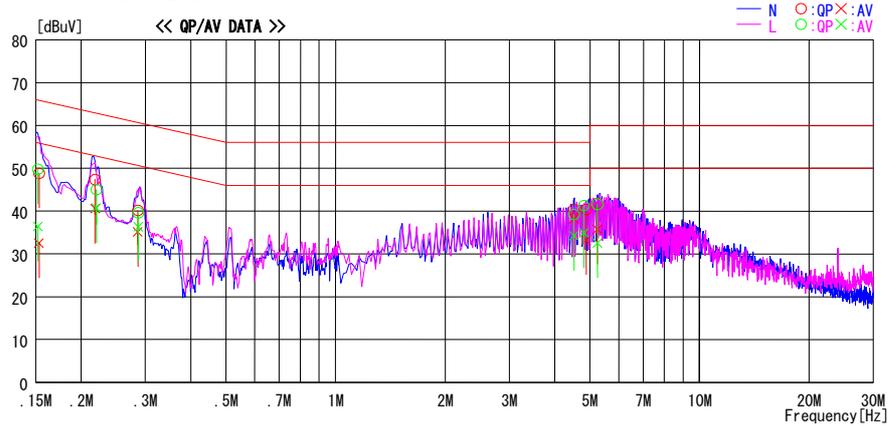

Frequency [MHz]	Reading Level		Corr. Factor	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15315	48.6	32.3	0.2	48.8	32.5	65.8	55.8	17.0	23.3	N	
0.21825	47.2	40.4	0.2	47.4	40.6	62.9	52.9	15.5	12.3	N	
0.28603	39.9	34.8	0.3	40.2	35.1	60.6	50.6	20.4	15.5	N	
4.51409	39.5	37.3	0.9	40.4	38.2	56.0	46.0	15.6	7.8	N	
4.87812	39.4	32.2	1.0	40.4	33.2	56.0	46.0	15.6	12.8	N	
5.24021	40.8	34.7	1.0	41.8	35.7	60.0	50.0	18.2	14.3	N	
0.15210	49.6	36.2	0.2	49.8	36.4	65.9	55.9	16.1	19.5	L	
0.21998	44.8	40.5	0.2	45.0	40.7	62.8	52.8	17.8	12.1	L	
0.28718	39.3	36.0	0.3	39.6	36.3	60.6	50.6	21.0	14.3	L	
4.51331	38.3	33.3	0.9	39.2	34.2	56.0	46.0	16.8	11.8	L	
4.80409	40.4	34.0	0.9	41.3	34.9	56.0	46.0	14.7	11.1	L	
5.24026	40.6	31.5	1.0	41.6	32.5	60.0	50.0	18.4	17.5	L	

CHART: WITH FACTOR, Peak hold data. CALCURATION: RESULT [dBuV]=READING [dBuV]+C. F [dB] (LISN factor+CABLE LOSS)
Except for the above table: adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2008/10/15

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T930
Serial No. : 004401/11/166117/5
Report No. : 29CE0005-HO
Power : AC 120V / 60Hz
Temp./Humi. : 23deg.C. / 61%
Engineer : Kazufumi Nakai

Mode / Remarks : USB Data Com Mode, Worst-axis(Hori:X, Vert:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

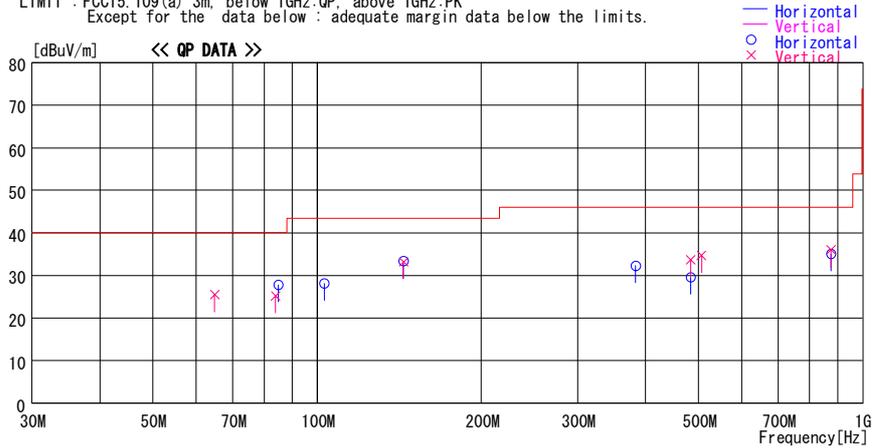

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss & Gain [dB]							
64.889	38.8	QP	7.4	-20.7	25.5	216	100	Vert.	40.0	14.5	
83.902	38.4	QP	7.1	-20.3	25.2	253	100	Vert.	40.0	14.8	
84.825	40.8	QP	7.3	-20.3	27.8	106	196	Hori.	40.0	12.2	
103.103	37.7	QP	10.3	-19.9	28.1	169	169	Hori.	43.5	15.4	
144.015	38.1	QP	14.4	-19.3	33.2	195	181	Vert.	43.5	10.3	
144.017	38.3	QP	14.4	-19.3	33.4	127	139	Hori.	43.5	10.1	
383.312	33.1	QP	16.2	-17.0	32.3	145	100	Hori.	46.0	13.7	
483.833	32.8	QP	17.9	-17.0	33.7	176	100	Vert.	46.0	12.3	
483.834	28.7	QP	17.9	-17.0	29.6	66	100	Hori.	46.0	16.4	
506.877	33.4	QP	18.2	-16.9	34.7	184	100	Vert.	46.0	11.3	
875.523	28.4	QP	21.2	-14.5	35.1	134	100	Hori.	46.0	10.9	
875.523	29.3	QP	21.2	-14.5	36.0	142	114	Vert.	46.0	10.0	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2008/10/15

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T930
Serial No. : 004401/11/166117/5
Report No. : 29CE0005-HO
Power : AC 120V / 60Hz
Temp./Humi. : 23deg.C. / 61%
Engineer : Kazufumi Nakai

Mode / Remarks : Standby Mode, Worst-axis (Hori:X, Vert:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

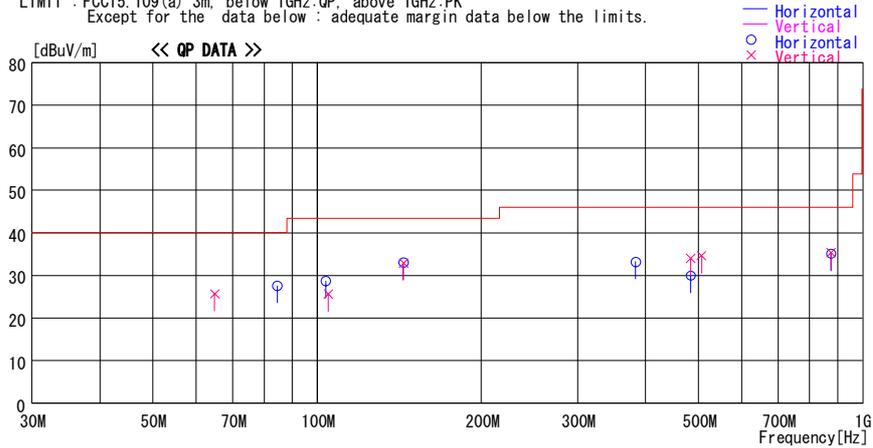

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss & Gain [dB]							
64.874	39.0	QP	7.4	-20.7	25.7	223	100	Vert.	40.0	14.3	
84.531	40.7	QP	7.2	-20.3	27.6	113	211	Hori.	40.0	12.4	
103.687	38.2	QP	10.4	-19.9	28.7	186	155	Hori.	43.5	14.8	
104.888	35.0	QP	10.5	-19.9	25.6	350	100	Vert.	43.5	17.9	
144.009	38.0	QP	14.4	-19.3	33.1	111	113	Hori.	43.5	10.4	
144.011	37.8	QP	14.4	-19.3	32.9	171	100	Vert.	43.5	10.6	
383.315	34.0	QP	16.2	-17.0	33.2	150	100	Hori.	46.0	12.8	
483.837	29.1	QP	17.9	-17.0	30.0	70	100	Hori.	46.0	16.0	
483.843	33.1	QP	17.9	-17.0	34.0	170	100	Vert.	46.0	12.0	
506.875	33.3	QP	18.2	-16.9	34.6	179	100	Vert.	46.0	11.4	
875.506	28.5	QP	21.2	-14.5	35.2	140	100	Hori.	46.0	10.8	
875.535	28.7	QP	21.2	-14.5	35.4	142	117	Vert.	46.0	10.6	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2008/10/15

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T930
Serial No. : 004401/11/166117/5
Report No. : 29CE0005-HO
Power : AC 120V / 60Hz
Temp./Humi. : 23deg. C. / 61%
Engineer : Kazufumi Nakai

Mode / Remarks : USB Data Com Mode, Worst-axis(Hori:X, Vert:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

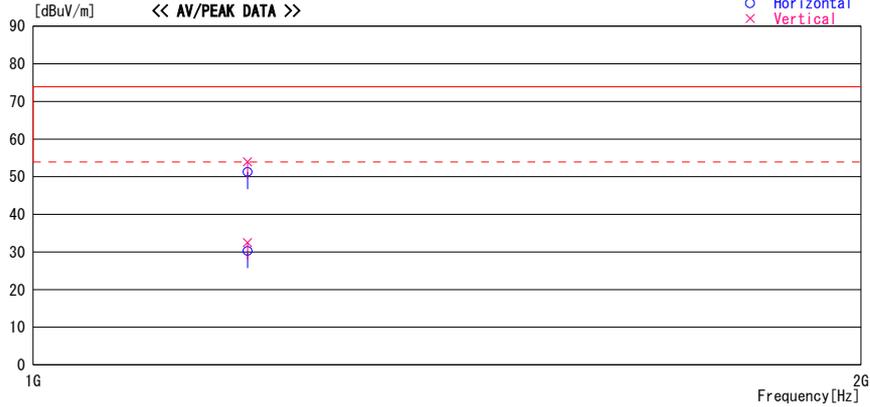

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]					
1196.566	61.4	PK	24.7	-34.9	51.2	Hori.	73.9	22.7	
1196.566	64.2	PK	24.7	-34.9	54.0	Vert.	73.9	19.9	
1196.566	40.5	AV	24.7	-34.9	30.3	Hori.	53.9	23.6	
1196.566	42.7	AV	24.7	-34.9	32.5	Vert.	53.9	21.4	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz--:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2008/10/15

Company : Sharp Corporation
Kind of EUT : Cellular Phone
Model No. : WX-T930
Serial No. : 004401/11/166117/5
Report No. : 29CE0005-HO
Power : AC 120V / 60Hz
Temp./Humi. : 23deg. C. / 61%
Engineer : Kazufumi Nakai

Mode / Remarks : Standby Mode, Worst-axis(Hori:X, Vert:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

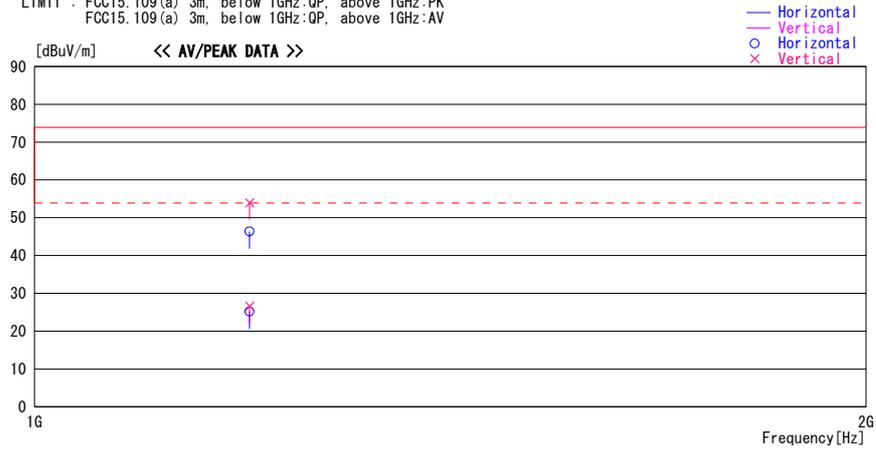

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]					
1196.469	56.6	PK	24.7	-34.9	46.4	Hori.	73.9	27.5	
1196.469	64.2	PK	24.7	-34.9	54.0	Vert.	73.9	19.9	
1196.469	35.4	AV	24.7	-34.9	25.2	Hori.	53.9	28.7	
1196.469	36.8	AV	24.7	-34.9	26.6	Vert.	53.9	27.3	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

APPENDIX 3: Test instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
MAEC-01	Anechoic Chamber	TDK	Semi Anechoic Chamber 10m	RE/CE	2007/11/23 * 12
MBA-01	Biconical Antenna	Schwarzbeck	BBA9106	RE	2007/10/21 * 12
MLA-09	Logperiodic Antenna	Schwarzbeck	USLP9143B	RE	2008/01/12 * 12
MAT-06	Attenuator(6dB)	Weinschel Corp	2	RE	2007/11/14 * 12
MCC-01	Coaxial Cable 0.1-3000MHz	Suhner/storm/Agilent/TSJ	-	RE	2008/10/02 * 12
MPA-04	Pre Amplifier	Agilent	8447D	RE	2008/07/23 * 12
MTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE/CE	2007/10/19 * 12
MSTW-14	EMI measurement program	TSJ	TEPTO-DV	RE/CE	-
MOS-01	Digital Humidity Indicator	N.T	NT-1800	RE/CE	2007/11/12 * 12
MJM-01	Measure	KDS	ES19-55	RE/CE	-
MLS-02	LISN(AMN)	Schwarzbeck	NSLK8127	CE(EUT)	2008/06/27 * 12
MLS-03	LISN(AMN)	Schwarzbeck	NSLK8127	CE(AE)	2008/07/01 * 12
MTA-06	Terminator	MCL	BTRM-50	CE	2008/02/04 * 12
MCC-03	Coaxial Cable	Fujikura/Suhner/Agilent/TSJ	-	CE	2007/12/27 * 12
MHA-05	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	RE	2008/01/19 * 12
MCC-18	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX 104	RE	2008/09/09 * 12
MPA-01	Pre Amplifier	Agilent	8449B	RE	2008/02/12 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

CE: Conducted emission

RE: Radiated emission

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124