


### A.3 SAR Measurement Data

#### A.3.1 Left Head

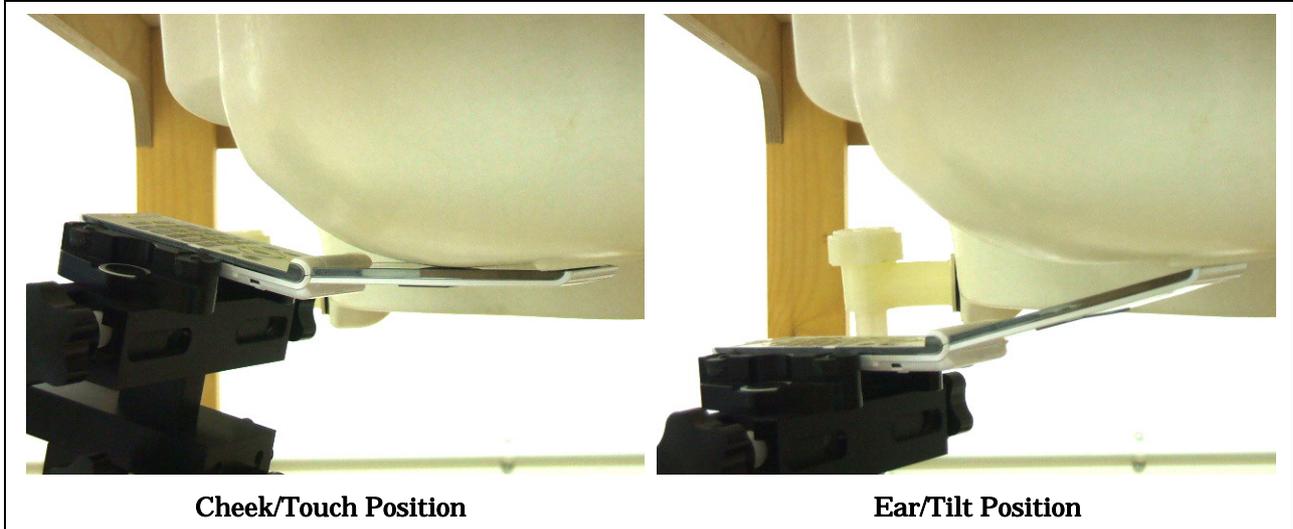


| WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1) |           | Date : November 11, 2008 |                |                  |              |                 |                   |
|---|-----------|--------------------------|----------------|------------------|--------------|-----------------|-------------------|
| Test Position                                     | Frequency |                          | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g] | SAR (1g) [mW/g] | Tissue Temp. [°C] |
|   | Channel   | MHz                      |                |                  |              |                 |                   |
| Cheek/Touch                                       | 4132      | 826.40                   | --             | --               | 1.6          | **              | --                |
|   | 4182      | 836.40                   | 23.43          | -0.039           |              | 0.679           | 22.0              |
|   | 4233      | 846.60                   | --             | --               |              | **              | --                |
| Ear/Tilt  | 4132      | 826.40                   | --             | --               | 1.6          | **              | --                |
|   | 4182      | 836.40                   | 23.43          | 0.007            |              | 0.138           | 22.0              |
|   | 4233      | 846.60                   | --             | --               |              | **              | --                |

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

### A.3.2 Right Head

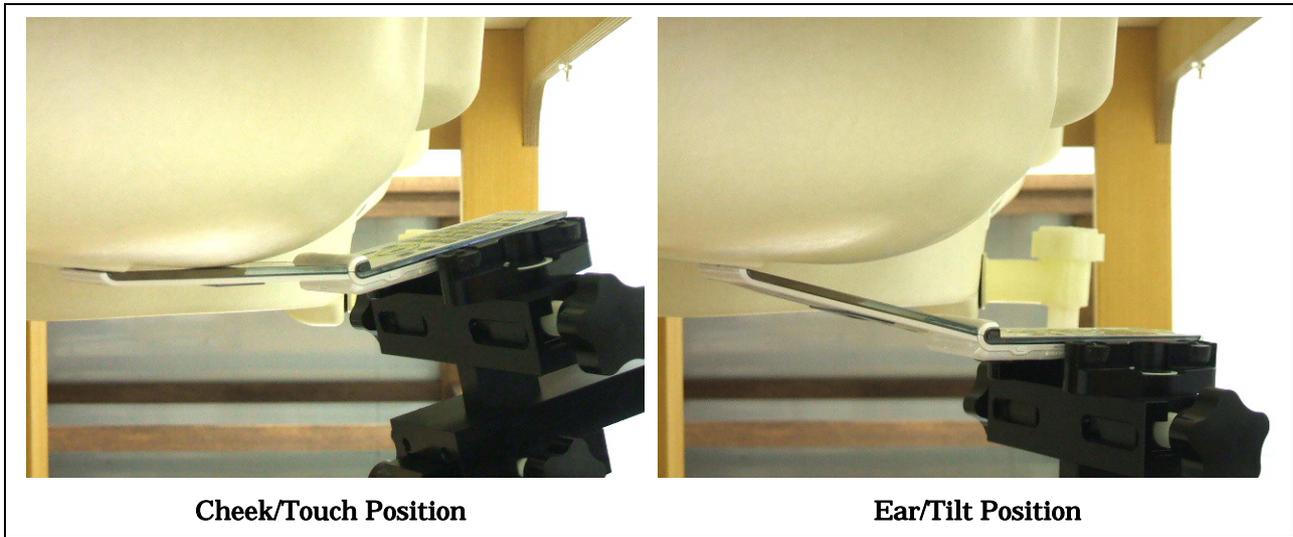

| WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1) |           |        |                |                  | Date : November 11, 2008 |                 |                   |
|---|-----------|--------|----------------|------------------|--------------------------|-----------------|-------------------|
| Test Position                                     | Frequency |        | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g]             | SAR (1g) [mW/g] | Tissue Temp. [°C] |
|   | Channel   | MHz    |                |                  |                          |                 |                   |
| Cheek/Touch                                       | 4132      | 826.40 | 23.32          | -0.090           | 1.6                      | <b>0.785</b>    | 22.0              |
|   | 4182      | 836.40 | 23.43          | -0.079           |                          | 0.769           | 22.0              |
|   | 4233      | 846.60 | 23.31          | -0.068           |                          | 0.624           | 22.0              |
| Ear/Tilt  | 4132      | 826.40 | --             | --               | 1.6                      | **              | --                |
|   | 4182      | 836.40 | 23.43          | -0.039           |                          | 0.184           | 22.0              |
|   | 4233      | 846.60 | --             | --               |                          | **              | --                |

- NOTES :
1. Depth of Liquid : 15.0 cm
  2. Transmitter power was measured at the antenna-conducted terminal.
  3. SAR is measured using a 12.2 kbps RMC.
  4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
  5. Please refer to attachment for the result presentation in plot format.

**A.3.3 Body-worn Position**



| WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1) |           |        |                |                  |              | Date : November 10, 2008 |                   |
|---|-----------|--------|----------------|------------------|--------------|--------------------------|-------------------|
| Separation Distance                               | Frequency |        | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g] | SAR (1g) [mW/g]          | Tissue Temp. [°C] |
|   | Channel   | MHz    |                |                  |              |                          |                   |
| 1.5 cm  | 4132      | 826.40 | 23.32          | 0.003            | 1.6          | 0.856                    | 22.0              |
|   | 4182      | 836.40 | 23.43          | -0.046           |              | 0.877                    | 22.0              |
|   | 4233      | 846.60 | 23.31          | -0.005           |              | <b>0.956</b>             | 22.0              |

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.