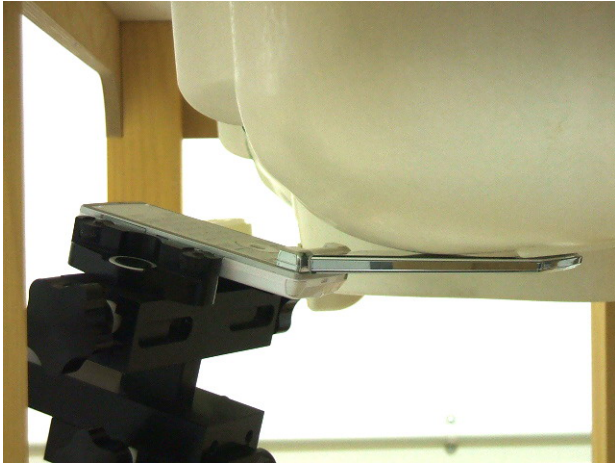
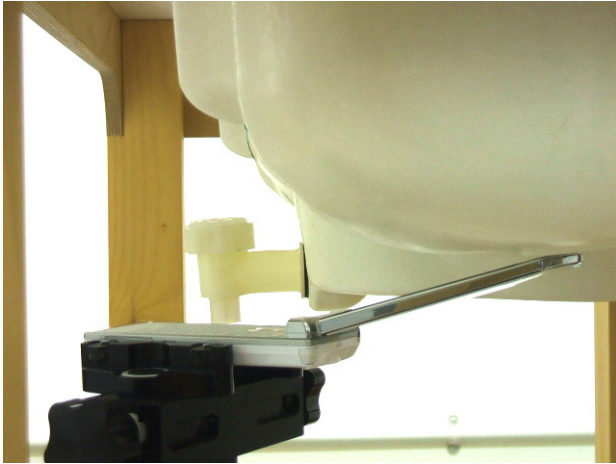


A.3 SAR Measurement Data


A.3.1 Left Head

							
Cheek/Touch Position				Ear/Tilt Position			
CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : November 28, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	--	--	1.6	**	--
	384	836.52	24.59	-0.029		0.364	22.0
	779	848.37	--	--		**	--
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	24.59	-0.034		0.299	22.0
	779	848.37	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.							
4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
5. Please refer to attachment for the result presentation in plot format.							

A.3.2 Right Head

							
Cheek/Touch Position				Ear/Tilt Position			
CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : November 28, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	24.63	-0.006	1.6	0.351	22.0
	384	836.52	24.59	-0.063		0.404	22.0
	779	848.37	24.51	0.000		0.394	22.0
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	24.59	-0.017		0.326	22.0
	779	848.37	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.							
4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
5. Please refer to attachment for the result presentation in plot format.							

A.3.3 Body-worn Position – close style

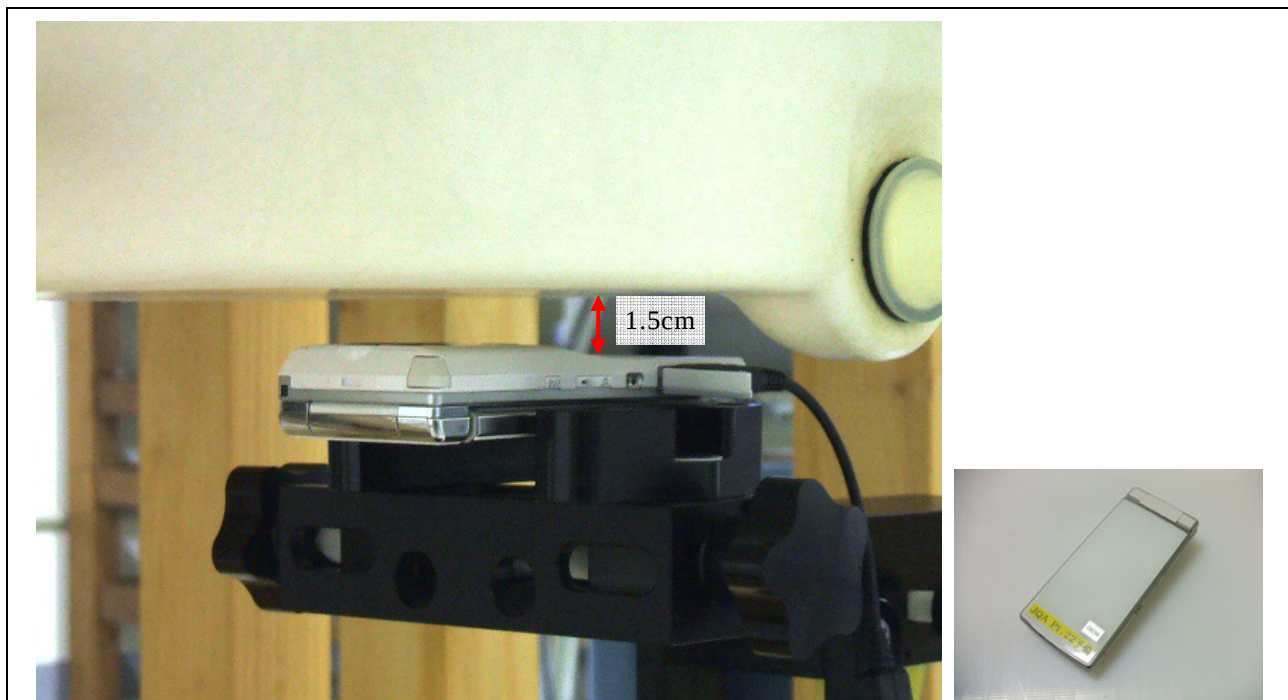

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)


Date : November 27, 2008

Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	1013	824.70	24.66	-0.026	1.6	0.454	22.0
	384	836.52	24.58	-0.008		0.502	22.0
	779	848.37	24.50	-0.006		0.528	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.

A.3.4 Body-worn Position – viewer style

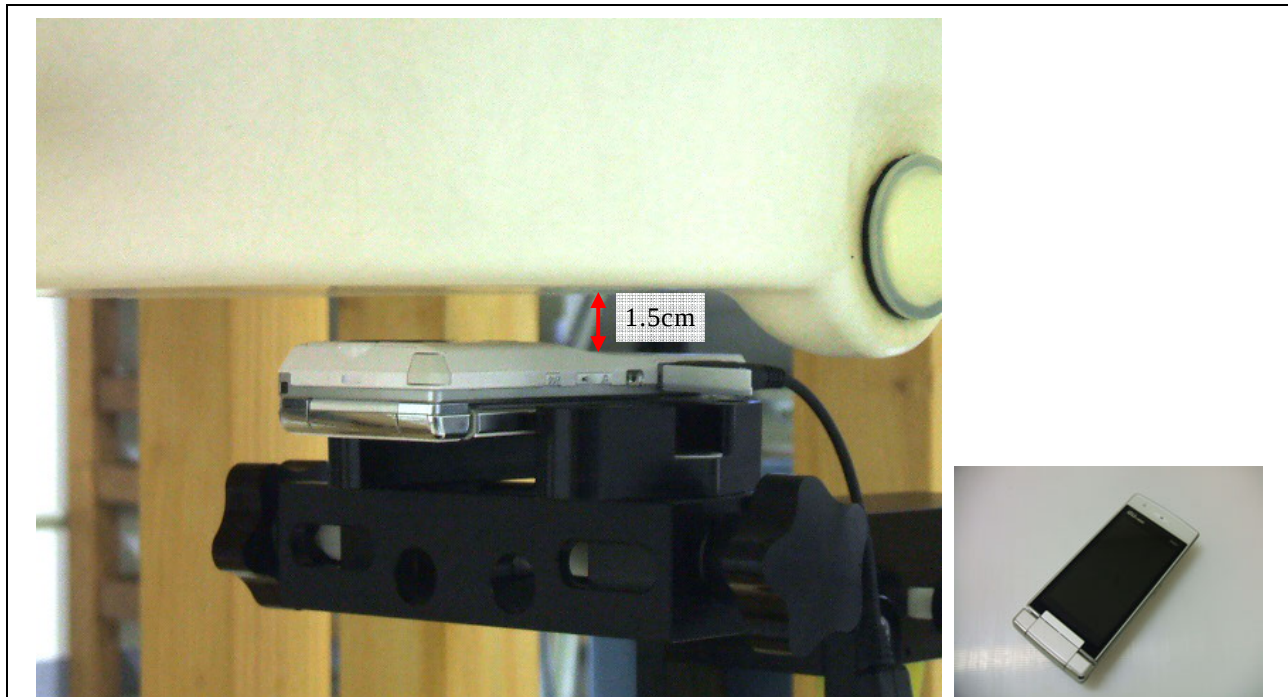

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : November 27, 2008		
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	1013	824.70	--	--	1.6	**	--
	384	836.52	24.58	-0.058		0.501	22.0
	779	848.37	--	--		**	--
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.							
4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.							
5. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.							
6. Please refer to attachment for the result presentation in plot format.							