


A.3 SAR Measurement Data

A.3.1 Left Head

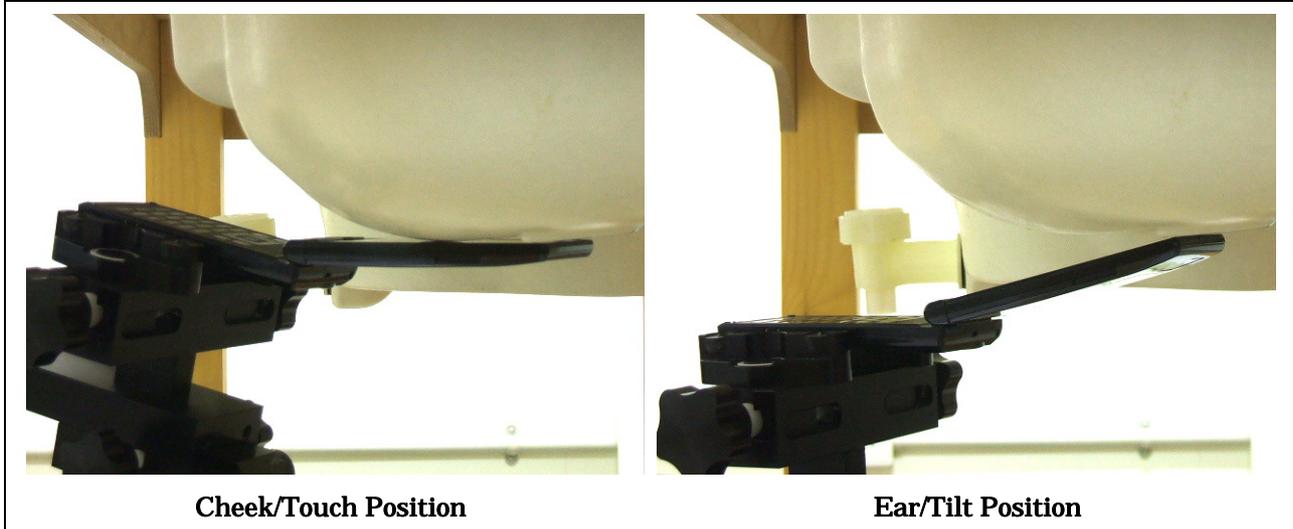


GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)							Date : December 24, 2008
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.01	-0.022		0.217	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.01	-0.042		0.158	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

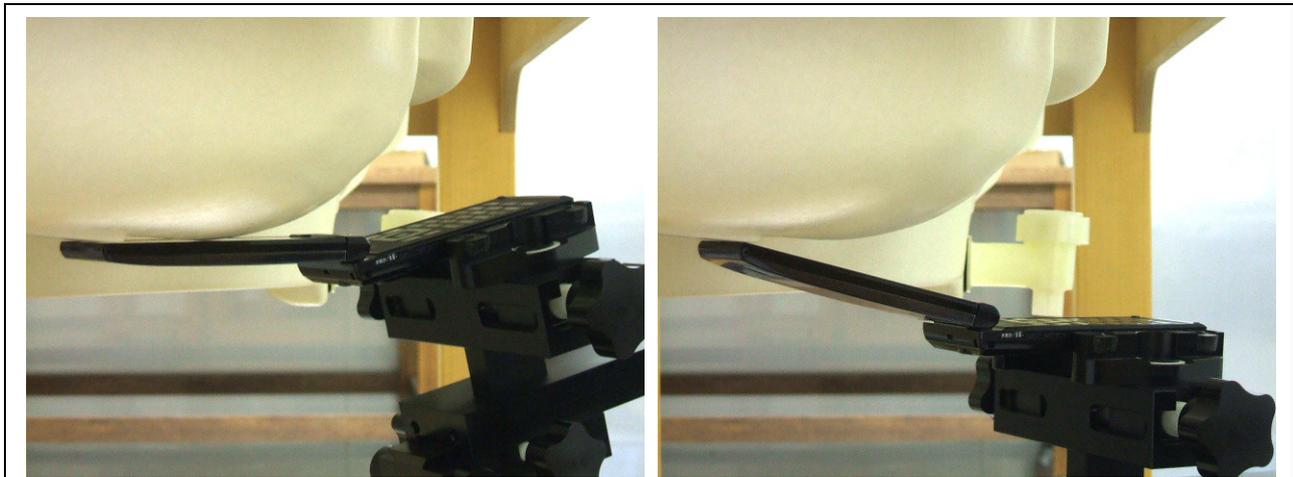

Cheek/Touch Position


Ear/Tilt Position

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)					Date : December 24, 2008		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	29.12	-0.019	1.6	0.343	22.0
	0661	1880.00	29.01	-0.046		0.350	22.0
	0810	1909.80	28.83	-0.036		0.330	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.01	-0.002		0.183	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

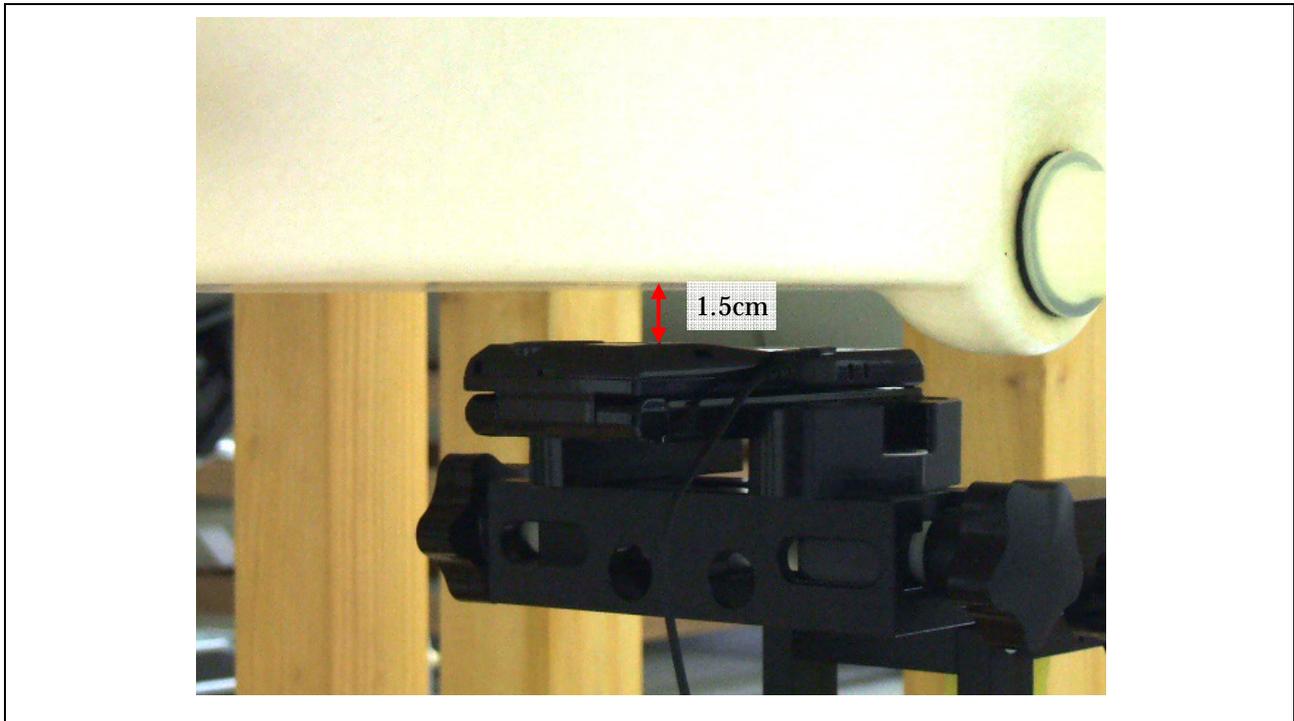

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)					Date : December 25, 2008		
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.01	-0.013		0.266	22.0
	0810	1909.80	--	--		**	--

GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.15)							
1.5 cm	0512	1850.20	29.07	-0.002	1.6	0.528	22.0
	0661	1880.00	28.96	-0.010		0.507	22.0
	0810	1909.80	28.78	-0.001		0.496	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.