


A.3 SAR Measurement Data


A.3.1 Left Head

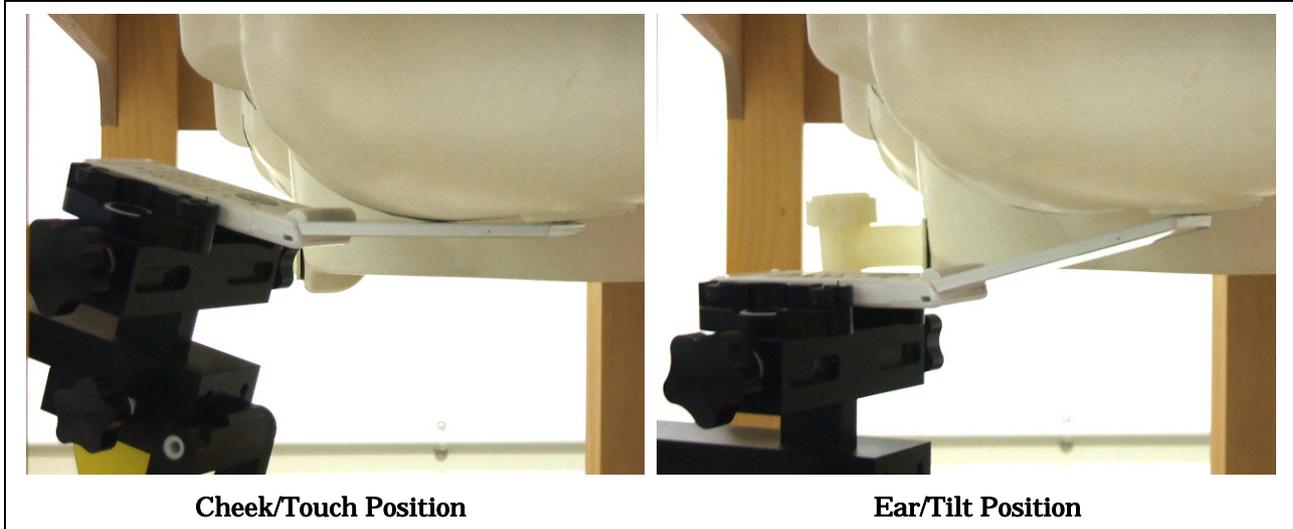

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : April 18, 2009		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	23.27	0.004	1.6	0.589	22.0
	4182	836.40	23.34	0.015		0.663	22.0
	4233	846.60	23.40	-0.034		0.582	22.0
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.34	0.014		0.202	22.0
	4233	846.60	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR is measured using a 12.2 kbps RMC.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

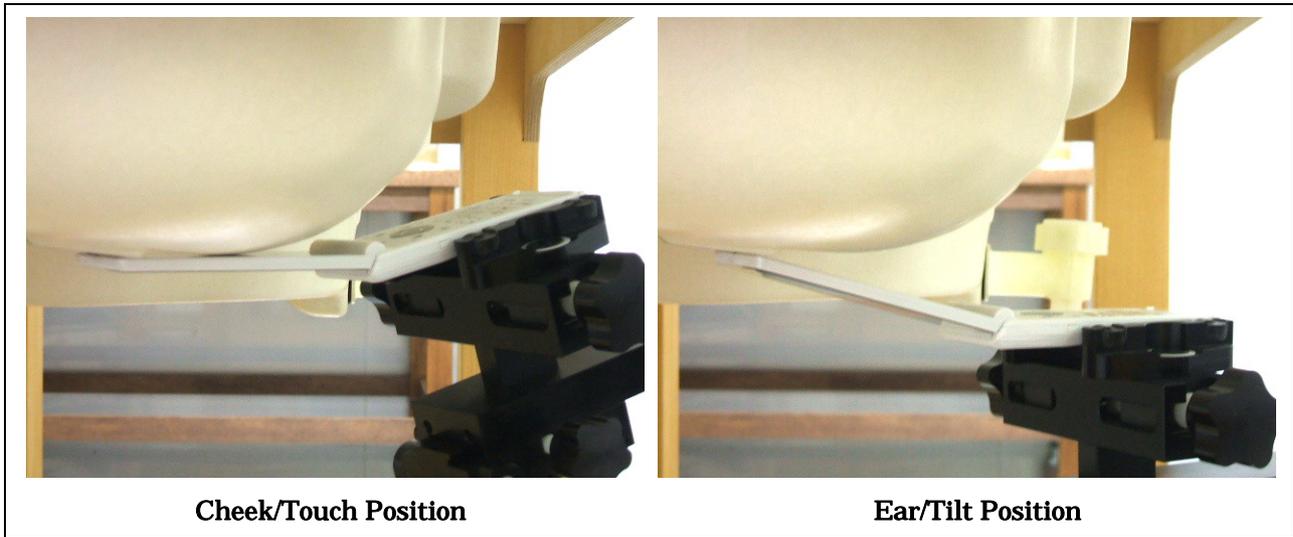

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : April 18, 2009		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.34	-0.044		0.533	22.0
	4233	846.60	--	--		**	--
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.34	-0.044		0.201	22.0
	4233	846.60	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR is measured using a 12.2 kbps RMC.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.1 Body-worn Position



WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : April 19, 2009	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.27	-0.015	1.6	0.690	22.0
	4182	836.40	23.34	-0.022		0.712	22.0
	4233	846.60	23.40	0.000		0.735	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.