



## EMI TEST REPORT


Test Report No. : 29HE0041-HO-B

**Applicant** : Sharp Corporation, Communication Systems Group.  
**Type of Equipment** : Cellular Phone  
**Model No.** : SH-05A  
**FCC ID** : APYHRO00094  
**Test regulation** : FCC Part 15 Subpart B 2009 Class B  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: April 13, 2009

Tested by:   
Takeshi Choda  
EMC Services

Approved by :   
Hironobu Shimoji  
Assistant Manager of EMC Services



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,

<http://uljapan.co.jp/emc/nvlap.html>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF060b (09.01.08)

| <b>CONTENTS</b>  | <b>PAGE</b> |
|--|-------------|
| <b>SECTION 1: Customer information .....</b>                         | <b>3</b>    |
| <b>SECTION 2: Equipment under test (E.U.T.) .....</b>                | <b>3</b>    |
| <b>SECTION 3: Test specification, procedures &amp; results .....</b> | <b>4</b>    |
| <b>SECTION 4: Operation of E.U.T. during testing .....</b>           | <b>7</b>    |
| <b>SECTION 5: Conducted Emission .....</b>                           | <b>8</b>    |
| <b>SECTION 6: Radiated Emission .....</b>                            | <b>9</b>    |
| <b>APPENDIX 1: Photographs of test setup.....</b>                    | <b>10</b>   |
| Conducted Emission .....   | 10          |
| Radiated Emission .....  | 11          |
| Worst Case Position (Horizontal: X-axis/ Vertical:X-axis) .....      | 12          |
| <b>APPENDIX 2: Data of EMI test .....</b>                            | <b>13</b>   |
| Conducted Emission .....   | 13          |
| Radiated Emission .....  | 15          |
| <b>APPENDIX 3: Test instruments .....</b>                            | <b>19</b>   |

## **SECTION 1: Customer information**

Company Name : Sharp Corporation, Communication Systems Group.  
Brand Name : SHARP  
Address : 2-13-1 Iida Hachihonmatsu HigashiHiroshima-City, Hiroshima,  
739-0192 Japan  
Telephone Number : +81-82-420-1643  
Facsimile Number : +81-82-420-1934  
Contact Person : Yoshiharu Koshikawa

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Cellular Phone  
Model No. : SH-05A  
Serial No. : 004401111905168  
Rating : AC 120V/60Hz, DC 4V  
Receipt Date of Sample : April 13, 2009  
Country of Mass-production : China and Japan  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

Model No: SH-05A (referred to as the EUT in this report) is the Cellular Phone.

Clock frequency(ies) in the system : 48MHz, 500.5MHz  
Feature of EUT : SH-05A is Quad-band (800/850/1700/2000) WCDMA Cellular Phone.

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

---

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test specification**

Test Specification : FCC Part 15 Subpart B 2009, final revised on February 27, 2009  
Title : FCC 47CFR Part15 Radio Frequency Device  
Subpart B Unintentional Radiators

### **3.2 Procedures and results**

| <b>Item</b>        | <b>Test Procedure</b>   | <b>Limits</b> | <b>Deviation</b> | <b>Worst margin</b>   | <b>Result</b> |
|--------------------|---|---------------|------------------|---|---------------|
| Conducted emission | ANSI C63.4: 2003<br>7. AC powerline<br>conducted emission<br>measurements | Class B       | N/A              | [QP]<br>12.6dB, 3.74561MHz, N<br>[AV]<br>16.1dB, 2.116655MHz, N | Complied      |
| Radiated emission  | ANSI C63.4: 2003<br>8. Radiated<br>emission measurements                  | Class B       | N/A              | 8.4dB, 47.913MHz,<br>Vertical, QP                               | Complied      |

\*Note: UL Japan, Inc's EMI Work Procedure QPM05.

### **3.3 Addition to standard**

No addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

| Test room                      | Conducted emission | Radiated emission (10m*) |              |             | Radiated emission (3m*) |              |             | Radiated emission (3m*) |             |
|--------------------------------|--------------------|--------------------------|--------------|-------------|-------------------------|--------------|-------------|-------------------------|-------------|
|                                | 150kHz-30MHz       | 9kHz-30MHz               | 30MHz-300MHz | 300MHz-1GHz | 9kHz-30MHz              | 30MHz-300MHz | 300MHz-1GHz | 1GHz-18GHz              | 18GHz-40GHz |
| No.1 semi-anechoic chamber (±) | 3.7dB              | 3.1dB                    | 4.4dB        | 4.2dB       | 3.2dB                   | 3.8dB        | 3.9dB       | 5.9dB                   | 6.1dB       |
| No.2 semi-anechoic chamber (±) | 3.7dB              | -                        | -            | -           | 3.2dB                   | 4.4dB        | 4.0dB       | 5.9dB                   | 6.1dB       |
| No.3 semi-anechoic chamber (±) | 3.7dB              | -                        | -            | -           | 3.2dB                   | 4.6dB        | 4.0dB       | 5.9dB                   | 6.1dB       |
| No.4 semi-anechoic chamber (±) | 3.7dB              | -                        | -            | -           | 3.2dB                   | 3.9dB        | 3.9dB       | 5.9dB                   | 6.1dB       |

\*10m/3m = Measurement distance

#### Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

#### Radiated emission test (3m)

The data listed in this test report has enough margin, more than the site margin.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

|                            | FCC Registration Number | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms            |
|----------------------------|-------------------------|------------------------|----------------------------|--|------------------------|
| No.1 semi-anechoic chamber | 313583                  | 2973C-1                | 19.2 x 11.2 x 7.7m         | 7.0 x 6.0m   | No.1 Power source room |
| No.2 semi-anechoic chamber | 655103                  | 2973C-2                | 7.5 x 5.8 x 5.2m           | 4.0 x 4.0m   | -                      |
| No.3 semi-anechoic chamber | 148738                  | 2973C-3                | 12.0 x 8.5 x 5.9m          | 6.8 x 5.75m  | No.3 Preparation room  |
| No.3 shielded room         | -                       | -                      | 4.0 x 6.0 x 2.7m           | N/A  | -                      |
| No.4 semi-anechoic chamber | 134570                  | 2973C-4                | 12.0 x 8.5 x 5.9m          | 6.8 x 5.75m  | No.4 Preparation room  |
| No.4 shielded room         | -                       | -                      | 4.0 x 6.0 x 2.7m           | N/A  | -                      |
| No.5 semi-anechoic chamber | -                       | -                      | 6.0 x 6.0 x 3.9m           | 6.0 x 6.0m   | -                      |
| No.6 shielded room         | -                       | -                      | 4.0 x 4.5 x 2.7m           | 4.75 x 5.4 m   | -                      |
| No.6 measurement room      | -                       | -                      | 4.75 x 5.4 x 3.0m          | 4.75 x 4.15 m  | -                      |
| No.7 shielded room         | -                       | -                      | 4.7 x 7.5 x 2.7m           | 4.7 x 7.5m   | -                      |
| No.8 measurement room      | -                       | -                      | 3.1 x 5.0 x 2.7m           | N/A  | -                      |
| No.9 measurement room      | -                       | -                      | 8.0 x 4.5 x 2.8m           | 2.0 x 2.0m   | -                      |
| No.10 measurement room     | -                       | -                      | 2.6 x 2.8 x 2.5m           | 2.4 x 2.4m   | -                      |
| No.11 measurement room     | -                       | -                      | 3.1 x 3.4 x 3.0m           | 2.4 x 3.4m   | -                      |

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test set up, Data of EMI, and Test instruments


Refer to APPENDIX 1 to 3.

## SECTION 4: Operation of E.U.T. during testing

### 4.1 Operating modes

The mode is used : 1) USB Data Com mode  
2) Standby mode

### 4.2 Configuration and peripherals

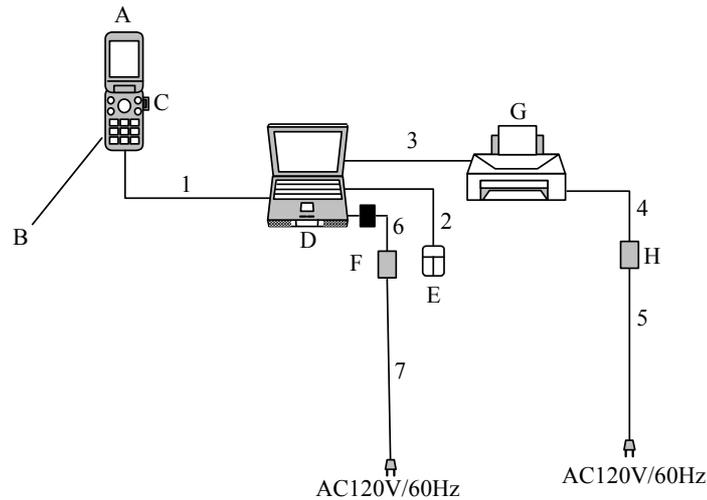

\*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

#### Description of EUT and Support equipment

| No. | Item                 | Model number | Serial number            | Manufacturer    | Remark |
|-----|----------------------|--------------|--------------------------|-----------------|--------|
| A   | Cellular Phone       | SH-05A       | 004401111905168          | SHARP           | EUT    |
| B   | Lithium-Ion Battery  | SH20         | RKA                      | SHARP           | EUT    |
| C   | microSD Memory Card  | SD-C08G      | 0831U49492Y              | Toshiba         | -      |
| D   | Personal Computer    | PP11L        | CN-0D4571-48643-58P-1053 | Dell            | -      |
| E   | Mouse                | MOC5UO       | 531048353                | Dell            | -      |
| F   | AC Adapter (PC)      | PA-1650-05D2 | 0F7970-71615-77H-0D63    | Dell            | -      |
| G   | Printer              | 895cxi       | SG8BL1W16V               | Hewlett Packard | -      |
| H   | AC Adapter (Printer) | C4557-60004  | C8K28B                   | Hewlett Packard | -      |

#### List of cables used

| No. | Name                     | Length (m) | Shield     |            | Remark |
|-----|--------------------------|------------|------------|------------|--------|
|     |                          |            | Cable      | Connector  |        |
| 1   | USB Data Cable           | 0.75       | Shielded   | Shielded   | -      |
| 2   | Mouse Cable              | 1.85       | Shielded   | Shielded   | -      |
| 3   | Parallel printer Cable   | 2.00       | Unshielded | Unshielded | -      |
| 4   | DC Power Cable (Printer) | 2.00       | Unshielded | Unshielded | -      |
| 5   | AC Power Cable (Printer) | 1.75       | Unshielded | Unshielded | -      |
| 6   | DC Power Cable (PC)      | 1.85       | Unshielded | Unshielded | -      |
| 7   | AC Power Cable (PC)      | 0.90       | Unshielded | Unshielded | -      |

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 5: Conducted Emission**

### **5.1 Operating environment**

Test place : No.1 semi anechoic chamber.  
Temperature : See data  
Humidity : See data

### **5.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from the LISN/AMN and excess AC cable was bundled in center. I/O cables that were connected to the other peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/AMN to the input power source. All unused 50 ohm connectors of the LISN/AMN were resistivity terminated in 50 ohm when not connected to the measuring equipment. Photographs of the set up are shown in Appendix 1.

Frequency range : 0.15 MHz-30MHz  
EUT position : Table top  
EUT operation mode : See Clause 4.1

### **5.3 Test procedure**

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT within a semi anechoic chamber. The EUT was connected to a Line Impedance Stabilization Network (LISN)/ Artificial Mains network (AMN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector.

The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : Quasi-Peak and Average  
IF Bandwidth : 9 kHz

### **5.4 Test result**

Summary of the test results: Pass

Date: April 13, 2009

Test engineer: Takeshi Choda

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 6: Radiated Emission**

### **6.1 Operating environment**

Test place : No.1 semi anechoic chamber  
Temperature : See data  
Humidity : See data

### **6.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The EUT was set on the edge of the tabletop.  
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

### **6.3 Test conditions**

Frequency range : 30MHz-300MHz (Biconical antenna) / 300MHz-1000MHz (Logperiodic antenna)  
1000MHz - 5000MHz (Horn antenna)  
Test distance : 3m  
EUT position : Table top  
EUT operation mode : See Clause 4.1

### **6.4 Test procedure**

The height of the measuring varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.  
The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.  
The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

|                 |               |   |
|-----------------|---------------|---|
| Frequency       | Below 1GHz    | Above 1GHz  |
| Instrument used | Test Receiver | Spectrum Analyzer                                   |
| IF Bandwidth    | QP: BW 120kHz | PK: RBW:1MHz/VBW: 1MHz<br>AV *1): RBW:1MHz/VBW:10Hz |

\*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

### **6.5 Test result**

Summary of the test results: Pass

Date: April 13, 2009

Test engineer: Takeshi Choda

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

**APPENDIX 1: Photographs of test setup**

**Conducted Emission**

**This page has been submitted for a separate exhibit.**

**Radiated Emission**

**This page has been submitted for a separate exhibit.**

**Worst Case Position (Horizontal: X-axis/ Vertical:X-axis)**

**This page has been submitted for a separate exhibit.**

**APPENDIX 2: Data of EMI test**

**Conducted Emission  
USB Data Com Mode**


**DATA OF CONDUCTED EMISSION TEST**

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber  
Date : 2009/04/13

Company : Sharp Corporation  
Kind of EUT : Cellular Phone  
Model No. : SH-05A  
Serial No. : 00440111905168  
Report No. : 29HE0041-HO  
Power : AC 120V / 60Hz  
Temp./Humi. : 23deg.C / 41%  
Engineer : Takeshi Choda

Mode / Remarks : USB Data Com Mode

LIMIT : FCC15.107(a) QP  
FCC15.107(a) AV

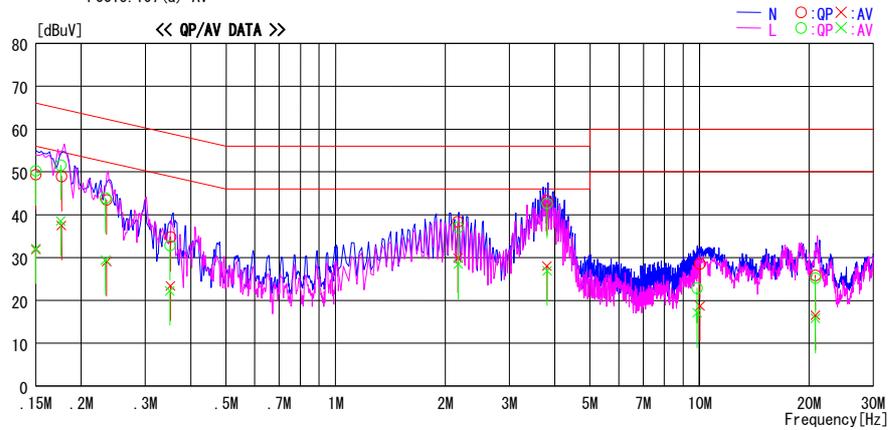

| Frequency<br>[MHz] | Reading Level |              | Corr.<br>Factor<br>[dB] | Results      |              | Limit        |              | Margin     |            | Phase | Comment |
|--------------------|---------------|--------------|-------------------------|--------------|--------------|--------------|--------------|------------|------------|-------|---------|
|                    | QP<br>[dBuV]  | AV<br>[dBuV] |                         | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dB] | AV<br>[dB] |       |         |
| 0.15000            | 50.1          | 31.9         | 0.2                     | 50.3         | 32.1         | 66.0         | 56.0         | 15.7       | 23.9       | L     |         |
| 0.17562            | 51.4          | 38.3         | 0.2                     | 51.6         | 38.5         | 64.7         | 54.7         | 13.1       | 16.2       | L     |         |
| 0.15000            | 49.2          | 31.7         | 0.2                     | 49.4         | 31.9         | 66.0         | 56.0         | 16.6       | 24.1       | N     |         |
| 0.17638            | 48.8          | 37.3         | 0.2                     | 49.0         | 37.5         | 64.7         | 54.7         | 15.7       | 17.2       | N     |         |
| 0.23336            | 43.6          | 29.1         | 0.3                     | 43.9         | 29.4         | 62.3         | 52.3         | 18.4       | 22.9       | L     |         |
| 0.23486            | 43.2          | 28.8         | 0.3                     | 43.5         | 29.1         | 62.3         | 52.3         | 18.8       | 23.2       | N     |         |
| 0.35055            | 32.5          | 21.9         | 0.3                     | 32.8         | 22.2         | 58.9         | 48.9         | 26.1       | 26.7       | L     |         |
| 0.35208            | 34.5          | 23.1         | 0.3                     | 34.8         | 23.4         | 58.9         | 48.9         | 24.1       | 25.5       | N     |         |
| 2.17248            | 36.5          | 27.8         | 0.6                     | 37.1         | 28.4         | 56.0         | 46.0         | 18.9       | 17.6       | L     |         |
| 2.16655            | 37.8          | 29.3         | 0.6                     | 38.4         | 29.9         | 56.0         | 46.0         | 17.6       | 16.1       | N     |         |
| 3.81335            | 41.9          | 26.1         | 0.8                     | 42.7         | 26.9         | 56.0         | 46.0         | 13.3       | 19.1       | L     |         |
| 3.80755            | 42.5          | 27.2         | 0.8                     | 43.3         | 28.0         | 56.0         | 46.0         | 12.7       | 18.0       | N     |         |
| 9.84980            | 21.5          | 15.7         | 1.4                     | 22.9         | 17.1         | 60.0         | 50.0         | 37.1       | 32.9       | L     |         |
| 10.01858           | 27.0          | 17.2         | 1.5                     | 28.5         | 18.7         | 60.0         | 50.0         | 31.5       | 31.3       | N     |         |
| 20.81463           | 22.9          | 13.5         | 2.3                     | 25.2         | 15.8         | 60.0         | 50.0         | 34.8       | 34.2       | L     |         |
| 20.80561           | 23.6          | 14.2         | 2.3                     | 25.9         | 16.5         | 60.0         | 50.0         | 34.1       | 33.5       | N     |         |

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuA] = READING [dBuV] + C. F [dB] (PROVE LOSS + CABLE LOSS)  
Except for the above table : adequate margin data below the limits.

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

## Conducted Emission Standby Mode

### DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber  
Date : 2009/04/13

Company : Sharp Corporation  
Kind of EUT : Cellular Phone  
Model No. : SH-05A  
Serial No. : 004401111905168

Report No. : 29HE0041-HO  
Power : AC 120V / 60Hz  
Temp./Humi. : 23deg. C / 41%  
Engineer : Takeshi Choda

Mode / Remarks : Standby Mode

LIMIT : FCC15.107(a) QP  
FCC15.107(a) AV

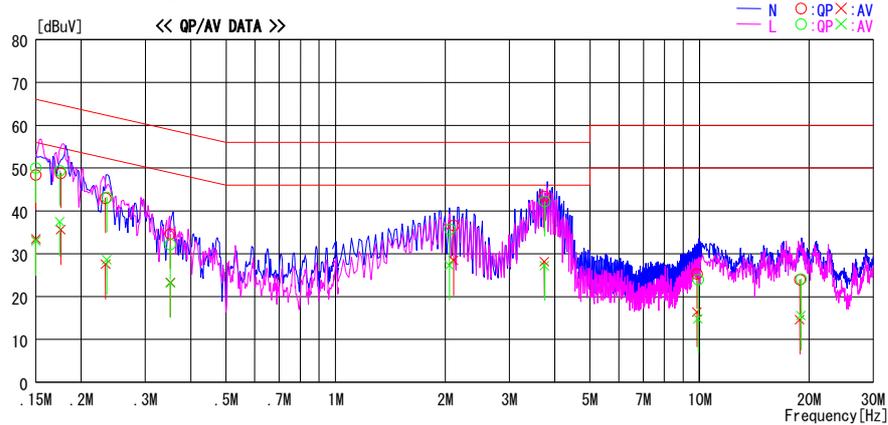

| Frequency<br>[MHz] | Reading Level |              | Corr.<br>Factor | Results      |              | Limit        |              | Margin     |            | Phase | Comment |
|--------------------|---------------|--------------|-----------------|--------------|--------------|--------------|--------------|------------|------------|-------|---------|
|                    | QP<br>[dBuV]  | AV<br>[dBuV] |                 | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dB] | AV<br>[dB] |       |         |
| 0.15000            | 48.2          | 33.2         | 0.2             | 48.4         | 33.4         | 66.0         | 56.0         | 17.6       | 22.6       | N     |         |
| 0.17572            | 48.6          | 35.4         | 0.2             | 48.8         | 35.6         | 64.7         | 54.7         | 15.9       | 19.1       | N     |         |
| 0.23318            | 42.7          | 27.2         | 0.3             | 43.0         | 27.5         | 62.3         | 52.3         | 19.3       | 24.8       | N     |         |
| 0.35152            | 34.3          | 23.0         | 0.3             | 34.6         | 23.3         | 58.9         | 48.9         | 24.3       | 25.6       | N     |         |
| 2.10702            | 36.1          | 27.9         | 0.5             | 36.6         | 28.4         | 56.0         | 46.0         | 19.4       | 17.6       | N     |         |
| 3.74561            | 42.6          | 27.4         | 0.8             | 43.4         | 28.2         | 56.0         | 46.0         | 12.6       | 17.8       | N     |         |
| 9.83076            | 23.9          | 15.0         | 1.4             | 25.3         | 16.4         | 60.0         | 50.0         | 34.7       | 33.6       | N     |         |
| 18.85557           | 21.6          | 12.3         | 2.3             | 23.9         | 14.6         | 60.0         | 50.0         | 36.1       | 35.4       | N     |         |
| 0.15000            | 49.8          | 32.8         | 0.2             | 50.0         | 33.0         | 66.0         | 56.0         | 16.0       | 23.0       | L     |         |
| 0.17464            | 49.2          | 37.3         | 0.2             | 49.4         | 37.5         | 64.7         | 54.7         | 15.3       | 17.2       | L     |         |
| 0.23505            | 42.9          | 28.3         | 0.3             | 43.2         | 28.6         | 62.3         | 52.3         | 19.1       | 23.7       | L     |         |
| 0.35149            | 31.9          | 22.9         | 0.3             | 32.2         | 23.2         | 58.9         | 48.9         | 26.7       | 25.7       | L     |         |
| 2.05224            | 35.2          | 26.8         | 0.5             | 35.7         | 27.3         | 56.0         | 46.0         | 20.3       | 18.7       | L     |         |
| 3.74887            | 41.4          | 26.4         | 0.8             | 42.2         | 27.2         | 56.0         | 46.0         | 13.8       | 18.8       | L     |         |
| 9.89580            | 22.5          | 13.4         | 1.4             | 23.9         | 14.8         | 60.0         | 50.0         | 36.1       | 35.2       | L     |         |
| 18.97881           | 21.8          | 13.3         | 2.3             | 24.1         | 15.6         | 60.0         | 50.0         | 35.9       | 34.4       | L     |         |

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuA] = READING [dBuV] + C. F [dB] (PROVE LOSS + CABLE LOSS)  
Except for the above table : adequate margin data below the limits.

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

## Radiated Emission USB Data Com Mode


### DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber  
Date : 2009/04/13

Company : Sharp Corporation  
Kind of EUT : Cellular Phone  
Model No. : SH-05A  
Serial No. : 004401111905168  
Report No. : 29HE0041-HO  
Power : AC 120V/ 60Hz  
Temp./Humi. : 21deg. C. / 40%  
Engineer : Takeshi Choda

Mode / Remarks : USB Data Com Mode, Worst-axis: (Hor:X, Ver:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
Except for the data below : adequate margin data below the limits.

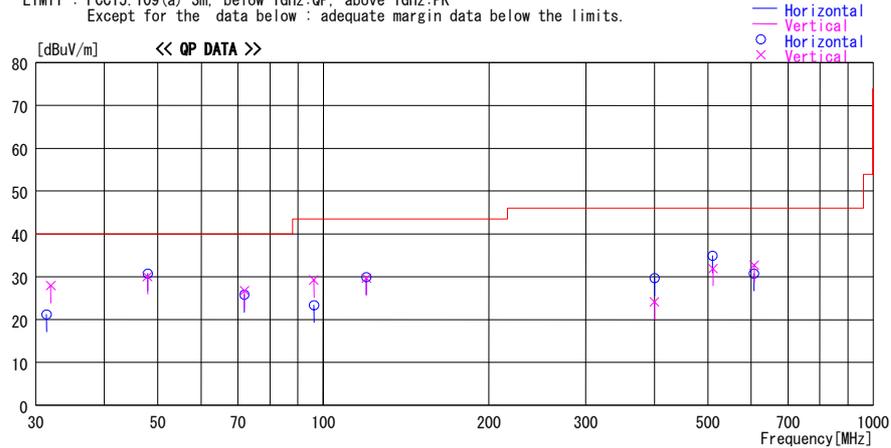

| Frequency<br>[MHz] | Reading<br>[dBuV] | DET | Antenna          |                    | Level<br>[dBuV/m] | Angle<br>[Deg] | Height<br>[cm] | Polar. | Limit<br>[dBuV/m] | Margin<br>[dB] | Comment |
|--------------------|-------------------|-----|------------------|--------------------|-------------------|----------------|----------------|--------|-------------------|----------------|---------|
|                    |                   |     | Factor<br>[dB/m] | Loss& Gain<br>[dB] |                   |                |                |        |                   |                |         |
| 31.371             | 24.2              | QP  | 18.4             | -21.4              | 21.2              | 134            | 281            | Hori.  | 40.0              | 18.8           |         |
| 31.954             | 31.2              | QP  | 18.1             | -21.4              | 27.9              | 18             | 100            | Vert.  | 40.0              | 12.1           |         |
| 47.919             | 40.9              | QP  | 10.8             | -21.0              | 30.7              | 96             | 300            | Hori.  | 40.0              | 9.3            |         |
| 47.919             | 40.2              | QP  | 10.8             | -21.0              | 30.0              | 118            | 100            | Vert.  | 40.0              | 10.0           |         |
| 71.869             | 40.4              | QP  | 6.8              | -20.5              | 26.7              | 104            | 100            | Vert.  | 40.0              | 13.3           |         |
| 71.869             | 39.5              | QP  | 6.8              | -20.5              | 25.8              | 181            | 255            | Hori.  | 40.0              | 14.2           |         |
| 96.134             | 33.9              | QP  | 9.5              | -20.0              | 23.4              | 245            | 340            | Hori.  | 43.5              | 20.1           |         |
| 96.134             | 39.7              | QP  | 9.5              | -20.0              | 29.2              | 165            | 108            | Vert.  | 43.5              | 14.3           |         |
| 119.782            | 36.8              | QP  | 12.8             | -19.7              | 29.9              | 159            | 280            | Hori.  | 43.5              | 13.6           |         |
| 119.782            | 36.5              | QP  | 12.8             | -19.7              | 29.6              | 147            | 100            | Vert.  | 43.5              | 13.9           |         |
| 400.001            | 24.6              | QP  | 16.5             | -17.0              | 24.1              | 64             | 228            | Vert.  | 46.0              | 21.9           |         |
| 400.001            | 30.2              | QP  | 16.5             | -17.0              | 29.7              | 4              | 100            | Hori.  | 46.0              | 16.3           |         |
| 510.267            | 33.5              | QP  | 18.4             | -17.0              | 34.9              | 135            | 100            | Hori.  | 46.0              | 11.1           |         |
| 511.266            | 30.5              | QP  | 18.4             | -17.0              | 31.9              | 106            | 100            | Vert.  | 46.0              | 14.1           |         |
| 607.129            | 27.8              | QP  | 19.4             | -16.5              | 30.7              | 25             | 100            | Hori.  | 46.0              | 15.3           |         |
| 607.216            | 29.8              | QP  | 19.4             | -16.5              | 32.7              | 42             | 115            | Vert.  | 46.0              | 13.3           |         |

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN  
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

## Radiated Emission USB Data Com Mode


### DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber  
Date : 2009/04/13

Company : Sharp Corporation  
Kind of EUT : Cellular Phone  
Model No. : SH-05A  
Serial No. : 004401111905168  
Report No. : 29HE0041-HO  
Power : AC 120V/ 60Hz  
Temp./Humi. : 21deg. C. / 40%  
Engineer : Takeshi Choda

Mode / Remarks : USB Data Com Mode, Worst-axis: (Hor:X, Ver:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

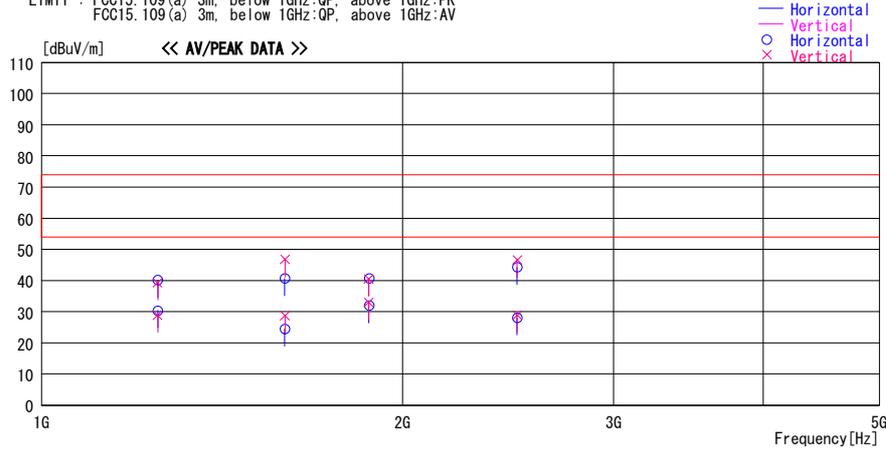

| Frequency<br>[MHz] | Reading<br>[dBuV] | DET | Antenna          |                    | Level<br>[dBuV/m] | Angle<br>[Deg] | Height<br>[cm] | Polar. | Limit<br>[dBuV/m] | Margin<br>[dB] | Comment |
|--------------------|-------------------|-----|------------------|--------------------|-------------------|----------------|----------------|--------|-------------------|----------------|---------|
|                    |                   |     | Factor<br>[dB/m] | Loss& Gain<br>[dB] |                   |                |                |        |                   |                |         |
| 1249.984           | 49.4              | PK  | 25.0             | -35.1              | 39.3              | 359            | 100            | Vert.  | 73.9              | 34.6           |         |
| 1249.984           | 39.0              | AV  | 25.0             | -35.1              | 28.9              | 359            | 100            | Vert.  | 53.9              | 25.0           |         |
| 1249.984           | 50.2              | PK  | 25.0             | -35.1              | 40.1              | 359            | 100            | Hori.  | 73.9              | 33.8           |         |
| 1249.984           | 40.5              | AV  | 25.0             | -35.1              | 30.4              | 359            | 100            | Hori.  | 53.9              | 23.5           |         |
| 1595.480           | 49.6              | PK  | 25.8             | -34.7              | 40.7              | 359            | 100            | Hori.  | 73.9              | 33.2           |         |
| 1595.480           | 33.4              | AV  | 25.8             | -34.7              | 24.5              | 359            | 100            | Hori.  | 53.9              | 29.4           |         |
| 1596.136           | 37.5              | AV  | 25.8             | -34.7              | 28.6              | 359            | 100            | Vert.  | 53.9              | 25.3           |         |
| 1596.136           | 55.6              | PK  | 25.8             | -34.7              | 46.7              | 359            | 100            | Vert.  | 73.9              | 27.2           |         |
| 1874.976           | 49.0              | PK  | 26.1             | -34.4              | 40.7              | 359            | 100            | Hori.  | 73.9              | 33.2           |         |
| 1874.976           | 40.3              | AV  | 26.1             | -34.4              | 32.0              | 359            | 100            | Hori.  | 53.9              | 21.9           |         |
| 1874.977           | 41.2              | AV  | 26.1             | -34.4              | 32.9              | 359            | 100            | Vert.  | 53.9              | 21.0           |         |
| 1874.977           | 48.8              | PK  | 26.1             | -34.4              | 40.5              | 359            | 100            | Vert.  | 73.9              | 33.4           |         |
| 2493.366           | 50.4              | PK  | 27.3             | -33.5              | 44.2              | 359            | 100            | Hori.  | 73.9              | 29.7           |         |
| 2493.366           | 34.2              | AV  | 27.3             | -33.5              | 28.0              | 359            | 100            | Hori.  | 53.9              | 25.9           |         |
| 2493.700           | 35.1              | AV  | 27.3             | -33.5              | 28.9              | 359            | 100            | Vert.  | 53.9              | 25.0           |         |
| 2493.700           | 52.7              | PK  | 27.3             | -33.5              | 46.5              | 359            | 100            | Vert.  | 73.9              | 27.4           |         |

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

\*The limit is rounded down to one decimal place.

\*The test result is rounded off to one or two decimal places, so some differences might be observed

## Radiated Emission Standby Mode


### DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber  
Date : 2009/04/13

Company : Sharp Corporation  
Kind of EUT : Cellular Phone  
Model No. : SH-05A  
Serial No. : 004401111905168  
Report No. : 29HE0041-HO  
Power : AC 120V/ 60Hz  
Temp./Humi. : 21deg. C. / 40%  
Engineer : Takeshi Choda

Mode / Remarks : Standby Mode, Worst-axis: (Hor:X, Ver:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
Except for the data below : adequate margin data below the limits.

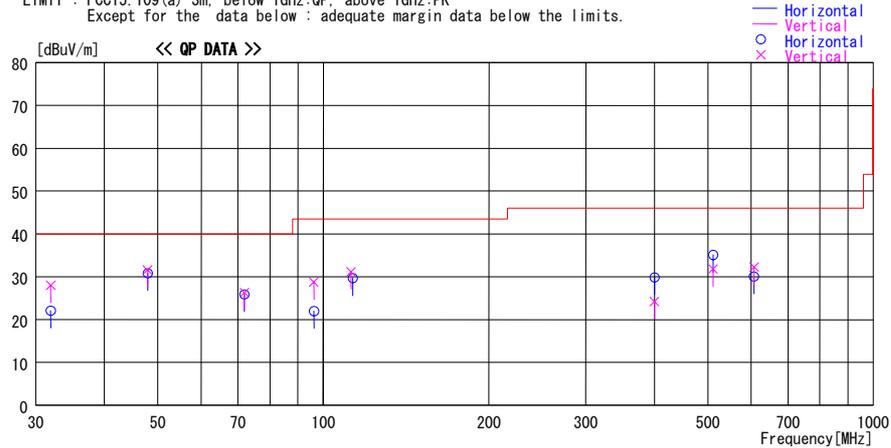

| Frequency<br>[MHz] | Reading<br>[dBuV] | DET | Antenna          |                    | Level<br>[dBuV/m] | Angle<br>[Deg] | Height<br>[cm] | Polar. | Limit<br>[dBuV/m] | Margin<br>[dB] | Comment |
|--------------------|-------------------|-----|------------------|--------------------|-------------------|----------------|----------------|--------|-------------------|----------------|---------|
|                    |                   |     | Factor<br>[dB/m] | Loss& Gain<br>[dB] |                   |                |                |        |                   |                |         |
| 31.954             | 31.3              | QP  | 18.1             | -21.4              | 28.0              | 33             | 100            | Vert.  | 40.0              | 12.0           |         |
| 31.955             | 25.4              | QP  | 18.1             | -21.4              | 22.1              | 141            | 303            | Hori.  | 40.0              | 17.9           |         |
| 47.913             | 41.8              | QP  | 10.8             | -21.0              | 31.6              | 115            | 100            | Vert.  | 40.0              | 8.4            |         |
| 47.913             | 41.0              | QP  | 10.8             | -21.0              | 30.8              | 98             | 343            | Hori.  | 40.0              | 9.2            |         |
| 71.869             | 39.6              | QP  | 6.8              | -20.5              | 25.9              | 196            | 255            | Hori.  | 40.0              | 14.1           |         |
| 71.869             | 40.0              | QP  | 6.8              | -20.5              | 26.3              | 101            | 100            | Vert.  | 40.0              | 13.7           |         |
| 96.134             | 32.5              | QP  | 9.5              | -20.0              | 22.0              | 240            | 197            | Hori.  | 43.5              | 21.5           |         |
| 96.134             | 39.2              | QP  | 9.5              | -20.0              | 28.7              | 176            | 114            | Vert.  | 43.5              | 14.8           |         |
| 112.362            | 39.1              | QP  | 11.9             | -19.8              | 31.2              | 146            | 100            | Vert.  | 43.5              | 12.3           |         |
| 113.209            | 37.5              | QP  | 12.0             | -19.8              | 29.7              | 204            | 275            | Hori.  | 43.5              | 13.8           |         |
| 400.000            | 30.3              | QP  | 16.5             | -17.0              | 29.8              | 6              | 100            | Hori.  | 46.0              | 16.2           |         |
| 400.000            | 24.7              | QP  | 16.5             | -17.0              | 24.2              | 66             | 201            | Vert.  | 46.0              | 21.8           |         |
| 511.266            | 33.7              | QP  | 18.4             | -17.0              | 35.1              | 133            | 100            | Hori.  | 46.0              | 10.9           |         |
| 511.266            | 30.4              | QP  | 18.4             | -17.0              | 31.8              | 77             | 100            | Vert.  | 46.0              | 14.2           |         |
| 607.128            | 27.2              | QP  | 19.4             | -16.5              | 30.1              | 133            | 100            | Hori.  | 46.0              | 15.9           |         |
| 607.129            | 29.4              | QP  | 19.4             | -16.5              | 32.3              | 38             | 126            | Vert.  | 46.0              | 13.7           |         |

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN  
CALCULATION:RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

## Radiated Emission Standby Mode


### DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber  
Date : 2009/04/13

Company : Sharp Corporation  
Kind of EUT : Cellular Phone  
Model No. : SH-05A  
Serial No. : 004401111905168  
Report No. : 29HE0041-HO  
Power : AC 120V/ 60Hz  
Temp./Humi. : 21deg. C. / 40%  
Engineer : Takeshi Choda

Mode / Remarks : Standby Mode, Worst-axis: (Hor:X, Ver:X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

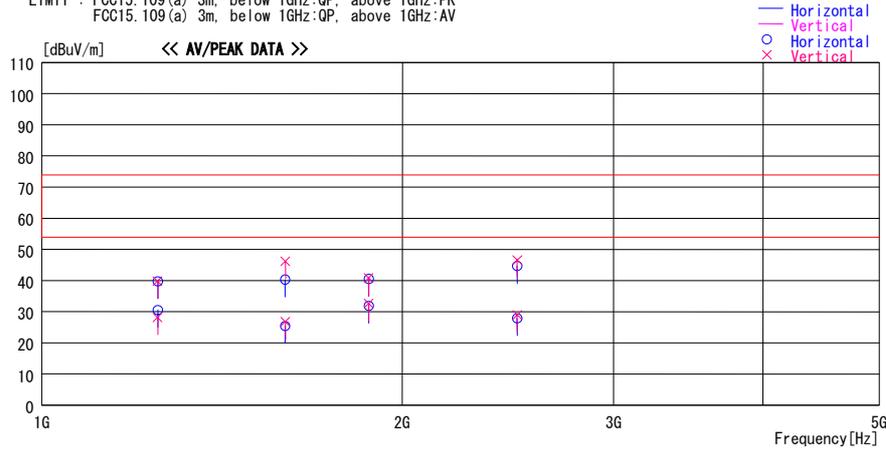

| Frequency<br>[MHz] | Reading<br>[dBuV] | DET | Antenna          |                       | Level<br>[dBuV/m] | Angle<br>[Deg] | Height<br>[cm] | Polar. | Limit<br>[dBuV/m] | Margin<br>[dB] | Comment |
|--------------------|-------------------|-----|------------------|-----------------------|-------------------|----------------|----------------|--------|-------------------|----------------|---------|
|                    |                   |     | Factor<br>[dB/m] | Loss&<br>Gain<br>[dB] |                   |                |                |        |                   |                |         |
| 1249.984           | 49.9              | PK  | 25.0             | -35.1                 | 39.8              | 359            | 100            | Vert.  | 73.9              | 34.1           |         |
| 1249.984           | 38.3              | AV  | 25.0             | -35.1                 | 28.2              | 359            | 100            | Vert.  | 53.9              | 25.7           |         |
| 1249.985           | 49.9              | PK  | 25.0             | -35.1                 | 39.8              | 359            | 100            | Hori.  | 73.9              | 34.1           |         |
| 1249.985           | 40.7              | AV  | 25.0             | -35.1                 | 30.6              | 359            | 100            | Hori.  | 53.9              | 23.3           |         |
| 1596.247           | 49.2              | PK  | 25.8             | -34.7                 | 40.3              | 359            | 100            | Hori.  | 73.9              | 33.6           |         |
| 1596.247           | 34.4              | AV  | 25.8             | -34.7                 | 25.5              | 359            | 100            | Hori.  | 53.9              | 28.4           |         |
| 1597.436           | 35.7              | AV  | 25.8             | -34.7                 | 26.8              | 359            | 100            | Vert.  | 53.9              | 27.1           |         |
| 1597.436           | 55.1              | PK  | 25.8             | -34.7                 | 46.2              | 359            | 100            | Vert.  | 73.9              | 27.7           |         |
| 1874.976           | 48.9              | PK  | 26.1             | -34.4                 | 40.6              | 359            | 100            | Hori.  | 73.9              | 33.3           |         |
| 1874.976           | 40.2              | AV  | 26.1             | -34.4                 | 31.9              | 359            | 100            | Hori.  | 53.9              | 22.0           |         |
| 1874.977           | 40.9              | AV  | 26.1             | -34.4                 | 32.6              | 359            | 100            | Vert.  | 53.9              | 21.3           |         |
| 1874.977           | 49.1              | PK  | 26.1             | -34.4                 | 40.8              | 359            | 100            | Vert.  | 73.9              | 33.1           |         |
| 2493.466           | 34.1              | AV  | 27.3             | -33.5                 | 27.9              | 359            | 100            | Hori.  | 53.9              | 26.0           |         |
| 2493.466           | 50.9              | PK  | 27.3             | -33.5                 | 44.7              | 359            | 100            | Hori.  | 73.9              | 29.2           |         |
| 2493.493           | 35.2              | AV  | 27.3             | -33.5                 | 29.0              | 359            | 100            | Vert.  | 53.9              | 24.9           |         |
| 2493.493           | 52.8              | PK  | 27.3             | -33.5                 | 46.6              | 359            | 100            | Vert.  | 73.9              | 27.3           |         |

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

## **APPENDIX 3: Test instruments**

### **EMI test equipment**

| Control No.  | Instrument                 | Manufacturer                    | Model No                  | Serial No                  | Test Item | Calibration Date *<br>Interval(month) |
|--------------|----------------------------|---------------------------------|---------------------------|----------------------------|-----------|---------------------------------------|
| MAEC-01      | Anechoic Chamber(NSA)      | TDK                             | Semi Anechoic Chamber 10m | DA-06881                   | CE/RE     | 2008/10/29 * 12                       |
| MLS-06       | LISN(AMN)                  | Schwarzbeck                     | NSLK8127                  | 8127363                    | CE(EUT)   | 2009/02/18 * 12                       |
| MLS-03       | LISN(AMN)                  | Schwarzbeck                     | NSLK8127                  | 8127384                    | CE(AE)    | 2008/07/01 * 12                       |
| MTA-06       | Terminator                 | MCL                             | BTRM-50                   | 1 9951                     | CE        | 2009/02/17 * 12                       |
| MCC-03       | Coaxial Cable              | Fujikura/Suhner/<br>Agilent/TSJ | -                         | -                          | CE        | 2008/12/16 * 12                       |
| MTR-01       | Test Receiver              | Rohde & Schwarz                 | ESI40                     | 100084                     | CE/RE     | 2008/12/01 * 12                       |
| CUST-MSTW-14 | EMI measurement program    | TSJ                             | TEPTO-DV                  | -                          | CE/RE     | -                                     |
| MOS-01       | Digital Humidity Indicator | N.T                             | NT-1800                   | MOS01                      | CE/RE     | 2009/02/06 * 12                       |
| MJM-01       | Measure                    | KDS                             | ES19-55                   | -                          | CE/RE     | -                                     |
| MBA-01       | Biconical Antenna          | Schwarzbeck                     | BBA9106                   | VHA91032007                | RE        | 2008/11/12 * 12                       |
| MLA-09       | Logperiodic Antenna        | Schwarzbeck                     | USLP9143B                 | 9143B006                   | RE        | 2008/11/12 * 12                       |
| MAT-06       | Attenuator(6dB)            | Weinschel Corp                  | 2                         | BL1069                     | RE        | 2008/11/14 * 12                       |
| MCC-01       | Coaxial Cable 0.1-3000MHz  | Suhner/storm/<br>Agilent/TSJ    | -                         | -                          | RE        | 2008/10/02 * 12                       |
| MPA-04       | Pre Amplifier              | Agilent                         | 8447D                     | 2944A09965                 | RE        | 2008/07/23 * 12                       |
| MHA-05       | Horn Antenna 1-18GHz       | Schwarzbeck                     | BBHA9120D                 | 253                        | RE        | 2009/01/31 * 12                       |
| MCC-18       | Microwave Cable 1G-26.5GHz | Suhner                          | SUCOFLEX 104              | 233010(1m) /<br>292410(5m) | RE        | 2008/09/09 * 12                       |
| MPA-01       | Pre Amplifier              | Agilent                         | 8449B                     | 3008A01671                 | RE        | 2009/02/12 * 12                       |
| MRENT-62     | Spectrum Analyzer          | Agilent                         | E4448A                    | MY46180856                 | RE        | 2008/11/25 * 12                       |

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

#### **Test Item:**

**CE: Conducted emission**

**RE: Radiated emission**

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124