



Attachment 2 – SAR Test Plots (WCDMA Band-V)

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1


Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.903 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

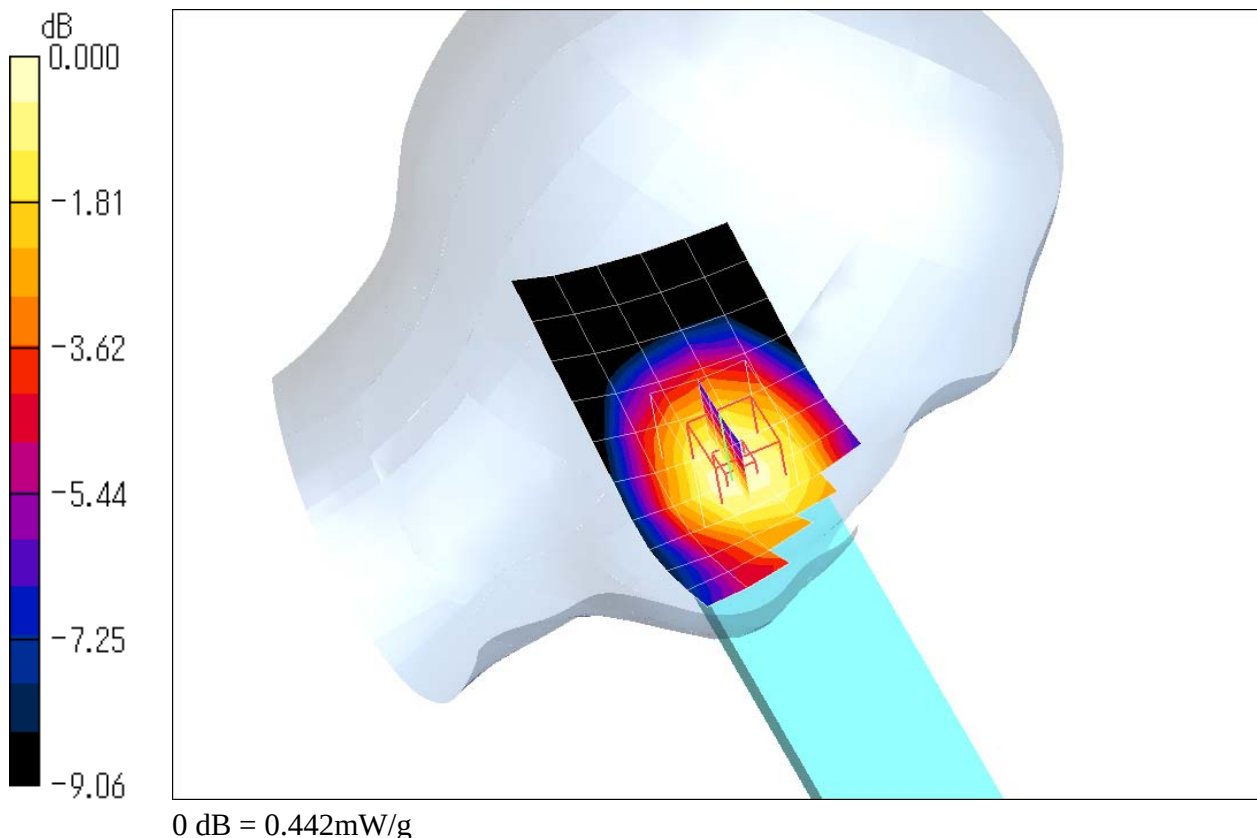Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.416 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 22.4 V/m ; Power Drift = -0.075 dB Peak SAR (extrapolated) = 0.527 W/kg **SAR(1 g) = 0.421 mW/g ; SAR(10 g) = 0.315 mW/g** Maximum value of SAR (measured) = 0.442 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1


Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.903 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

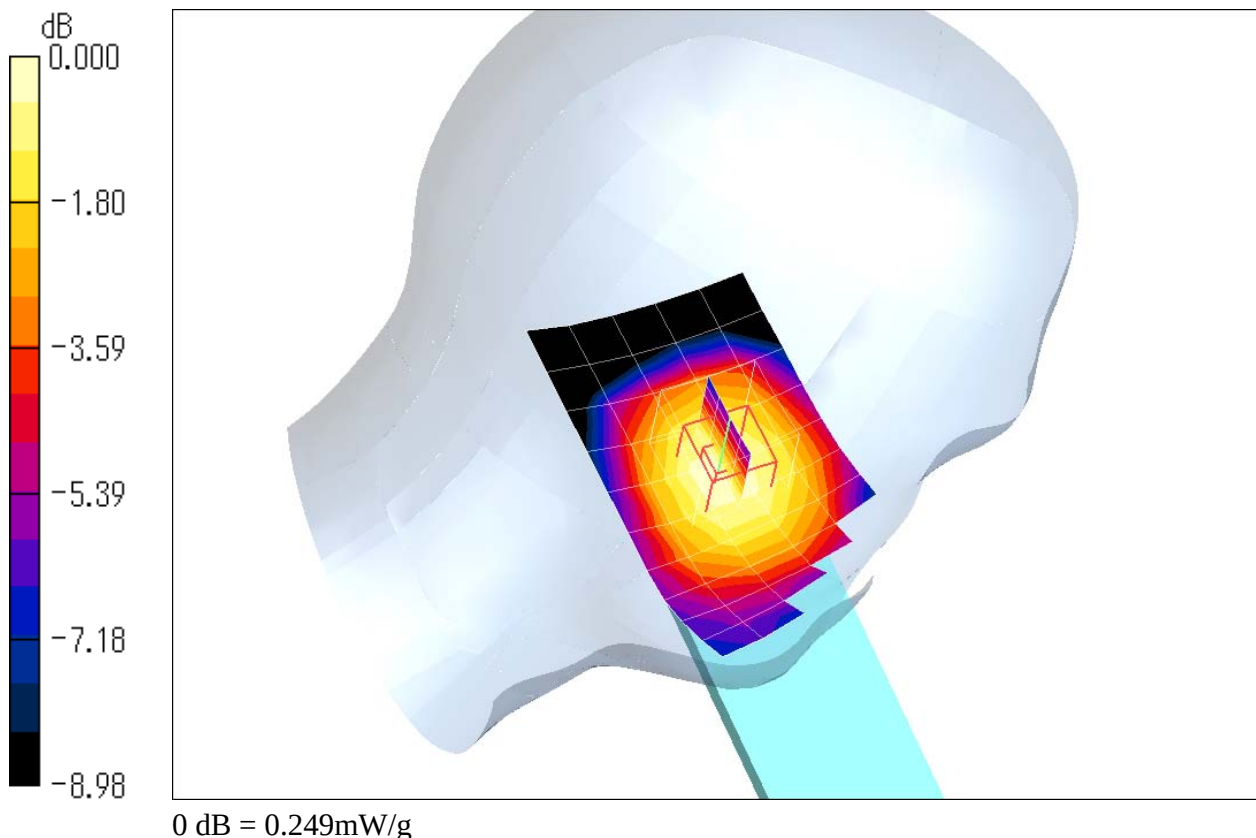Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.238 mW/g **Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 16.1 V/m ; Power Drift = -0.059 dB Peak SAR (extrapolated) = 0.296 W/kg **SAR(1 g) = 0.238 mW/g ; SAR(10 g) = 0.180 mW/g** Maximum value of SAR (measured) = 0.249 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4132ch (826.4MHz)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1


Medium: HSL900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.894 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

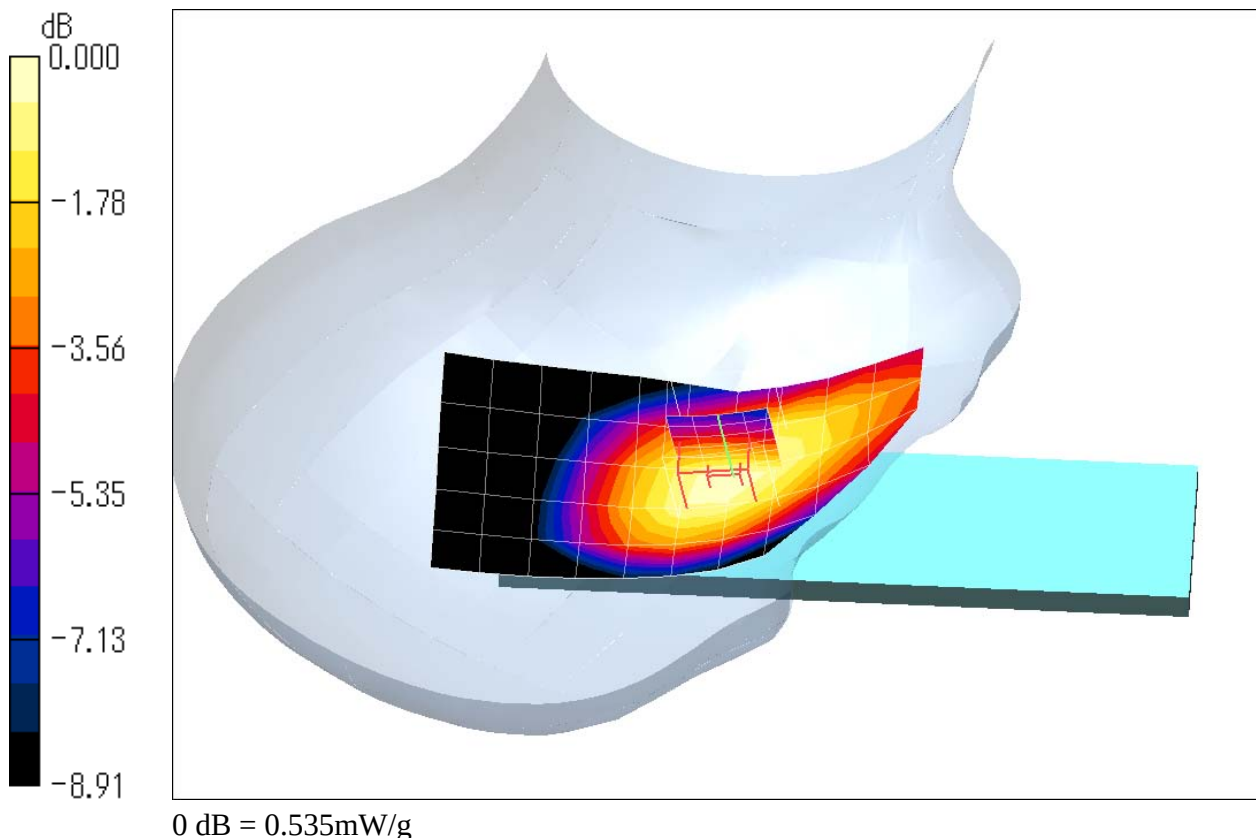Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.533 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 24.7 V/m ; Power Drift = -0.028 dB Peak SAR (extrapolated) = 0.661 W/kg **SAR(1 g) = 0.509 mW/g ; SAR(10 g) = 0.378 mW/g** Maximum value of SAR (measured) = 0.535 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4132ch (826.4MHz)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1


Medium: HSL900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.894 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

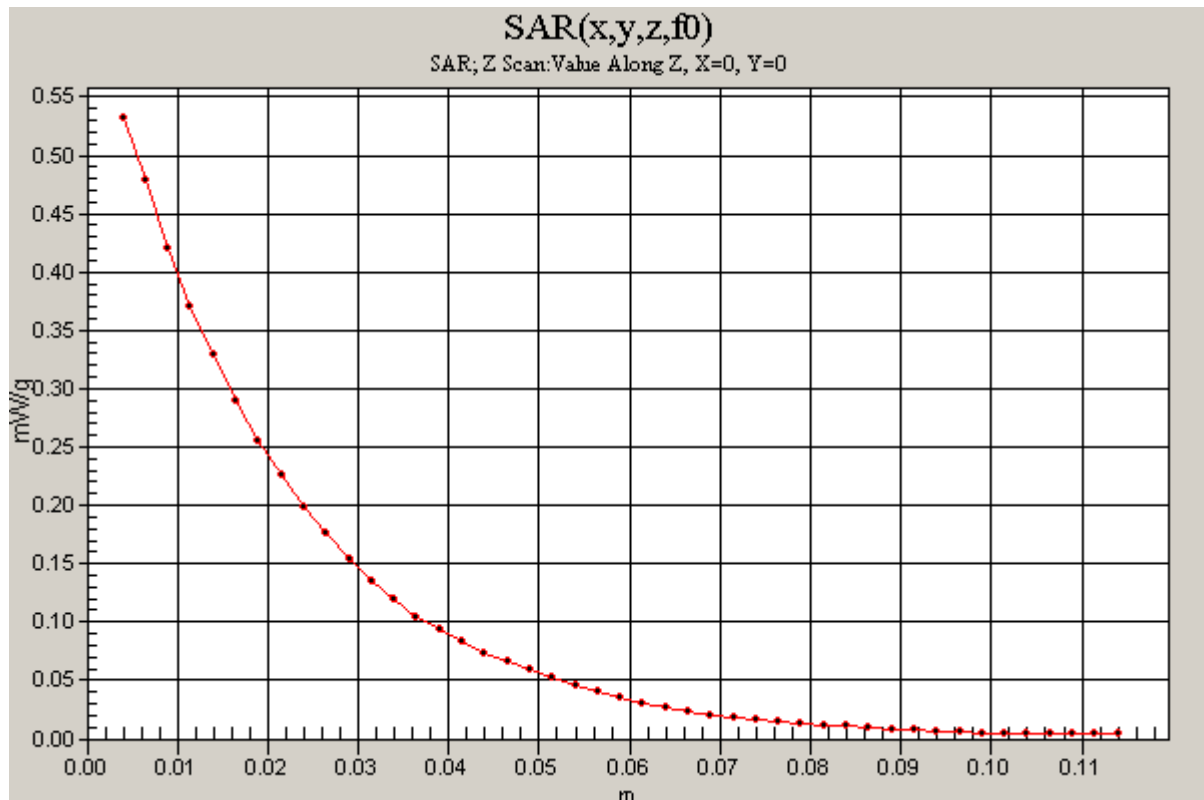Cheek/Touch Position/Z Scan (1x1x45): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=2.5\text{mm}$
Maximum value of SAR (measured) = 0.532 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1


Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.903 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

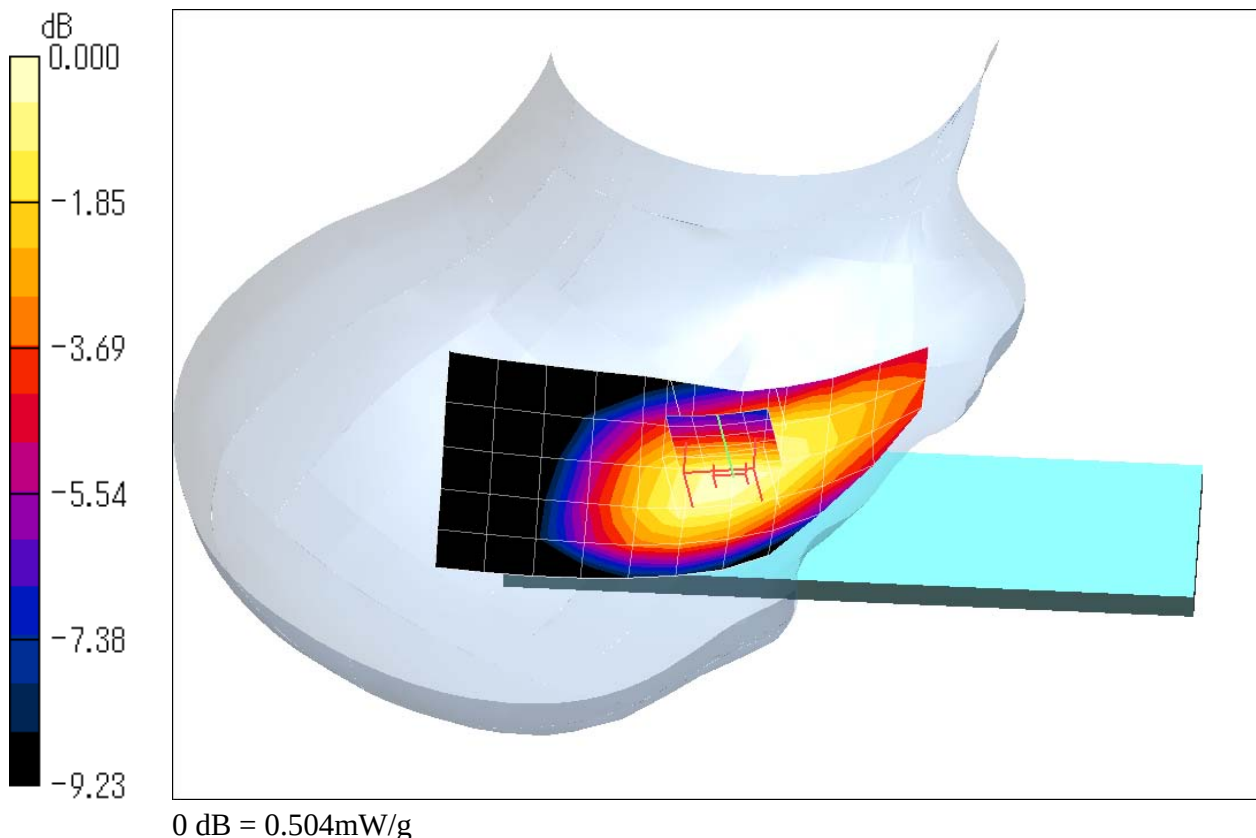Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.494 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.8 V/m ; Power Drift = 0.001 dB Peak SAR (extrapolated) = 0.618 W/kg **SAR(1 g) = 0.475 mW/g ; SAR(10 g) = 0.351 mW/g** Maximum value of SAR (measured) = 0.504 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4233ch (846.6MHz)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1


Medium: HSL900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.914 \text{ mho/m}$; $\epsilon_r = 41.5$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

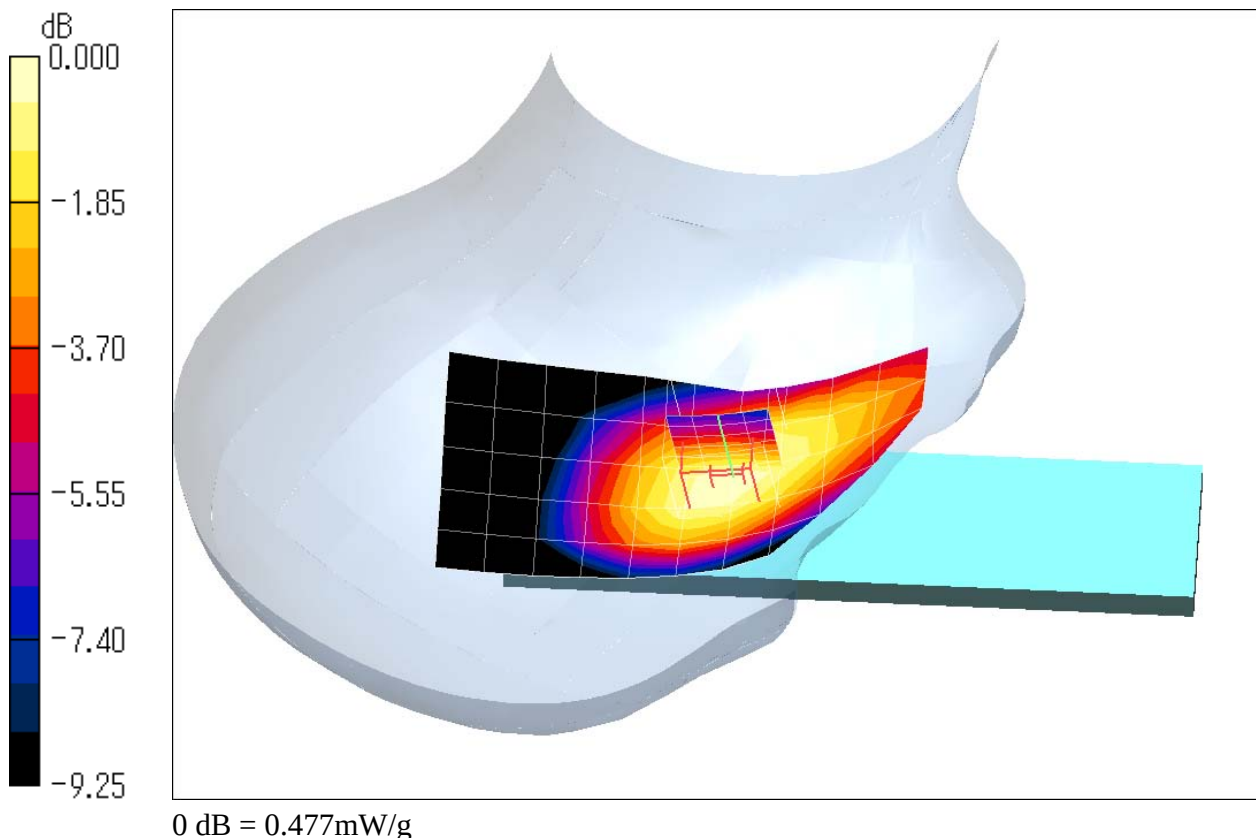Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.479 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.0 V/m ; Power Drift = -0.039 dB Peak SAR (extrapolated) = 0.599 W/kg **SAR(1 g) = 0.452 mW/g ; SAR(10 g) = 0.333 mW/g** Maximum value of SAR (measured) = 0.477 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.903$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.271 mW/g


Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.6 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 0.330 W/kg

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

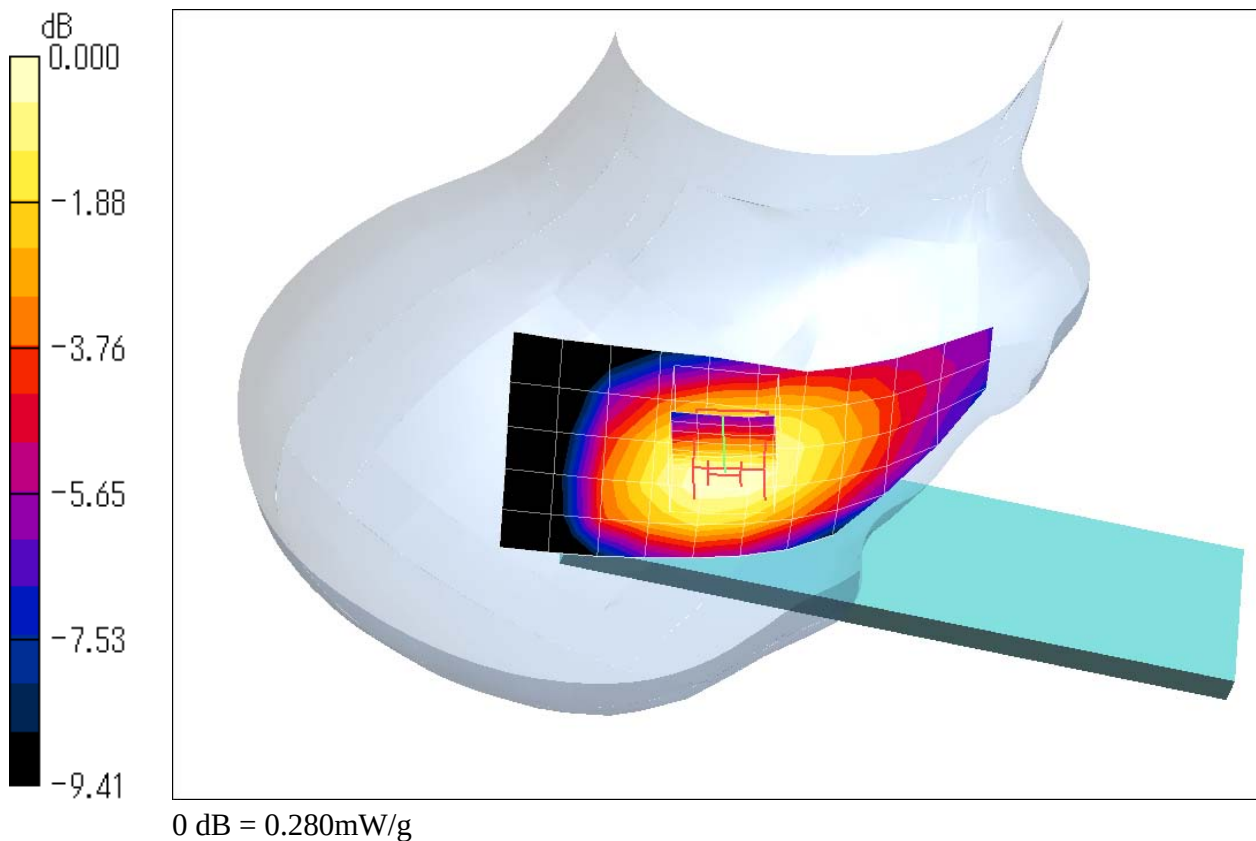

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4182ch (836.4MHz) - close style (w/o carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.947 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.730 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.4 V/m ; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 1.01 W/kg

SAR(1 g) = 0.753 mW/g ; SAR(10 g) = 0.531 mW/g

Maximum value of SAR (measured) = 0.804 mW/g

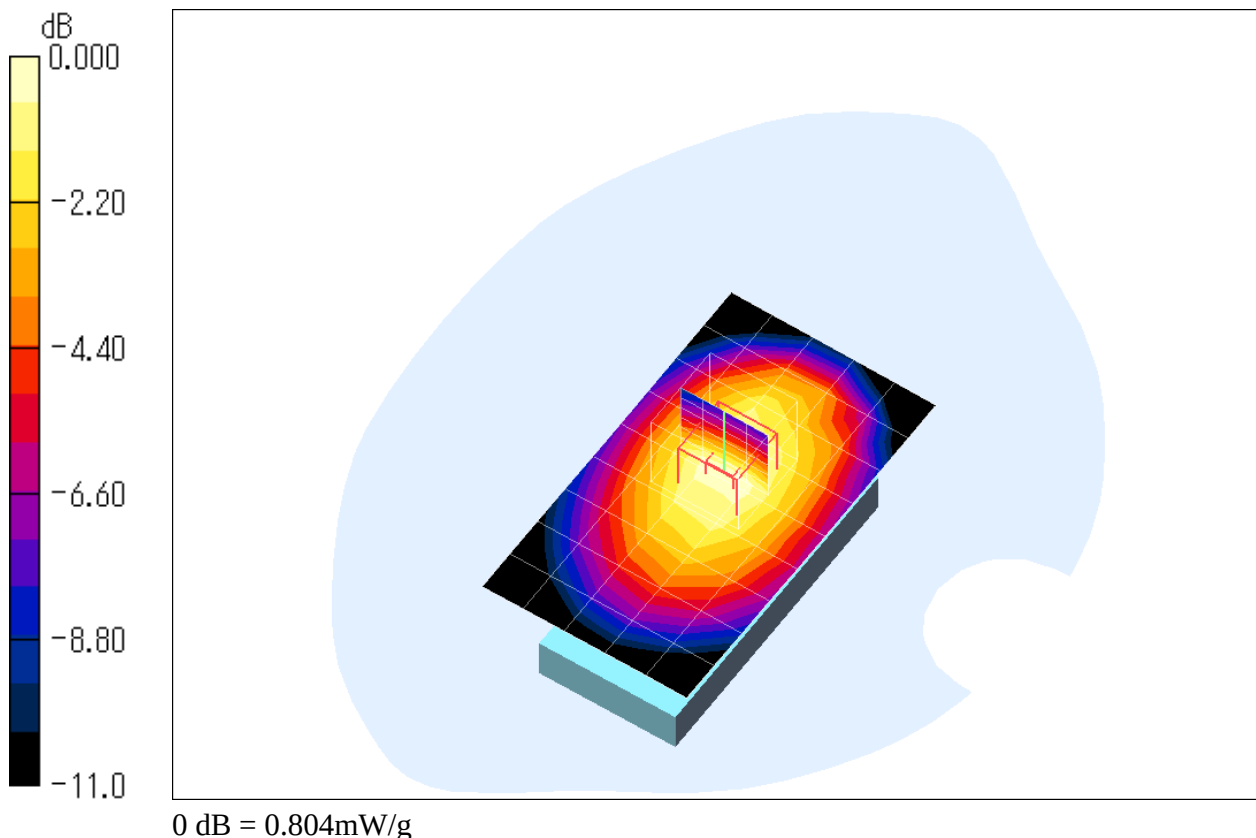

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4182ch (836.4MHz) - viewer style (w/o carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.947 \text{ mho/m}$; $\epsilon_r = 54.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.732 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.5 V/m ; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.746 mW/g ; SAR(10 g) = 0.529 mW/g

Maximum value of SAR (measured) = 0.793 mW/g

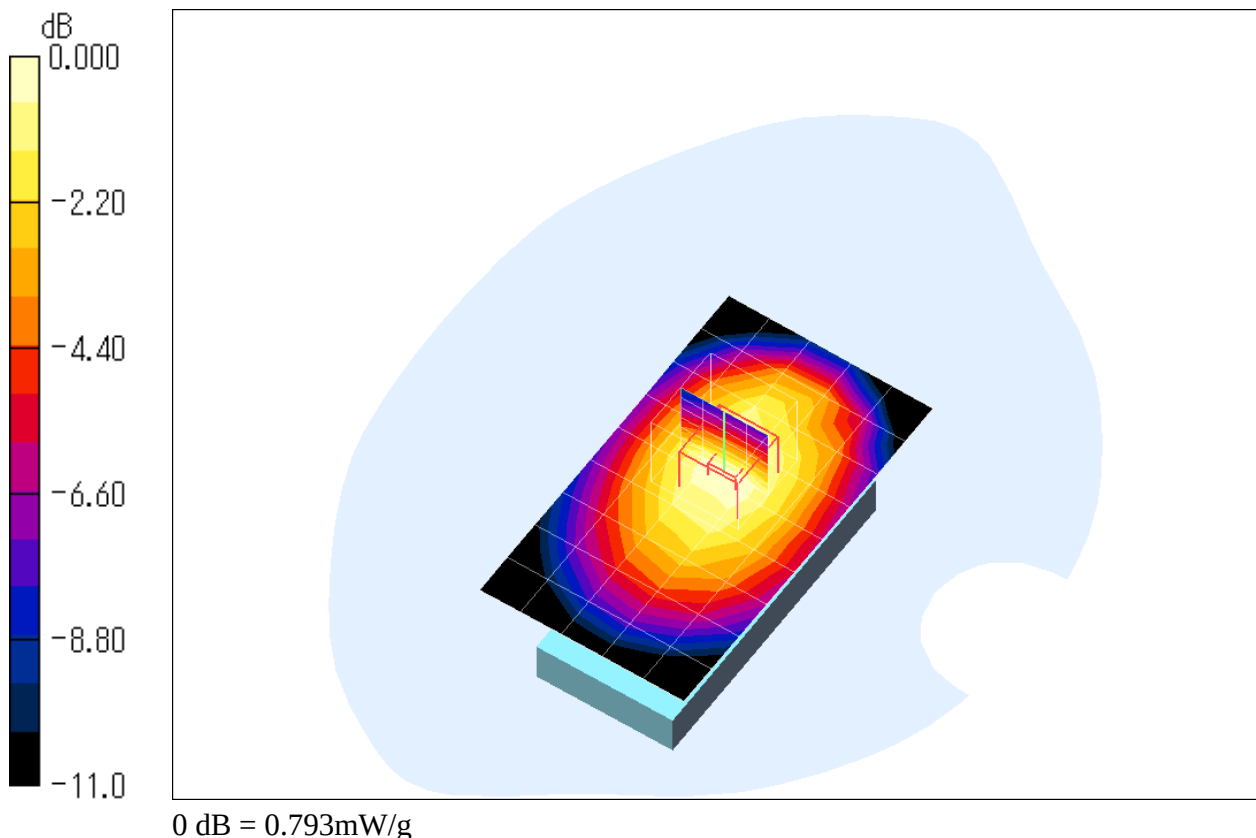

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Front 4182ch (836.4MHz) - close style (w/ carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.418 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.4 V/m ; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.498 W/kg

SAR(1 g) = 0.402 mW/g ; SAR(10 g) = 0.300 mW/g

Maximum value of SAR (measured) = 0.425 mW/g

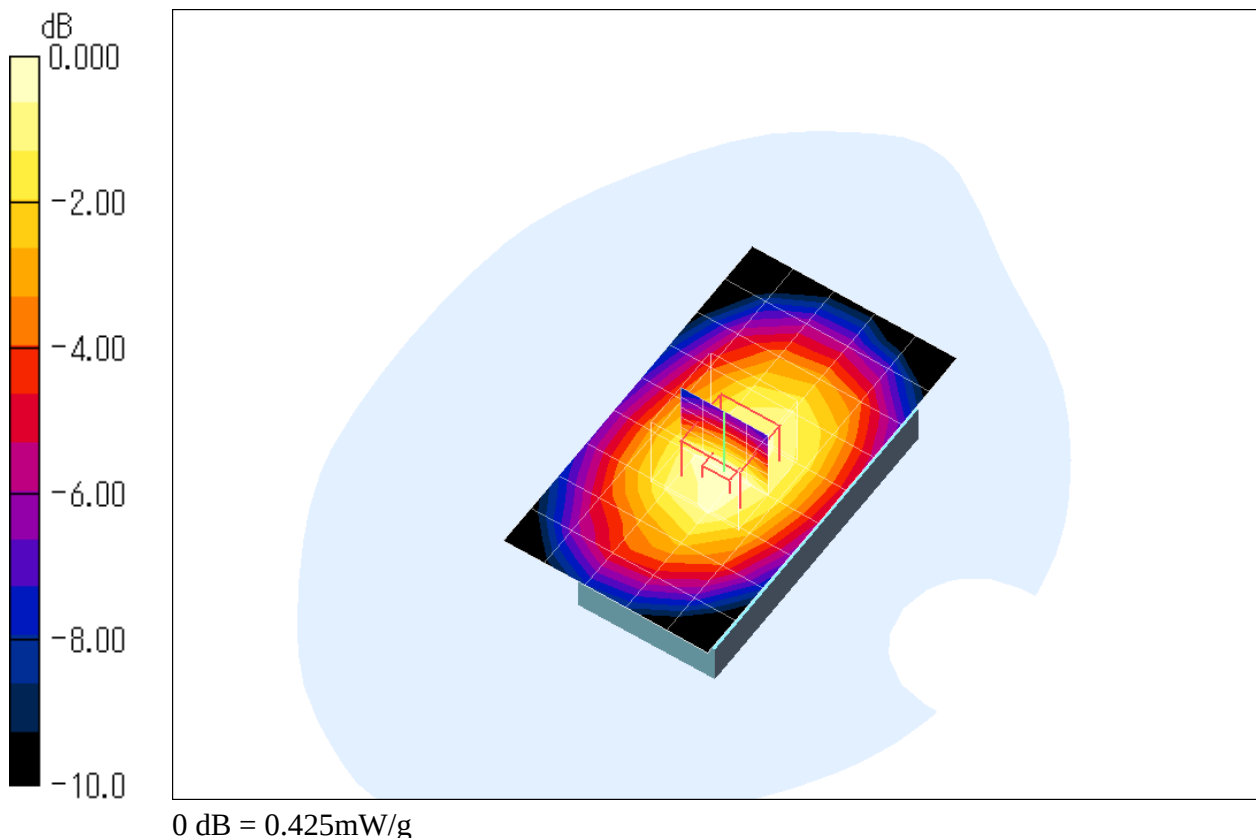

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Front 4182ch (836.4MHz) - viewer style (w/ carry case)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1


Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

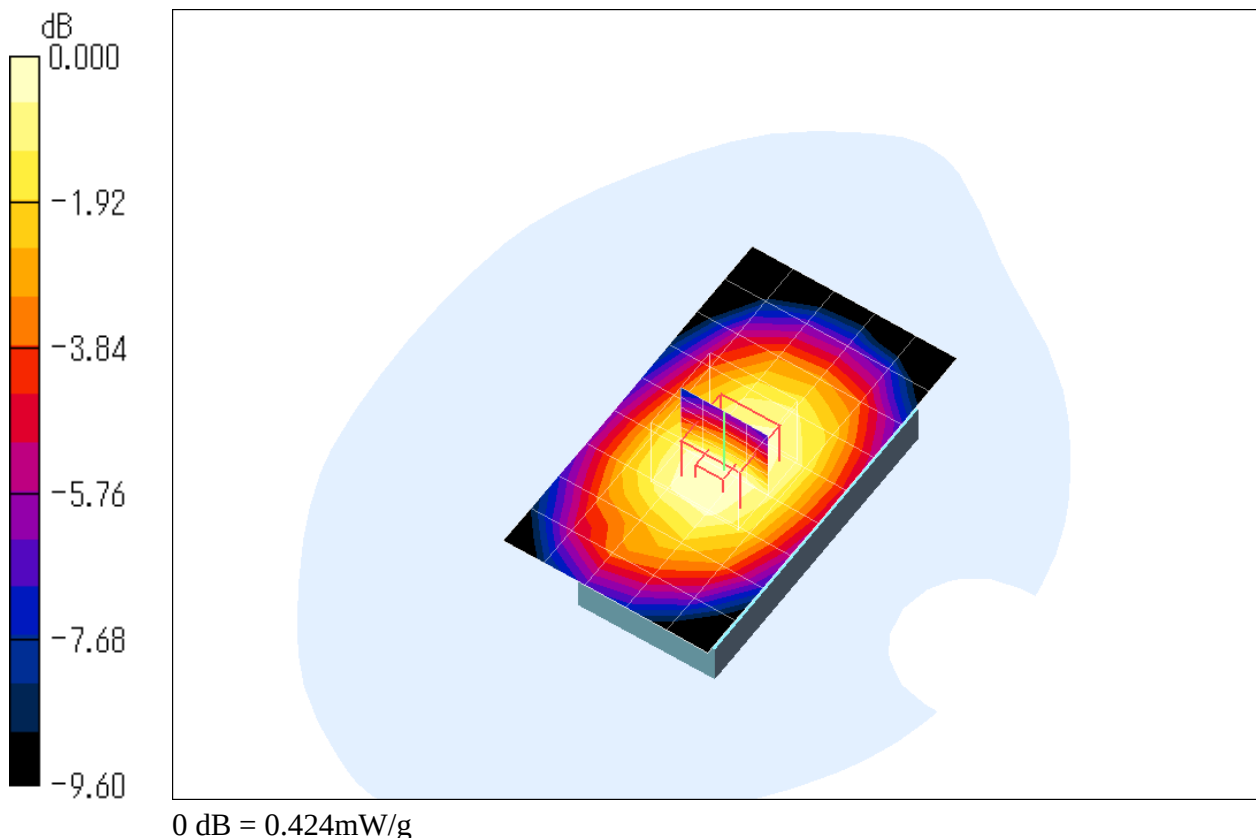Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.425 mW/g **Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.8 V/m ; Power Drift = -0.003 dB Peak SAR (extrapolated) = 0.496 W/kg **SAR(1 g) = 0.406 mW/g ; SAR(10 g) = 0.311 mW/g** Maximum value of SAR (measured) = 0.424 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4132ch (826.4MHz) - close style (w/ carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.05 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 33.0 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.741 mW/g

Maximum value of SAR (measured) = 1.07 mW/g

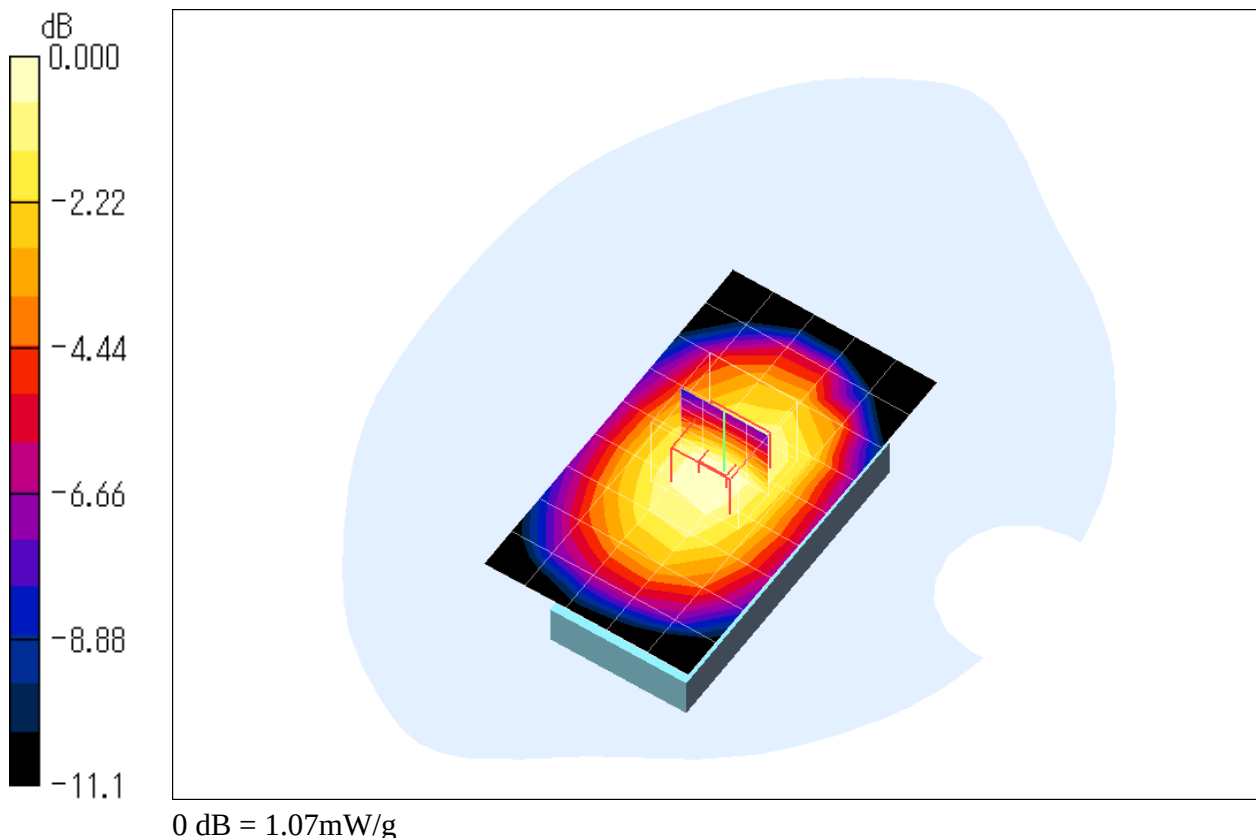

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4132ch (826.4MHz) - close style (w/ carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Z Scan (1x1x45): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=2.5\text{mm}$

Maximum value of SAR (measured) = 1.06 mW/g

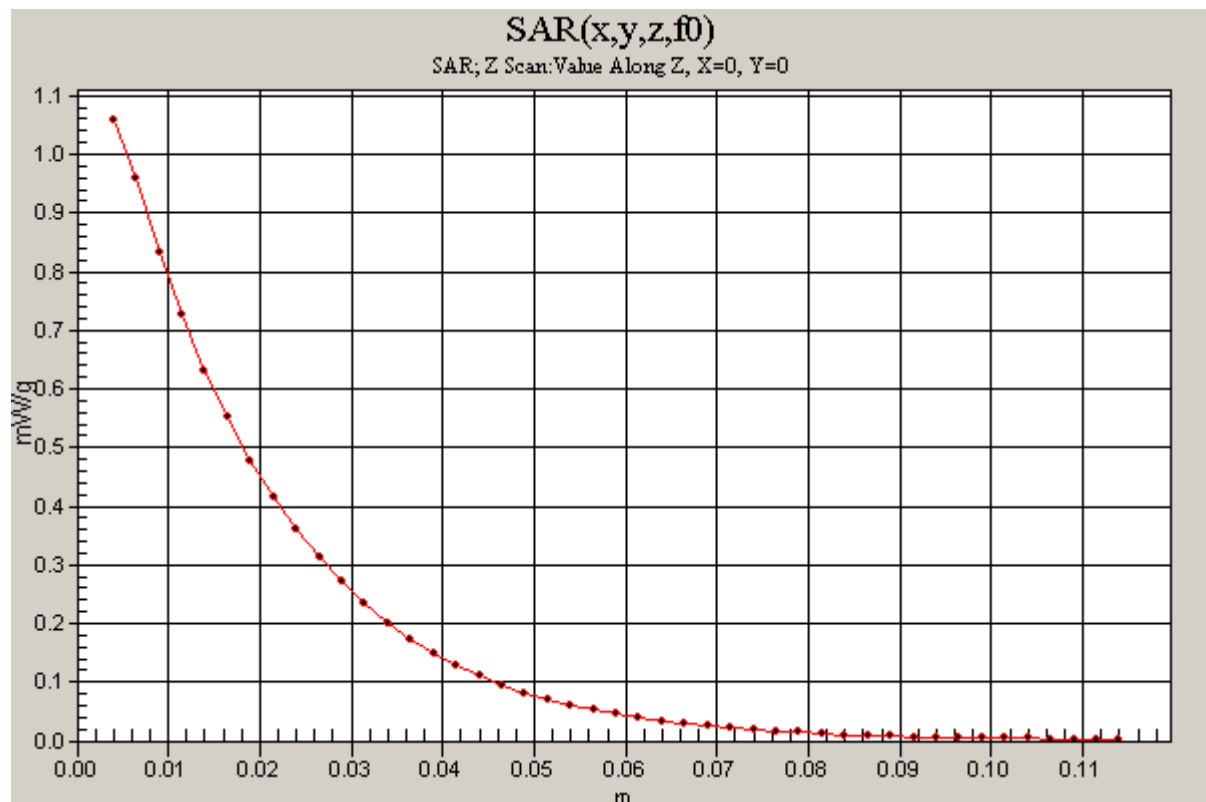

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4182ch (836.4MHz) - close style (w/ carry case)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1


Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

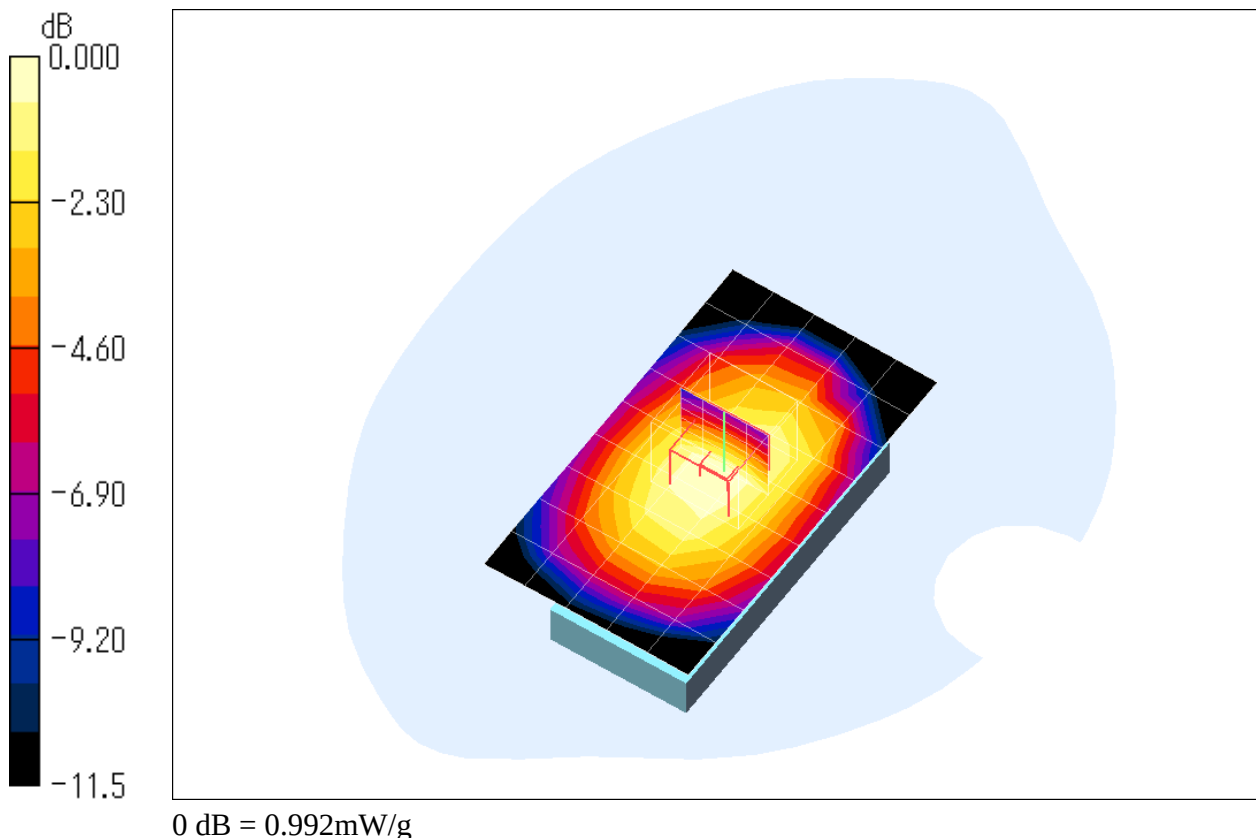Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.962 mW/g **Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 30.9 V/m ; Power Drift = -0.014 dB Peak SAR (extrapolated) = 1.17 W/kg **SAR(1 g) = 0.937 mW/g ; SAR(10 g) = 0.688 mW/g** Maximum value of SAR (measured) = 0.992 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4233ch (846.6MHz) - close style (w/ carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.974 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.964 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.5 V/m ; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.929 mW/g ; SAR(10 g) = 0.684 mW/g

Maximum value of SAR (measured) = 0.982 mW/g

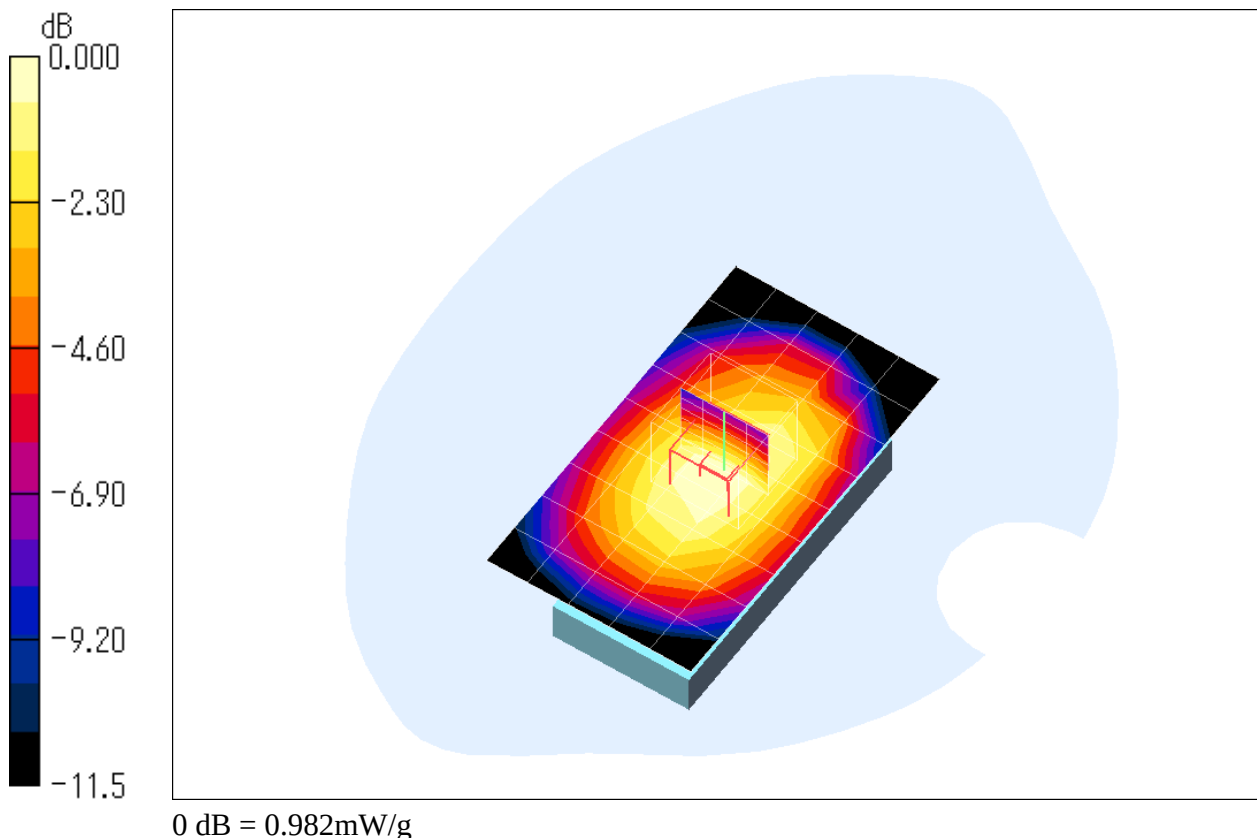

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4132ch (826.4MHz) - viewer style (w/ carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.04 mW/g


Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.1 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.743 mW/g

Maximum value of SAR (measured) = 1.08 mW/g

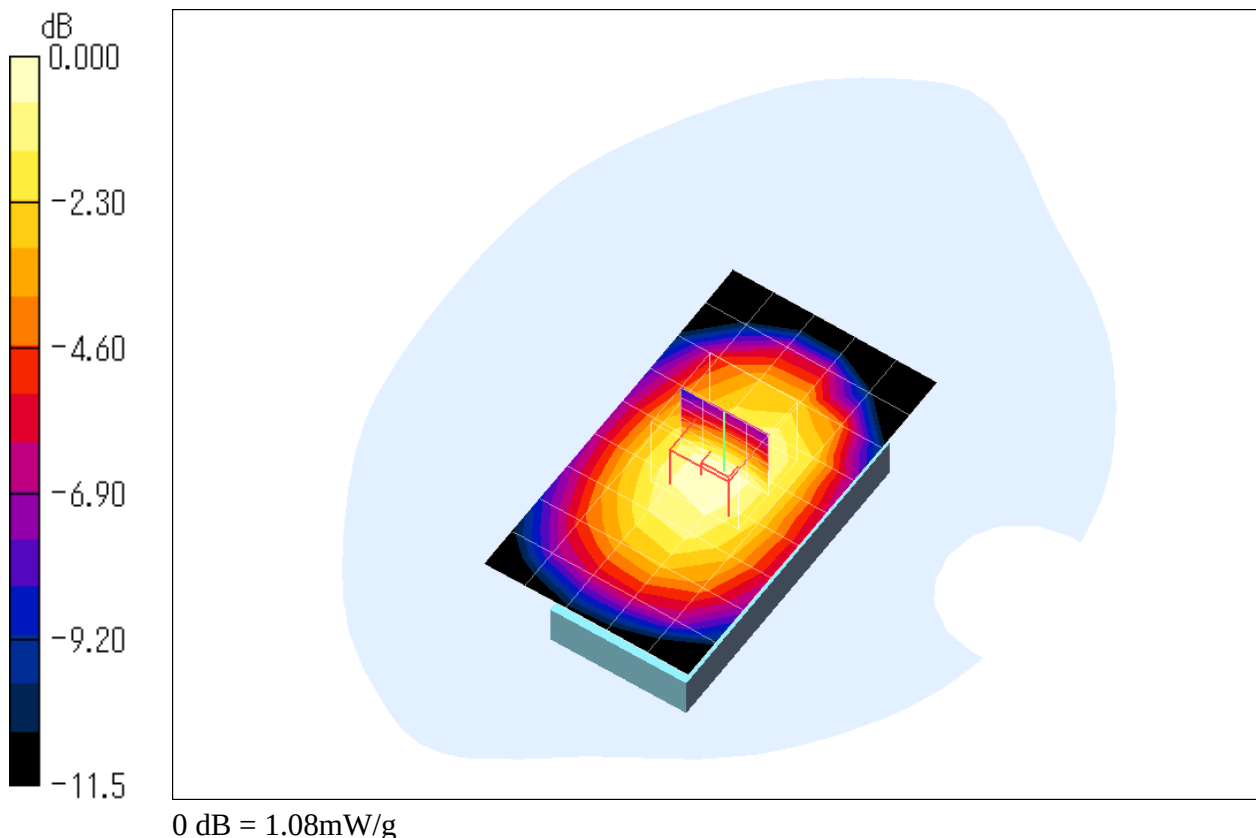

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4132ch (826.4MHz) - viewer style (w/ carry case)

DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.954 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section


Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Z Scan (1x1x45): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=2.5\text{mm}$

Maximum value of SAR (measured) = 1.07 mW/g

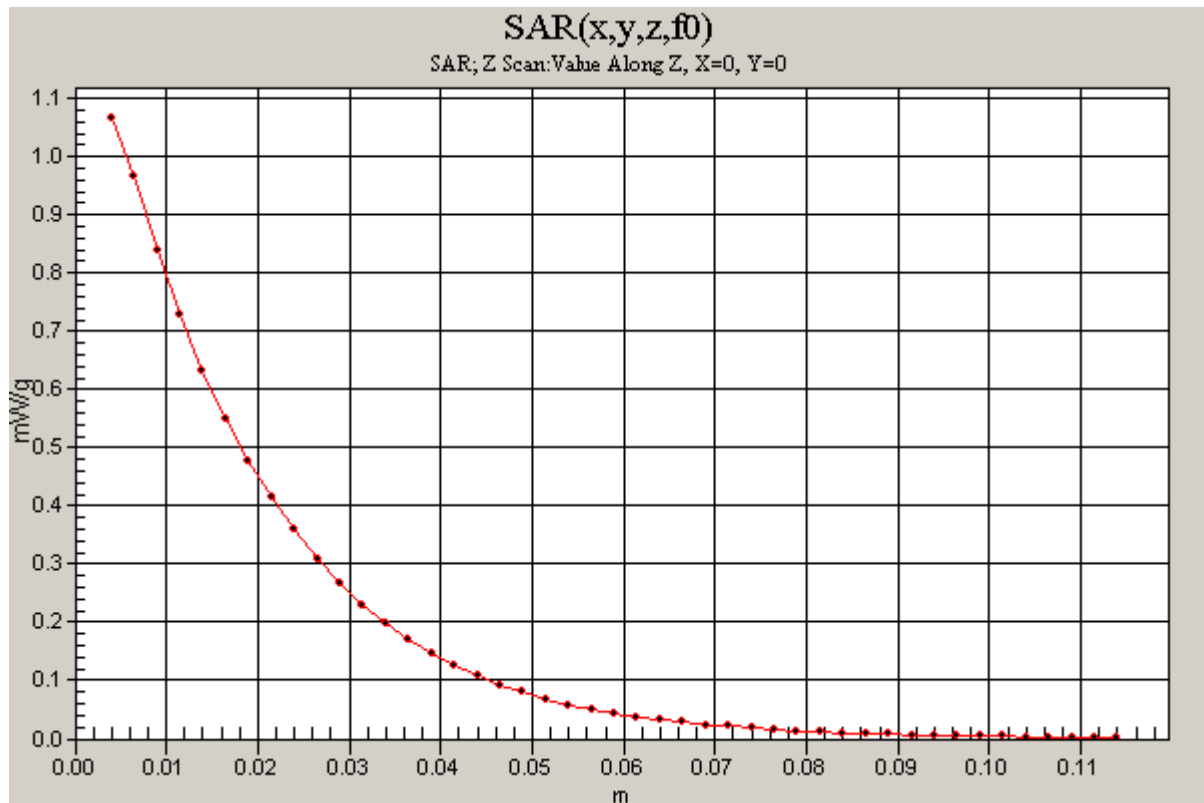

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4182ch (836.4MHz) - viewer style (w/ carry case)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1


Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.964 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

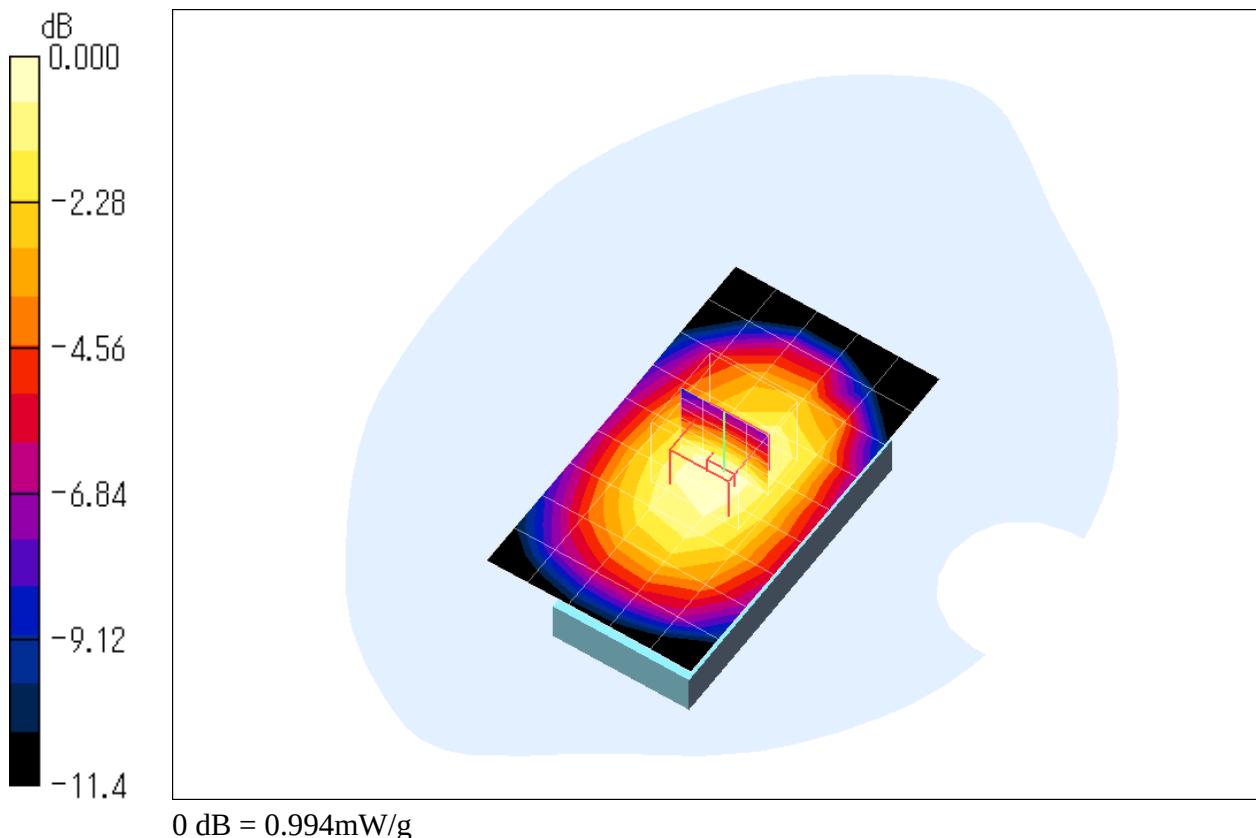Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.960 mW/g **Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 30.3 V/m ; Power Drift = -0.032 dB Peak SAR (extrapolated) = 1.19 W/kg **SAR(1 g) = 0.938 mW/g ; SAR(10 g) = 0.688 mW/g** Maximum value of SAR (measured) = 0.994 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn, Back 4233ch (846.6MHz) - viewer style (w/ carry case)**DUT: Cellular Phone; Type: SH-06A; Serial: 004401111805285**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.974 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.975 mW/g **Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 29.9 V/m ; Power Drift = -0.008 dB Peak SAR (extrapolated) = 1.17 W/kg **SAR(1 g) = 0.935 mW/g ; SAR(10 g) = 0.687 mW/g** Maximum value of SAR (measured) = 0.990 mW/g 