


A.3 SAR Measurement Data

A.3.1 Left Head

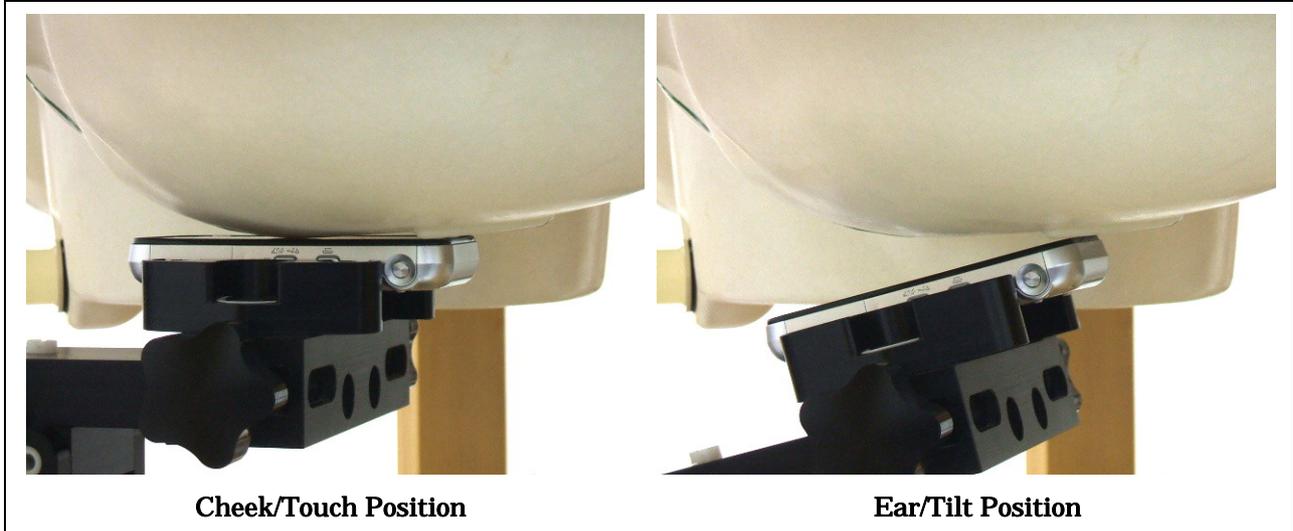


| CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1) | | | | | | Date : March 6, 2009 | |
|--|-----------|--------|----------------|------------------|--------------|----------------------|-------------------|
| Test Position | Frequency | | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g] | SAR (1g) [mW/g] | Tissue Temp. [°C] |
| | Channel | MHz | | | | | |
| Cheek/Touch | 1013 | 824.70 | 23.66 | 0.006 | 1.6 | 0.817 | 22.0 |
| | 384 | 836.52 | 23.75 | -0.022 | | 0.945 | 22.0 |
| | 779 | 848.37 | 23.82 | -0.071 | | 1.02 | 22.0 |
| Ear/Tilt | 1013 | 824.70 | -- | -- | 1.6 | ** | -- |
| | 384 | 836.52 | 23.75 | -0.050 | | 0.565 | 22.0 |
| | 779 | 848.37 | -- | -- | | ** | -- |

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

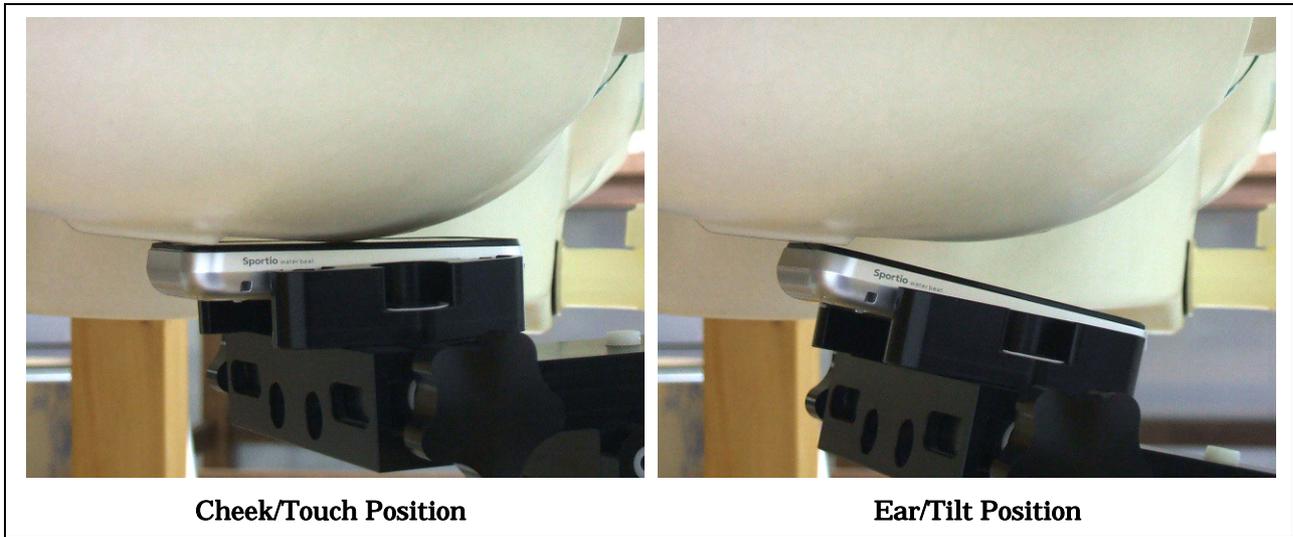


CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1) Date : March 6, 2009

| Test Position | Frequency | | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g] | SAR (1g) [mW/g] | Tissue Temp. [°C] |
|---------------|-----------|--------|----------------|------------------|--------------|-----------------|-------------------|
| | Channel | MHz | | | | | |
| Cheek/Touch | 1013 | 824.70 | 23.66 | -0.065 | 1.6 | 0.765 | 22.0 |
| | 384 | 836.52 | 23.75 | -0.012 | | 0.892 | 22.0 |
| | 779 | 848.37 | 23.82 | 0.003 | | 0.950 | 22.0 |
| Ear/Tilt | 1013 | 824.70 | -- | -- | 1.6 | ** | -- |
| | 384 | 836.52 | 23.75 | -0.026 | | 0.572 | 22.0 |
| | 779 | 848.37 | -- | -- | | ** | -- |

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

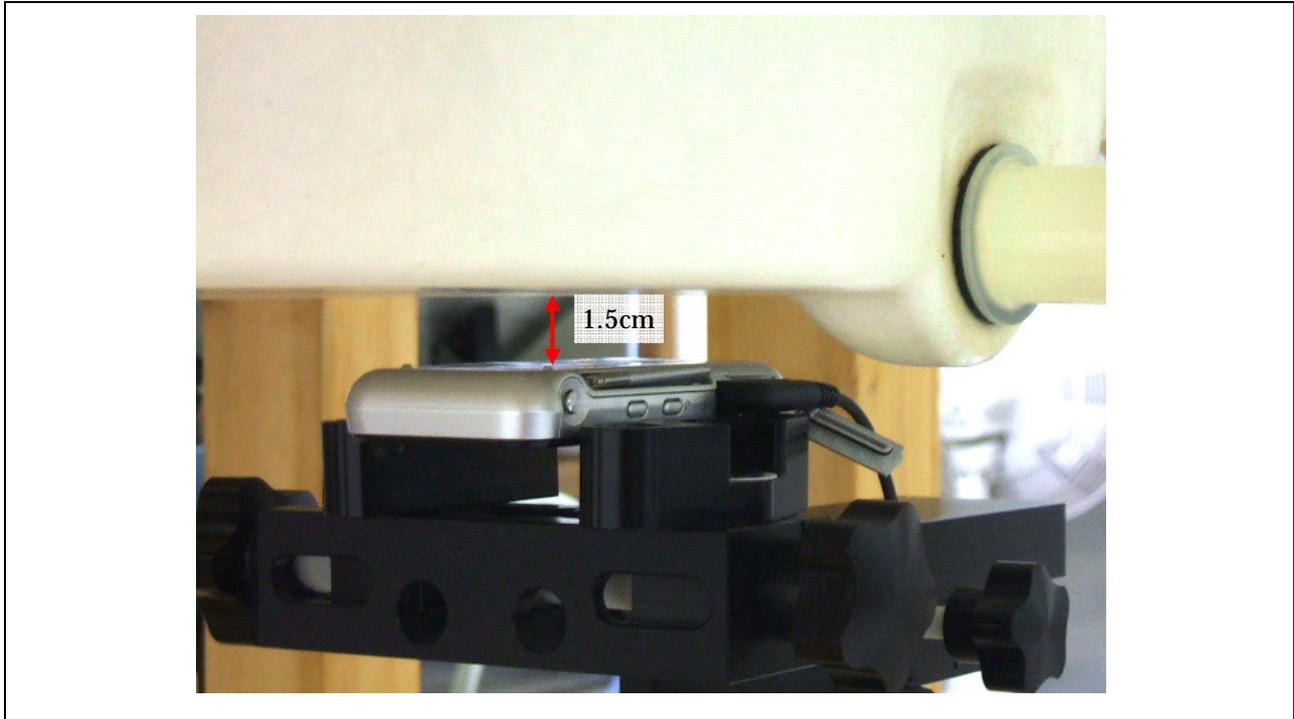

| CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1) | | | | | | Date : March 10, 2009 | |
|--|-----------|--------|----------------|------------------|--------------|-----------------------|-------------------|
| Separation Distance | Frequency | | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g] | SAR (1g) [mW/g] | Tissue Temp. [°C] |
| | Channel | MHz | | | | | |
| 1.5 cm | 1013 | 824.70 | 23.66 | -0.052 | 1.6 | 0.316 | 22.0 |
| | 384 | 836.52 | 23.76 | -0.032 | | 0.386 | 22.0 |
| | 779 | 848.37 | 23.81 | 0.010 | | 0.436 | 22.0 |

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.