


A.3 SAR Measurement Data

A.3.1 Left Head

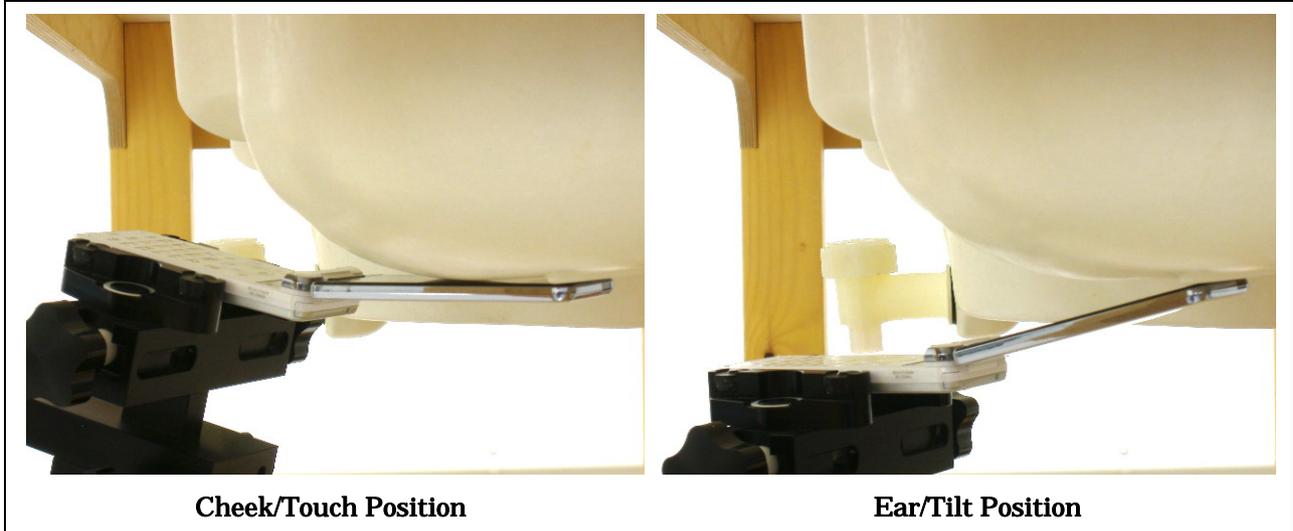


GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)							Date : March 31, 2009
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	29.43	-0.042	1.6	0.374	22.0
	0661	1880.00	29.30	-0.014		0.421	22.0
	0810	1909.80	29.30	-0.063		0.455	22.0
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.30	-0.001		0.231	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

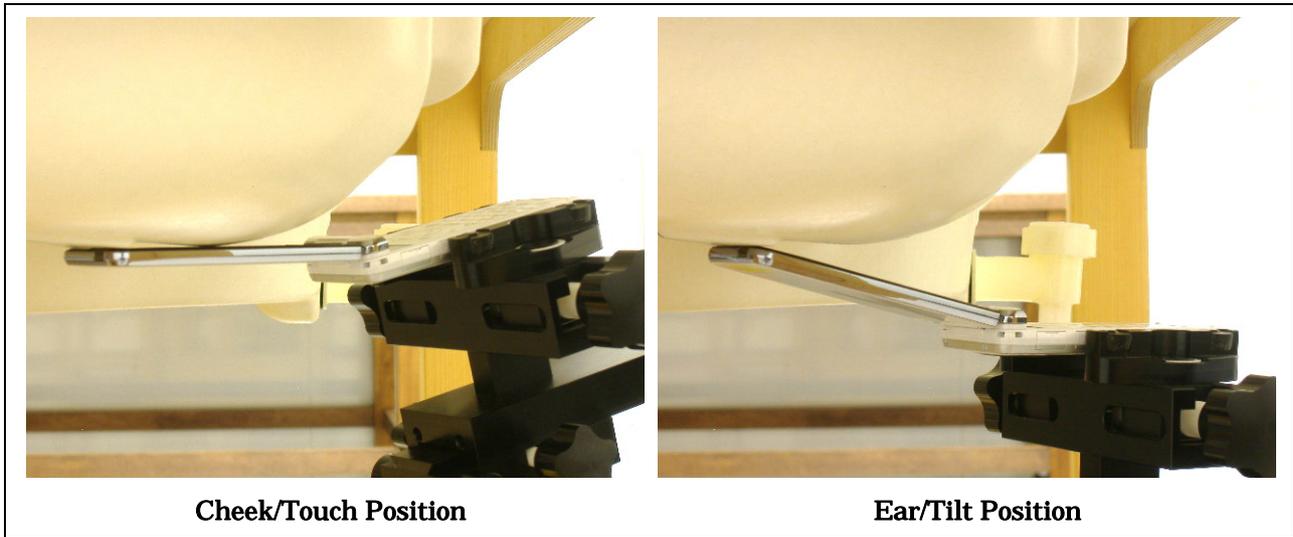


GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)			Date : March 31, 2009				
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.30	-0.041		0.343	22.0
	0810	1909.80	--	--		**	--
Ear/Tilt	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.30	-0.015		0.312	22.0
	0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
4. Please refer to attachment for the result presentation in plot format.


A.3.3 Body-worn Position – close style

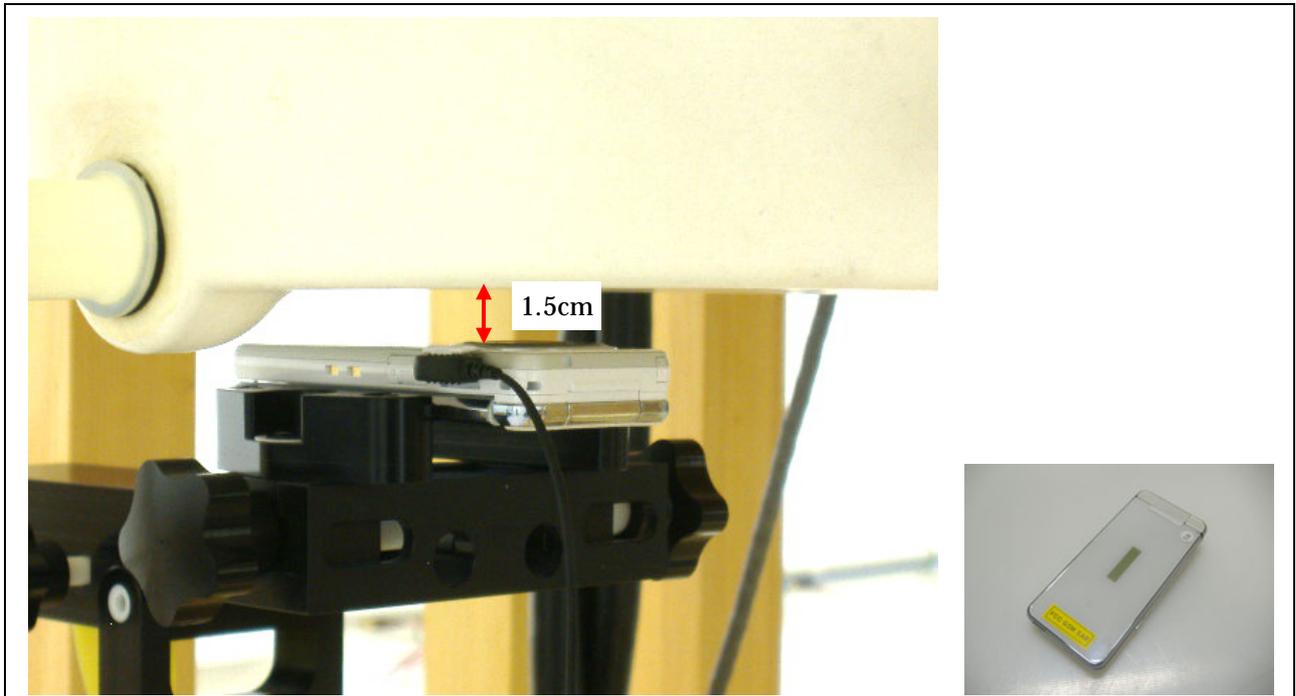

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)							Date : April 1, 2009	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]	
	Channel	MHz						
1.5 cm	0512	1850.20	--	--	1.6	**	--	
	0661	1880.00	29.30	-0.026		0.284	22.0	
	0810	1909.80	--	--		**	--	
GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.15)								
1.5 cm	0512	1850.20	29.31	-0.051	1.6	0.494	22.0	
	0661	1880.00	29.18	-0.067		0.527	22.0	
	0810	1909.80	29.18	-0.045		0.484	22.0	

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.

A.3.4 Body-worn Position – viewer style

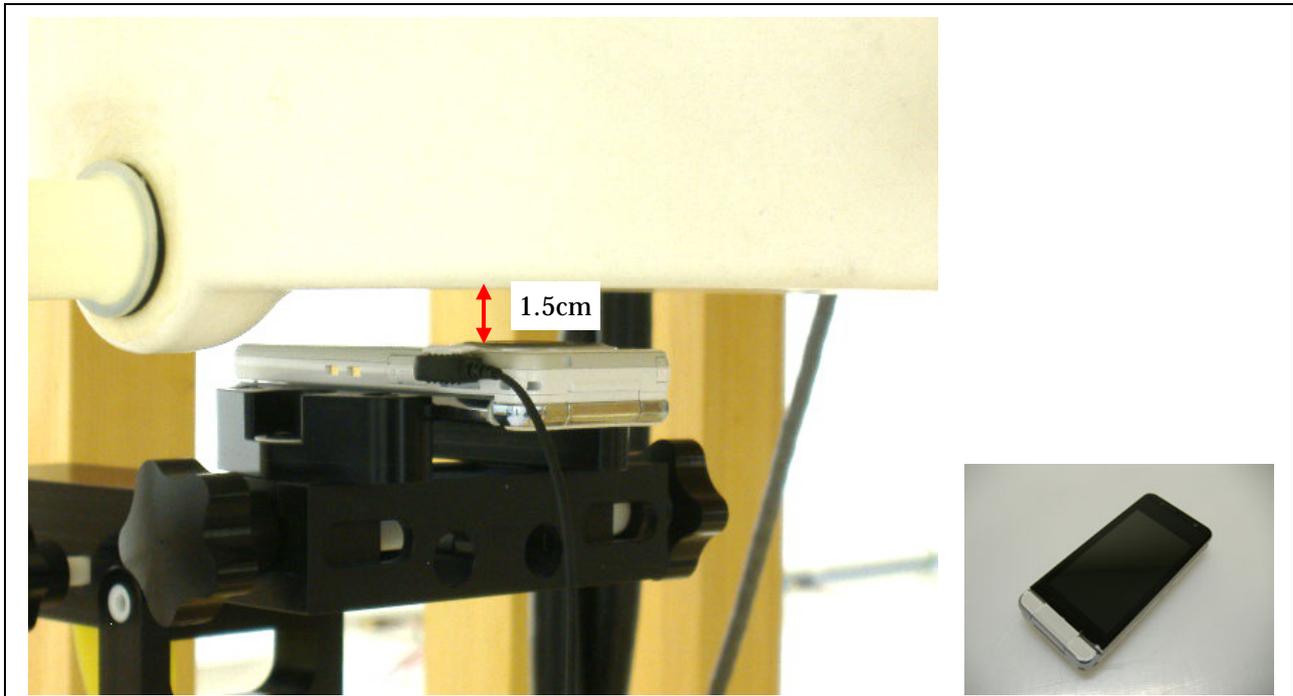

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : April 1, 2009	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.30	-0.028		0.254	22.0
	0810	1909.80	--	--		**	--
GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.15)							
1.5 cm	0512	1850.20	--	--	1.6	**	--
	0661	1880.00	29.18	-0.052		0.463	22.0
	0810	1909.80	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.