



Attachment 2 – SAR Test Plots (WCDMA Band-V)

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4132ch (826.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

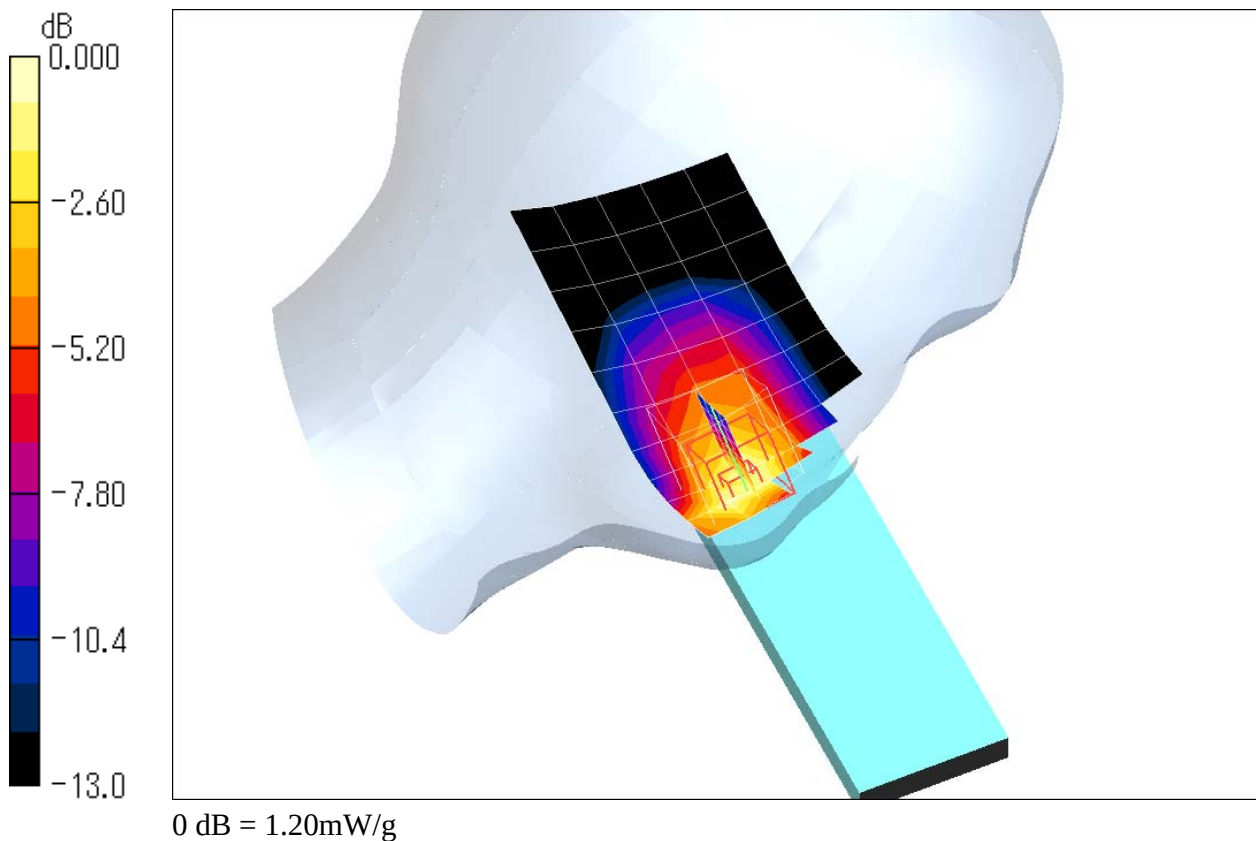
Medium: HSL900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.05 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.4 V/m ; Power Drift = 0.053 dB Peak SAR (extrapolated) = 1.91 W/kg **SAR(1 g) = 1.11 mW/g ; SAR(10 g) = 0.663 mW/g** Maximum value of SAR (measured) = 1.20 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4132ch (826.4MHz)

DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

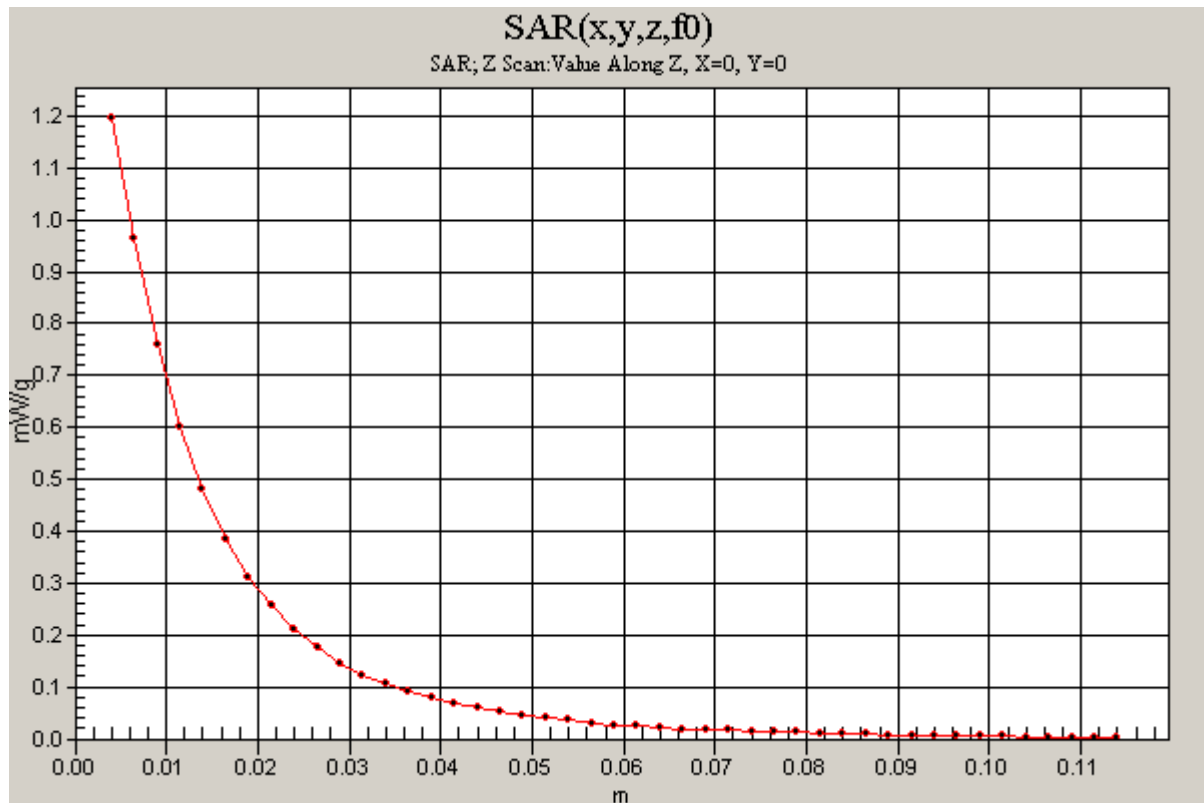
Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Z Scan (1x1x45): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=2.5\text{mm}$
Maximum value of SAR (measured) = 1.20 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

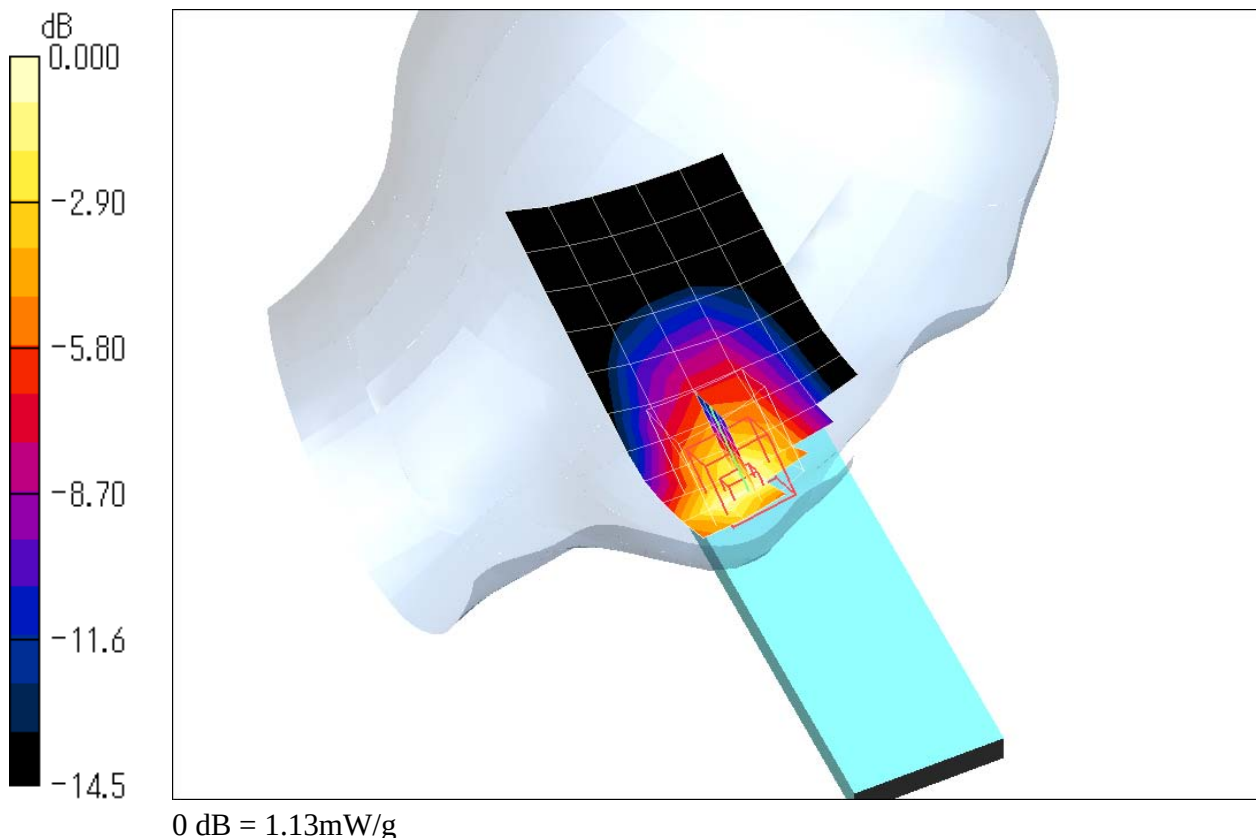
Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.997 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 18.6 V/m ; Power Drift = -0.002 dB Peak SAR (extrapolated) = 1.78 W/kg **SAR(1 g) = 1.03 mW/g ; SAR(10 g) = 0.594 mW/g** Maximum value of SAR (measured) = 1.13 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Cheek/Touch 4233ch (846.6MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

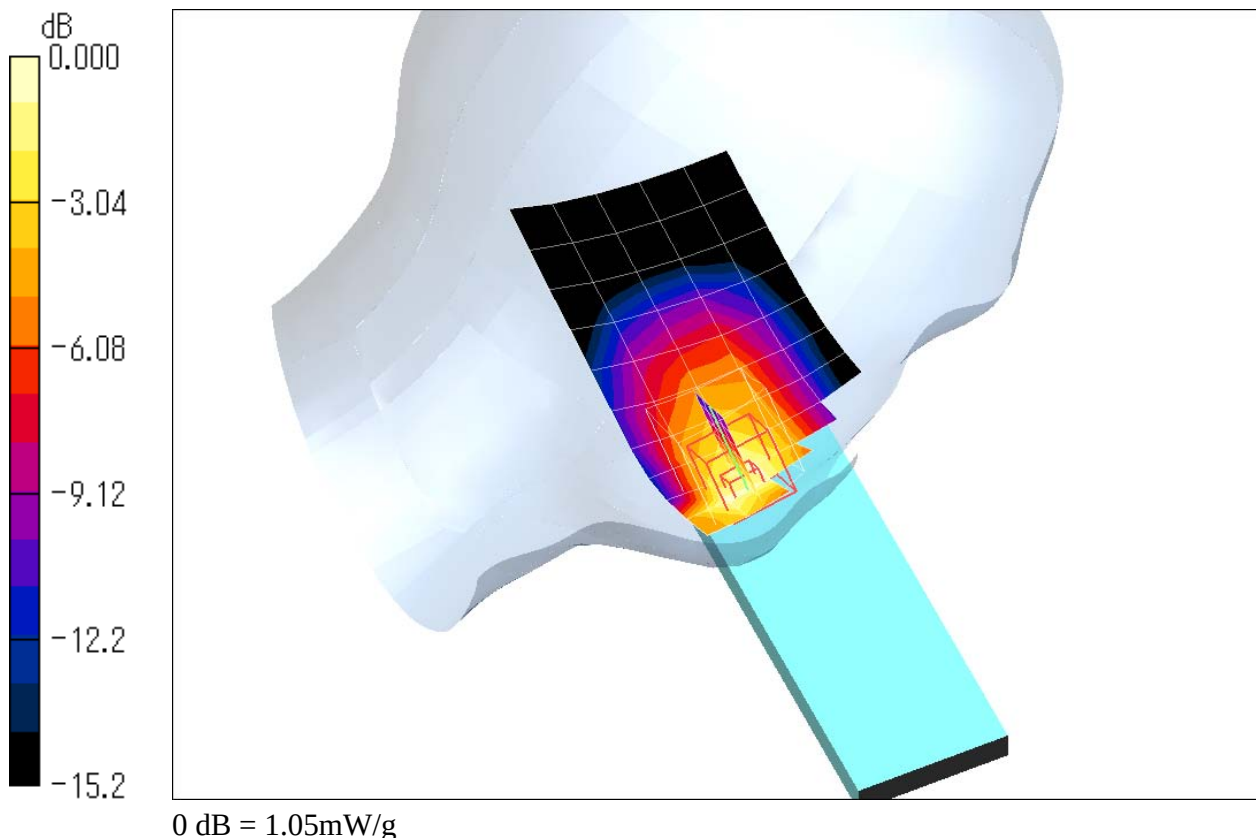
Medium: HSL900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.898 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.940 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.5 V/m ; Power Drift = -0.008 dB Peak SAR (extrapolated) = 1.58 W/kg **SAR(1 g) = 0.959 mW/g ; SAR(10 g) = 0.572 mW/g** Maximum value of SAR (measured) = 1.05 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Left Head, Ear/Tilt 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

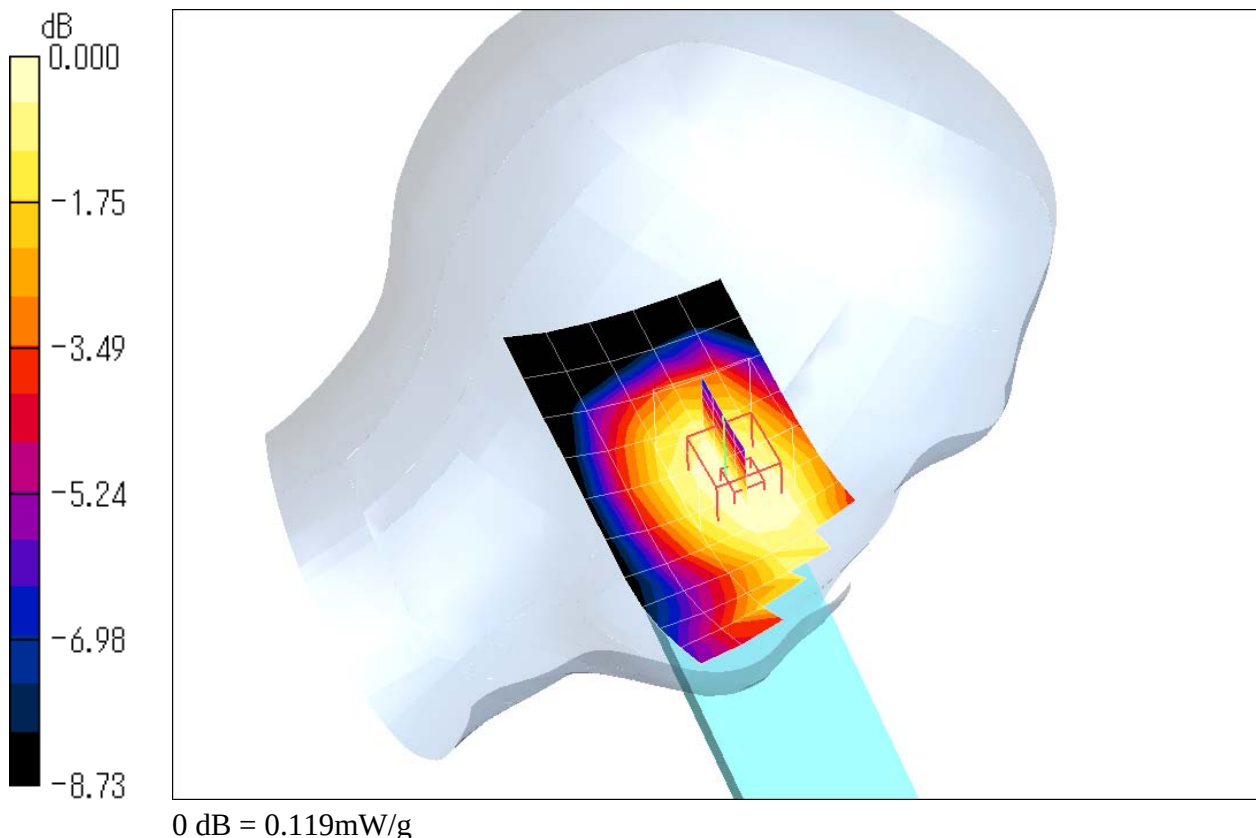
Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.117 mW/g **Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 11.1 V/m ; Power Drift = 0.025 dB Peak SAR (extrapolated) = 0.142 W/kg **SAR(1 g) = 0.115 mW/g ; SAR(10 g) = 0.088 mW/g** Maximum value of SAR (measured) = 0.119 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4132ch (826.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

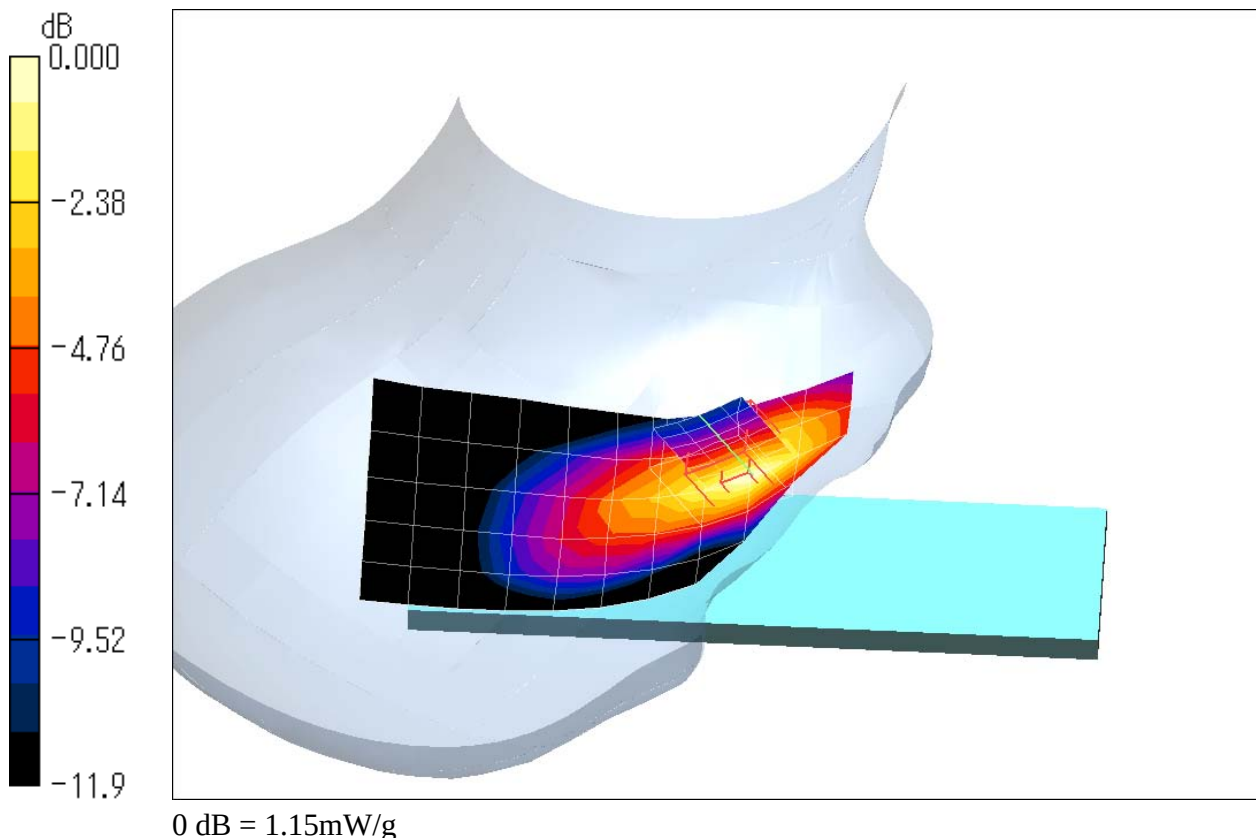
Medium: HSL900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.88 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 1.13 mW/g **Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.3 V/m ; Power Drift = 0.021 dB Peak SAR (extrapolated) = 1.91 W/kg **SAR(1 g) = 1.05 mW/g ; SAR(10 g) = 0.609 mW/g** Maximum value of SAR (measured) = 1.15 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.889$ mho/m; $\epsilon_r = 41.2$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.03 mW/g

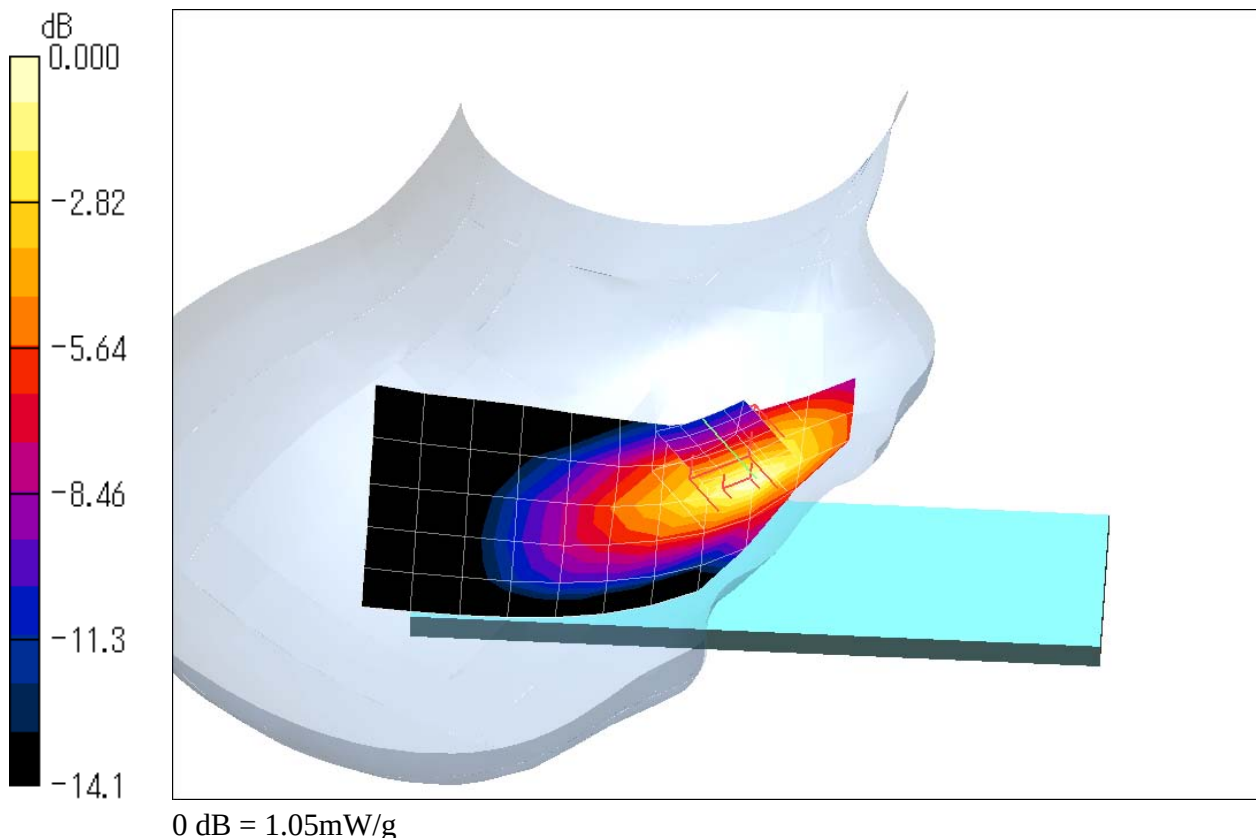
Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.5 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 1.83 W/kg

SAR(1 g) = 0.960 mW/g; SAR(10 g) = 0.538 mW/g

Maximum value of SAR (measured) = 1.05 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Cheek/Touch 4233ch (846.6MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.898 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Cheek/Touch Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.03 mW/g

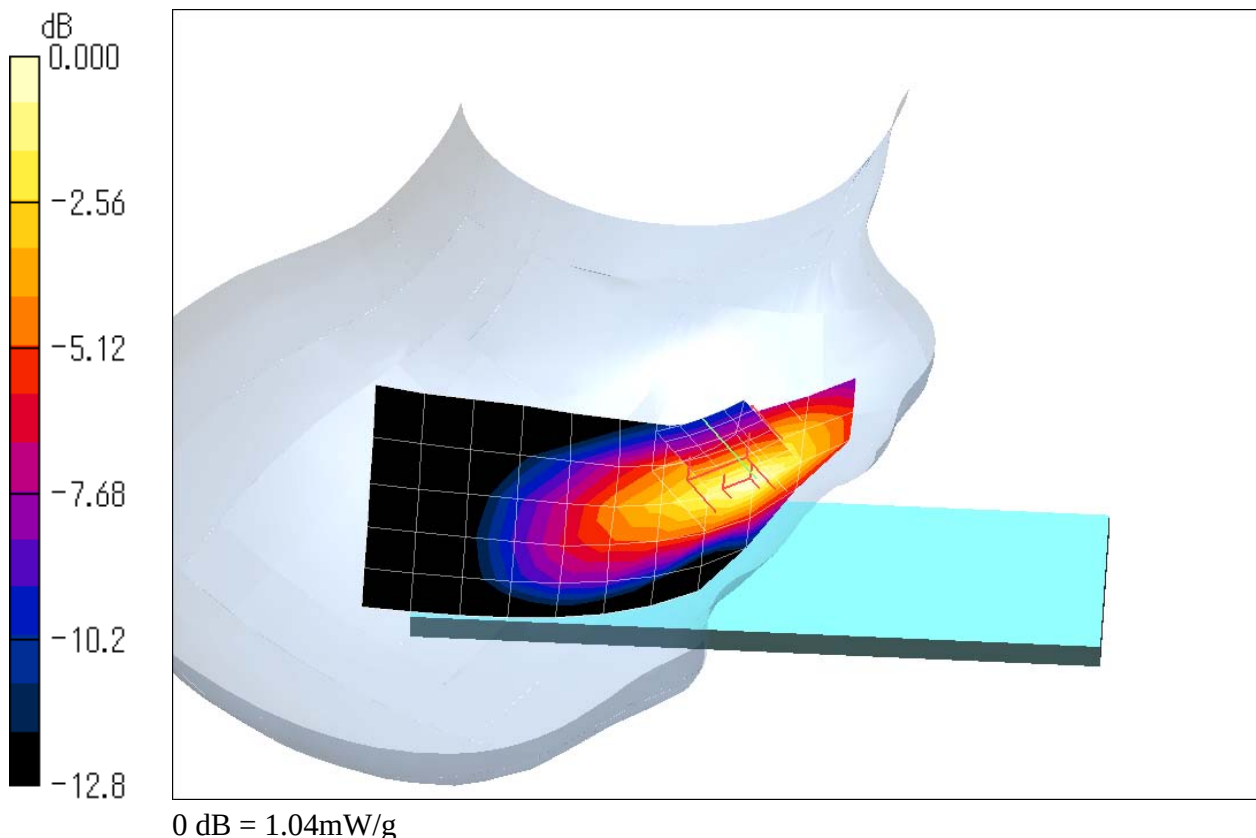
Cheek/Touch Position/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.3 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.952 mW/g; SAR(10 g) = 0.552 mW/g

Maximum value of SAR (measured) = 1.04 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Right Head, Ear/Tilt 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

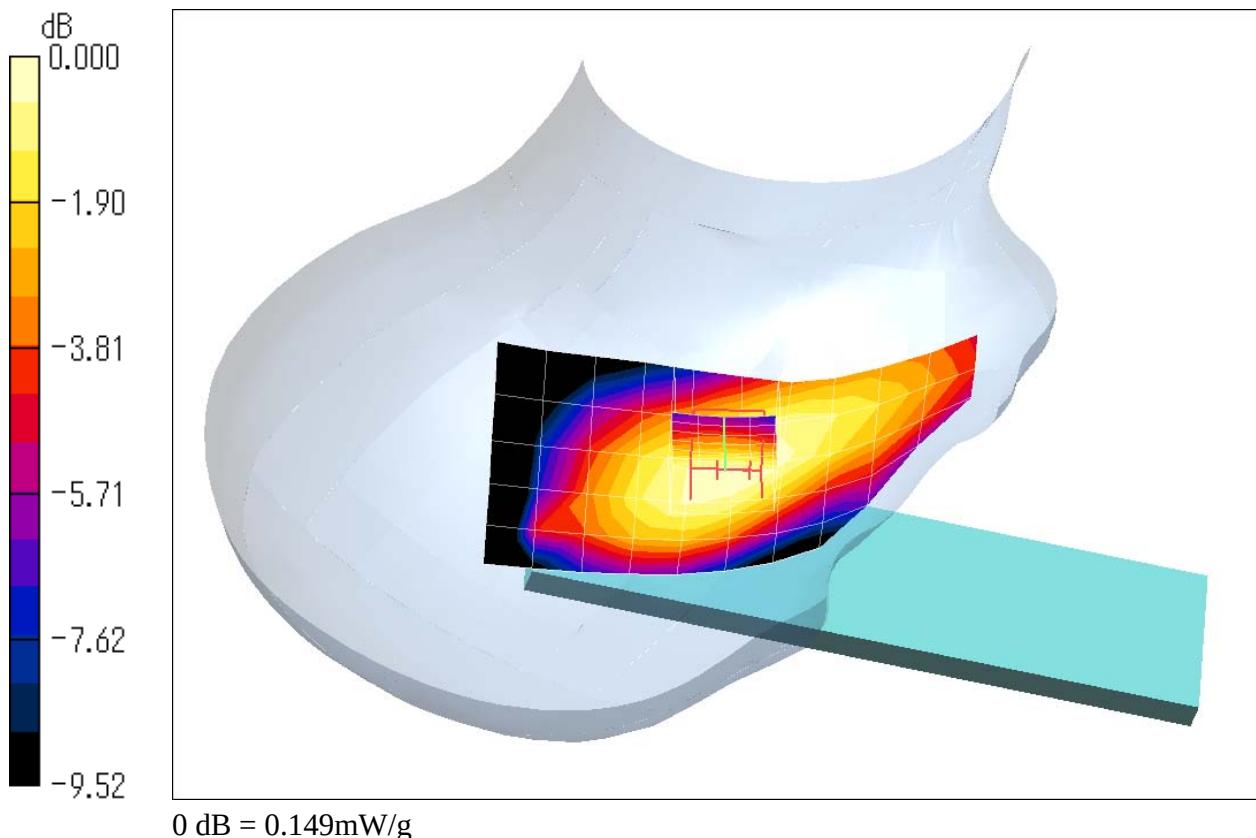
Medium: HSL900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.889 \text{ mho/m}$; $\epsilon_r = 41.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.29, 6.29, 6.29); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Ear/Tilt Position/Area Scan (11x6x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.148 mW/g **Ear/Tilt Position/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.3 V/m ; Power Drift = 0.019 dB Peak SAR (extrapolated) = 0.173 W/kg **SAR(1 g) = 0.142 mW/g ; SAR(10 g) = 0.107 mW/g** Maximum value of SAR (measured) = 0.149 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4132ch (826.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 826.4 \text{ MHz}$; $\sigma = 0.942 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.362 mW/g

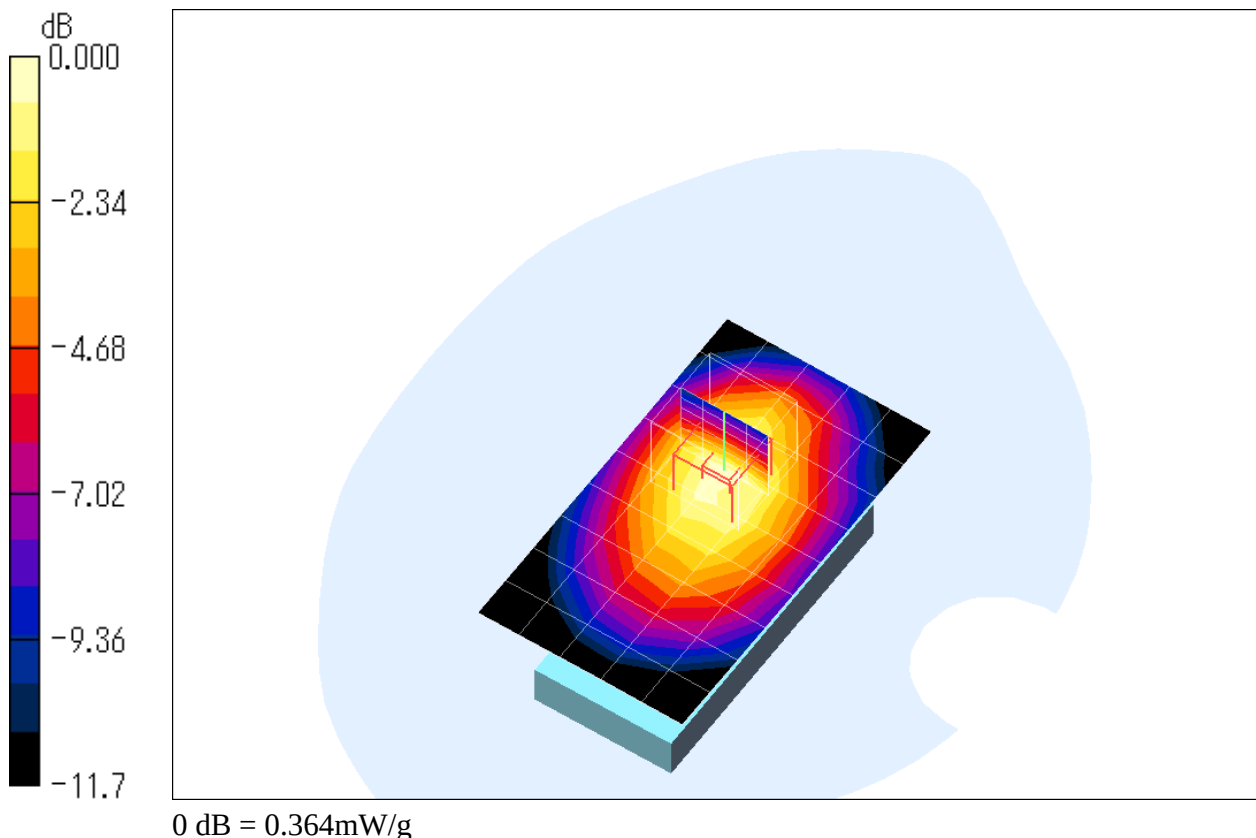
Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.4 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.338 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.364 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4182ch (836.4MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

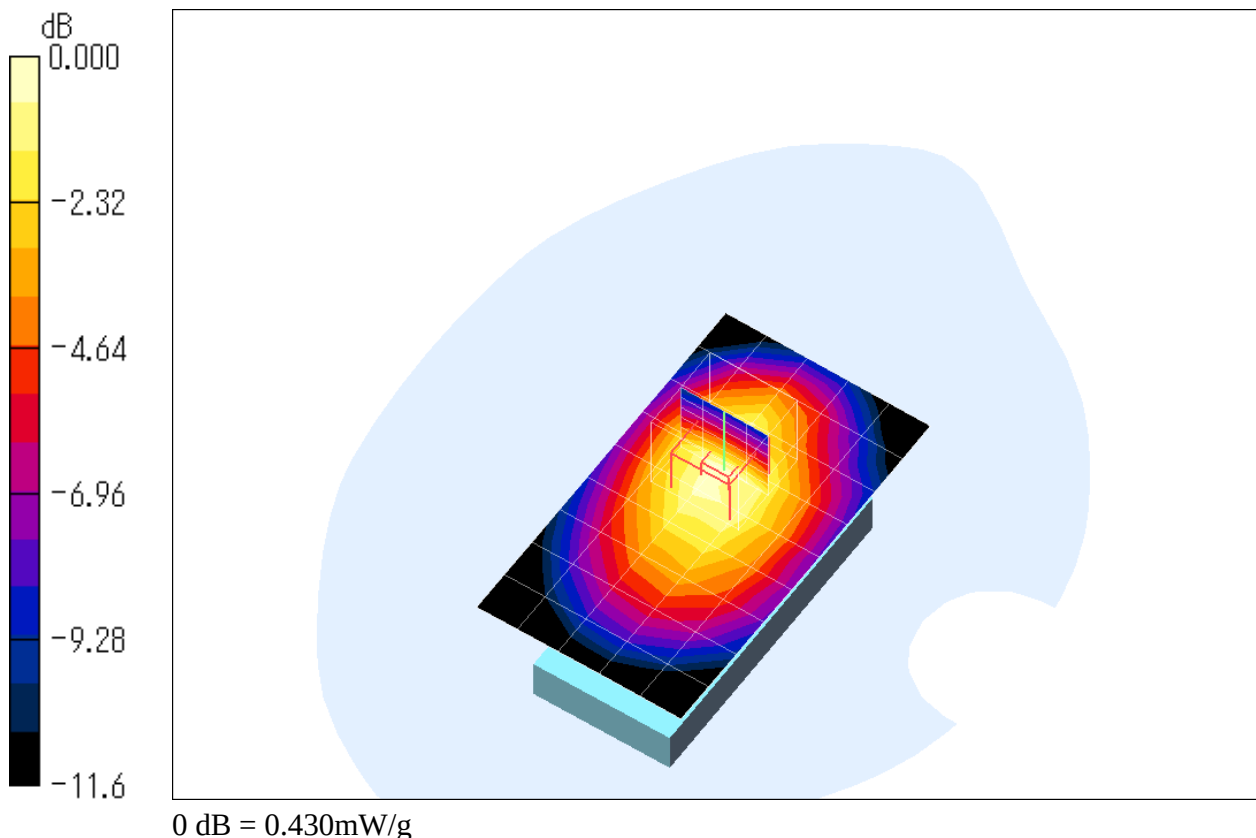
Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.951 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.423 mW/g **Body-worn/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 21.4 V/m ; Power Drift = -0.061 dB Peak SAR (extrapolated) = 0.566 W/kg **SAR(1 g) = 0.398 mW/g ; SAR(10 g) = 0.268 mW/g** Maximum value of SAR (measured) = 0.430 mW/g 

Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4182ch (836.4MHz)

DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.951 \text{ mho/m}$; $\epsilon_r = 54.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

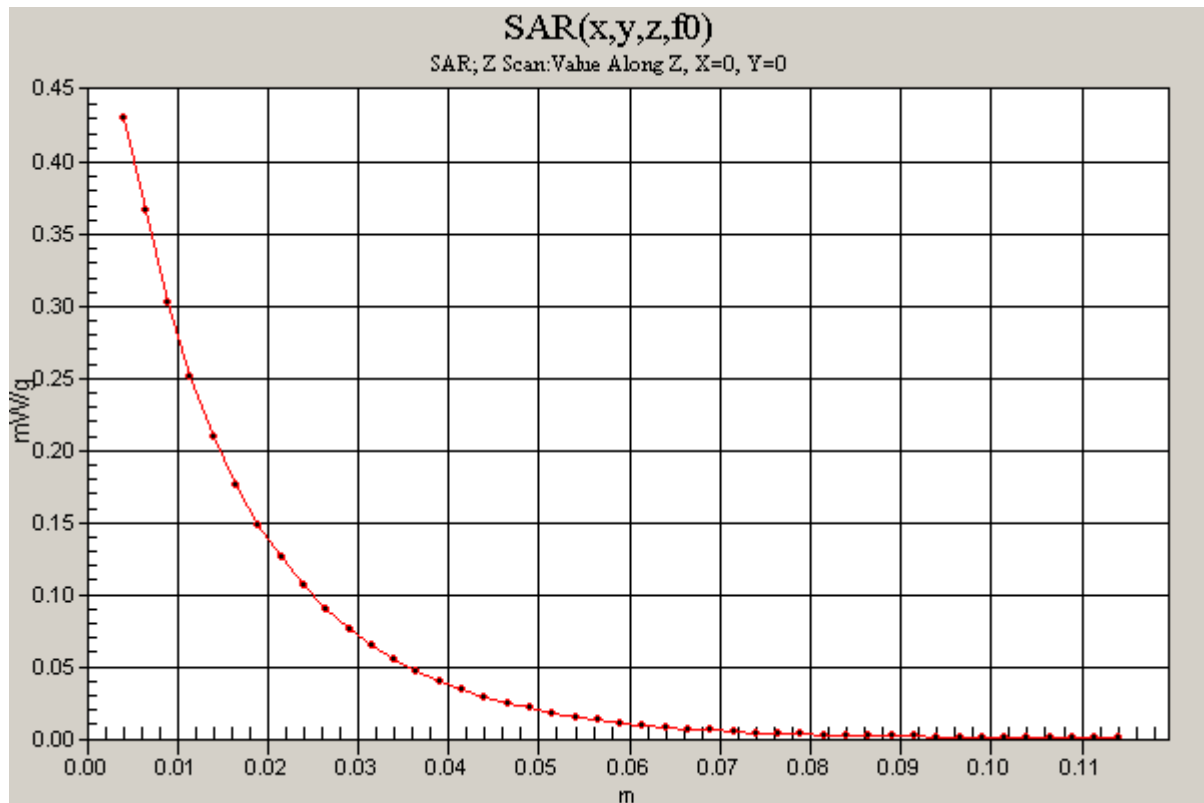
Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DAS4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Z Scan (1x1x45): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$, $dz=2.5\text{mm}$

Maximum value of SAR (measured) = 0.431 mW/g



Test Laboratory: JAPAN QUALITY ASSURANCE ORGANIZATION

Body-worn 4233ch (846.6MHz)**DUT: Cellular Phone; Type: SH-07A; Serial: 004401111935165**

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: M900 Medium parameters used: $f = 846.6 \text{ MHz}$; $\sigma = 0.962 \text{ mho/m}$; $\epsilon_r = 54.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1679; ConvF(6.22, 6.22, 6.22); Calibrated: 2008/12/15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn508; Calibrated: 2008/10/31
- Phantom: SAM 1200; Type: QD 000 P40 CA; Serial: 1200
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

Body-worn/Area Scan (6x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.366 mW/g

Body-worn/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.8 V/m; Power Drift = -0.058 dB

Peak SAR (extrapolated) = 0.483 W/kg

SAR(1 g) = 0.343 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.371 mW/g

