


A.3 SAR Measurement Data


A.3.1 Left Head

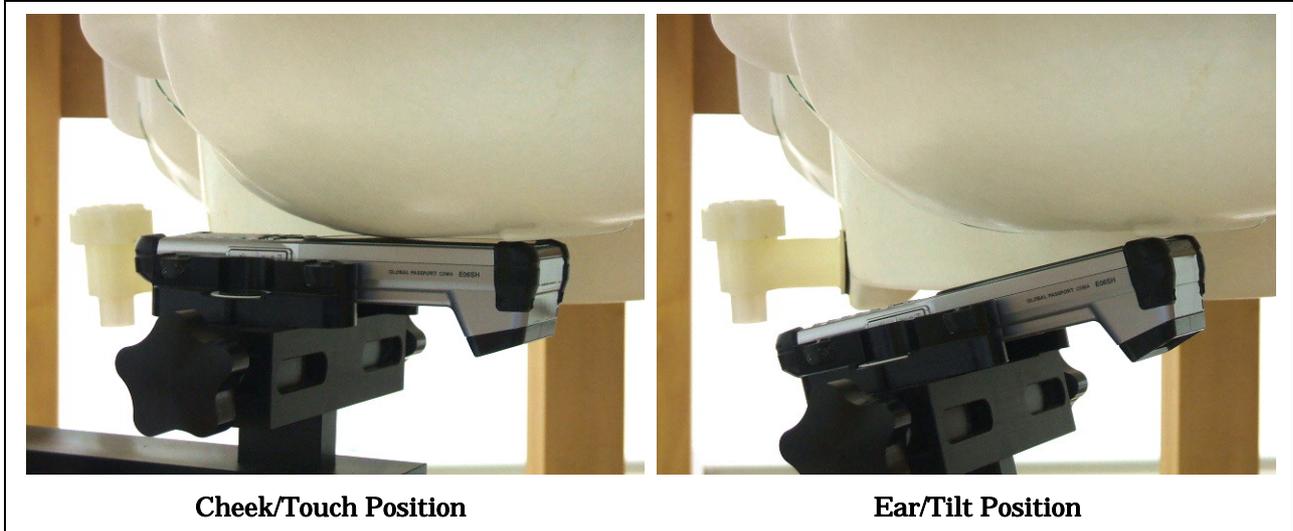

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : May 12, 2009		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	--	--	1.6	**	--
	384	836.52	23.94	-0.037		0.709	22.0
	779	848.37	--	--		**	--
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.94	-0.030		0.311	22.0
	779	848.37	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

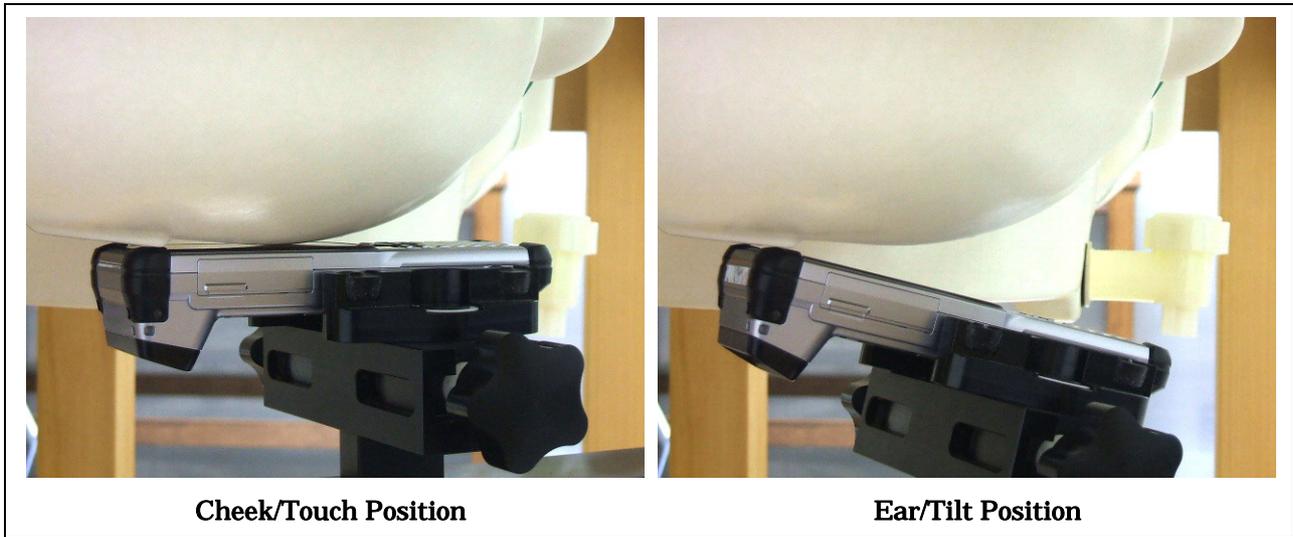


CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1) Date : May 12, 2009

Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	23.99	0.029	1.6	0.756	22.0
	384	836.52	23.94	0.076		0.796	22.0
	779	848.37	23.99	-0.007		0.880	22.0
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.94	-0.155		0.354	22.0
	779	848.37	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

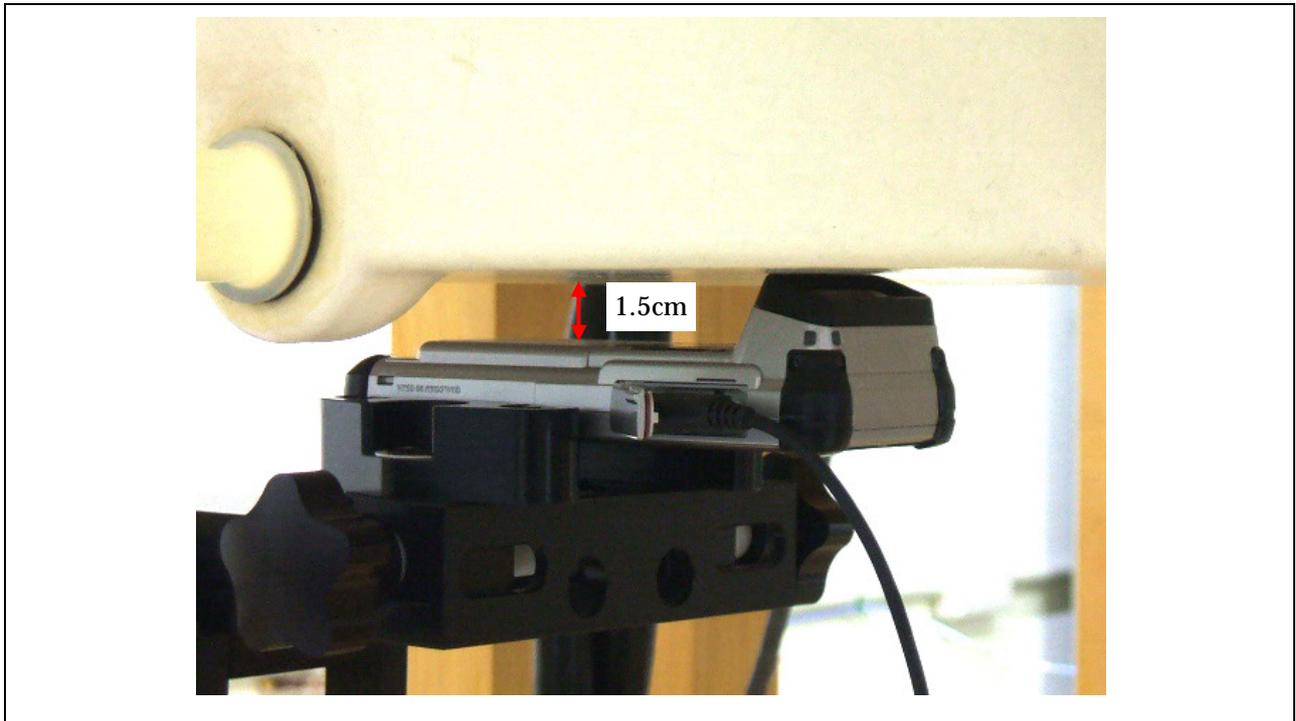

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : May 13, 2009		
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	1013	824.70	23.98	0.032	1.6	0.235	22.0
	384	836.52	23.97	-0.116		0.244	22.0
	779	848.37	23.99	-0.048		0.258	22.0
NOTES :							
1. Depth of Liquid : 15.0 cm							
2. Transmitter power was measured at the antenna-conducted terminal.							
3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.							
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.							
5. Please refer to attachment for the result presentation in plot format.							