


A.3 SAR Measurement Data


A.3.1 Left Head

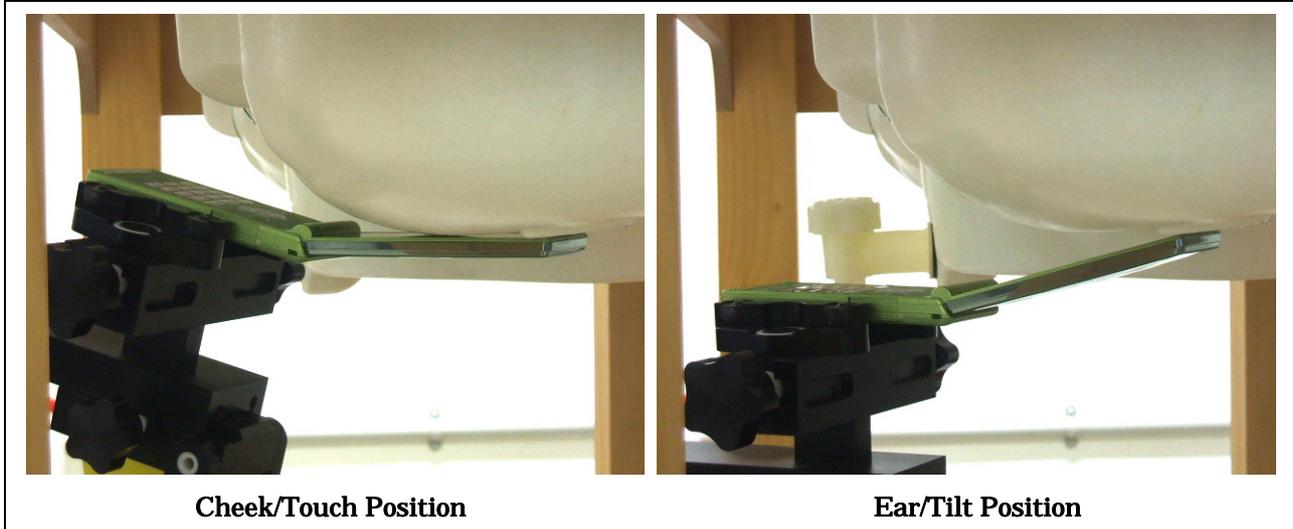

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : July 21, 2009	
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	23.60	0.075	1.6	0.611	22.0
	4182	836.40	23.53	0.071		0.678	22.0
	4233	846.60	23.61	-0.091		0.542	22.0
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.53	0.016		0.207	22.0
	4233	846.60	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR is measured using a 12.2 kbps RMC.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.


A.3.2 Right Head

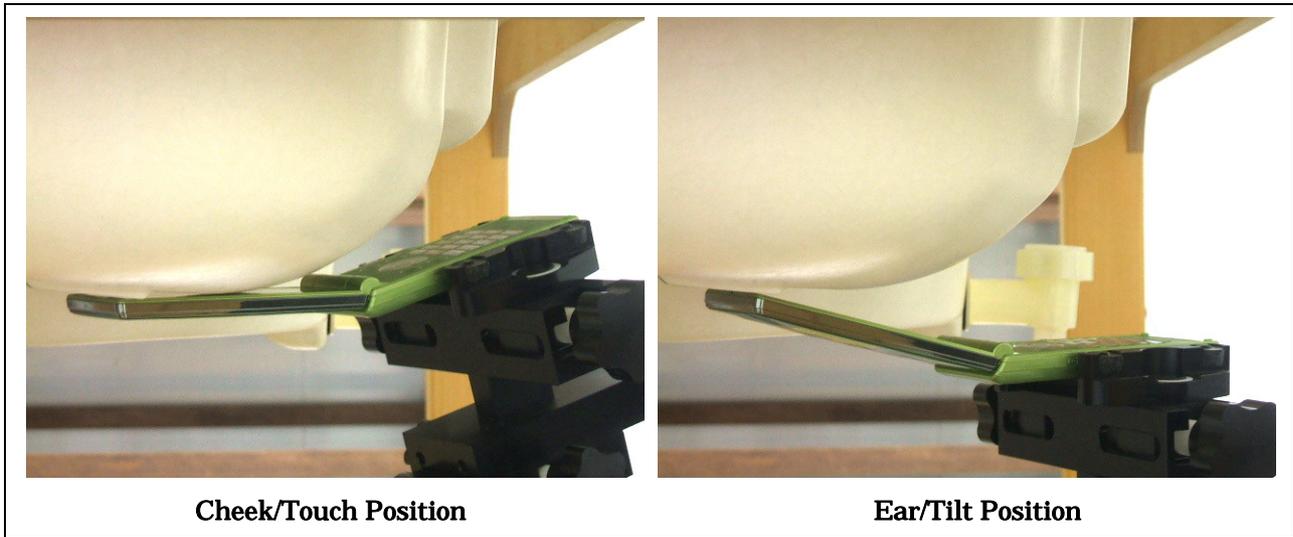

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : July 21, 2009		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.53	-0.140		0.545	22.0
	4233	846.60	--	--		**	--
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.53	-0.046		0.200	22.0
	4233	846.60	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR is measured using a 12.2 kbps RMC.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.1 Body-worn Position

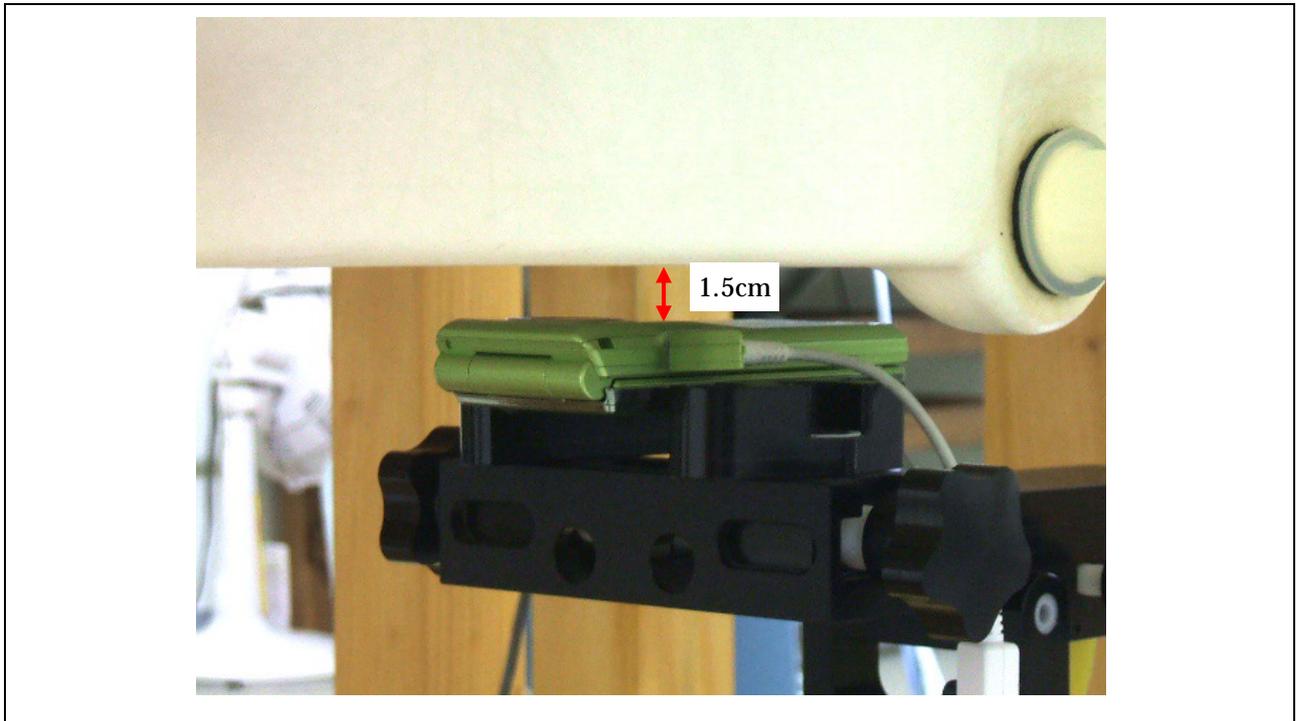

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : July 22, 2009	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.60	0.039	1.6	0.721	22.0
	4182	836.40	23.53	-0.018		0.748	22.0
	4233	846.60	23.61	0.021		0.801	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.