


A.3 SAR Measurement Data

A.3.1 Left Head

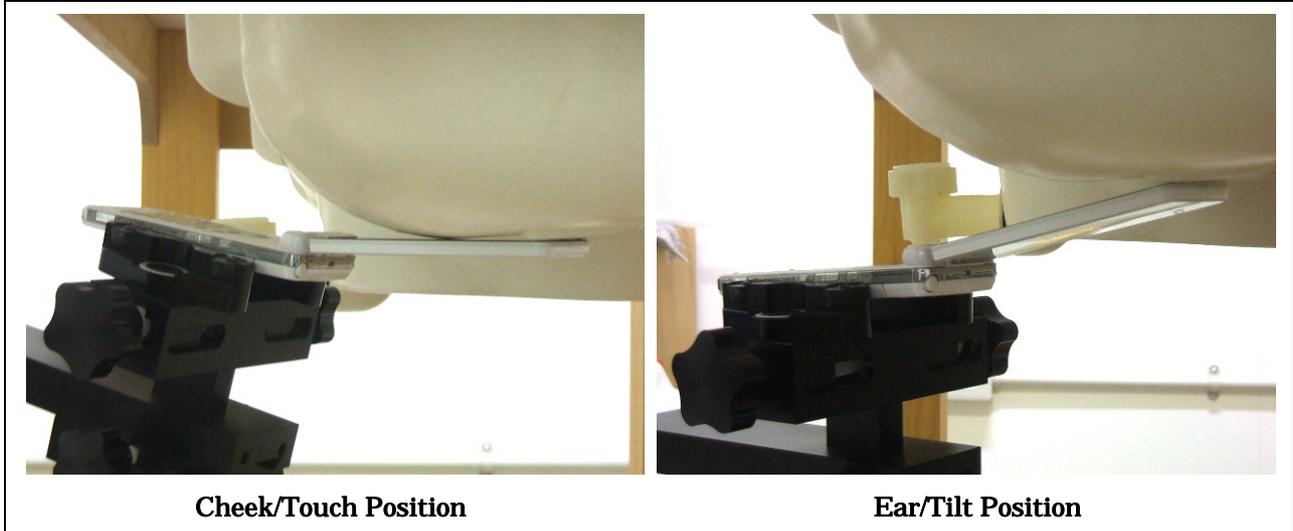


CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)							Date : July 28, 2009
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	23.38	-0.059	1.6	0.246	22.0
	384	836.52	23.21	0.073		0.254	22.0
	779	848.37	23.13	0.029		0.257	22.0
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.21	-0.100		0.187	22.0
	779	848.37	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

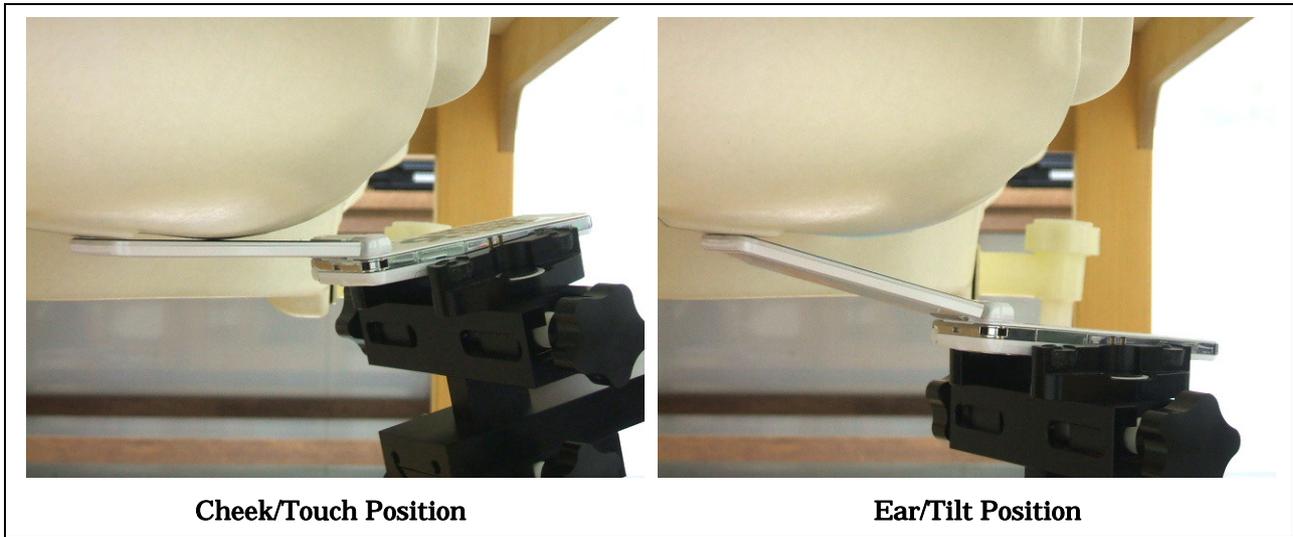


CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1) Date : July 28, 2009

Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	--	--	1.6	**	--
	384	836.52	23.21	-0.049		0.252	22.0
	779	848.37	--	--		**	--
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.21	-0.043		0.225	22.0
	779	848.37	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.


A.3.3 Body-worn Position – close style

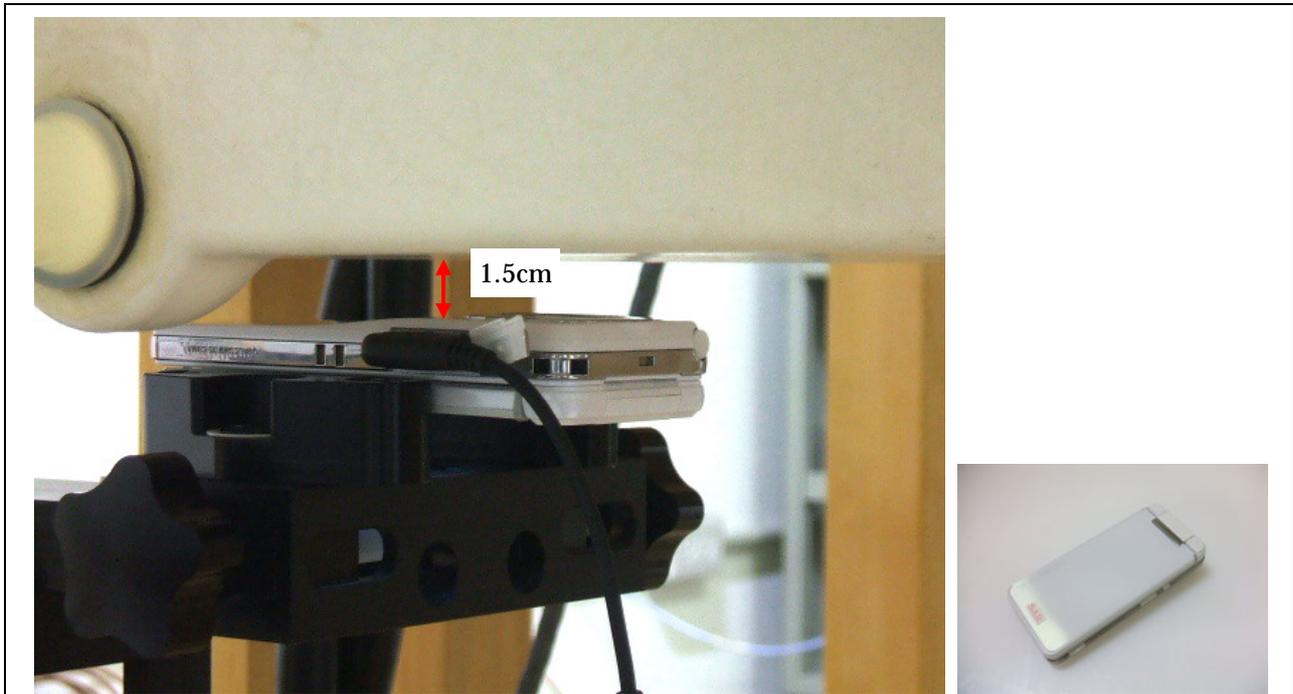

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)					Date : July 29, 2009		
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	1013	824.70	--	--	1.6	**	--
	384	836.52	23.15	0.064		0.317	22.0
	779	848.37	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 6. Please refer to attachment for the result presentation in plot format.

A.3.4 Body-worn Position – viewer style

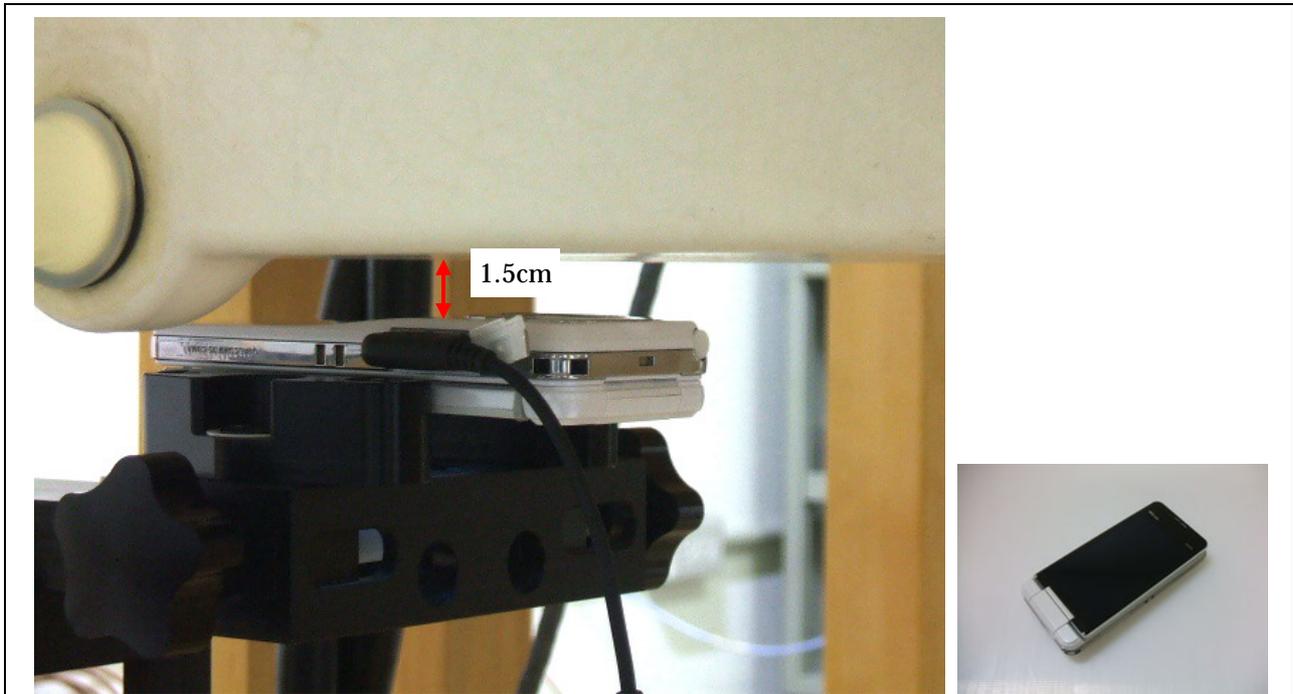

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)						Date : July 29, 2009	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	1013	824.70	23.42	-0.132	1.6	0.341	22.0
	384	836.52	23.15	0.019		0.339	22.0
	779	848.37	23.15	-0.038		0.372	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.