

## TEST REPORT

**APPLICANT** : Sharp Corporation, Communication Systems Group  
**ADDRESS** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN

**PRODUCTS** : Cellular Phone

**MODEL NO.** : CDMA SH005  
**SERIAL NO.** : SSHDK00582  
SSHDK00598

**FCC ID** : APYHRO00111

**TEST STANDARD** : CFR 47 FCC Rules and Regulations Part 15

**TESTING LOCATION** : Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

**TEST RESULTS** : **Passed**

**DATE OF TEST** : October 23, 2009 - November 18, 2009

This report must not be used by the client to claim product endorsement by NVLAP or NIST or any agency of the U.S. Government.



NVLAP LAB CODE 200191-0

A handwritten signature in black ink, which appears to read 'Junichi Wakamatsu', is written over a horizontal line.

Junichi Wakamatsu

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

Testing Dept. EMC Division

1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.

**TABLE OF CONTENTS**

|   | <b>Page</b> |
|---|-------------|
| <b>Documentation</b> .....                                  | <b>3</b>    |
| 1 <b>Test Regulation</b> .....                              | 3           |
| 2 <b>Test Location</b> .....                                | 3           |
| 3 <b>Recognition of Test Laboratory</b> .....               | 3           |
| 4 <b>Description of the Equipment Under Test</b> .....      | 4           |
| 5 <b>Test Condition</b> .....                               | 5           |
| 6 <b>Preliminary Test and Test Setup</b> .....              | 7           |
| 7 <b>Equipment Under Test Modification</b> .....            | 14          |
| 8 <b>Responsible Party</b> .....                            | 14          |
| 9 <b>Deviation from Standard</b> .....                      | 14          |
| 10 <b>Test Results</b> .....                                | 15          |
| 11 <b>Summary</b> .....                                     | 18          |
| 12 <b>Operating Condition</b> .....                         | 19          |
| 13 <b>Test Configuration</b> .....                          | 19          |
| 14 <b>Equipment Under Test Arrangement (Drawings)</b> ..... | 20          |
| <b>Appendix A: Test Data</b> .....                          | <b>21</b>   |
| <b>Appendix B: Test Arrangement (Photographs)</b> .....     | <b>55</b>   |
| <b>Appendix C: Test Instruments</b> .....                   | <b>57</b>   |

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT****EUT** : Equipment Under Test**EMC** : Electromagnetic Compatibility**AE** : Associated Equipment**EMI** : Electromagnetic Interference**N/A** : Not Applicable**EMS** : Electromagnetic Susceptibility**N/T** : Not Tested - indicates that the listed condition, standard or equipment is applicable for this report. - indicates that the listed condition, standard or equipment is not applicable for this report.

**Documentation****1 Test Regulation**

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.4–2003

The tests were performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000.  
The test set-up was made in accordance to the general provisions of ANSI C63.4-2003.

**2 Test Location**

KITA-KANSAI Testing Center  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan  
KAMEOKA EMC Branch  
9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto 621-0126, Japan

**3 Recognition of Test Laboratory**

JQA KITA-KANSAI Testing Center Testing Department EMC Division is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : April 3, 2010)  
NVLAP Lab Code : 200191-0 (Effective through : June 30, 2010)  
BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006  
(Effective through : September 14, 2010)

VCCI Registration No. : R-008, R-1117, C-006, C-007, C-1674, C-2143, T-1418, T-1419  
(Effective through : April 3, 2010)

IC Registration No. : 2079E-1, 2079E-2 (Effective through : January 6, 2011)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Effective through : February 22, 2010)

## 4 Description of the Equipment Under Test

### 4.1 General Information

1. Manufacturer : Sharp Corporation, Communication Systems Group  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : CDMA SH005
4. Serial No. : SSHDK00582  
: SSHDK00598
5. Product Type : Pre-production
6. Date of Manufacture : October, 2009
7. Transmitting Frequency : 2402.0 MHz(00CH) –2480.0MHz(78CH)
8. Receiving Frequency : 2402.0 MHz(00CH) –2480.0MHz(78CH)
9. Max. RF Output Power : 3.32dBm(Measure Value)
10. Power Rating : 4.0VDC (Lithium-ion Battery Pack SH002UAA 800mAh)
11. EUT Grounding : None
12. Category : Spread Spectrum Transmitter(FHSS).
13. EUT Authorization : Certification
14. Receive Date of EUT : October 21, 2009

### 4.2 Channel Plan

The carrier spacing is 1 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

$$\text{Transmitting Frequency (in MHz)} = 2402.0 + n$$

$$\text{Receiving Frequency (in MHz)} = 2402.0 + n$$

where, n : channel number ( $0 \leq n \leq 78$ )

## 5 Test Condition

### 5.1 Channel Separation

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : KITA-KANSAI  - Shielded room  - 2<sup>nd</sup> Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.2 Minimum Hopping Channel

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : KITA-KANSAI  - Shielded room  - 2<sup>nd</sup> Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.3 Occupied Bandwidth

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : KITA-KANSAI  - Shielded room  - 2<sup>nd</sup> Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

### 5.4 Dwell Time

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : KITA-KANSAI  - Shielded room  - 2<sup>nd</sup> Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.5 Peak Output Power (Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : KITA-KANSAI  - Shielded room  - 2<sup>nd</sup> Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.6 Spurious Emission (Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : KITA-KANSAI  - Shielded room  - 2<sup>nd</sup> Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.7 AC Powerline Conducted Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : KITA-KANSAI  - Shielded room  - Anechoic chamber  
KAMEOKA  - Shielded room  - Conducted emission facility  
 - 1st open site

Test instruments : Refer to Appendix C.

**5.8 Field Strength of Spurious Radiation**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable


Test site :  - KAMEOKA 1st open site  - 3 m  - 10 m  
 - KAMEOKA 2nd open site  - 3 m  - 10 m

Test instruments : Refer to Appendix C.

**6 Preliminary Test and Test Setup**

**6.1 Channel Separation**

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

|                 |         |
|-----------------|---------|
| Res. Bandwidth  | 100 kHz |
| Video Bandwidth | 300 kHz |
| Span            | 3 MHz   |
| Sweep Time      | AUTO    |
| Trace           | Maxhold |

**6.2 Minimum Hopping Channel**

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

|                 |         |
|-----------------|---------|
| Res. Bandwidth  | 300 kHz |
| Video Bandwidth | 1 MHz   |
| Span            | 30 MHz  |
| Sweep Time      | AUTO    |
| Trace           | Maxhold |

**6.3 Occupied Bandwidth**

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

|                 |         |
|-----------------|---------|
| Res. Bandwidth  | 10 kHz  |
| Video Bandwidth | 30 kHz  |
| Span            | 3 MHz   |
| Sweep Time      | AUTO    |
| Trace           | Maxhold |

**6.4 Dwell Time**

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

|                 |           |
|-----------------|-----------|
| Res. Bandwidth  | 1 MHz     |
| Video Bandwidth | 1 MHz     |
| Span            | Zero Span |


**6.5 Peak Output Power**

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.



**6.6 Spurious Emission(Conduction)**

The test system is shown as follows:

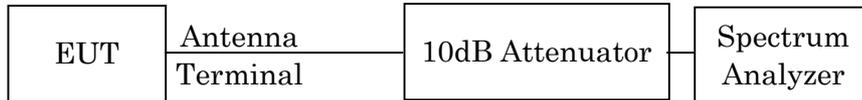

The setting of the spectrum analyzer are shown as follows:

|                 |                 |           |
|-----------------|-----------------|-----------|
| Frequency Range | 30 MHz - 25 GHz | Band-Edge |
| Res. Bandwidth  | 100 kHz         | 200 kHz   |
| Video Bandwidth | 300 kHz         | 200 kHz   |
| Sweep Time      | AUTO            | AUTO      |
| Trace           | Maxhold         | Maxhold   |


## 6.7 AC Powerline Conducted Emission

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

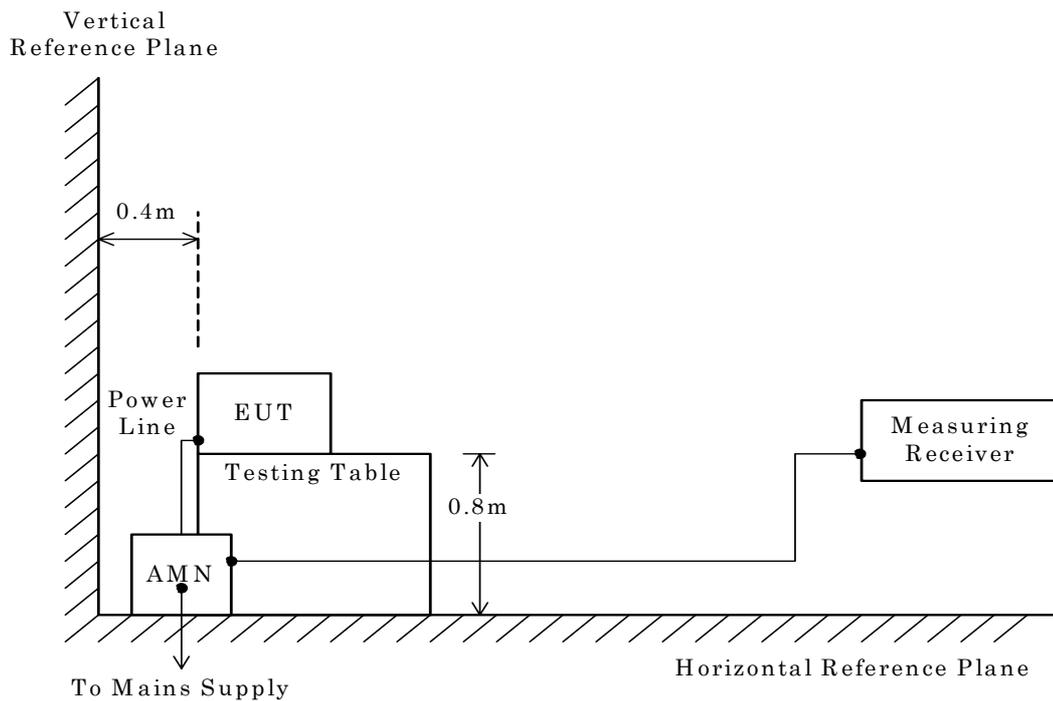

NOTE

AMN : Artificial Mains Network

## 6.8 Field Strength of Spurious Emission


### 6.8.1 Field Strength of Spurious Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

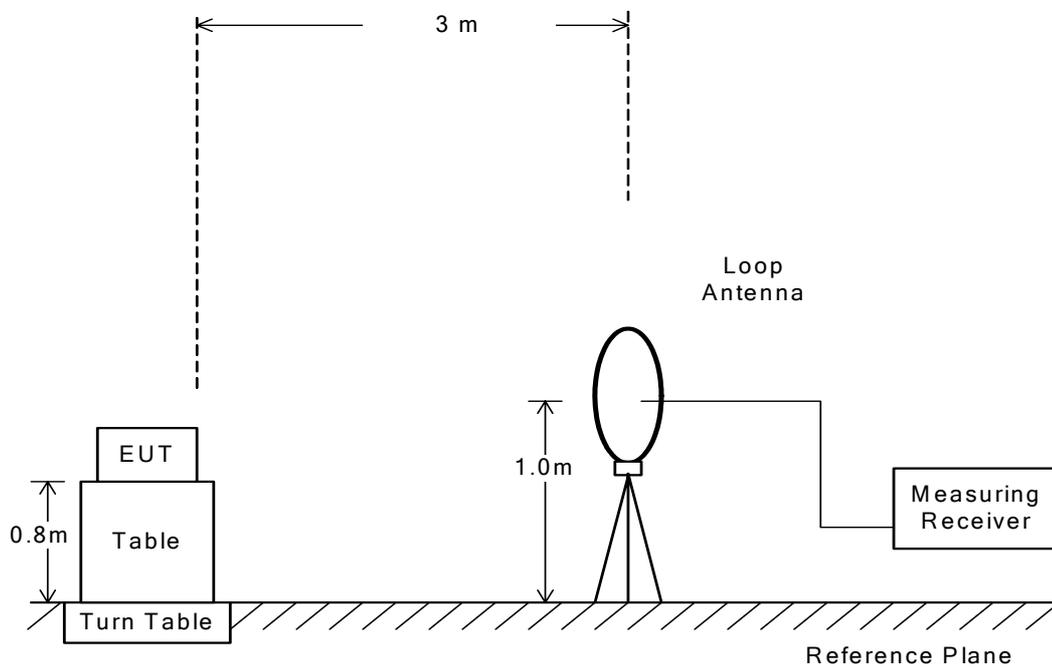


**6.8.2 Field Strength of Spurious Emission 30 MHz – 1000 MHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

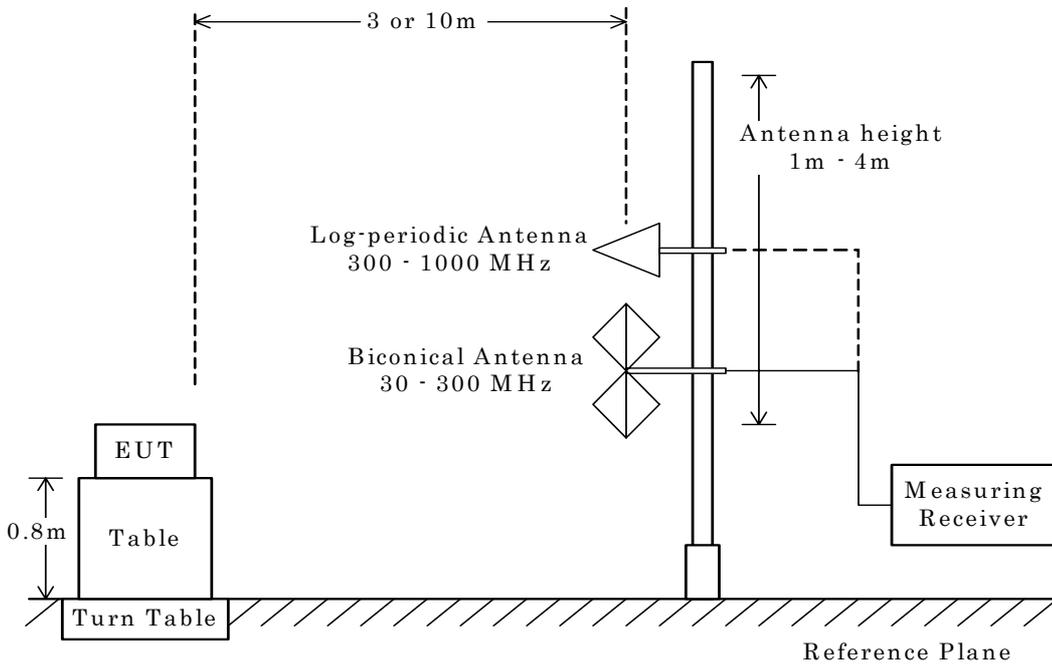


**6.8.3 Field Strength of Spurious Emission above 1 GHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

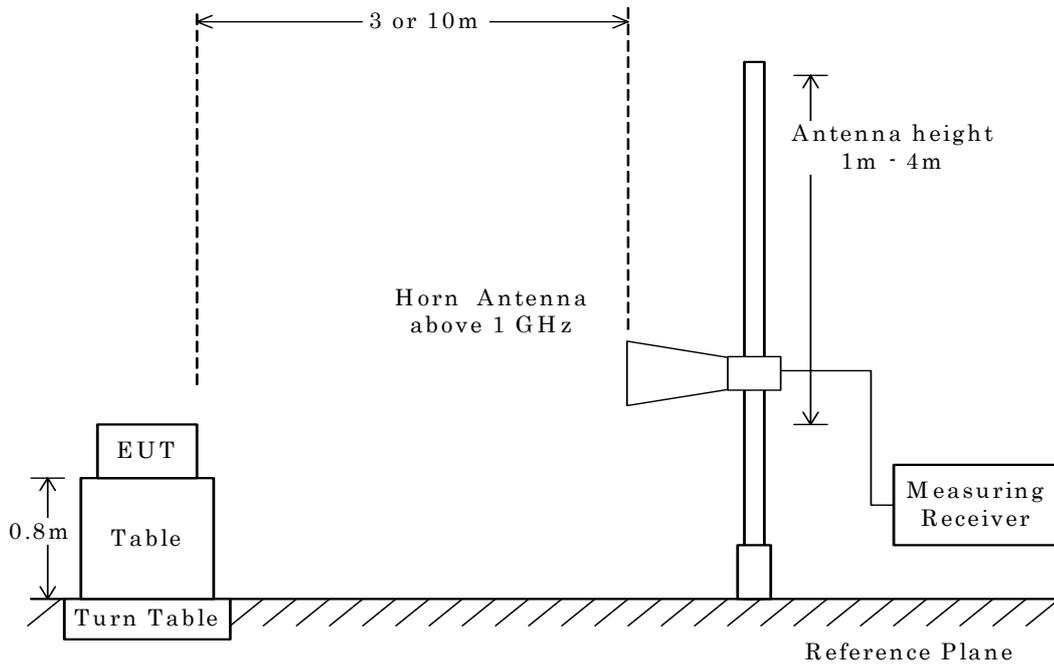

**NOTE**

The antenna height is scanned depending on the EUT's size and mounting height.

**7 Equipment Under Test Modification**

- No modifications were conducted by JQA to achieve compliance to the limitations.  
 - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory : Not Applicable

**8 Responsible Party**Responsible Party of Test Item (Product)

|                     |           |
|---------------------|-----------|
| Responsible Party : |           |
| Contact Person :    | _____     |
|                     | Signatory |

**9 Deviation from Standard**

- No deviations from the standard described in clause 1.  
 - The following deviations were employed from the standard described in clause 1.
-

**10 Test Results****10.1 RF Power Output (§2.1046)****10.1.1 Channel Separation**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Channel Separation is 1.017 MHz  
 Channel Separation(Inquiry) is 2.000 MHz

Uncertainty of Measurement Results at Frequency +/-20.0 kHz(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.2 Minimum Hopping Channel**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Number of Channel is 79  
 Number of Channel (Inquiry) is 32

Uncertainty of Measurement Results at Frequency +/-15.0 kHz(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.3 Occupied Bandwidth**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

The 99% Bandwidth is 1186.3 kHz at 2480.0 MHz  
 The 20dB Bandwidth is 1307.0 kHz at 2402.0 MHz

Uncertainty of Measurement Results at Frequency +/-5.0 kHz(2 $\sigma$ )  
 Uncertainty of Measurement Results at Amplitude +/-0.24 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.4 Dwell Time**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- **Passed**  - **Failed**  - **Not judged**

Dwell Time is 305.6 msec  
Dwell Time (Inquiry) is 73.0 msec

Uncertainty of Measurement Results at Frequency +/-0.8  $\mu$ sec(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.5 Peak Output Power(Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Transmitter Power is 3.32 dBm at 2480.0 MHz

Uncertainty of Measurement Results at Amplitude +/-0.19 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.6 Spurious Emissions(Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- **Passed**  - **Failed**  - **Not judged**

Uncertainty of Measurement Results at Amplitude +/-0.24 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.7 AC Powerline Conducted Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Min. Limit Margin (Quasi-Peak) 30.6 dB at 0.97 MHz

Max. Limit Exceeding (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results +/-2.9 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.8 Field Strength of Spurious Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Min. Limit Margin (Average) >10.1 dB at 19840.00 MHz

Max. Limit Exceeding (Average) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results  
9 kHz – 30 MHz +/-1.6 dB(2 $\sigma$ )  
30 MHz – 300 MHz +/-4.3 dB(2 $\sigma$ )  
300 MHz – 1000 MHz +/-4.5 dB(2 $\sigma$ )  
above 1 GHz +/-3.7 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**11 Summary****General Remarks :**

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 15

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

**Test Results :**

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.
- doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:

Tested by:



---

Shigeru Kinoshita  
Deputy Manager  
Testing Dept. EMC Div.  
JQA KITA-KANSAI Testing Center



---

Akio Hosoda  
Manager  
Testing Dept. EMC Div.  
JQA KITA-KANSAI Testing Center

## 12 Operating Condition

Transmitting/Receiving

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(78CH)

Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(78CH)

Other Clock Frequency

19.2 MHz, 32.768 kHz

## 13 Test Configuration

The equipment under test (EUT) consists of :

|   | Item                   | Manufacturer | Model No.      | Serial No.                             | FCC ID      |
|---|------------------------|--------------|----------------|--|-------------|
| A | Cellular Phone         | Sharp        | CDMA SH005     | SSHDK00<br>582*1)<br>SSHDK00<br>598*2) | APYHRO00111 |
| B | Lithium-ion Battery    | Sharp        | SH002UAA       | --                                     | N/A         |
| C | AC Adapter             | MITSUMI      | 0203PQA        | --                                     | N/A         |
| D | Stereo Earphone        | SONY         | MDR-E0921SP/BC | --                                     | N/A         |
| E | Arib Connector Adaptor | SMK          | --             | --                                     | N/A         |

\*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

\*2) Used for Antenna Conducted Emission

The auxiliary equipment used for testing :


None

Type of Cable:



| No. | Description           | Identification<br>(Manu. etc.) | Connector<br>Shielded | Cable<br>Shielded | Ferrite<br>Core | Length<br>(m) |
|-----|-----------------------|--------------------------------|-----------------------|-------------------|-----------------|---------------|
| 1   | DC Power Cord         | --                             | --                    | NO                | NO              | 1.4           |
| 2   | Stereo Earphone Cable | --                             | --                    | NO                | NO              | 0.9           |
| 3   | Arib Connector Cable  | --                             | --                    | NO                | NO              | 0.1           |

**14 Equipment Under Test Arrangement (Drawings)**

a) Single Unit




b) AC Adapter used



120 VAC 60 Hz

c) Stereo Earphone used



2&3(E)



**Appendix A: Test Data**


Test Date : October 27, 2009

Temp.:25°C, Humi:50%


**A.1 Channel Separation**

| Mode of EUT | Channel Separation (MHz) |
|-------------|--------------------------|
| Hopping     | 1.017                    |
| Inquiry     | 2.000                    |

Mode of EUT : Hopping

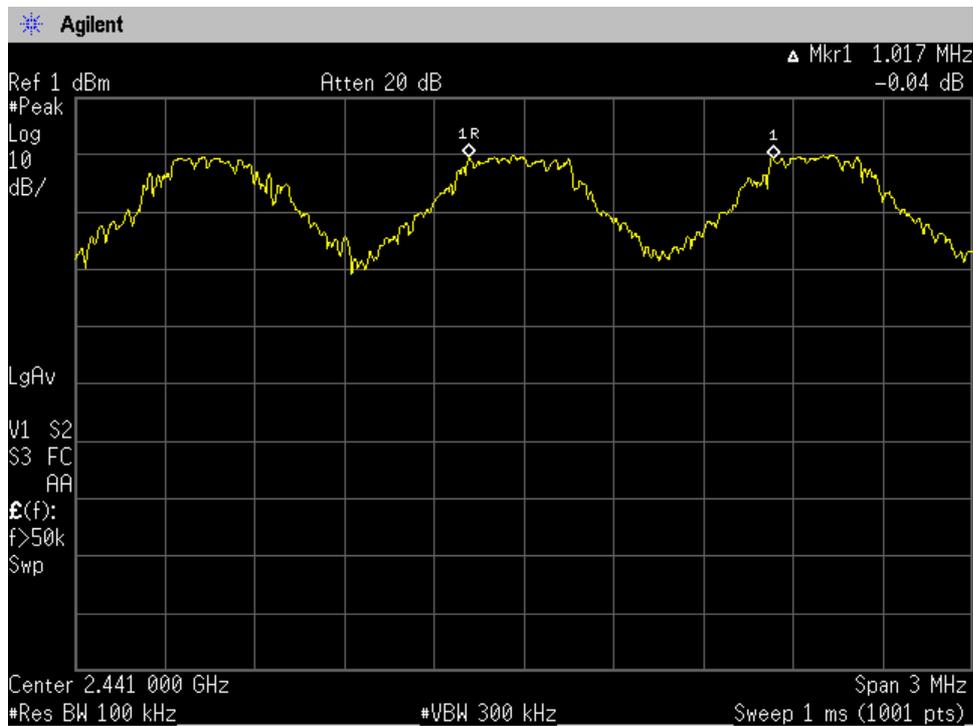

Mode of EUT : Inquiry

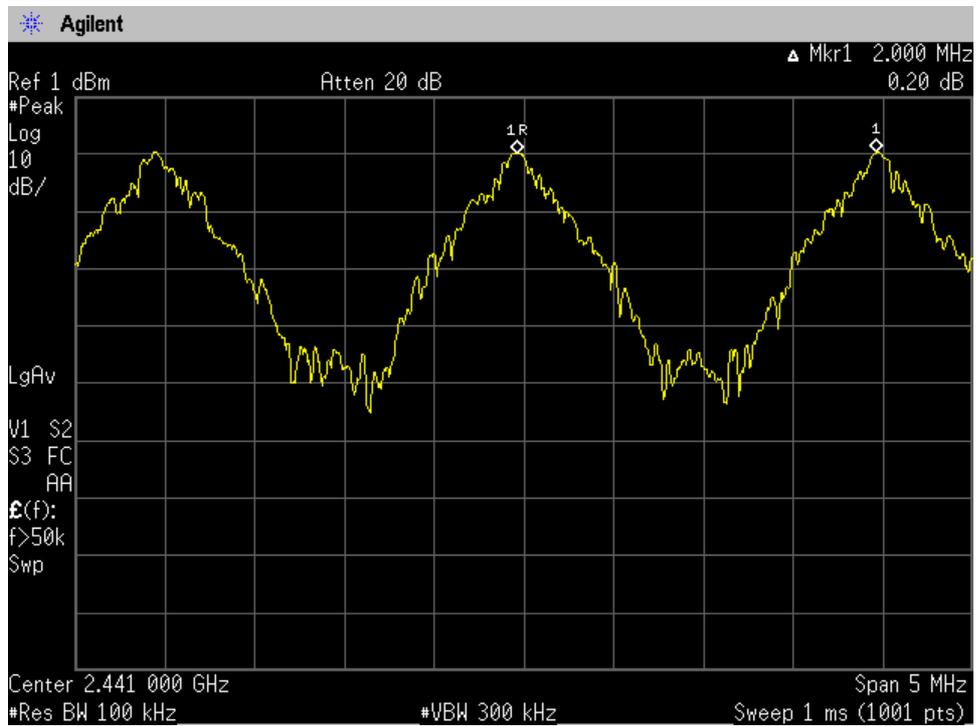


**A.2 Minimum Hopping Channel**

Test Date : October 27, 2009


Temp.:25°C, Humi:50%

| Mode of EUT | Minimum Hopping Channel |
|-------------|-------------------------|
| Hopping     | 79                      |
| Inquiry     | 32                      |


Mode of EUT : Hopping(1/3)

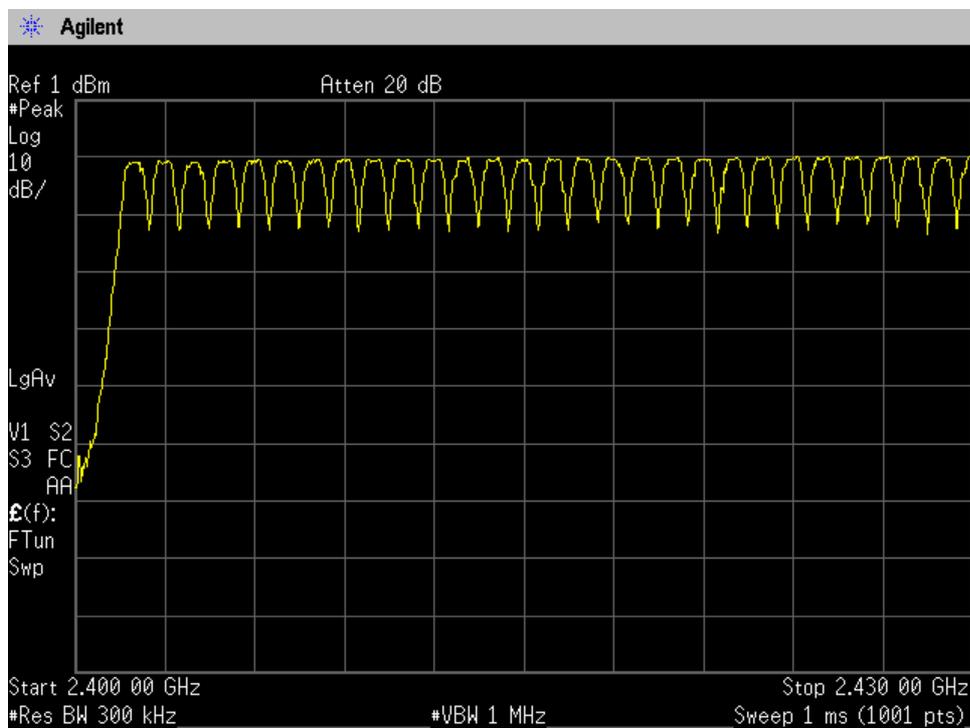


Mode of EUT : Hopping(2/3)

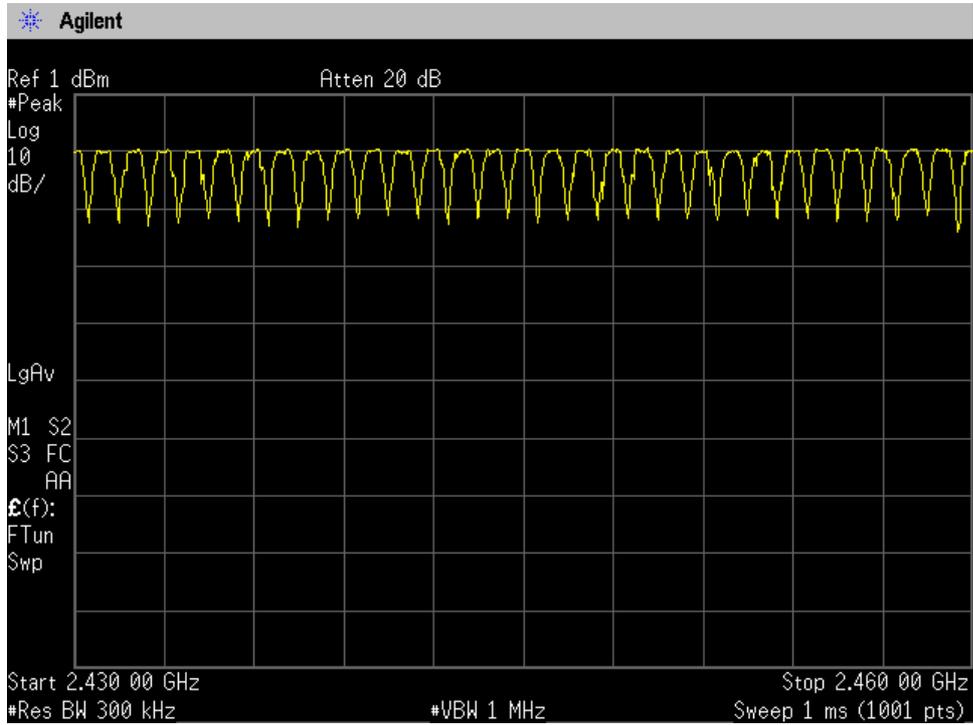


Mode of EUT : Hopping(3/3)

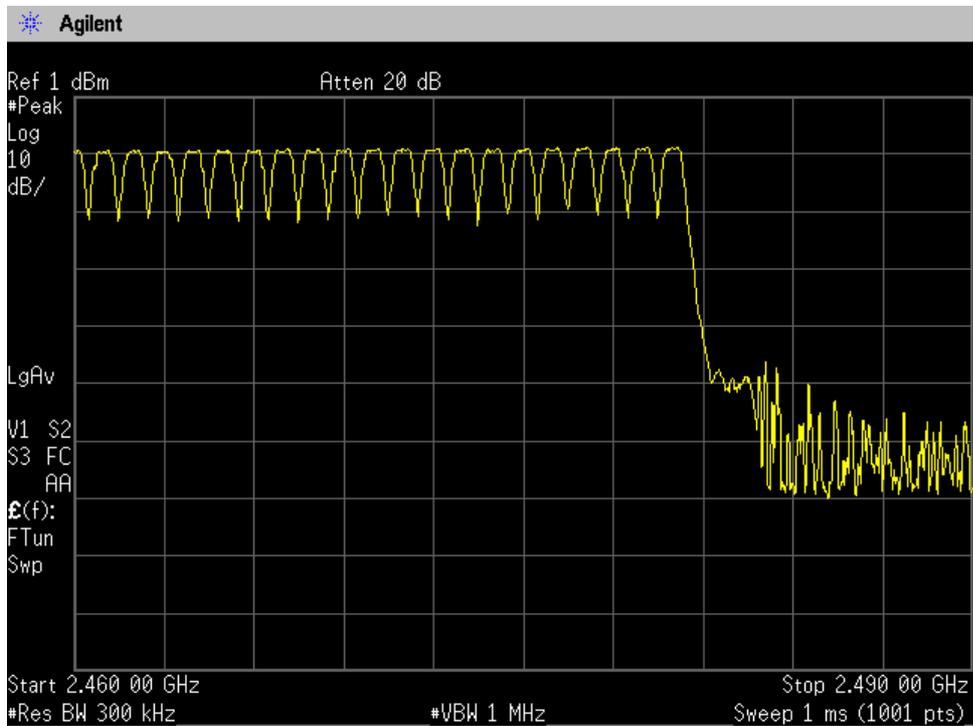


Mode of EUT : Inquiry(1/3)

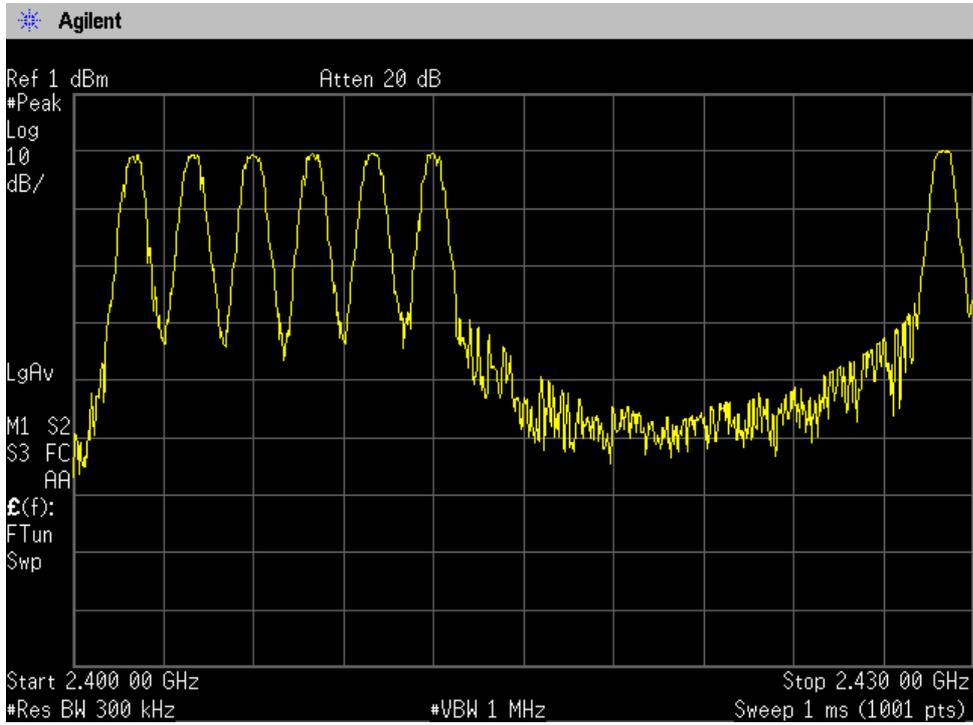

Mode of EUT : Inquiry(2/3)

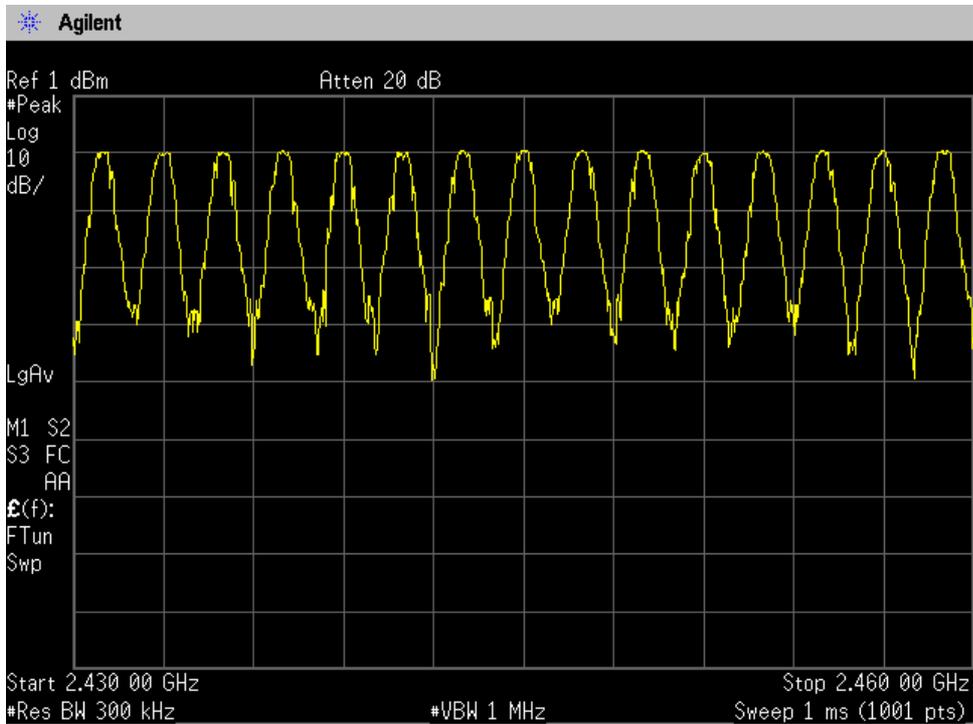

Mode of EUT : Inquiry(3/3)

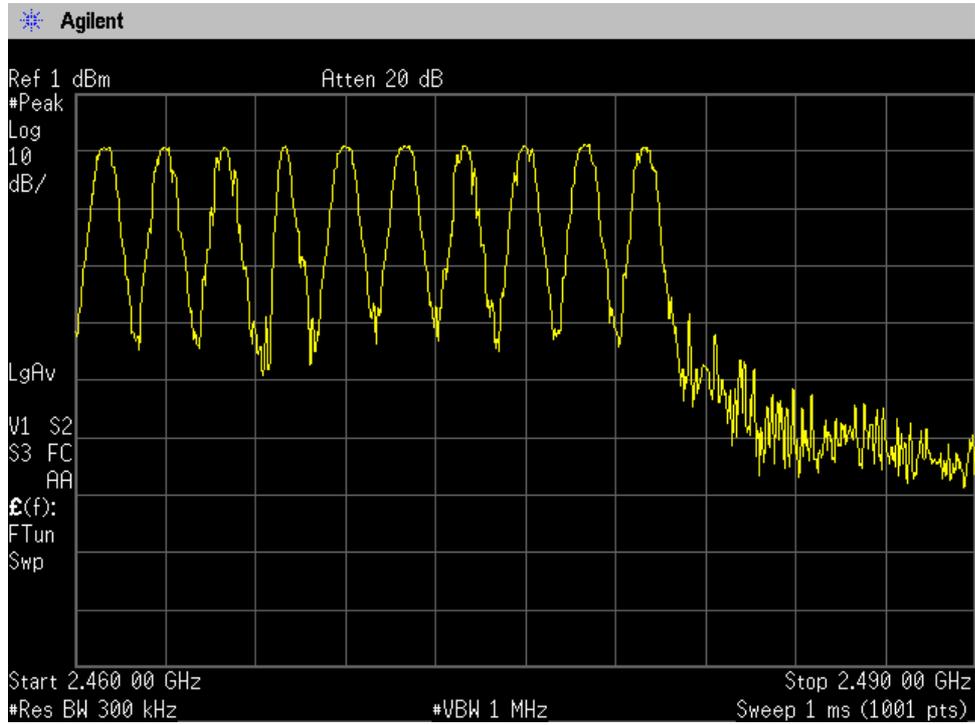

**A.3 Occupied Bandwidth**

Test Date : October 27, 2009

Temp.:25°C, Humi:50%

The resolution bandwidth was set to about 1% of emission bandwidth, -20dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

## 1)Packet Setting : DH5

| Channel | Frequency (MHz) | 99% Bandwidth (kHz) | -20dBc Bandwidth (kHz) |
|---------|-----------------|---------------------|------------------------|
| 00      | 2402.0          | 842.8               | 923.8                  |
| 39      | 2441.0          | 848.8               | 924.5                  |
| 78      | 2480.0          | 866.8               | 922.6                  |

## 2)Packet Setting : 2DH5

| Channel | Frequency (MHz) | 99% Bandwidth (kHz) | -20dBc Bandwidth (kHz) |
|---------|-----------------|---------------------|------------------------|
| 00      | 2402.0          | 1184.3              | 1307.0                 |
| 39      | 2441.0          | 1180.6              | 1290.0                 |
| 78      | 2480.0          | 1178.8              | 1290.0                 |


## 3)Packet Setting : 3DH5

| Channel | Frequency (MHz) | 99% Bandwidth (kHz) | -20dBc Bandwidth (kHz) |
|---------|-----------------|---------------------|------------------------|
| 00      | 2402.0          | 1178.2              | 1260.0                 |
| 39      | 2441.0          | 1179.8              | 1257.0                 |
| 78      | 2480.0          | 1186.3              | 1262.0                 |

1)Packet Setting : DH5  
Low Channel




Middle Channel

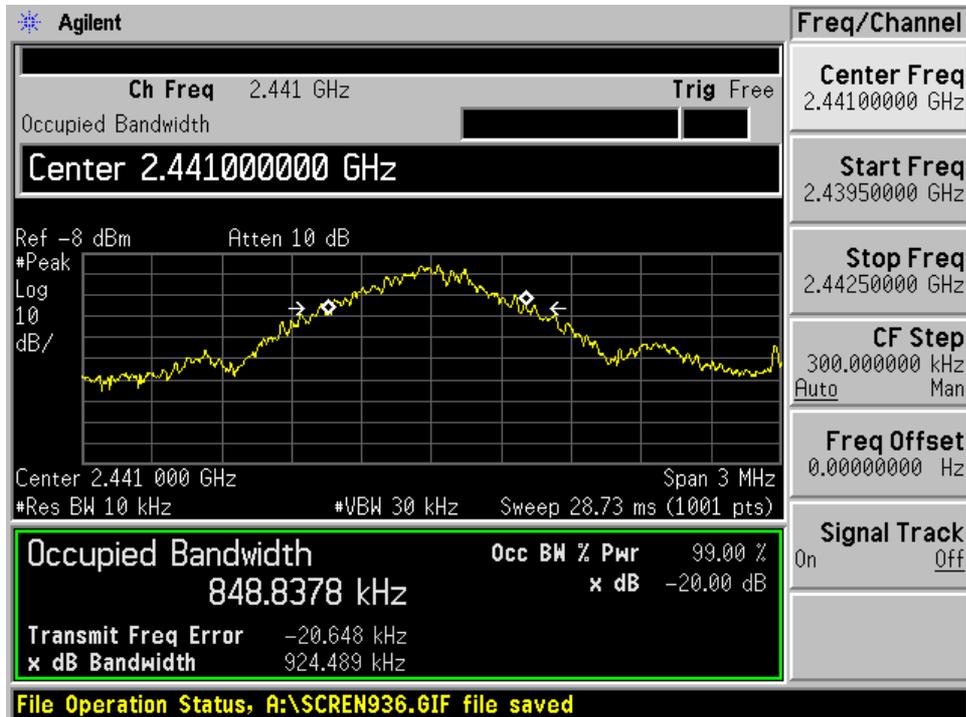


## High Channel




2)Packet Setting : 2DH5  
Low Channel

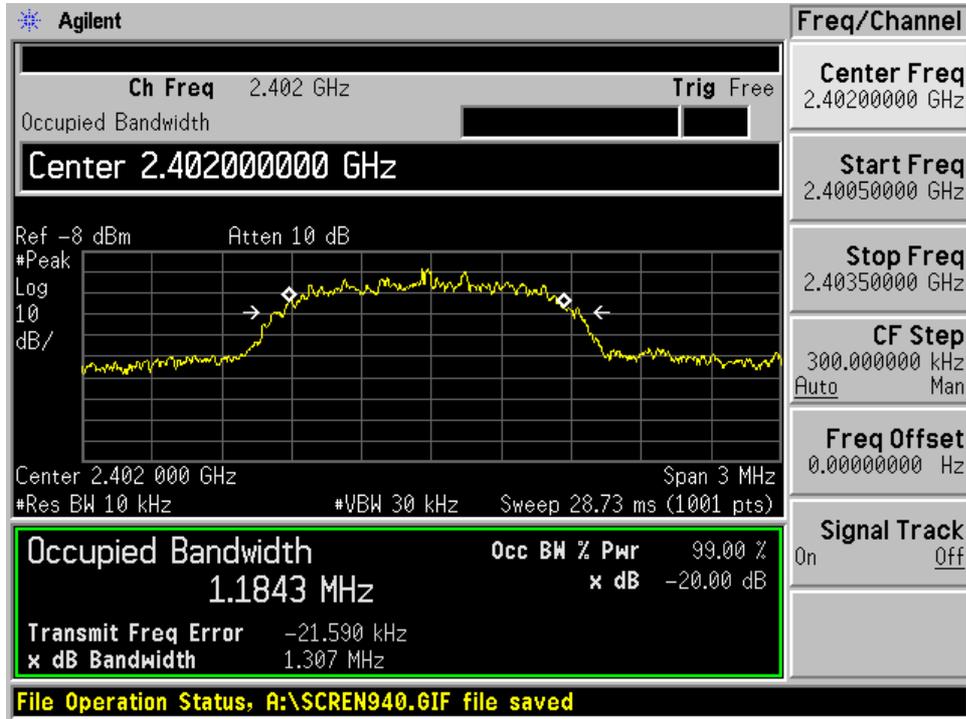


Middle Channel

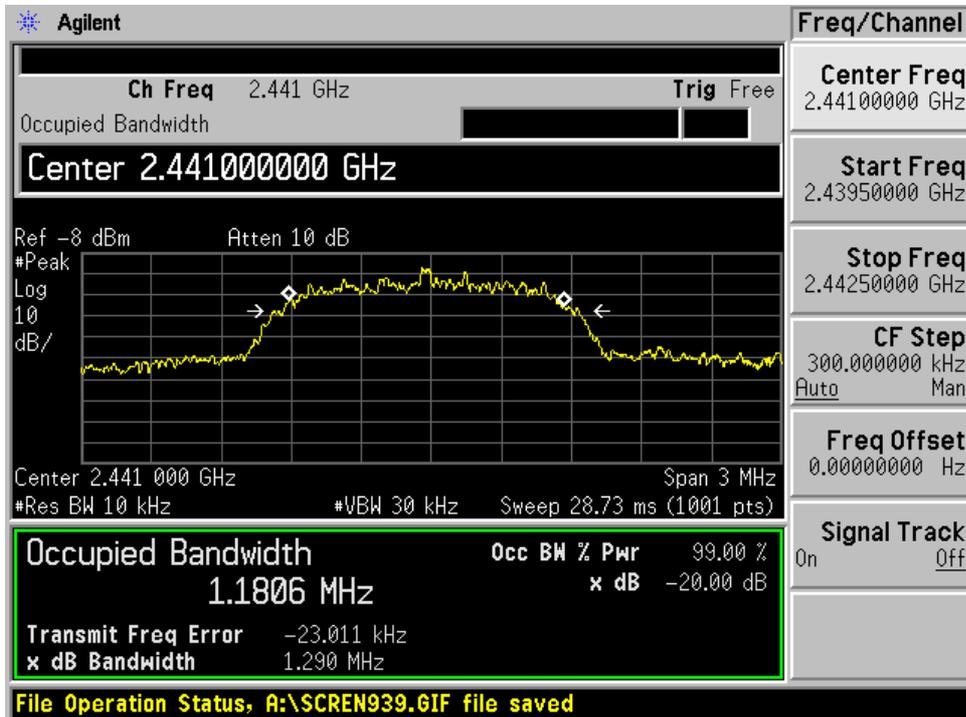


## High Channel

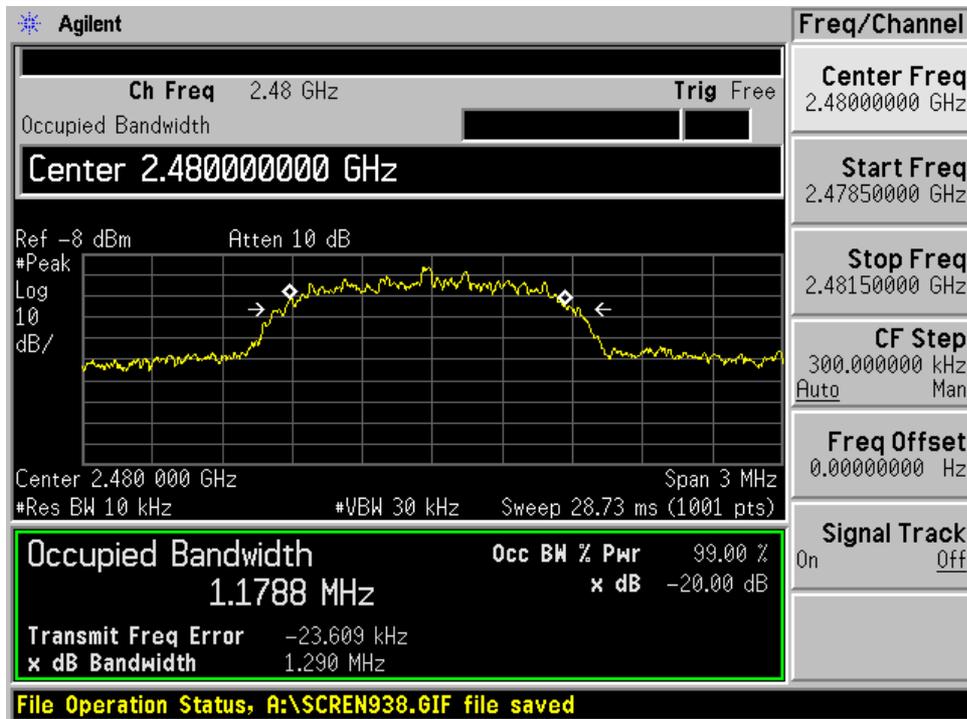


3)Packet Setting : 3DH5  
Low Channel

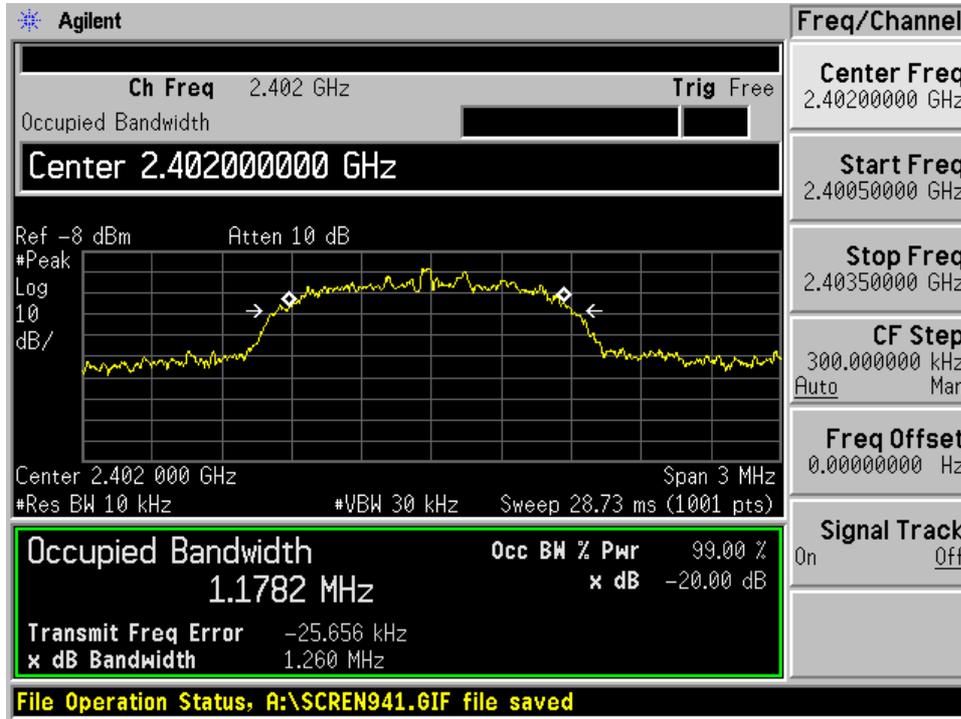

Middle Channel

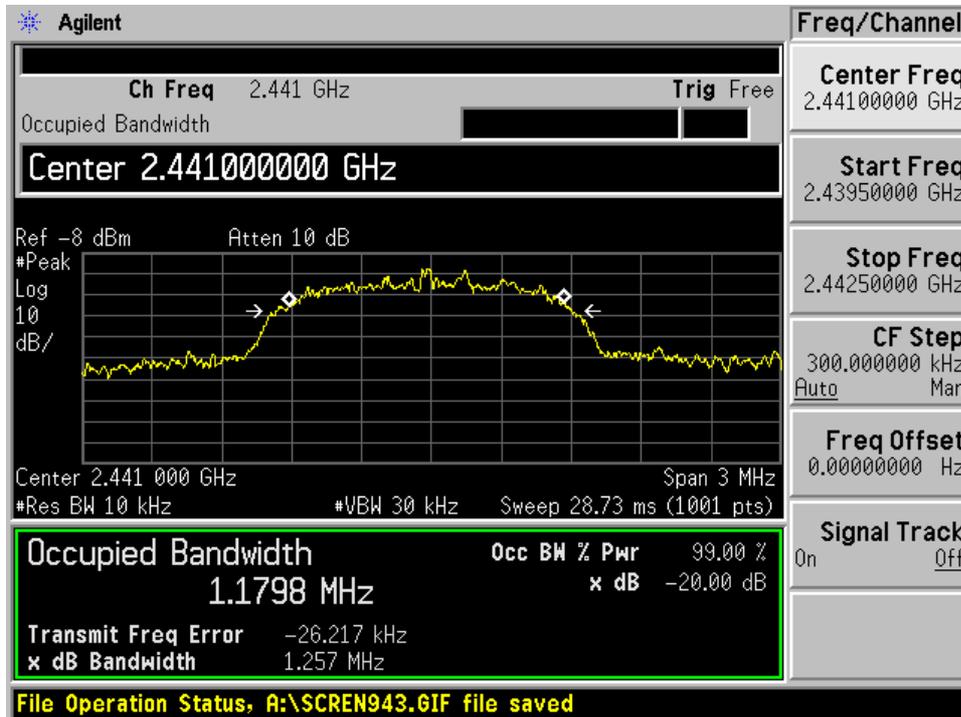

## High Channel

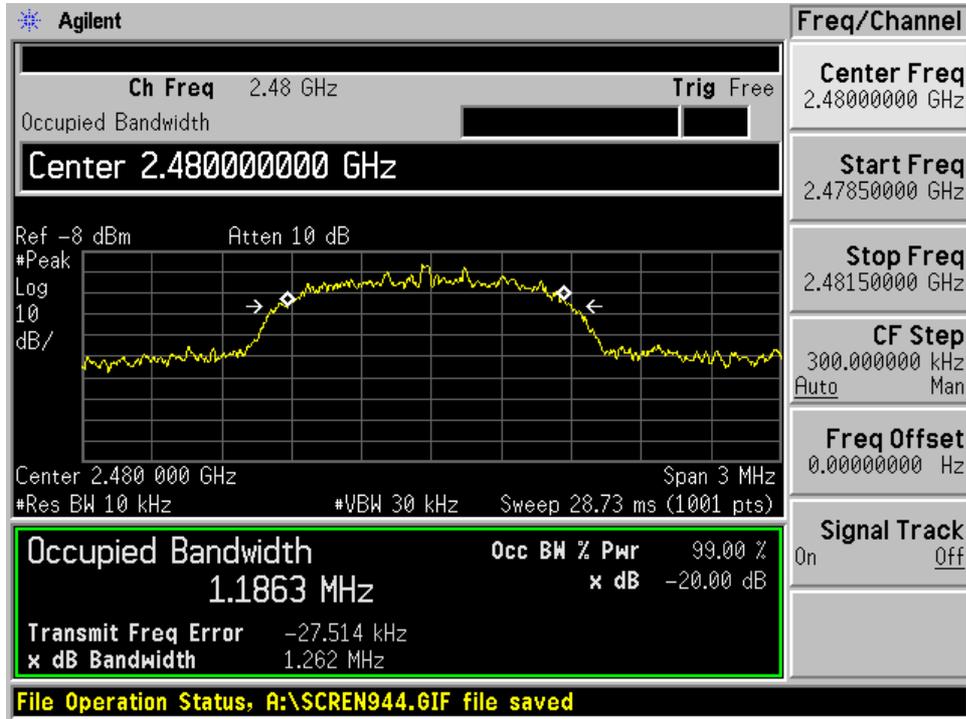


**A.4 Dwell Time**

Test Date : October 27, 2009

Temp.:25°C, Humi:50%

| Mode of EUT | Dwell Time (msec) |
|-------------|-------------------|
| DH1         | 126.1             |
| DH3         | 260.0             |
| DH5         | 305.6             |
| Inquiry     | 73.0              |

**DH1**

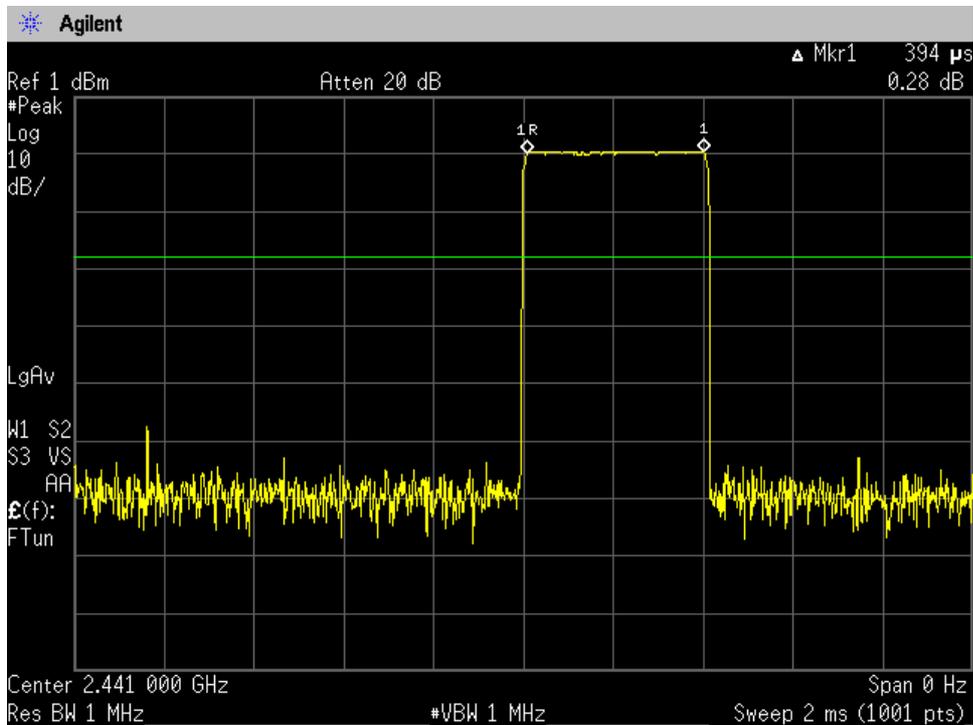


Note : The system makes worst case 1600 hops per second or 1 time slot has a length of 625 μs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So the system has each channel 10.1266 times per second and so for 31.6 seconds the system have 320.0 times of appearance.

Each tx-time per appearance is 0.394 ms.


Dwell time = 320.0 \* 0.394 = 126.1 ms

DH3

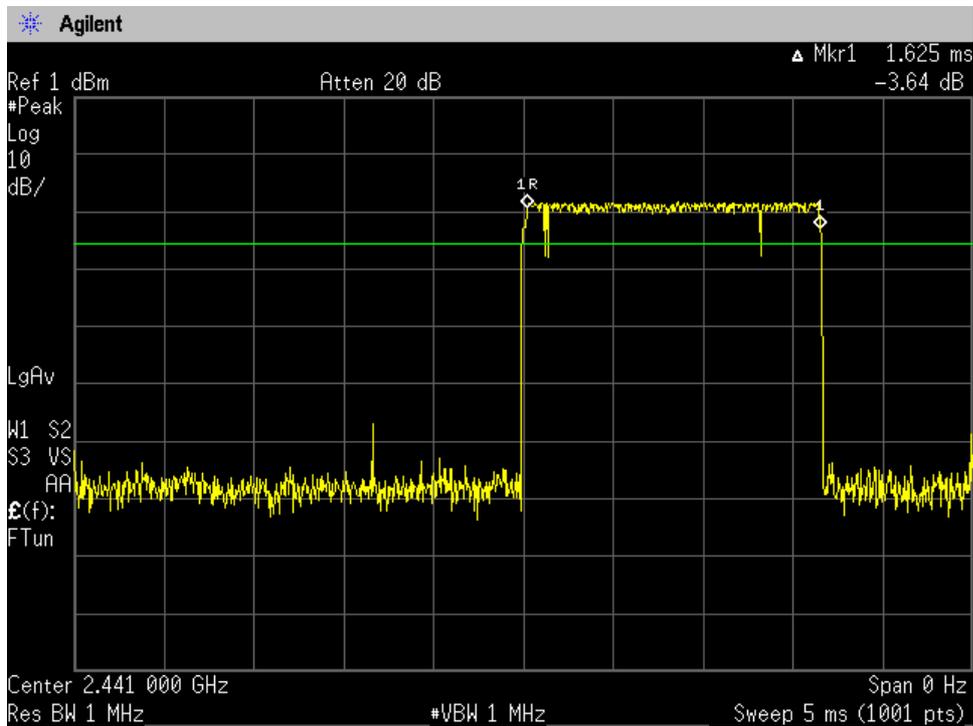


Note : A DH3 Packet need 3 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 400 hops per second with 79 channels. So the system have each channel 5.063 times per second and so for 31.6 seconds the system have 160.0 times of appearance. Each tx-time per appearance is 1.625 ms.  
 Dwell time = 160.0 \* 1.6125= 260.0 ms

DH5

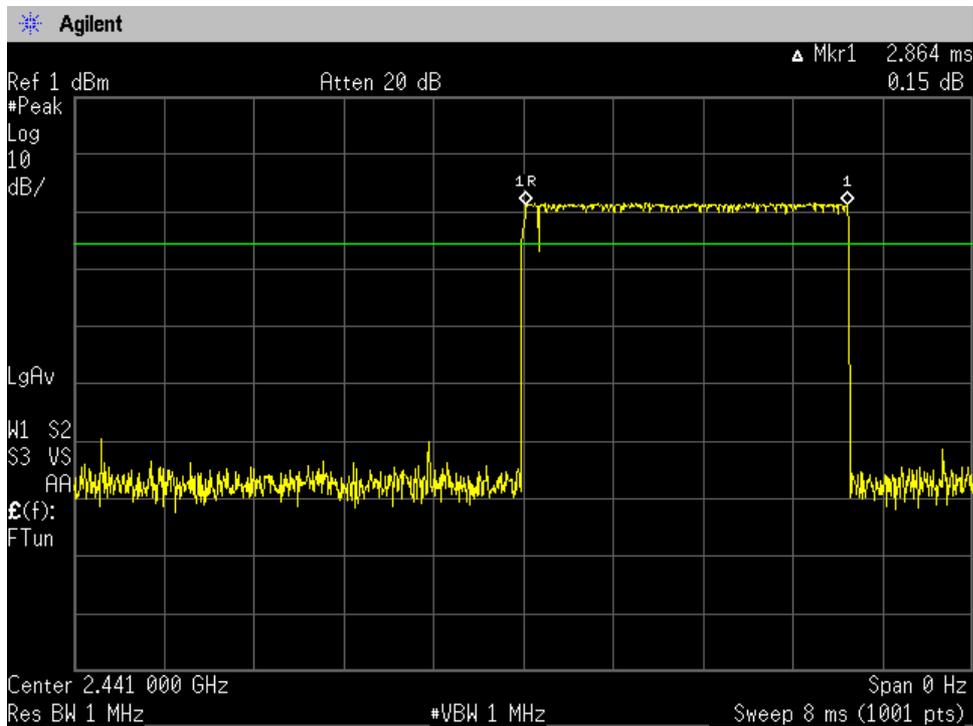

Note : A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 266.667 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.7 times of appearance. Each tx-time per appearance is 2.864 ms.  
 Dwell time = 106.7 \* 2.864 = 305.6 ms

Inquiry

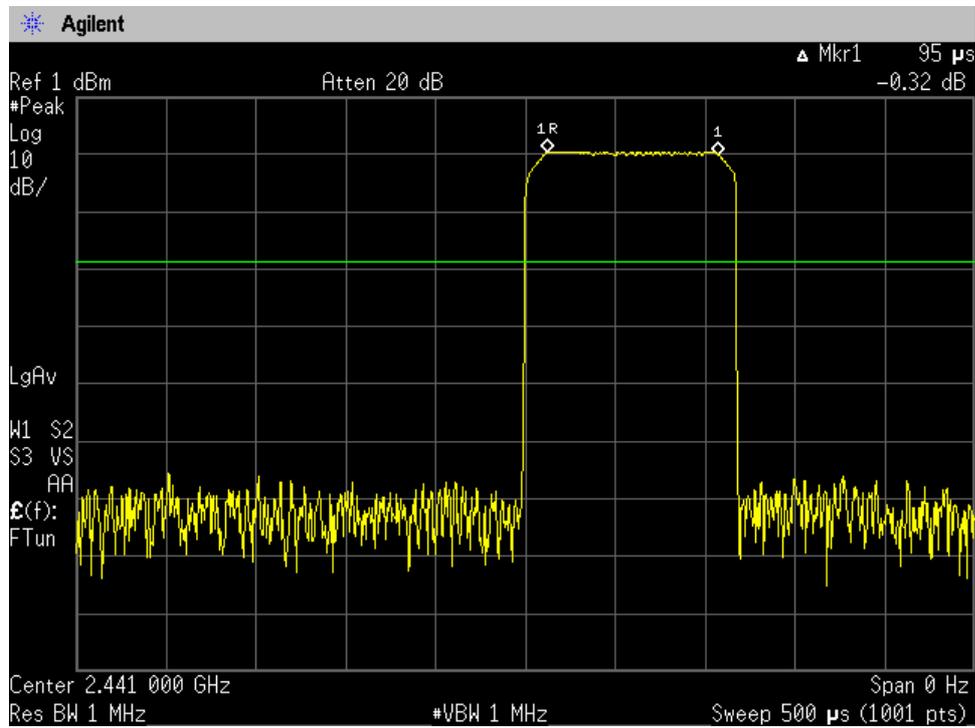

Note : The system have 32 hopping channel in Inquiry mode.  
 The time period =  $32 * 0.4 = 12.8$  seconds  
 In maximum case the bluetooth system have three blocks of 2560 ms in 12.8 s period. One block has 256 burst at each hopping channel.  
 Each tx-time per appearance is 0.095ms.  
 Dwell time =  $0.095 * 256 * 3 = 73.0$  ms

**A.5 Peak Output Power(Conduction)**

1)DH5

Test Date: October 27, 2009  
Temp.: 25 °C, Humi: 50 %

| CH | Transmitting Frequency | Correction Factor | Meter Reading | Conducted |                   | Limits | Margin |
|----|------------------------|-------------------|---------------|-----------|-------------------|--------|--------|
|    | [MHz]                  |                   |               | [dB]      | Peak Output Power |        |        |
|    |                        | [dB]              | [dBm]         | [dBm]     |                   | [dBm]  | [dB]   |
| 00 | 2402.0                 | 9.90              | -8.94         | 0.96      | 1.25              | 20.97  | +20.01 |
| 39 | 2441.0                 | 9.90              | -7.86         | 2.04      | 1.60              | 20.97  | +18.93 |
| 78 | 2480.0                 | 9.90              | -7.37         | 2.53      | 1.79              | 20.97  | +18.44 |

Calculated result at 2480.000 MHz, as the worst point shown on underline:

|                   |   |           |           |
|-------------------|---|-----------|-----------|
| Correction Factor | = | 9.90 dB   |           |
| + ) Meter Reading | = | -7.37 dBm |           |
| Result            | = | 2.53 dBm  | = 1.79 mW |

Minimum Margin: 20.97 - 2.53 = 18.44 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

|                   |            |
|-------------------|------------|
| Detector Function | Video B.W. |
| Peak              | 5 MHz      |

2)2DH5

Test Date: October 27, 2009

Temp.: 25 °C, Humi: 50 %

| CH | Transmitting Frequency | Correction Factor | Meter Reading | Conducted         |       | Limits | Margin |
|----|------------------------|-------------------|---------------|-------------------|-------|--------|--------|
|    | [MHz]                  |                   |               | Peak Output Power | [dBm] |        |        |
|    |                        | [dB]              | [dBm]         | [dBm]             |       | [dBm]  | [dB]   |
| 00 | 2402.0                 | 9.90              | -8.25         | 1.65              | 1.46  | 20.97  | +19.32 |
| 39 | 2441.0                 | 9.90              | -7.62         | 2.28              | 1.69  | 20.97  | +18.69 |
| 78 | 2480.0                 | 9.90              | -6.94         | 2.96              | 1.98  | 20.97  | +18.01 |

Calculated result at 2480.000 MHz, as the worst point shown on underline:

|                   |   |                    |
|-------------------|---|--------------------|
| Correction Factor | = | 9.90 dB            |
| + ) Meter Reading | = | -6.94 dBm          |
| Result            | = | 2.96 dBm = 1.98 mW |

Minimum Margin: 20.97 - 2.96 = 18.01 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
2. Setting of measuring instrument(s) :

|                   |            |
|-------------------|------------|
| Detector Function | Video B.W. |
| Peak              | 5 MHz      |

3)3DH5

Test Date: October 27, 2009

Temp.: 25 °C, Humi: 50 %

| CH | Transmitting Frequency | Correction Factor | Meter Reading | Conducted         |       | Limits | Margin |
|----|------------------------|-------------------|---------------|-------------------|-------|--------|--------|
|    | [MHz]                  |                   |               | Peak Output Power | [dBm] |        |        |
|    |                        | [dB]              | [dBm]         | [dBm]             |       | [dBm]  | [dB]   |
| 00 | 2402.0                 | 9.90              | -8.06         | 1.84              | 1.53  | 20.97  | +19.13 |
| 39 | 2441.0                 | 9.90              | -7.20         | 2.70              | 1.86  | 20.97  | +18.27 |
| 78 | 2480.0                 | 9.90              | -6.58         | 3.32              | 2.15  | 20.97  | +17.65 |

Calculated result at 2480.000 MHz, as the worst point shown on underline:

|                   |   |                    |
|-------------------|---|--------------------|
| Correction Factor | = | 9.90 dB            |
| + ) Meter Reading | = | -6.58 dBm          |
| Result            | = | 3.32 dBm = 2.15 mW |

Minimum Margin: 20.97 - 3.32 = 17.65 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
2. Setting of measuring instrument(s) :


|                   |            |
|-------------------|------------|
| Detector Function | Video B.W. |
| Peak              | 5 MHz      |

## A.6 Spurious Emission(Conduction)


Test Date : October 27, 2009

Temp.:25°C, Humi:50%


### Low Channel

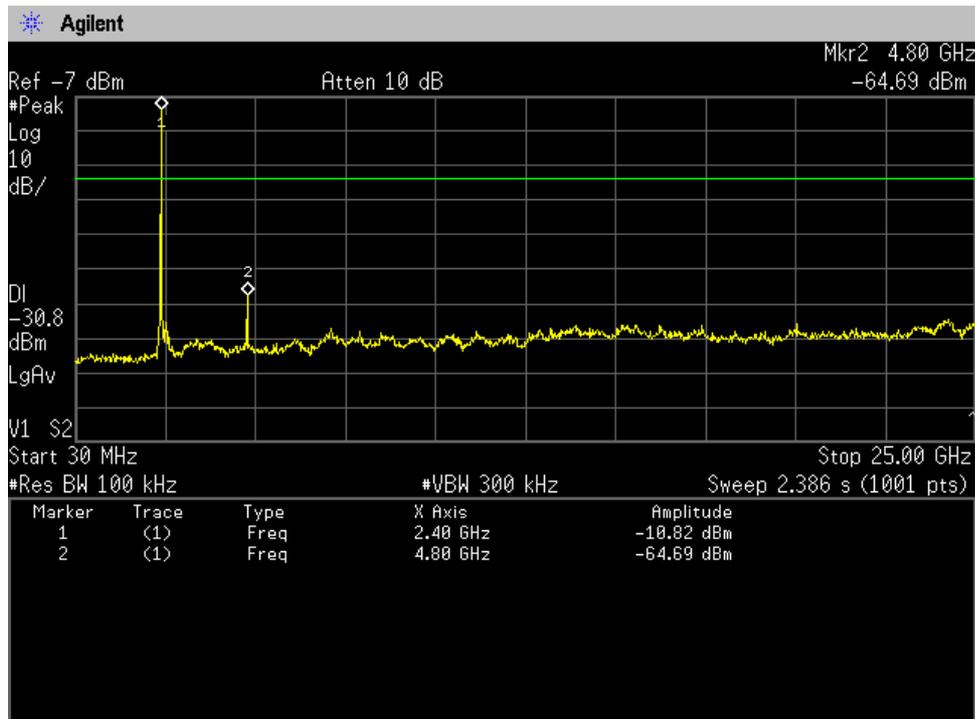


### Middle Channel

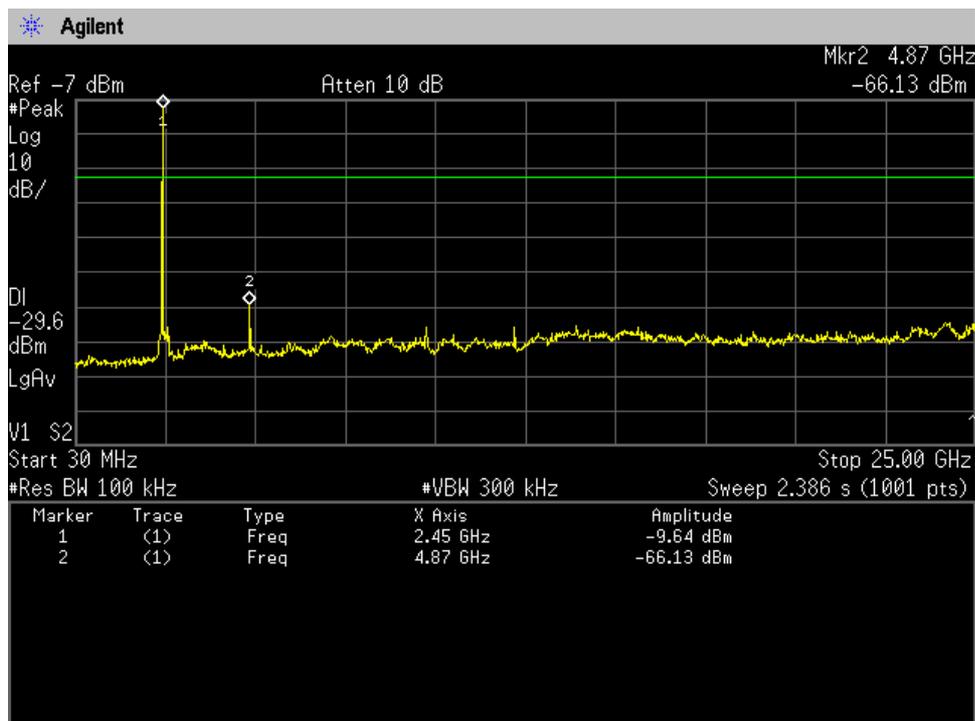

High Channel

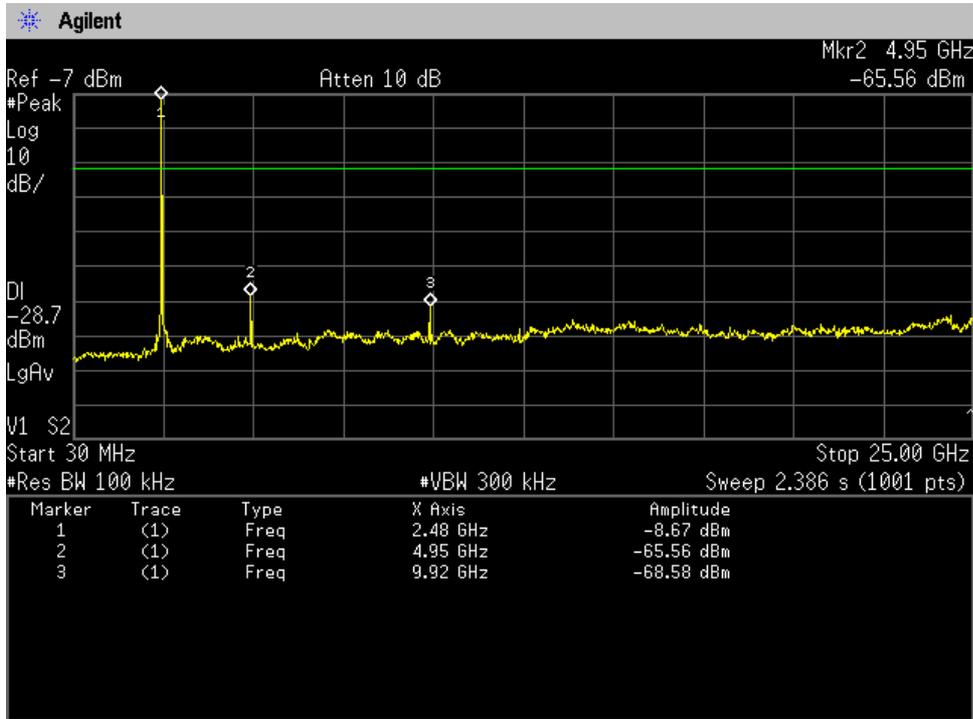


Receiving(Middle Channel)

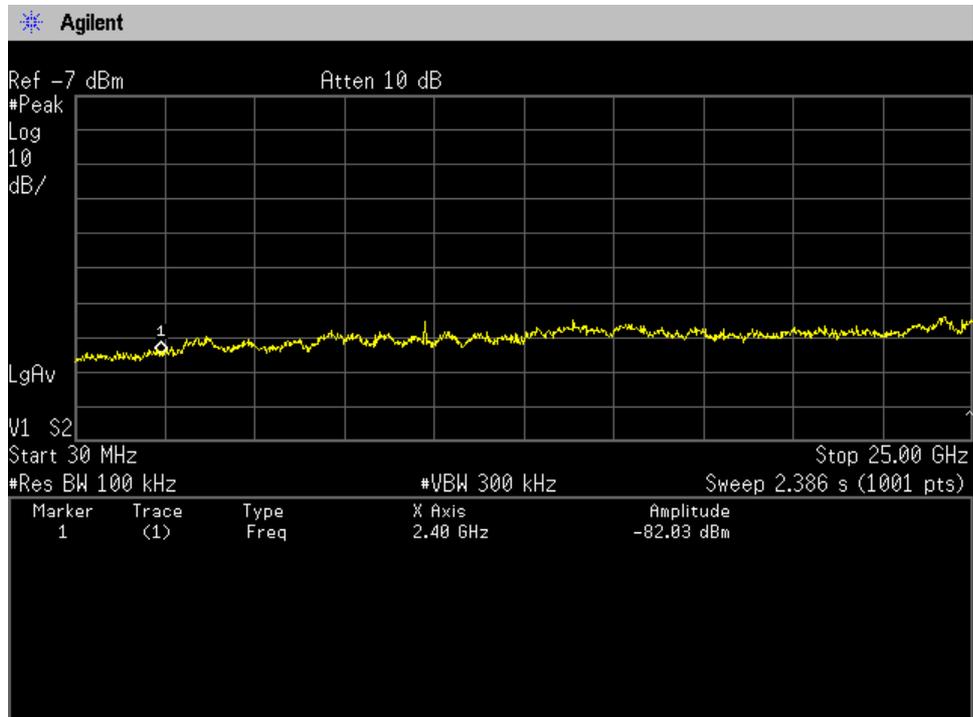


**Band-Edge Emission**


Low Channel(Hopping off), Band-Edge Emission

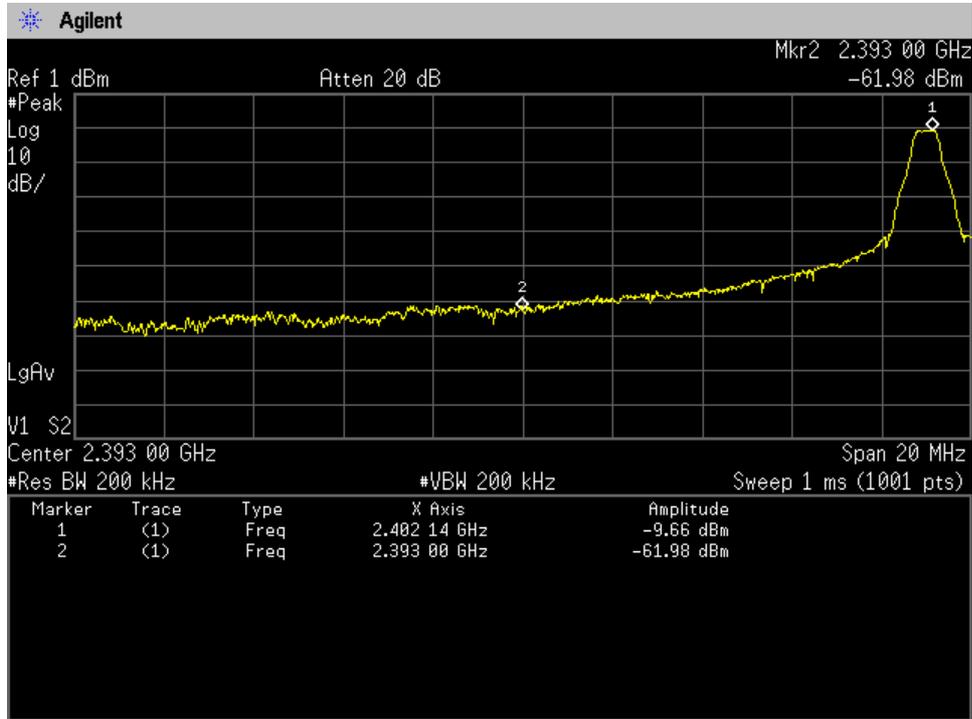


High Channel(Hopping off), Band-Edge Emission

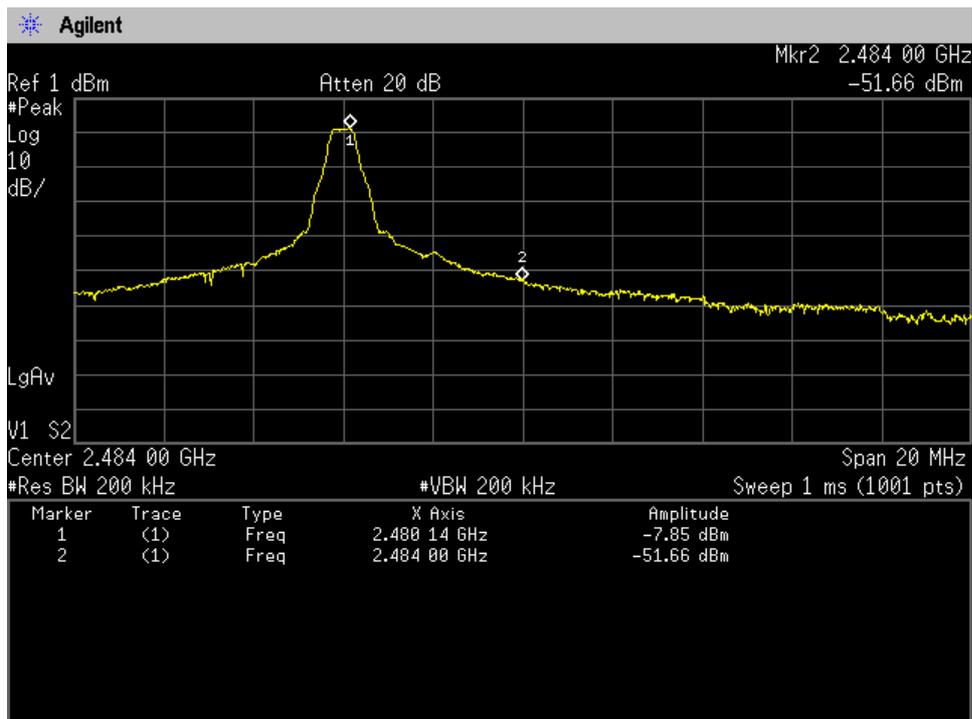

Low Channel(Hopping on), Band-Edge Emission

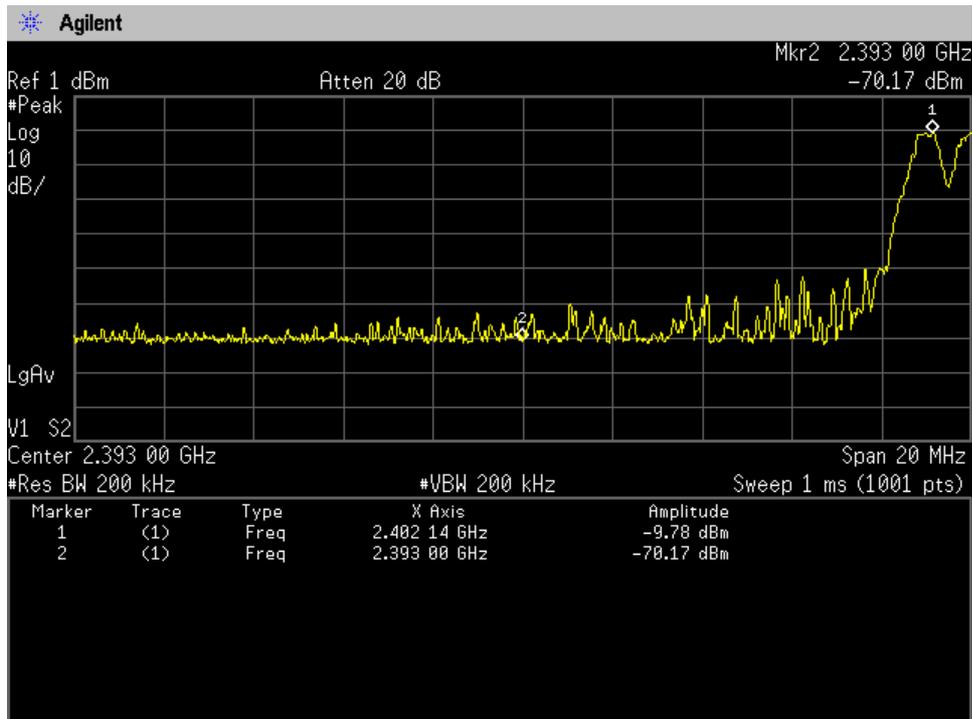


High Channel(Hopping on), Band-Edge Emission

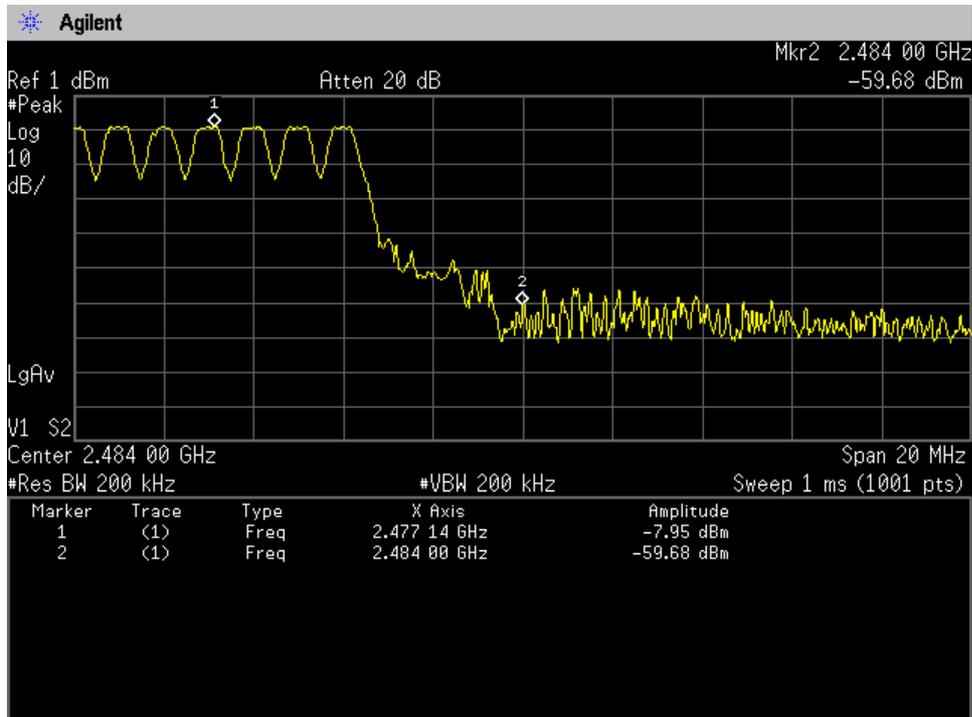

**A.7 AC Powerline Conducted Emission**

Test Date: November 18, 2009  
Temp.: 24 °C, Humi: 32 %

| Frequency [MHz] | Corr. Factor [dB] | Meter Readings [dB(μV)] |    |        |    | Limits [dB(μV)] |      | Results [dB(μV)] |     | Margin [dB] | Remarks |
|-----------------|-------------------|-------------------------|----|--------|----|-----------------|------|------------------|-----|-------------|---------|
|                 |                   | VA                      |    | VB     |    | QP              | AVE  | QP               | AVE |             |         |
| 0.15            | 10.1              | < 10.0                  | -- | < 10.0 | -- | 66.0            | 56.0 | < 20.1           | --  | > +45.9     | -       |
| 0.50            | 9.9               | < 10.0                  | -- | < 10.0 | -- | 56.0            | 46.0 | < 19.9           | --  | > +36.1     | -       |
| 0.97            | 10.0              | < 10.0                  | -- | 15.4   | -- | 56.0            | 46.0 | 25.4             | --  | +30.6       | -       |
| 3.00            | 10.1              | < 10.0                  | -- | < 10.0 | -- | 56.0            | 46.0 | < 20.1           | --  | > +35.9     | -       |
| 5.00            | 10.1              | < 10.0                  | -- | < 10.0 | -- | 56.0            | 46.0 | < 20.1           | --  | > +35.9     | -       |
| 7.00            | 10.3              | < 10.0                  | -- | < 10.0 | -- | 60.0            | 50.0 | < 20.3           | --  | > +39.7     | -       |
| 10.00           | 10.4              | < 10.0                  | -- | < 10.0 | -- | 60.0            | 50.0 | < 20.4           | --  | > +39.6     | -       |
| 20.00           | 10.9              | < 10.0                  | -- | < 10.0 | -- | 60.0            | 50.0 | < 20.9           | --  | > +39.1     | -       |
| 30.00           | 11.2              | < 10.0                  | -- | < 10.0 | -- | 60.0            | 50.0 | < 21.2           | --  | > +38.8     | -       |

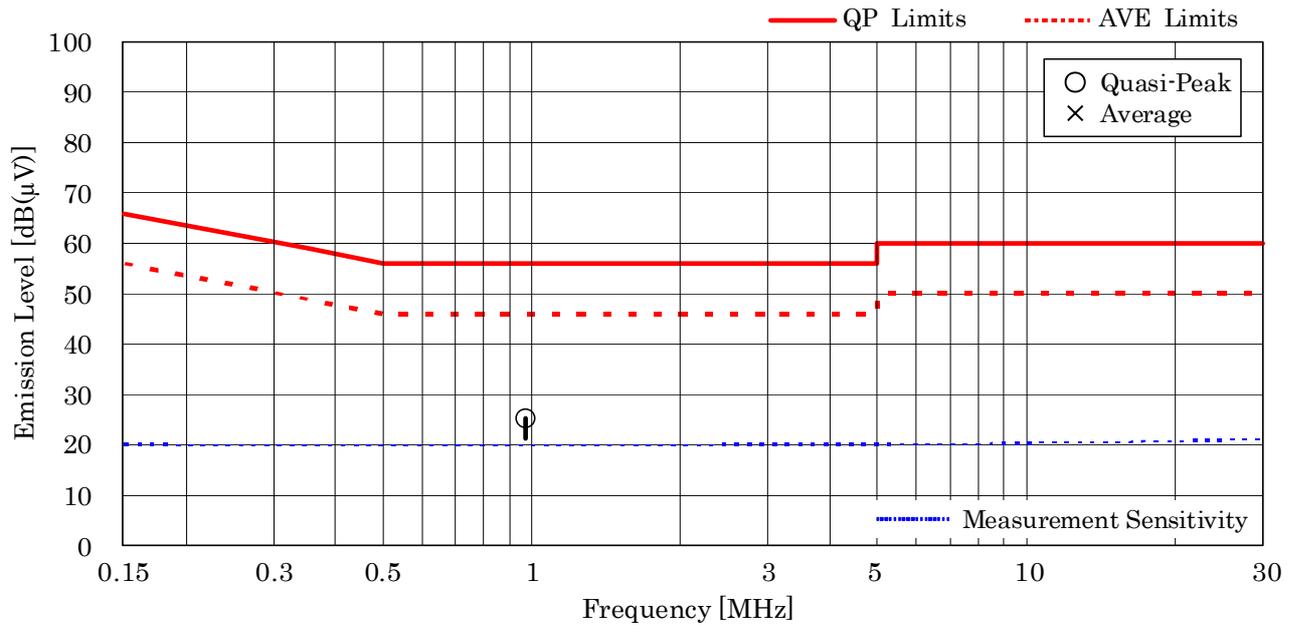

**NOTES**

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 0.97 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading = 10.0 + 15.4 = 25.4 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

**A.8 Field Strength of Spurious Radiation**


**A.8.1 Band-edge Compliance**

Test Date : November 11, 2009

Temp.:24°C, Humi:53%

Mode of EUT : Hopping


Antenna Polarization : Horizontal

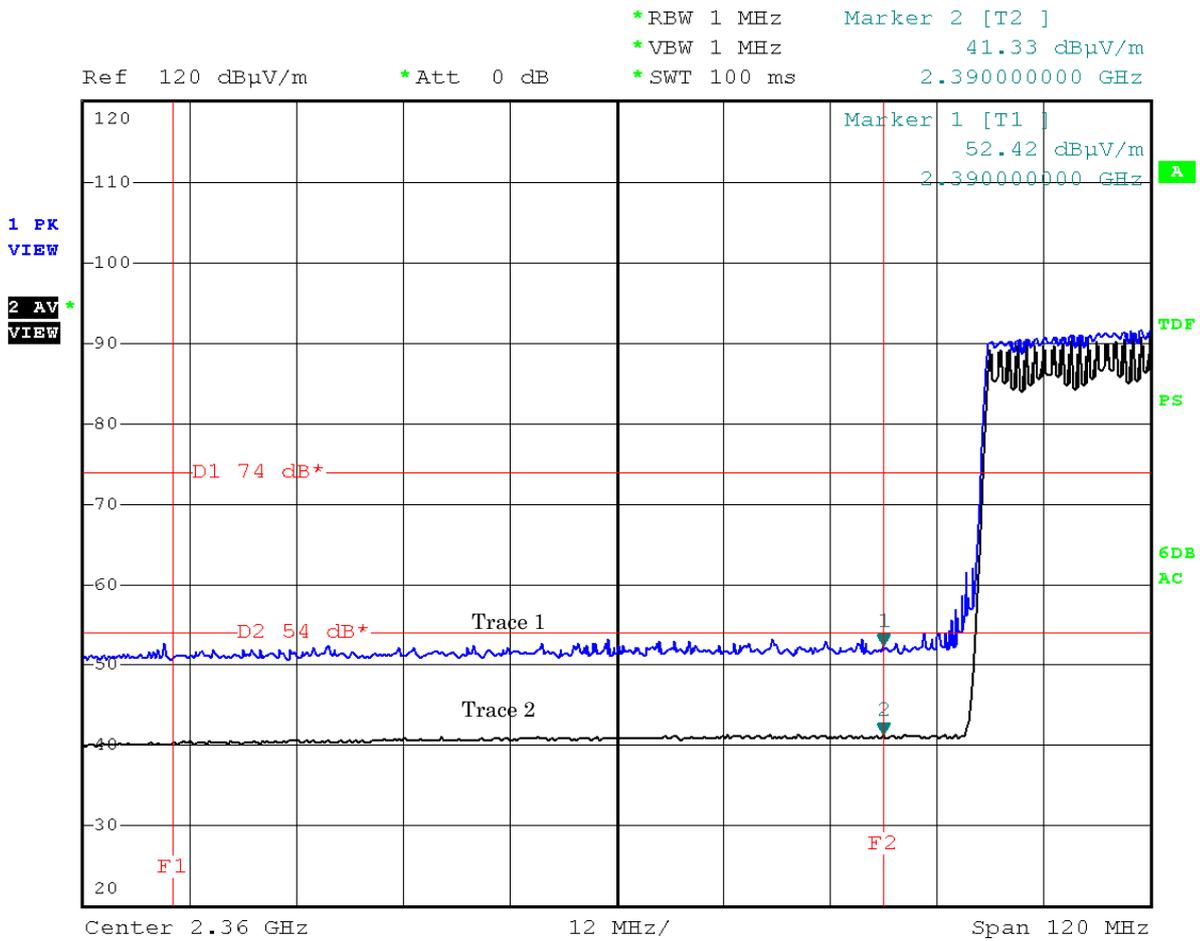

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping


Antenna Polarization : Vertical

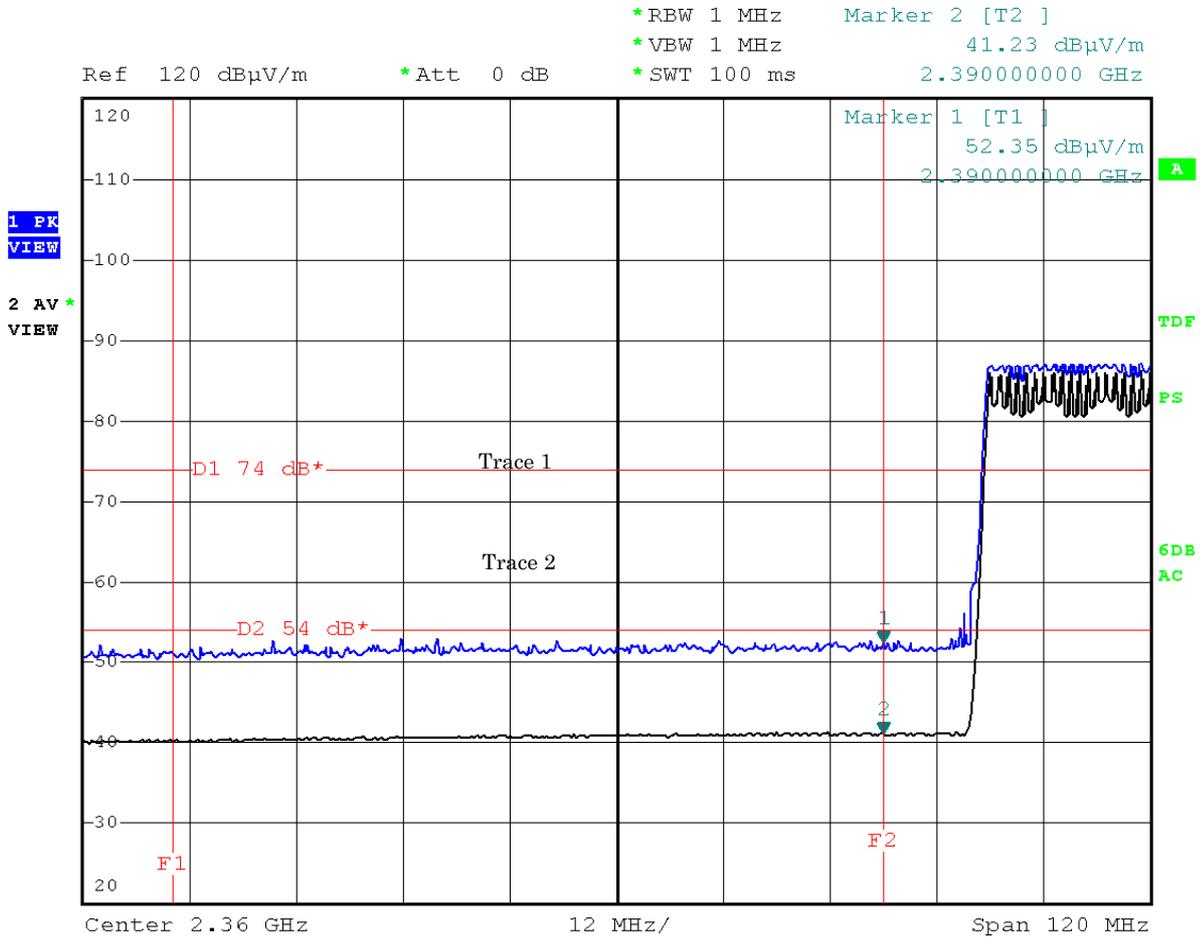

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping


Antenna Polarization : Horizontal

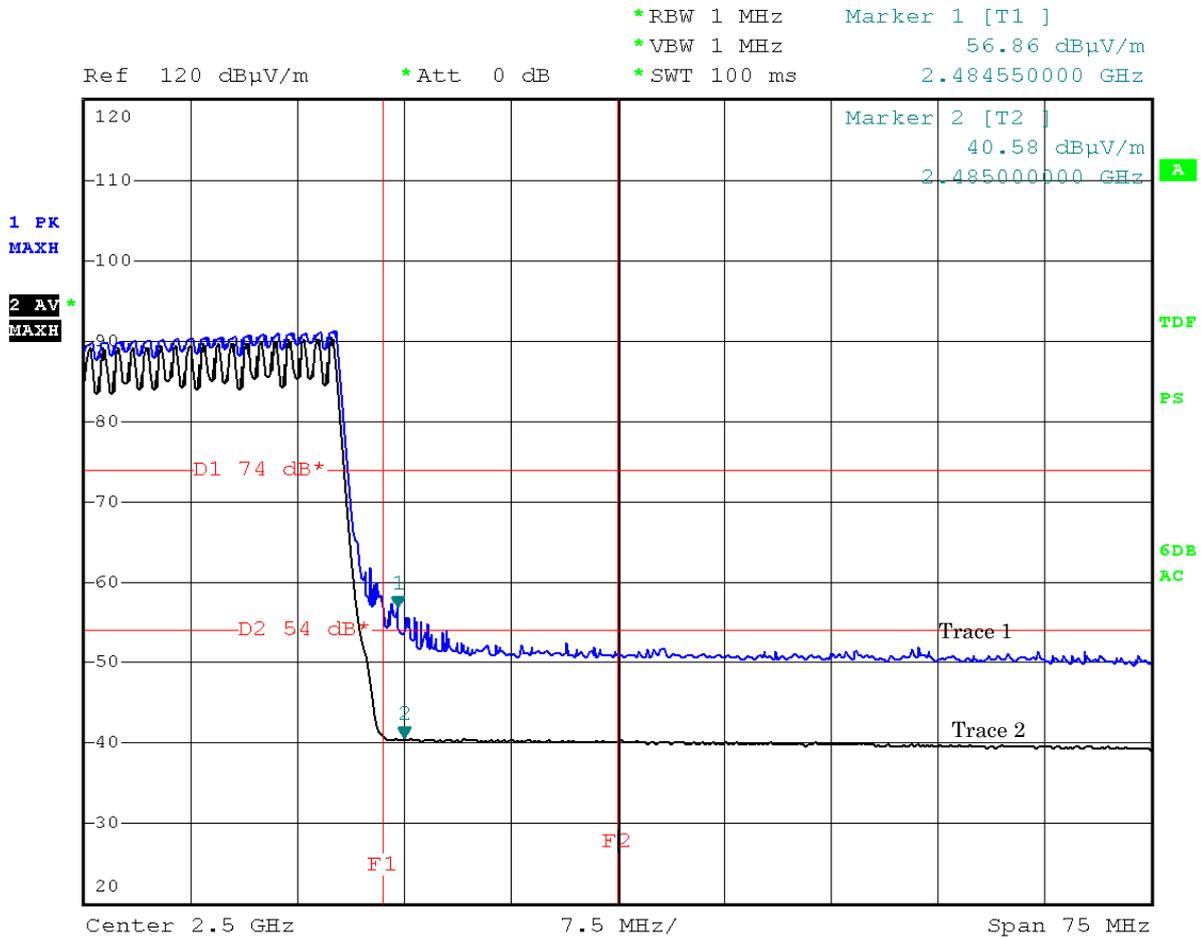

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : Hopping

Antenna Polarization : Vertical

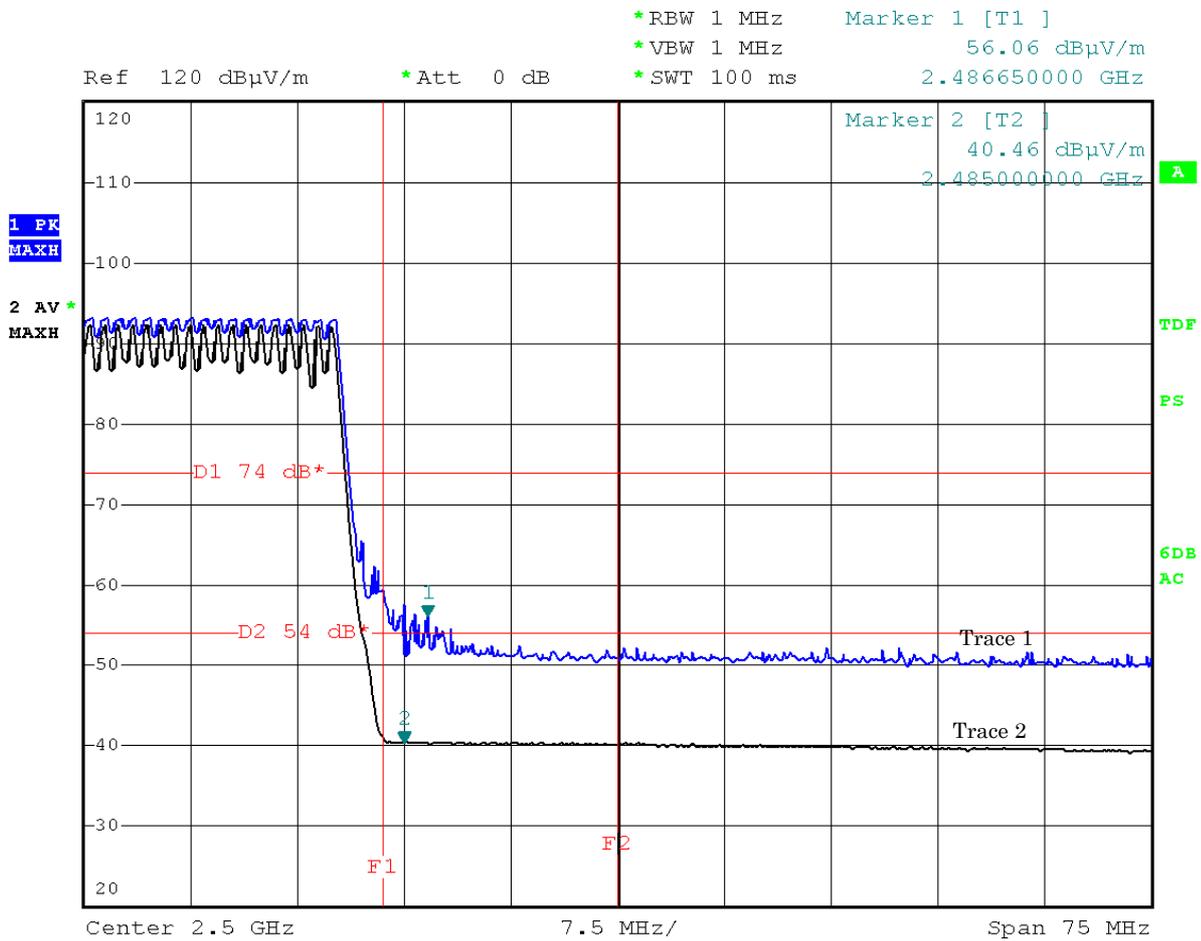

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

**A.8.2 Other Spurious Emission**

**A.8.2.1 Other Spurious Emission(9kHz – 30MHz)**

Test Date : October 23, 2009

Temp.:181C, Humi:46%

Mode of EUT : All modes have been investigated and the worst case mode for channel (39ch: 2441MHz) has been listed.

Results : No spurious emissions in the range 20dB below the limit.


**A.8.2.2 Other Spurious Emission(30MHz – 1000MHz)**

Mode of EUT : All modes have been investigated and the worst case mode for channel (39ch: 2441MHz) has been listed.

Test Date: October 23, 2009

Temp.: 18 °C, Humi: 46 %

| Frequency<br>[MHz] | Antenna<br>Factor<br>[dB(1/m)] | Cable<br>Loss<br>[dB] | Meter Readings<br>[dB(μV)] |       | Limits<br>[dB(μV/m)] | Results<br>[dB(μV/m)] |       | Margin<br>[dB] | Remarks |
|--------------------|--------------------------------|-----------------------|----------------------------|-------|----------------------|-----------------------|-------|----------------|---------|
|                    |                                |                       | Hori.                      | Vert. |                      | Hori.                 | Vert. |                |         |
| <u>339.2</u>       | 14.5                           | 3.7                   | 17.4                       | 8.4   | 46.0                 | 35.6                  | 26.6  | +10.4          | -       |
| 678.4              | 20.0                           | 5.5                   | 8.0                        | 6.6   | 46.0                 | 33.5                  | 32.1  | +12.5          | -       |

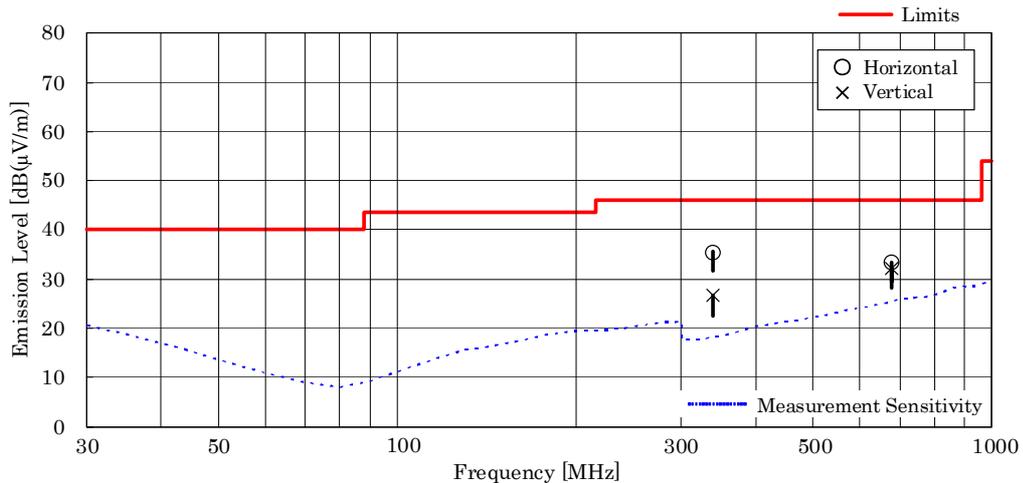

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 339.2 MHz, as the worst point shown on underline:  
Antenna Factor + Cable Loss + Meter Reading = 14.5 + 3.7 + 17.4 = 35.6 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

**A.8.2.3 Other Spurious Emission(Above 1000MHz)**

Test Date: November 11, 2009

Temp.: 24 °C, Humi: 53 %

Test condition : Tx Low Ch

| Frequency<br>[MHz] | Antenna<br>Factor<br>[dB(1/m)] | Corr.<br>Factor<br>[dB] | Meter Readings [dB(μV)] |        |          |        | Limits<br>[dB(μV/m)] |      | Results<br>[dB(μV/m)] |        | Margin<br>[dB] | Remarks |
|--------------------|--------------------------------|-------------------------|-------------------------|--------|----------|--------|----------------------|------|-----------------------|--------|----------------|---------|
|                    |                                |                         | Horizontal              |        | Vertical |        | PK                   | AVE  | PK                    | AVE    |                |         |
|                    |                                |                         | PK                      | AVE    | PK       | AVE    |                      |      |                       |        |                |         |
| 4804.0             | 27.4                           | -20.3                   | 43.0                    | < 30.0 | 43.4     | < 30.0 | 74.0                 | 54.0 | 50.5                  | < 37.1 | > +16.9        | A/B     |
| 12010.0            | 33.8                           | -25.2                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 48.6                | < 38.6 | > +15.4        | A/B     |
| 19216.0            | 40.4                           | -26.5                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 53.9                | < 43.9 | > +10.1        | A/B     |

Calculated result at 19216.0 MHz, as the worst point shown on underline:

Antenna Factor = 40.4 dB(1/m)

Corr. Factor = -26.5 dB

+ ) Meter Reading = <30.0 dB(μV)

Result = >10.1 dB(μV/m)

Minimum Margin: 54.0 - <43.9 = >10.1 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

|   | Detector Function | Resolution B.W. | Video B.W. | Sweep Time |
|---|-------------------|-----------------|------------|------------|
| A | Peak              | 1 MHz           | 1 MHz      | AUTO       |
| B | Average           | 1 MHz           | 10 Hz      | AUTO       |

Test Date: November 11, 2009

Temp.: 24 °C, Humi: 53 %

Test condition : Tx Middle Ch

| Frequency<br>[MHz] | Antenna<br>Factor<br>[dB(1/m)] | Corr.<br>Factor<br>[dB] | Meter Readings [dB(μV)] |        |          |        | Limits<br>[dB(μV/m)] |      | Results<br>[dB(μV/m)] |        | Margin<br>[dB] | Remarks |
|--------------------|--------------------------------|-------------------------|-------------------------|--------|----------|--------|----------------------|------|-----------------------|--------|----------------|---------|
|                    |                                |                         | Horizontal              |        | Vertical |        | PK                   | AVE  | PK                    | AVE    |                |         |
|                    |                                |                         | PK                      | AVE    | PK       | AVE    |                      |      |                       |        |                |         |
| 4882.0             | 27.3                           | -20.3                   | 41.3                    | < 30.0 | 41.1     | < 30.0 | 74.0                 | 54.0 | 48.3                  | < 37.0 | > +17.0        | A/B     |
| 12205.0            | 33.6                           | -25.1                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 48.5                | < 38.5 | > +15.5        | A/B     |
| 19528.0            | 40.4                           | -26.5                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 53.9                | < 43.9 | > +10.1        | A/B     |

Calculated result at 19528.0 MHz, as the worst point shown on underline:

Antenna Factor = 40.4 dB(1/m)

Corr. Factor = -26.5 dB

+ ) Meter Reading = <30.0 dB(μV)

Result = >10.1 dB(μV/m)

Minimum Margin: 54.0 - <43.9 = >10.1 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
  - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

|   | Detector Function | Resolution B.W. | Video B.W. | Sweep Time |
|---|-------------------|-----------------|------------|------------|
| A | Peak              | 1 MHz           | 1 MHz      | AUTO       |
| B | Average           | 1 MHz           | 10 Hz      | AUTO       |

Test Date: November 11, 2009

Temp.: 24 °C, Humi: 53 %

Test condition : Tx High Ch

| Frequency<br>[MHz] | Antenna<br>Factor<br>[dB(1/m)] | Corr.<br>Factor<br>[dB] | Meter Readings [dB(μV)] |        |          |        | Limits<br>[dB(μV/m)] |      | Results<br>[dB(μV/m)] |        | Margin<br>[dB] | Remarks |
|--------------------|--------------------------------|-------------------------|-------------------------|--------|----------|--------|----------------------|------|-----------------------|--------|----------------|---------|
|                    |                                |                         | Horizontal              |        | Vertical |        | PK                   | AVE  | PK                    | AVE    |                |         |
|                    |                                |                         | PK                      | AVE    | PK       | AVE    |                      |      |                       |        |                |         |
| 4960.0             | 27.3                           | -20.4                   | 41.9                    | < 30.0 | 40.5     | < 30.0 | 74.0                 | 54.0 | 48.8                  | < 36.9 | > +17.1        | A/B     |
| 12400.0            | 33.6                           | -25.0                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 48.6                | < 38.6 | > +15.4        | A/B     |
| 19840.0            | 40.4                           | -26.5                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 53.9                | < 43.9 | > +10.1        | A/B     |

Calculated result at 19840.0 MHz, as the worst point shown on underline:

Antenna Factor = 40.4 dB(1/m)

Corr. Factor = -26.5 dB

+ ) Meter Reading = <30.0 dB(μV)

Result = >10.1 dB(μV/m)

Minimum Margin: 54.0 - <43.9 = >10.1 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
  - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

|   | Detector Function | Resolution B.W. | Video B.W. | Sweep Time |
|---|-------------------|-----------------|------------|------------|
| A | Peak              | 1 MHz           | 1 MHz      | AUTO       |
| B | Average           | 1 MHz           | 10 Hz      | AUTO       |

Test Date: November 11, 2009

Temp.: 24 °C, Humi: 53 %

Test condition : Rx Middle Ch

| Frequency<br>[MHz] | Antenna<br>Factor<br>[dB(1/m)] | Corr.<br>Factor<br>[dB] | Meter Readings [dB(μV)] |        |          |        | Limits<br>[dB(μV/m)] |      | Results<br>[dB(μV/m)] |        | Margin<br>[dB] | Remarks |
|--------------------|--------------------------------|-------------------------|-------------------------|--------|----------|--------|----------------------|------|-----------------------|--------|----------------|---------|
|                    |                                |                         | Horizontal              |        | Vertical |        | PK                   | AVE  | PK                    | AVE    |                |         |
|                    |                                |                         | PK                      | AVE    | PK       | AVE    |                      |      |                       |        |                |         |
| 2441.0             | 21.5                           | -21.1                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 40.4                | < 30.4 | > +23.6        | A/B     |
| 4882.0             | 27.3                           | -20.3                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 47.0                | < 37.0 | > +17.0        | A/B     |
| 7323.0             | 29.8                           | -18.5                   | < 40.0                  | < 30.0 | < 40.0   | < 30.0 | 74.0                 | 54.0 | < 51.3                | < 41.3 | > +12.7        | A/B     |

Calculated result at 7323.0 MHz, as the worst point shown on underline:

Antenna Factor = 29.8 dB(1/m)

Corr. Factor = -18.5 dB

+ ) Meter Reading = <30.0 dB(μV)

Result = >12.7 dB(μV/m)

Minimum Margin: 54.0 - <41.3 = >12.7 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 7.5 GHz (3rd harmonic of the highest local oscillator frequency).
3. The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.5GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

|   | Detector Function | Resolution B.W. | Video B.W. | Sweep Time |
|---|-------------------|-----------------|------------|------------|
| A | Peak              | 1 MHz           | 1 MHz      | AUTO       |
| B | Average           | 1 MHz           | 10 Hz      | AUTO       |

## Appendix B: Test Arrangement (Photographs)

### B.1 AC Powerline Conducted Emission

*This page is CONFIDENTIAL.*

## B.2 Radiated Emission

*This page is CONFIDENTIAL.*

**Appendix C: Test Instruments**

**C.1 Channel Separation**

| Type              | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|-------------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent      | A-39   | 2008/12   | 1 Year   |
| Attenuator        | 54-10       | Weinschel    | D-82   | 2009/6    | 1 Year   |
| XF Cable          | SUCOFLEX102 | SUHNER       | C-52   | 2009/6    | 1 Year   |

**C.2 Minimum Hopping Channel**

| Type              | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|-------------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent      | A-39   | 2008/12   | 1 Year   |
| Attenuator        | 54-10       | Weinschel    | D-82   | 2009/6    | 1 Year   |
| RF Cable          | SUCOFLEX102 | SUHNER       | C-52   | 2009/6    | 1 Year   |

**C.3 Occupied Bandwidth**

| Type              | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|-------------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent      | A-39   | 2008/12   | 1 Year   |
| Attenuator        | 54-10       | Weinschel    | D-82   | 2009/6    | 1 Year   |
| RF Cable          | SUCOFLEX102 | SUHNER       | C-52   | 2009/6    | 1 Year   |

**C.4 Dwell Time**

| Type              | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|-------------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent      | A-39   | 2008/12   | 1 Year   |
| Attenuator        | 54-10       | Weinschel    | D-82   | 2009/6    | 1 Year   |
| RF Cable          | SUCOFLEX102 | SUHNER       | C-52   | 2009/6    | 1 Year   |

**C.5 Peak Output Power (Conduction)**

| Type         | Model  | Manufacturer | ID No. | Last Cal. | Interval |
|--------------|--------|--------------|--------|-----------|----------|
| Power Meter  | N1911A | Agilent      | B-63   | 2009/6    | 1 Year   |
| Power Sensor | N1921A | Agilent      | B-64   | 2009/6    | 1 Year   |
| Attenuator   | 54-10  | Weinschel    | D-82   | 2009/6    | 1 Year   |

**C.6 Spurious Emission (Conduction)**

| Type              | Model       | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|-------------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A      | Agilent      | A-39   | 2008/12   | 1 Year   |
| Attenuator        | 54-10       | Weinschel    | D-82   | 2009/6    | 1 Year   |
| RF Cable          | SUCOFLEX102 | SUHNER       | C-52   | 2009/6    | 1 Year   |

**C.7 AC Power Conducted Emission**

| Type          | Model     | Manufacturer    | ID No. | Last Cal. | Interval |
|---------------|-----------|-----------------|--------|-----------|----------|
| Test Receiver | ESCI      | Rohde & Schwarz | A-42   | 2009/11   | 1 Year   |
| AMN (main)    | KNW-407FR | Kyoritsu        | D-103  | 2009/9    | 1 Year   |
| Attenuator    | MP721C    | Anritsu         | D-66   | 2009/9    | 1 Year   |
| RF Cable      | ---       | ----            | H-33   | 2009/4    | 1 Year   |

**C.8 Radiated Emission**

**C.8.1 Radiated Emission 9 kHz – 30 MHz**

| Type          | Model   | Manufacturer    | ID No. | Last Cal. | Interval |
|---------------|---------|-----------------|--------|-----------|----------|
| Test Receiver | ESCS 30 | Rohde & Schwarz | A-1    | 2009/2    | 1 Year   |
| Loop Antenna  | HFH2-Z2 | Rohde & Schwarz | C-3    | 2009/8    | 1 Year   |
| RF Cable      | RG213/U | Rohde & Schwarz | H-29   | 2009/8    | 1 Year   |

**C.8.2 Radiated Emission 30MHz – 1000 MHz**

| Type                 | Model            | Manufacturer    | ID No. | Last Cal. | Interval |
|----------------------|------------------|-----------------|--------|-----------|----------|
| Test Receiver        | ESVS 10          | Rohde & Schwarz | A-5    | 2009/10   | 1 Year   |
| Pre-Amplifier        | ESV-Z3           | Rohde & Schwarz | A-19   | 2008/11   | 1 Year   |
| Biconical Antenna    | VHA9103/FBAB9177 | Schwarzbeck     | C-25   | 2009/5    | 1 Year   |
| Log-periodic Antenna | UHALP9108-A1     | Schwarzbeck     | C-28   | 2009/5    | 1 Year   |
| RF Cable             | --               | ----            | H-1    | 2009/5    | 1 Year   |
| Site Attenuation     | --               | ----            | H-11   | 2009/10   | 1 Year   |

**C.8.3 Radiated Emission Above 1000 MHz**

| Type              | Model                     | Manufacturer    | ID No.  | Last Cal. | Interval |
|-------------------|---------------------------|-----------------|---------|-----------|----------|
| Spectrum Analyzer | E4446A                    | Agilent         | A-39    | 2008/12   | 1 Year   |
| Attenuator        | 54-10                     | Weinschel       | D-82    | 2008/12   | 1 Year   |
| Attenuator        | 2-10                      | Weinschel       | D-40    | 2008/12   | 1 Year   |
| Pre-Amplifier     | WJ-6611-513               | Watkins Johnson | A-23    | 2008/12   | 1 Year   |
| Pre-Amplifier     | WJ-6882-824               | Watkins Johnson | A-21    | 2008/12   | 1 Year   |
| Pre-Amplifier     | DBL-0618N515              | DBS Microwave   | A-33    | 2008/12   | 1 Year   |
| Pre-Amplifier     | ALN-22093545-01           | Wisewave Tech.  | A-37    | 2009/4    | 1 Year   |
| RF Cable          | SUCOFLEX104               | SUHNER          | C-40-11 | 2008/12   | 1 Year   |
| RF Cable          | SUCOFLEX104               | SUHNER          | C-40-14 | 2008/12   | 1 Year   |
| RF Cable          | 102EA-40<br>11K-252 x2 2m | SUHNER          | C-69    | 2009/4    | 1 Year   |
| RF Cable          | SUCOFLEX102               | SUHNER          | C-54    | 2009/4    | 1 Year   |
| RF Cable          | 102EA-40 11K-252 x2<br>2m | SUHNER          | C-69    | 2009/4    | 1 Year   |
| Horn Antenna      | 91888-2                   | EATON           | C-41-1  | 2009/6    | 1 Year   |
| Horn Antenna      | 91889-2                   | EATON           | C-41-2  | 2009/6    | 1 Year   |
| Horn Antenna      | 3160-06                   | EATON           | C-57    | 2009/6    | 2 Years  |
| Horn Antenna      | 3160-07                   | EATON           | C-58    | 2009/6    | 2 Years  |
| Horn Antenna      | 3160-08                   | EATON           | C-59    | 2009/6    | 2 Years  |
| Horn Antenna      | 3160-09                   | EMCO            | C-48    | 2009/6    | 2 Years  |