


A.3 SAR Measurement Data


A.3.1 Left Head

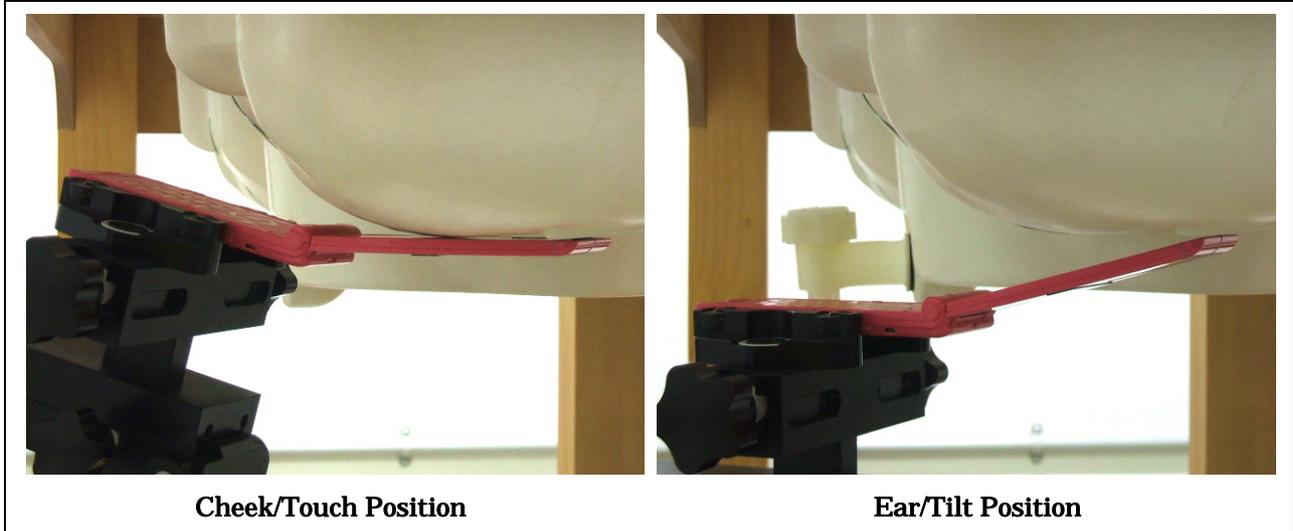

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)							Date : December 3, 2009
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.20	-0.044		0.486	22.0
	4233	846.60	--	--		**	--
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.20	-0.052		0.217	22.0
	4233	846.60	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR is measured using a 12.2 kbps RMC.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

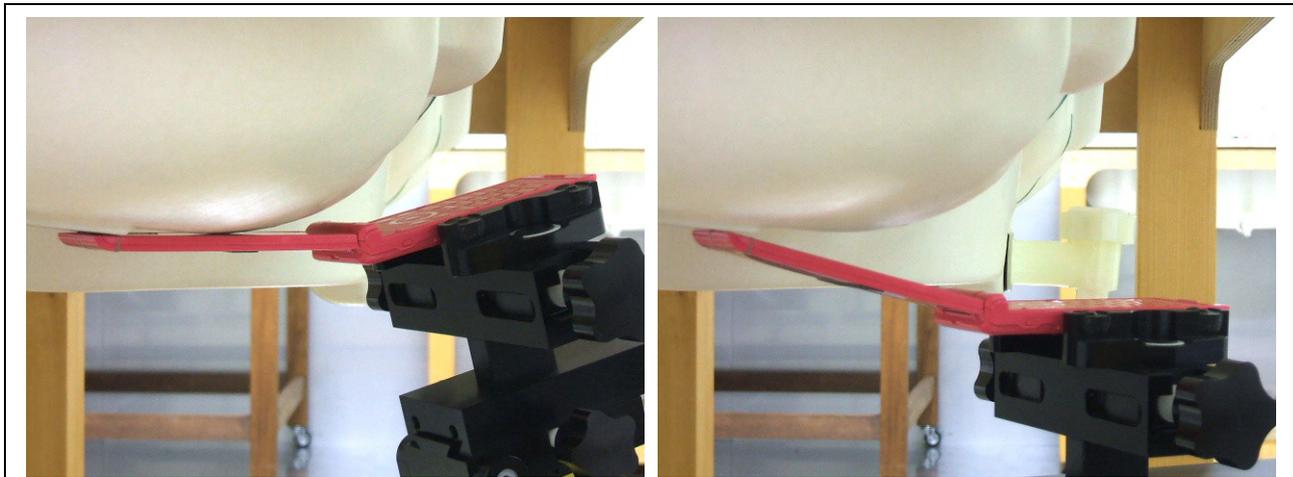


Cheek/Touch Position

Ear/Tilt Position

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : December 3, 2009		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	23.17	-0.024	1.6	0.547	22.0
	4182	836.40	23.20	-0.018		0.662	22.0
	4233	846.60	23.07	-0.060		0.606	22.0
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.20	-0.051		0.251	22.0
	4233	846.60	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR is measured using a 12.2 kbps RMC.
 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
 5. Please refer to attachment for the result presentation in plot format.

A.3.1 Body-worn Position

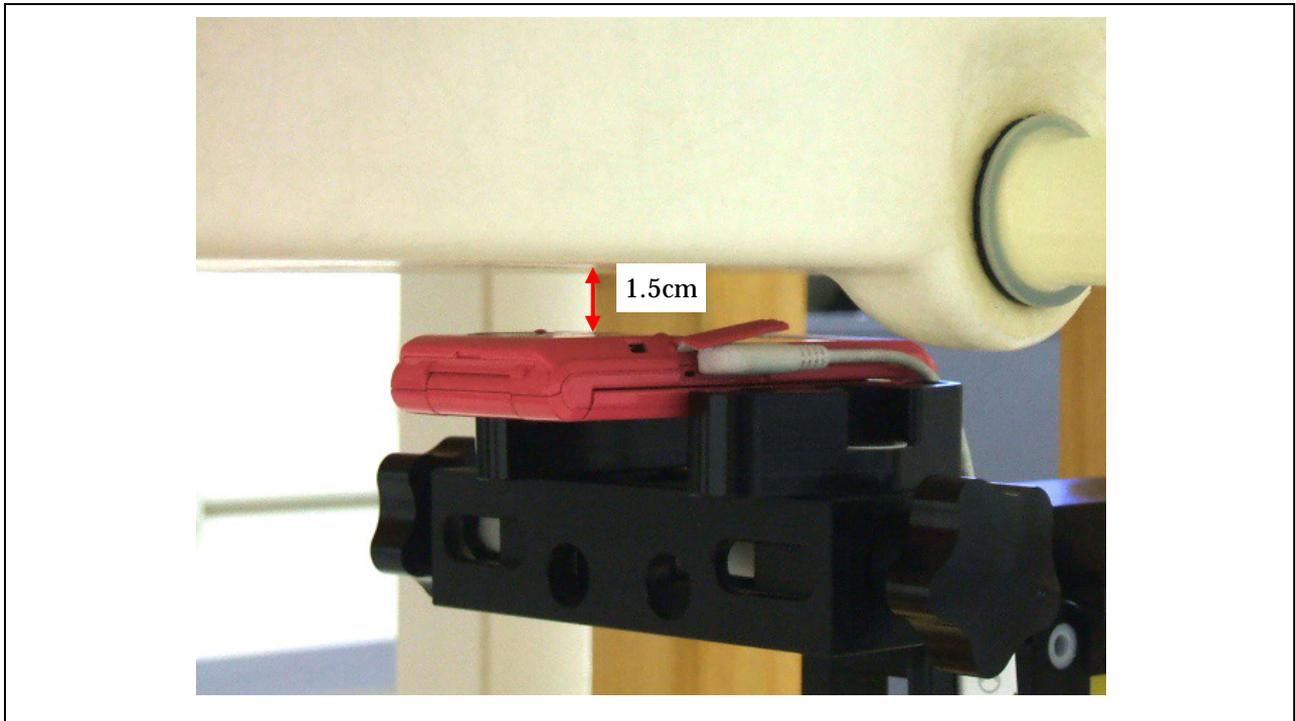

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : December 4, 2009	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.17	-0.009	1.6	0.681	22.0
	4182	836.40	23.20	-0.019		0.776	22.0
	4233	846.60	23.07	-0.014		0.821	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.