
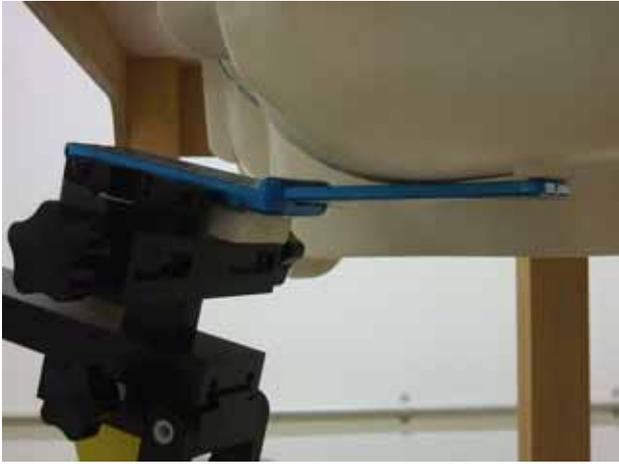


### A.3 SAR Measurement Data

#### A.3.1 Left Head

							
<b>Cheek/Touch Position</b>		<b>Ear/Tilt Position</b>					
CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)				Date : March 1, 2010			
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	23.13	-0.079	1.6	<b>0.454</b>	22.0
	384	836.52	23.12	0.170		0.440	22.0
	779	848.37	23.01	0.051		0.418	22.0
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.12	-0.082		0.259	22.0
	779	848.37	--	--		**	--
<b>NOTES :</b> 1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55. 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit. 5. Please refer to attachment for the result presentation in plot format.							

### A.3.2 Right Head

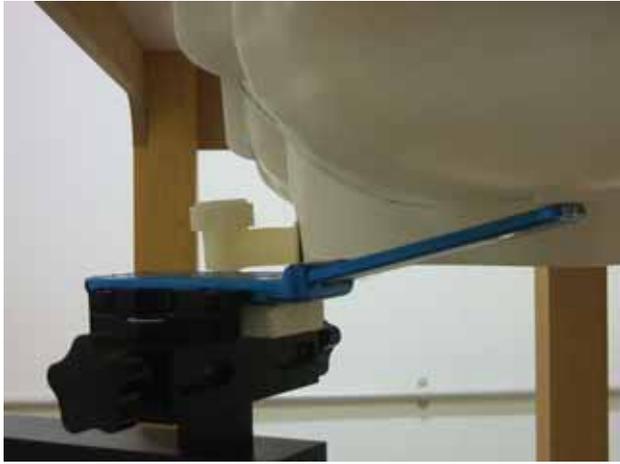


**Cheek/Touch Position**

**Ear/Tilt Position**

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)						Date : March 1, 2010	
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	--	--	1.6	**	--
	384	836.52	23.12	-0.065		0.412	22.0
	779	848.37	--	--		**	--
Ear/Tilt	1013	824.70	--	--	1.6	**	--
	384	836.52	23.12	-0.118		0.225	22.0
	779	848.37	--	--		**	--

- NOTES :
1. Depth of Liquid : 15.0 cm
  2. Transmitter power was measured at the antenna-conducted terminal.
  3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
  4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
  5. Please refer to attachment for the result presentation in plot format.

**A.3.3 Body-worn Position**

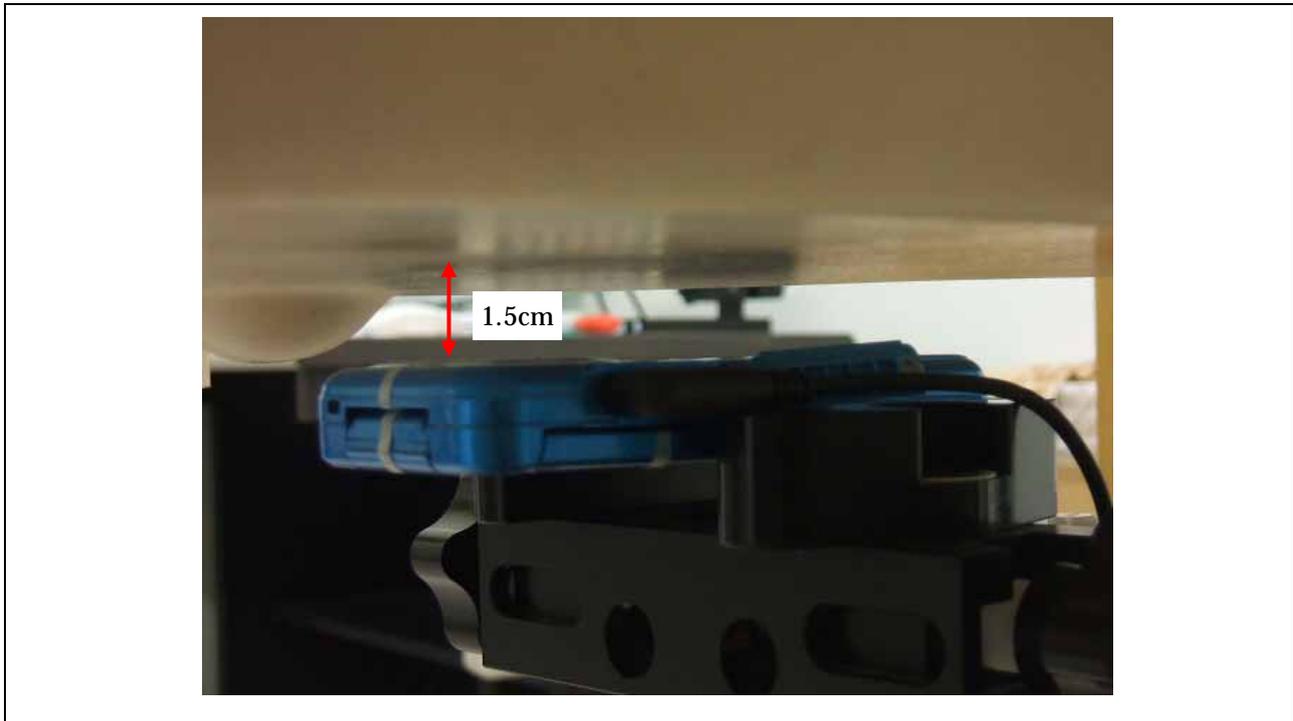

CDMA Cellular (Duty Cycle: 100 %, Crest Factor: 1)						Date : March 3, 2010	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	1013	824.70	23.15	-0.009	1.6	0.582	22.0
	384	836.52	23.10	0.071		<b>0.646</b>	22.0
	779	848.37	23.01	-0.122		0.542	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.