


### A.3 SAR Measurement Data

#### A.3.1 Left Head

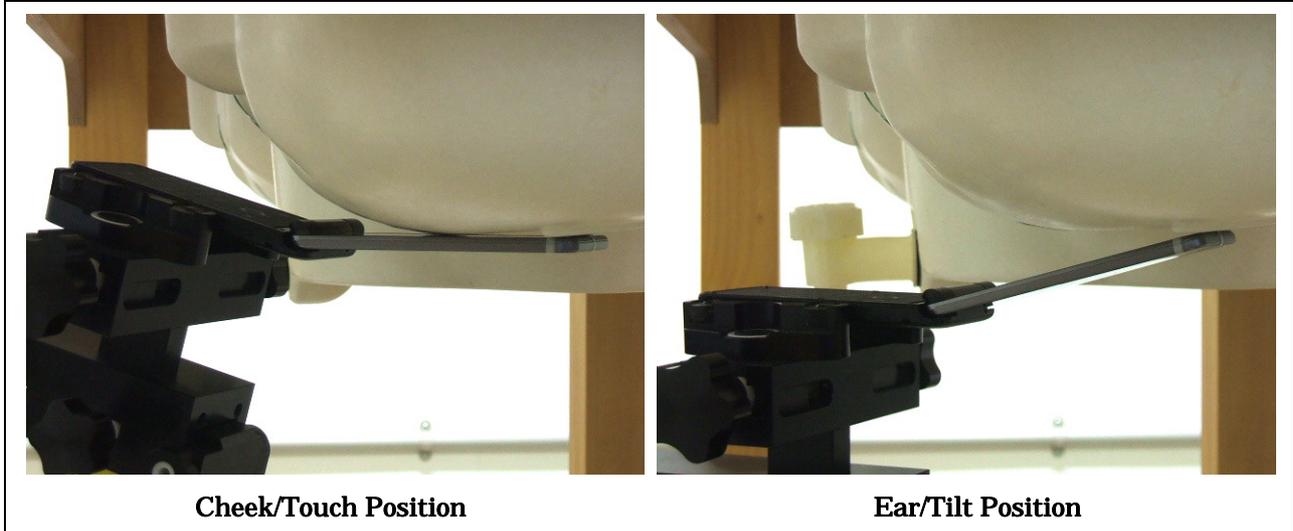


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)							Date : March 30, 2010
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	23.27	-0.057	1.6	<b>0.953</b>	22.0
	4182	836.40	23.32	-0.032		0.881	22.0
	4233	846.60	23.35	-0.033		0.806	22.0
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.32	-0.026		0.327	22.0
	4233	846.60	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

**A.3.2 Right Head**

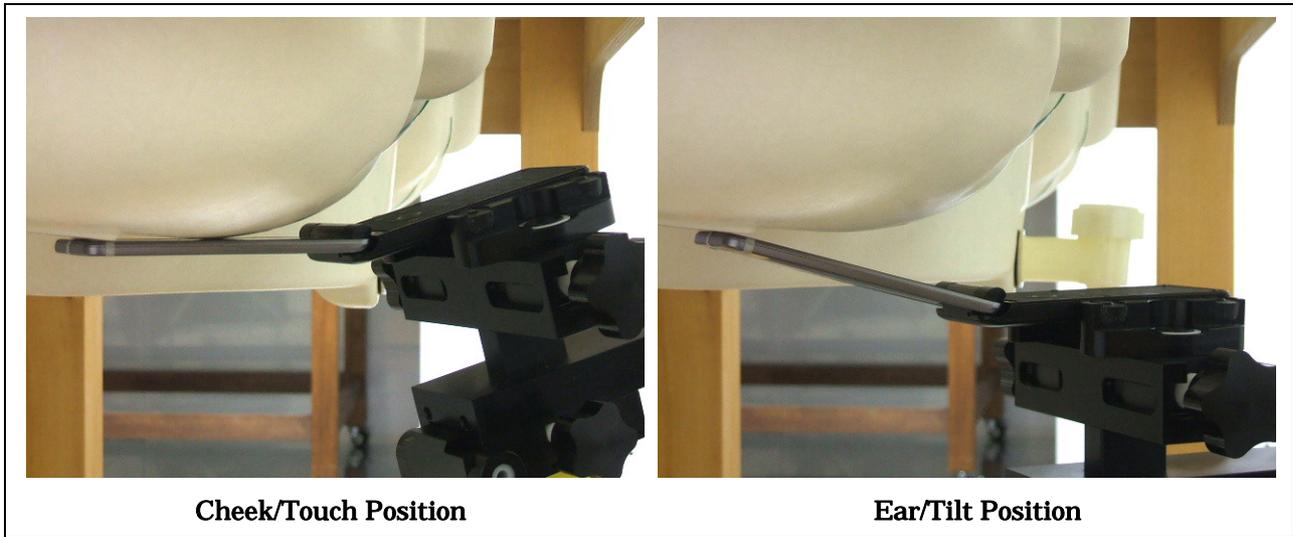


WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)					Date : March 30, 2010		
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.32	-0.012		0.718	22.0
	4233	846.60	--	--		**	--
Ear/Tilt	4132	826.40	--	--	1.6	**	--
	4182	836.40	23.32	-0.002		0.295	22.0
	4233	846.60	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The SAR result marked at \*\* is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.
5. Please refer to attachment for the result presentation in plot format.

**A.3.1 Body-worn Position**

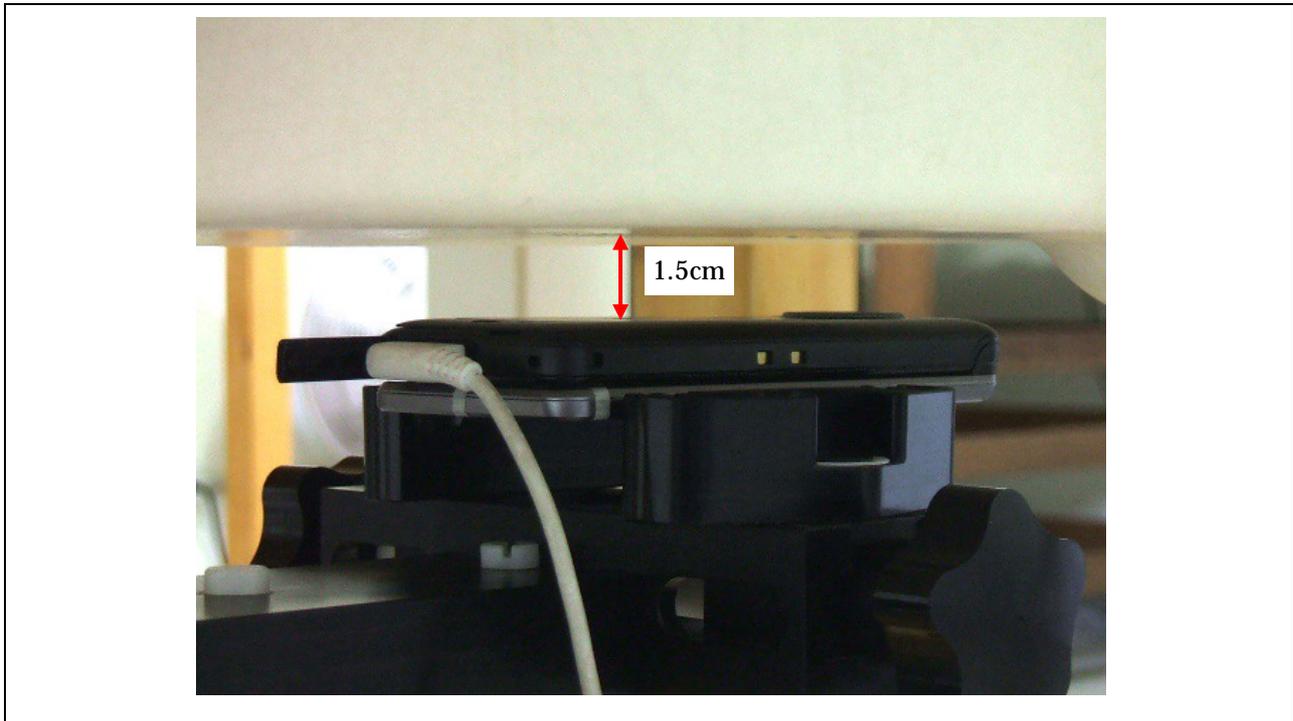

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)						Date : March 31, 2010	
Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.27	-0.010	1.6	0.648	22.0
	4182	836.40	23.32	-0.032		<b>0.690</b>	22.0
	4233	846.60	23.35	-0.041		0.659	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.