


A.3 SAR Measurement Data

A.3.1 Left Head

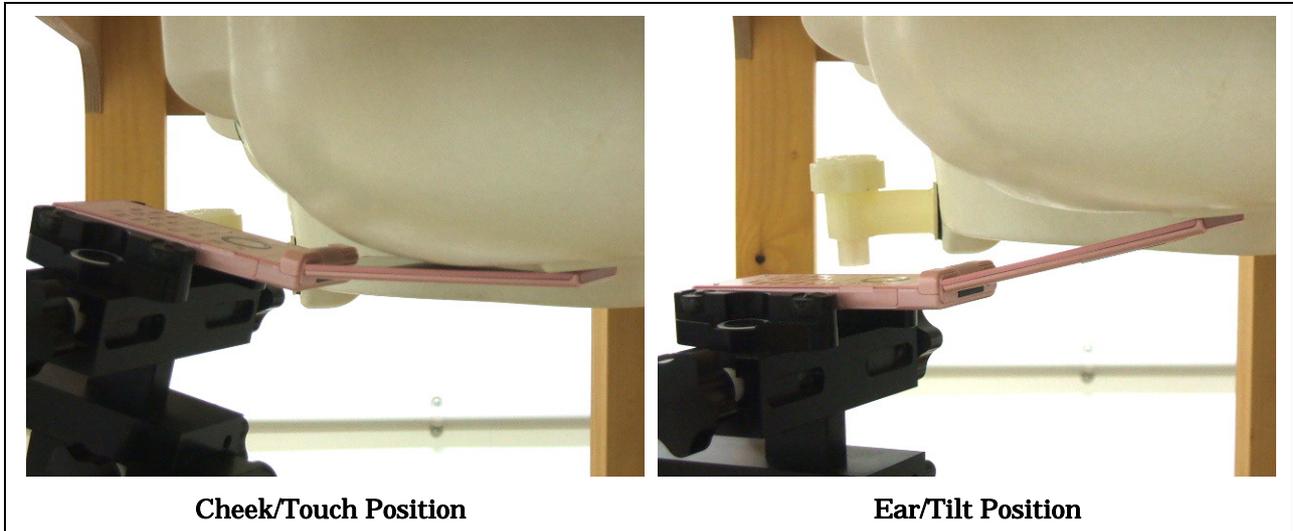


CDMA2000 BC0 (Duty Cycle: 100 %, Crest Factor: 1)							Date : August 12, 2010
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	23.73	-0.007	1.6	0.399	22.0
	384	836.52	23.68	-0.020		0.395	22.0
	777	848.31	23.57	-0.071		0.359	22.0
Ear/Tilt	384	836.52	23.68	-0.026	1.6	0.140	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

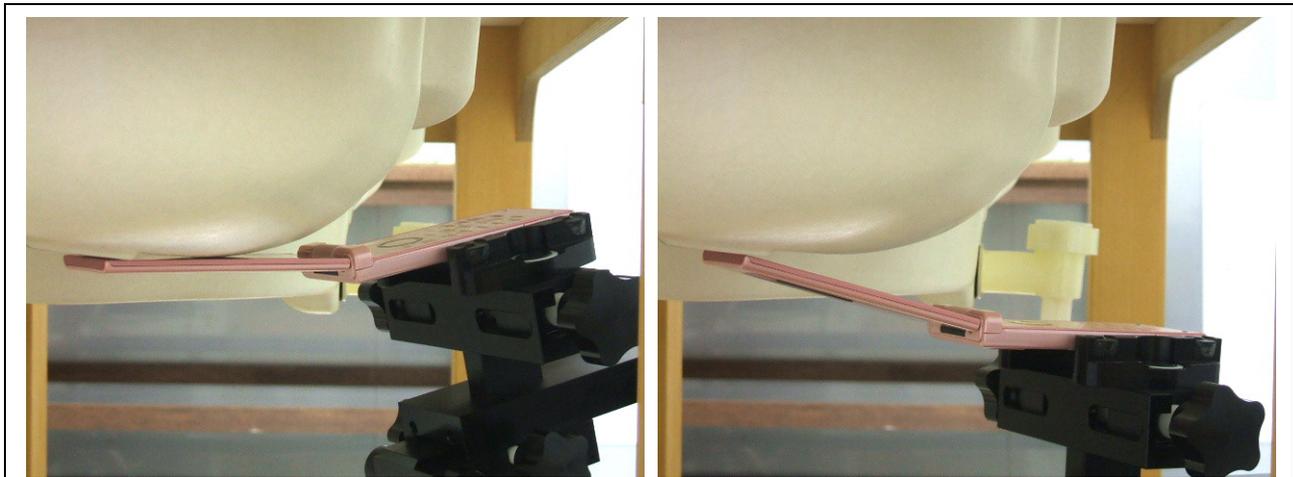

Cheek/Touch Position


Ear/Tilt Position

CDMA2000 BC0 (Duty Cycle: 100 %, Crest Factor: 1)						Date : August 12, 2010	
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	384	836.52	23.68	-0.020	1.6	0.366	22.0
Ear/Tilt	384	836.52	23.68	-0.027	1.6	0.148	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

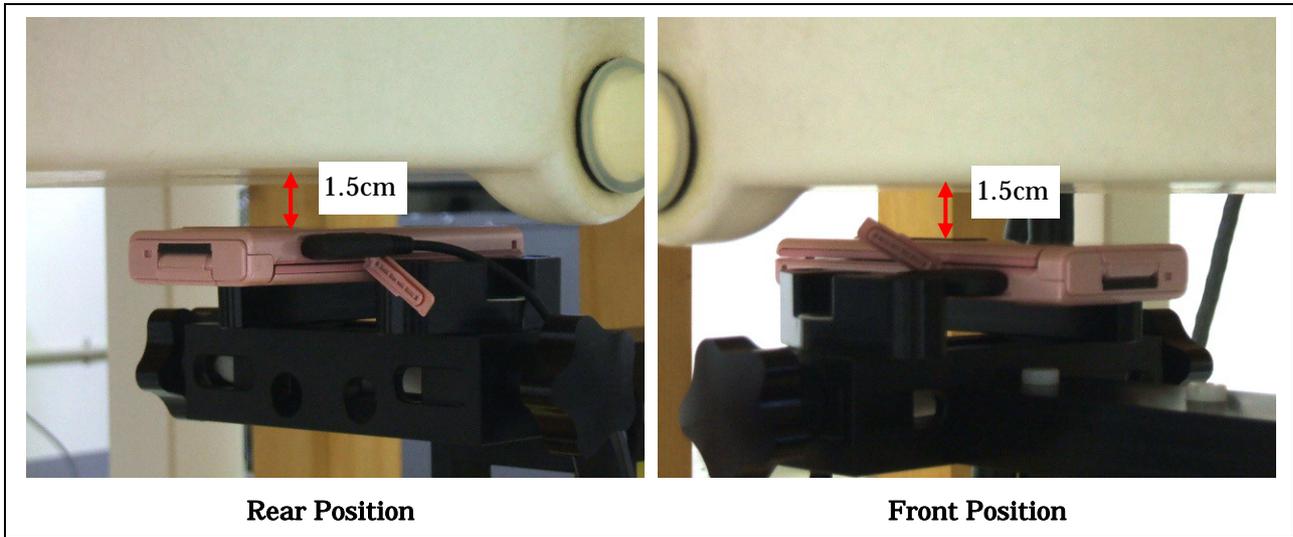

CDMA2000 BC0 (Duty Cycle: 100 %, Crest Factor: 1) Date : August 11, 2010

Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Rear	1013	824.70	23.72	-0.010	1.6	0.734	22.0
	384	836.52	23.67	-0.017		0.761	22.0
	777	848.31	23.58	-0.008		0.659	22.0
Front	384	836.52	23.67	-0.004	1.6	0.391	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.