


A.3 SAR Measurement Data

A.3.1 Left Head

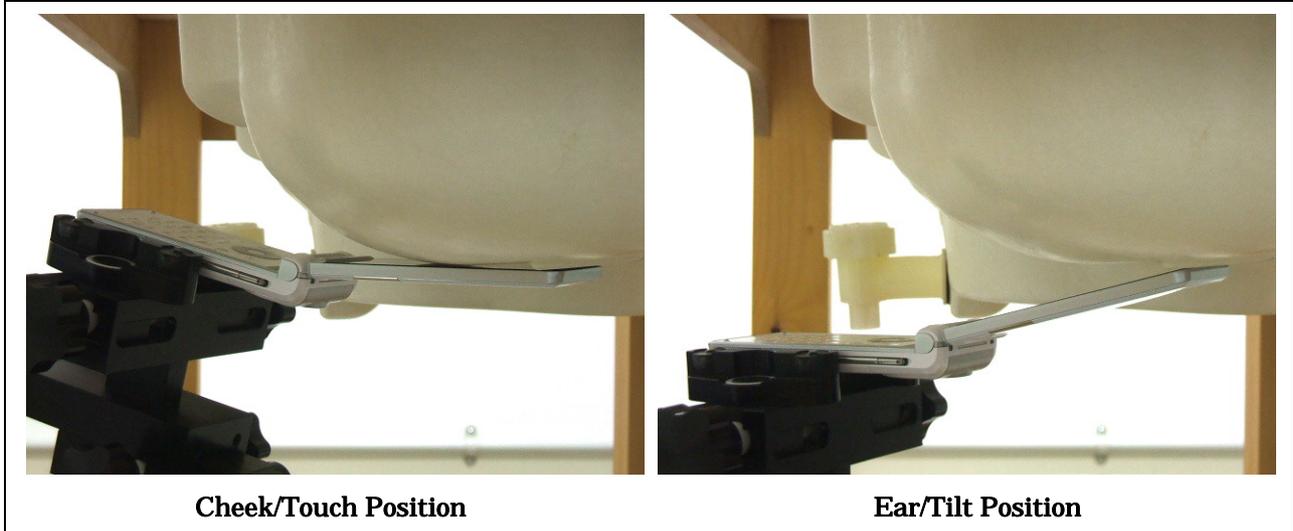


CDMA2000 BC0 (Duty Cycle: 100 %, Crest Factor: 1)							Date : August 12, 2010
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	1013	824.70	23.35	-0.004	1.6	0.409	22.0
	384	836.52	23.41	-0.056		0.396	22.0
	777	848.31	23.23	-0.041		0.392	22.0
Ear/Tilt	384	836.52	23.41	-0.067	1.6	0.249	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Head

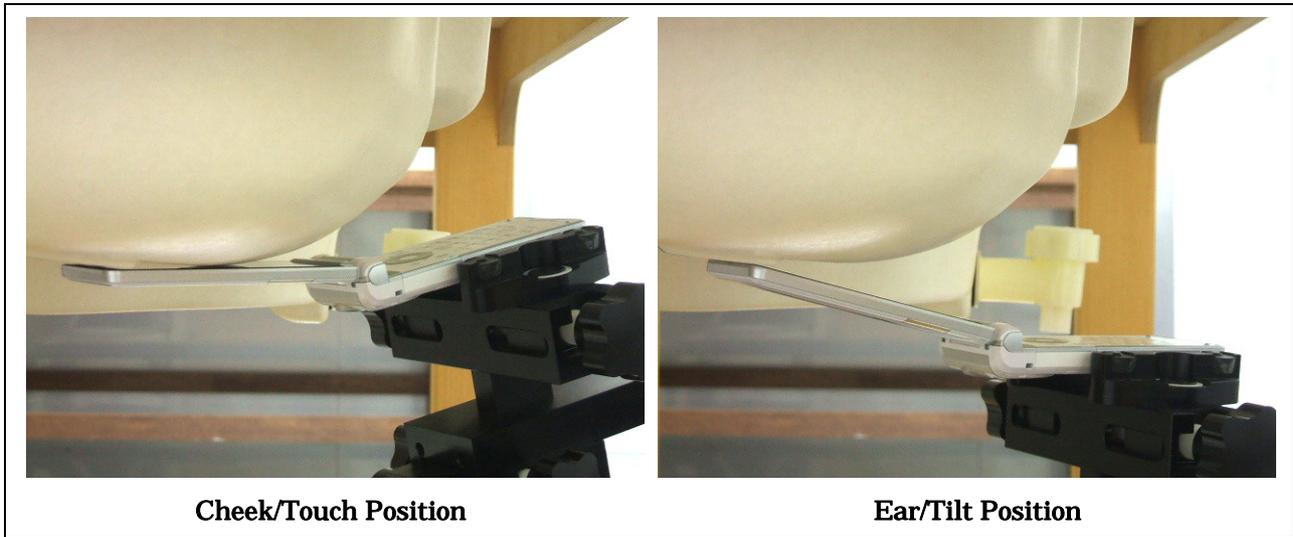


CDMA2000 BC0 (Duty Cycle: 100 %, Crest Factor: 1)							Date : August 12, 2010
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	384	836.52	23.41	-0.089	1.6	0.352	22.0
Ear/Tilt	384	836.52	23.41	-0.009	1.6	0.248	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR for head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.
4. Please refer to attachment for the result presentation in plot format.

A.3.4 Body-worn Position – viewer style

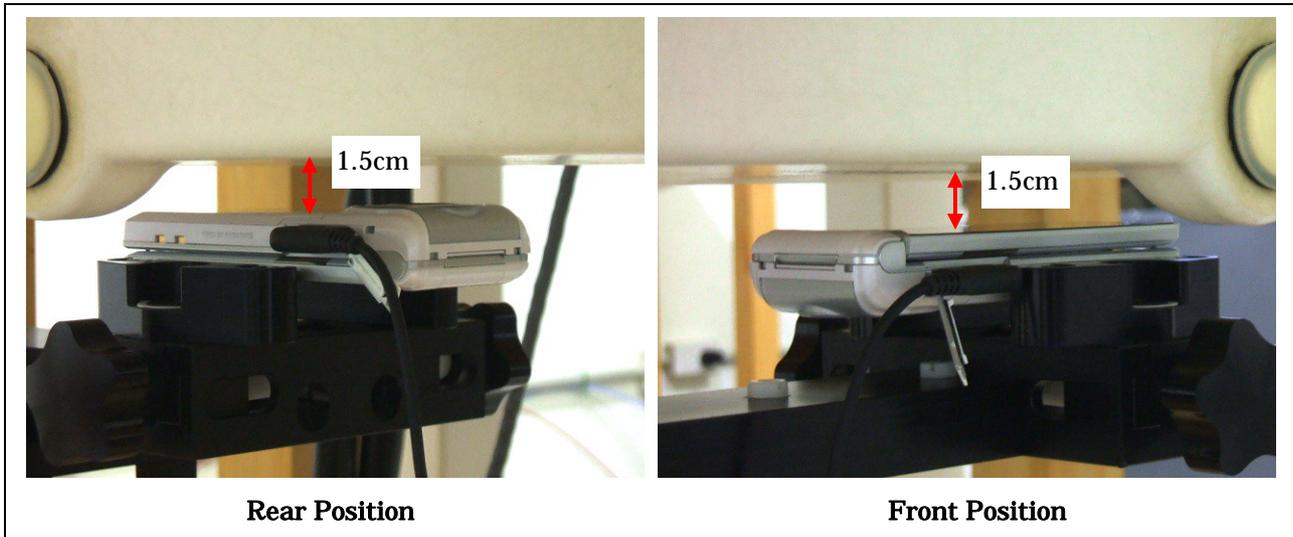

CDMA2000 BC0 (Duty Cycle: 100 %, Crest Factor: 1) Date : August 11, 2010

Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Rear	1013	824.70	23.34	-0.039	1.6	0.477	22.0
	384	836.52	23.40	-0.035		0.512	22.0
	777	848.31	23.24	-0.048		0.565	22.0
Front	384	836.52	23.40	-0.031	1.6	0.174	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. SAR for body exposure configurations is measured in RC3 with the EUT configured using TDSO / SO32, to transmit at full rate on FCH with all other code channels disabled.
 4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 5. Please refer to attachment for the result presentation in plot format.