



Product Service

**Choose certainty.
Add value.**

Report On

Specific Absorption Rate Testing of the Sharp SH011
CDMA2000(US850MHz) Cellular Phone with Bluetooth

FCC ID: APYHRO00132

COMMERCIAL-IN-CONFIDENCE

Document 75911236 Report 04 Issue 1

November 2010



Product Service

TÜV Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

Specific Absorption Rate Testing of the Sharp SH011
CDMA2000(US850MHz) Cellular Phone with Bluetooth

Document 75911236 Report 04 Issue 1

November 2010

PREPARED FOR

Sharp Telecommunications of Europe
Azure House
Bagshot Road
Bracknell, Reading
Berkshire
RG12 7QY

PREPARED BY

A handwritten signature in black ink, appearing to be 'N Grigsby', written over a horizontal line.

N Grigsby
Senior SAR Engineer

APPROVED BY

A handwritten signature in black ink, appearing to be 'M Jenkins', written over a horizontal line.

M Jenkins
Authorised Signatory

DATED

16 November 2010





Product Service

CONTENTS

Section	Page No
1 REPORT SUMMARY	3
1.1 Introduction	4
1.2 Brief Summary of Results	5
1.3 Test Results Summary	5
1.4 Product Information	7
1.5 FCC Power Measurements	9
2 TEST DETAILS	10
2.1 SAR Measurement System	11
2.2 Cellular CDMA 2000 Head SAR Test Results and Course Area Scans – 2D.....	17
2.3 Cellular CDMA 2000 Body SAR Test Results and Course Area Scans – 2D.....	21
3 TEST EQUIPMENT USED	23
3.1 Test Equipment Used	24
3.2 Test Software.....	25
3.3 Dielectric Properties of Simulant Liquids	26
3.4 Test Conditions.....	26
3.5 Measurement Uncertainty.....	28
4 PHOTOGRAPHS.....	30
4.1 Test Positional Photographs.....	31
4.2 Photographs of Equipment Under Test (EUT).....	34
5 ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....	37
5.1 Accreditation, Disclaimers and Copyright.....	38
ANNEX A Probe Calibration Report	A.2



Product Service

SECTION 1

REPORT SUMMARY

Specific Absorption Rate Testing of the Sharp SH011
CDMA2000(US850MHz) Cellular Phone with Bluetooth



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Specific Absorption Rate Testing of the Sharp Telecommunications of Europe SH011 CDMA2000(US850MHz) Cellular Phone with Bluetooth to the requirements of FCC OET65©: 2001.

Objective	To perform Specific Absorption Rate Testing to determine the Equipment Under Test's (EUT's) compliance with the requirements specified of FCC OET65 C:2001, for the series of tests carried out.
Applicant	Sharp Telecommunications of Europe
Manufacturer	Sharp Corporation, Communication Systems Group
Manufacturing Description	CDMA2000(US850MHz) Cellular Phone with Bluetooth
Model Number	SH011
Serial Number	000902
Hardware Version	A9170
Software Version	PP1
Battery Cell Manufacturer	Sharp Corporation
Battery Model Number	SH009UAA
Test Specification/Issue/Date	FCC OET65 C: 2001
Start of Test	08 November 2010
Finish of Test	09 November 2010
Related Document(s)	47CFR 2.1093 KDB 941225 – D01 v02 KDB 450824 – D01 (Rev 1.1) KDB 648474 – D01 v01r05
Name of Engineer(s)	N Grigsby



Product Service

1.2 BRIEF SUMMARY OF RESULTS

The measurements shown in this report were made in accordance with the procedures specified OET 65(C) – 2001.

The maximum 1g volume averaged SAR found during this Assessment

Max 1g SAR (W/kg)	0.606
The maximum 1g volume averaged SAR level measured for all the tests performed did not exceed the limits for General Population/Uncontrolled Exposure (W/kg) Partial Body of 1.6 W/kg. Level defined in Supplement C (Edition 01-01) to OET Bulletin 65 (97-01).	

1.3 TEST RESULTS SUMMARY

1.3.1 System Performance / Validation Check Results

Prior to formal testing being performed a System Check was performed in accordance with OET 65(C) – 2001 and the results were compared against published data in Standard IEEE 1528-2003. The following results were obtained: -

System performance / Validation results

Date	Dipole Used	Frequency (MHz)	Max 1g SAR (W/kg)*	Percentage Drift on Reference	Max 10g SAR (W/kg)*	Percentage Drift on Reference
08/11/2010	844.4	844.4	8.88	-6.55%	5.84	-5.80%

*Normalised to a forward power of 1W



Product Service

1.3.2 Results Summary Tables

Cellular CDMA 2000 Head Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp Telecommunications of Europe SH011.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Ear	Head							
Left	Cheek	1013	824.7	0.41	0.36	0.25	3.74	Figure 8
Left	15°	1013	824.7	0.15	0.17	0.10	-2.62	Figure 9
Right	Cheek	1013	824.7	0.44	0.39	0.27	0.99	Figure 10
Right	15°	1013	824.7	0.12	0.13	0.09	2.86	Figure 11
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)								

Cellular CDMA 2000 Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp Telecommunications of Europe SH011.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
15mm	Front Facing	1013	824.7	0.23	0.25	0.18	-1.16	Figure 12
15mm	Rear Facing	1013	824.7	0.54	0.61	0.43	0.37	Figure 13
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)								



1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The equipment under test (EUT) was a Sharp SH011. A full technical description can be found in the manufacturer's documentation.

1.4.2 Test Configuration and Modes of Operation

The testing was performed with standard batteries supplied and manufactured by Sharp Corporation. Each battery was fully charged before each measurement and there were no external connections.

For head SAR assessment, testing was performed with the device in the declared normal position of operation for the Cellular CDMA 2000 frequency band at maximum power. The device was placed against a Specific Anthropomorphic Mannequin (SAM) phantom as specified in the OET 65(C) - 2001. The phantom was filled with simulant liquid appropriate to the frequency band. The dielectric properties were measured and found to be in accordance with the requirements for the dielectric properties specified OET 65(C) - 2001 testing was performed at both the left and right ear of the phantom at both handset positions stated in the applied specification.

For body SAR assessment, the device was tested for typical body-worn operation in accordance with the requirements of OET65(c) with the exception of SAR limits applied, these were obtained from ICNIRP (1998). Flat phantom dimensions are 210mmx210mmx210mm and with a sidewall thickness of 6.0mm. The phantom was filled to a depth of 150mm with the appropriate body simulant liquid. The dielectric properties were in accordance with the requirements specified in Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01). SAR testing was performed with the body of the device placed at 15mm separation from the phantom.

Testing was performed in each position at the frequency that gave the highest output power for each band. No SAR level was found to be within -3dB of the applicable limit (-3dB equates to ≤ 0.802 W/kg in this instance) therefore no additional testing was required at the remaining frequencies / channels of the bands.

The maximum measured Head SAR was recorded as 0.39W/kg and the maximum measured Body SAR was recorded as 0.61 W/kg. Therefore because maximum measured SAR is less than 1.2W/kg, Bluetooth testing and Simultaneous Transmission SAR testing is not required.

The following configurations and procedures for SAR testing were used:

HEAD SAR:

SAR for the head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.

SAR for RC1 is not required when the maximum average output of each channel is less than 0.25dB higher than that measured in RC3. If SAR for RC1 is required, then SAR is measured on the maximum output channel in RC1 using the exposure configuration that results in the highest SAR for that channel in RC3.



Product Service

BODY SAR:

SAR for the body exposure configuration is measured in RC3 with the EUT configured using TDSO32, to transmit at full rate on FCH with all other code channels disabled.

SAR for multiple code channels (FCH + SCH) is not required when the maximum average output of each RF channel is less than 0.25dB higher than that measured with FCH only. If SAR for multiple code channels is required then SAR is measured on the maximum output channel (FCH + SCH_n) with FCH at full rate and SCH₀ enabled at 9600bps, using the exposure configuration that results in the highest SAR with FCH only for that channel. When multiple code channels are enabled, the DUT may shift by more than 0.5dB and lead to higher SAR drifts and SCH dropouts.

Body SAR in RC1 is not required when the maximum average output of each channel is less than 0.25dB higher than that measured in RC3. If SAR for RC1 is required, then SAR is measured on the maximum output channel in RC1; with Loopback Service Option SO55, at full rate, using the body exposure configuration that results in the highest SAR that channel in RC3.

Included in this report are descriptions of the test method; the equipment used and an analysis of the test uncertainties applicable and diagrams indicating the locations of maximum SAR for each test position along with photographs indicating the positioning of the handset against the body as appropriate.



Product Service

1.5 FCC POWER MEASUREMENTS

1.5.1 Method

Conducted power measurements were made using a power meter.

1.5.2 Conducted Power Measurements

Head

Serial No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm)
000902	S055, RC1	64-RAY Orthogonal	824.7	23.62
			836.52	23.45
			848.27	23.27

Serial No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm)
000902	S055, RC3	64-RAY Orthogonal	824.7	23.61
			838.52	23.39
			848.37	23.26

Body

Serial No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm)
000902	TDS032,	BPSK	824.7	23.78
	FCH		838.52	23.62
	RC3		848.37	23.50

Serial No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm)
000902	TDS032,	BPSK	824.7	23.77
	FCH +SCH		838.52	23.61
	RC3		848.37	23.46



Product Service

SECTION 2

TEST DETAILS

Specific Absorption Rate Testing of the Sharp SH011
CDMA2000(US850MHz) Cellular Phone with Bluetooth



2.1 SAR MEASUREMENT SYSTEM

2.1.1 Robot System Specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

Schematic diagram of the SAR measurement system

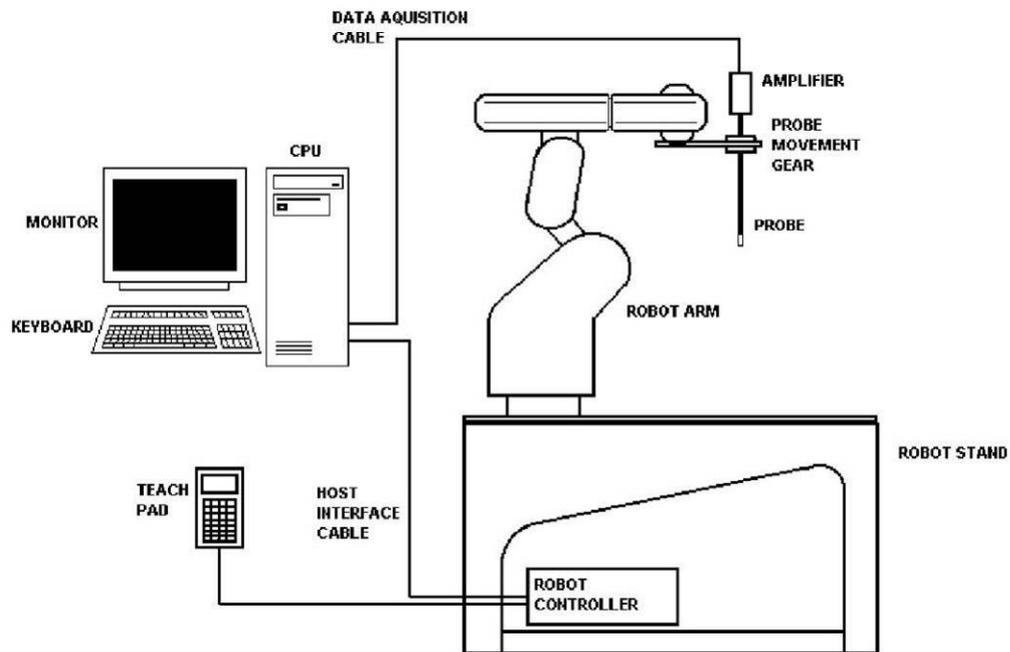


Figure 1

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.001mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.



2.1.2 Probe and Amplifier Specification

IXP-050 IndexSAR isotropic immersible SAR probe

The probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip. Probe calibration is described in the following section.

IFA-010 Fast Amplifier

Technical description of IndexSAR IFA-010 Fast probe amplifier
 A block diagram of the fast probe amplifier electronics is shown below.

Block diagram of the fast probe amplifier electronic

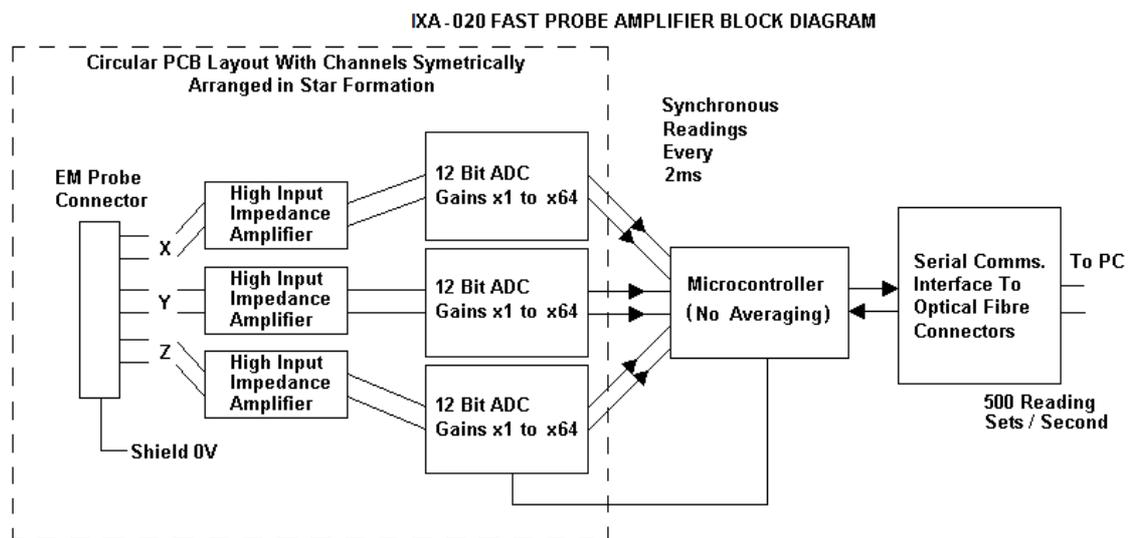


Figure 2

This amplifier has a time constant of approx. 50µs, which is much faster than the SAR probe response time. The overall system time constant is therefore that of the probe (<1ms) and reading sets for all three channels (simultaneously) are returned every 2ms to the PC. The conversion period is approx. 1 µs at the start of each 2ms period. This enables the probe to follow pulse modulated signals of periods >>2ms. The PC software applies the linearisation procedure separately to each reading, so no linearisation corrections for the averaging of modulated signals are needed in this case. It is important to ensure that the probe reading frequency and the pulse period are not synchronised and the behaviour with pulses of short duration in comparison with the measurement interval need additional consideration.

Phantoms

The Flat phantom used is a rectangular Perspex Box IndexSAR item IXB-070. Dimensions 210w 210d 210h (mm). This phantom is used with IndexSAR side bench IXM-030.

The Specific Anthropomorphic Mannequin (SAM) Upright Phantom is fabricated using moulds generated from the CAD files as specified by CENELEC EN 62209-1: 2006. It is mounted via a rotation base to a supporting table, which also holds the robotic positioner. The phantom and robot alignment is assured by both mechanical and laser registration systems.



2.1.3 SAR Measurement Procedure

Principal components of the SAR measurement test bench



Figure 3

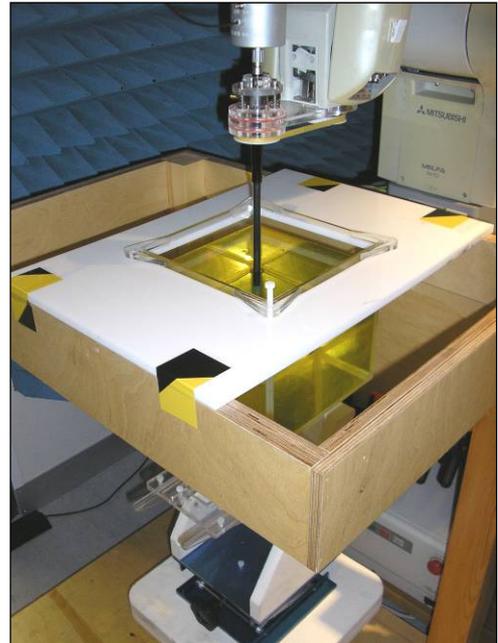


Figure 4

The major components of the test bench are shown in the pictures above. A test set and dipole antenna control the handset via an air link and a low-mass phone holder can position the phone at either ear. Graduated scales are provided to set the phone in the 15 degree position. The upright phantom head holds approx. 7 litres of simulant liquid. The phantom is filled and emptied through a 45mm diameter penetration hole in the top of the head.

After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

SARA2 Interpolation and Extrapolation schemes

SARA2 software contains support for both 2D cubic B-spline interpolation as well as 3D cubic B-spline interpolation. In addition, for extrapolation purposes, a general n^{th} order polynomial fitting routine is implemented following a singular value decomposition algorithm presented in [4]. A 4th order polynomial fit is used by default for data extrapolation, but a linear-logarithmic fitting function can be selected as an option. The polynomial fitting procedures have been tested by comparing the fitting coefficients generated by the SARA2 procedures with those obtained using the polynomial fit functions of Microsoft Excel when applied to the same test input data.



Interpolation of 2D area scan

The 2D cubic B-spline interpolation is used after the initial area scan at fixed distance from the phantom shell wall. The initial scan data are collected with approx. 115mm spatial resolution and spline interpolation is used to find the location of the local maximum to within a 1mm resolution for positioning the subsequent 3D scanning.

Extrapolation of 3D scan

For the 3D scan, data are collected on a spatially regular 3D grid having (by default) 6.4 mm steps in the lateral dimensions and 3.5 mm steps in the depth direction (away from the source). SARA2 enables full control over the selection of alternative step sizes in all directions.

The digitised shape of the head is available to the SARA2 software, which decides which points in the 3D array are sufficiently well within the shell wall to be 'visited' by the SAR probe. After the data collection, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

Interpolation of 3D scan and volume averaging

The procedure used for defining the shape of the volumes used for SAR averaging in the SARA2 software follow the method of adapting the surface of the 'cube' to conform with the curved inner surface of the phantom (see Appendix C.2.2.1 in EN 62209-1: 2006). This is called, here, the conformal scheme.

For each row of data in the depth direction, the data are extrapolated and interpolated to less than 1mm spacing and average values are calculated from the phantom surface for the row of data over distances corresponding to the requisite depth for 10g and 1g cubes. This results in two 2D arrays of data, which are then cubic B-spline interpolated to sub mm lateral resolution. A search routine then moves an averaging square around through the 2D array and records the maximum value of the corresponding 1g and 10g volume averages. For the definition of the surface in this procedure, the digitised position of the headshell surface is used for measurement in head-shaped phantoms. For measurements in rectangular, box phantoms, the distance between the phantom wall and the closest set of gridded data points is entered into the software.

For measurements in box-shaped phantoms, this distance is under the control of the user. The effective distance must be greater than 2.5mm as this is the tip-sensor distance and to avoid interface proximity effects, it should be at least 5mm. A value of 6 or 8mm is recommended. This distance is called **dbe** in EN 62209-1: 2006.

For automated measurements inside the head, the distance cannot be less than 2.5mm, which is the radius of the probe tip and to avoid interface proximity effects, a minimum clearance distance of x mm is retained. The actual value of **dbe** will vary from point to point depending upon how the spatially-regular 3D grid points fit within the shell. The greatest separation is when a grid point is just not visited due to the probe tip dimensions. In this case the distance could be as large as the step-size plus the minimum clearance distance (i.e with $x=5$ and a step size of 3.5, **dbe** will be between 3.5 and 8.5mm).

The default step size (**dstep** in EN 62209-1: 2006) used is 3.5mm, but this is under user-control. The compromise is with time of scan, so it is not practical to make it much smaller or scan times become long and power-drop influences become larger.



Product Service

The robot positioning system specification for the repeatability of the positioning (**dss** in EN 62209-1: 2006) is +/- 0.04mm.

The phantom shell is made by an industrial moulding process from the CAD files of the SAM shape, with both internal and external moulds. For the upright phantoms, the external shape is subsequently digitised on a Mitutoyo CMM machine (Euro C574) to a precision of 0.001mm. Wall thickness measurements made non-destructively with an ultrasonic sensor indicate that the shell thickness (**dph**) away from the ear is 2.0 +/- 0.1mm. The ultrasonic measurements were calibrated using additional mechanical measurements on available cut surfaces of the phantom shells.

For the upright phantom, the alignment is based upon registration of the rotation axis of the phantom on its 253mm-diameter baseplate bearing and the position of the probe axis when commanded to go to the axial position. A laser alignment tool is provided (procedure detailed elsewhere). This enables the registration of the phantom tip (**dmis**) to be assured to within approx. 0.2mm. This alignment is done with reference to the actual probe tip after installation and probe alignment. The rotational positioning of the phantom is variable – offering advantages for special studies, but locating pins ensure accurate repositioning at the principal positions (LH and RH ears).



2.1.4 Head Test Positions

This recommended practice specifies exactly two test positions for the handset against the head phantom, the “Cheek” position and the “tilted” position. These two test positions are defined in the following sub-clauses. The handset should be tested in both positions on the left and right sides of the SAM phantom. In each test position the centre of the earpiece of the device is placed directly at the entrance of the auditory canal. The angles mentioned in the test positions used are referenced to the line connecting both auditory canal openings. The plane this line is on is known as the reference plane. Testing is performed on the right and left-hand sides of the generic phantom head.

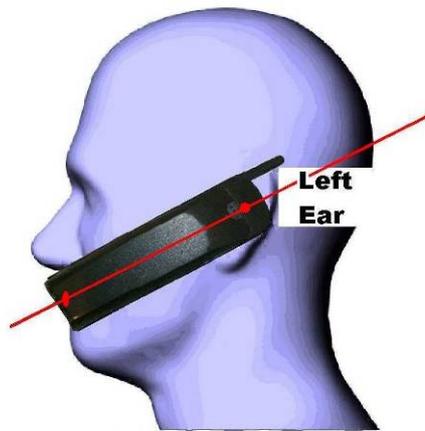


Figure 5. – Side View of Mobile next to head showing alignment.

The Cheek Position

The Cheek Position is where the mobile is in the reference plane and the line between the mobile and the line connecting both auditory canal openings is reduced until any part of the mobile touches any part of the generic twin phantom head.

The 15° Position

The 15° Position is where the mobile is in the reference Cheek position and the phone is kept in contact with the auditory canal at the earpiece; the bottom of the phone is then tilted away from the phantom mouth by 15°.

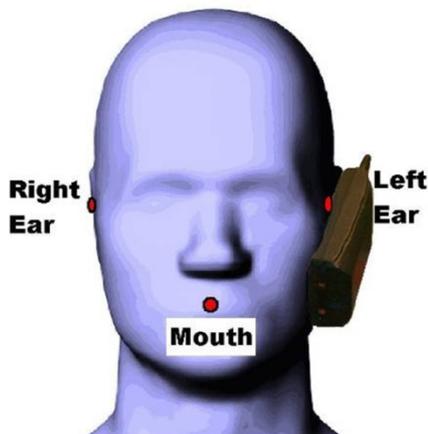


Figure 6. – Cheek Position.

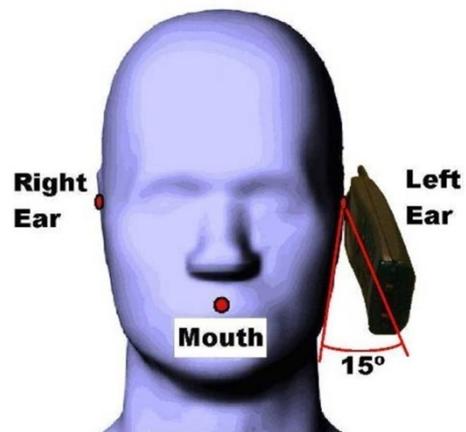


Figure 7. – 15° Tilt Position.



2.2 CELLULAR CDMA 2000 HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	08/11/2010 14:37:37	DUT BATTERY MODEL/NO:	SH009JAA
FILENAME:	01.txt	PROBE SERIAL NUMBER:	170
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	850Head
DEVICE UNDER TEST:	SH011	RELATIVE PERMITTIVITY:	39.94
RELATIVE HUMIDITY:	36.40%	CONDUCTIVITY:	0.880
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.40°C
PHANTOM ROTATION:	330°	MAX SAR Y-AXIS LOCATION:	-39.70mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-195.05mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	21.56 V/m
TEST FREQUENCY:	824.7MHz	SAR 1g:	0.360 W/kg
AIR FACTORS:	425.2 / 368 / 406.8	SAR 10g:	0.249 W/kg
CONVERSION FACTORS:	0.267 / 0.267 / 0.267	SAR START:	0.187 W/kg
TYPE OF MODULATION:	64-RAY Orthogonal	SAR END:	0.194 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	3.740 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	08/11/2010
INPUT POWER LEVEL:	23Bm	EXTRAPOLATION:	poly4

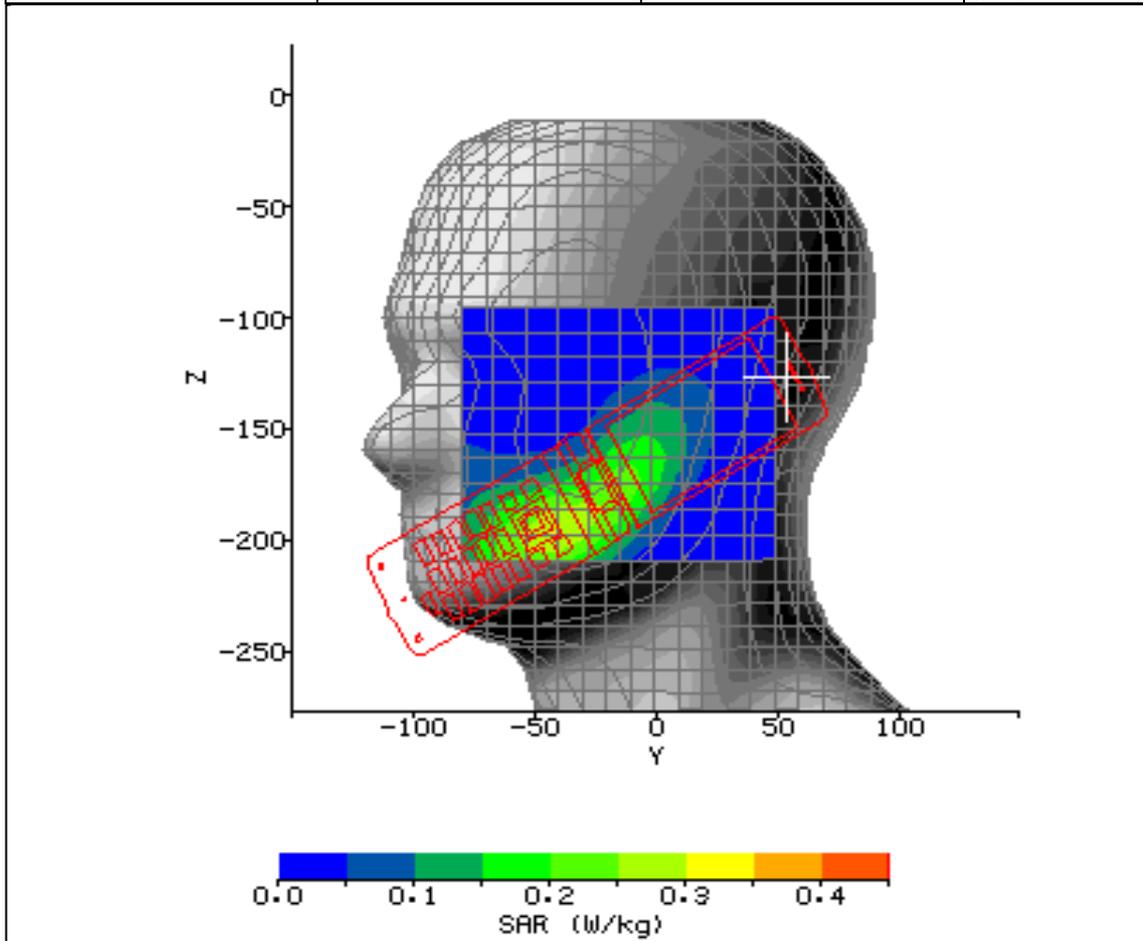


Figure 8: SAR Head Testing Results for the SH011 Mobile Handset at 824.7MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	08/11/2010 15:03:34	DUT BATTERY MODEL/NO:	SH009UAA
FILENAME:	02.txt	PROBE SERIAL NUMBER:	170
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	850Head
DEVICE UNDER TEST:	SH011	RELATIVE PERMITTIVITY:	39.94
RELATIVE HUMIDITY:	40.10%	CONDUCTIVITY:	0.880
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.40°C
PHANTOM ROTATION:	330°	MAX SAR Y-AXIS LOCATION:	0.60mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-149.05mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	13.09 V/m
TEST FREQUENCY:	824.7MHz	SAR 1g:	0.170 W/kg
AIR FACTORS:	425.2 / 368 / 406.8	SAR 10g:	0.104 W/kg
CONVERSION FACTORS:	0.267 / 0.267 / 0.267	SAR START:	0.084 W/kg
TYPE OF MODULATION:	64-RAY Orthogonal	SAR END:	0.082 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-2.620 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	08/11/2010
INPUT POWER LEVEL:	23Bm	EXTRAPOLATION:	poly4

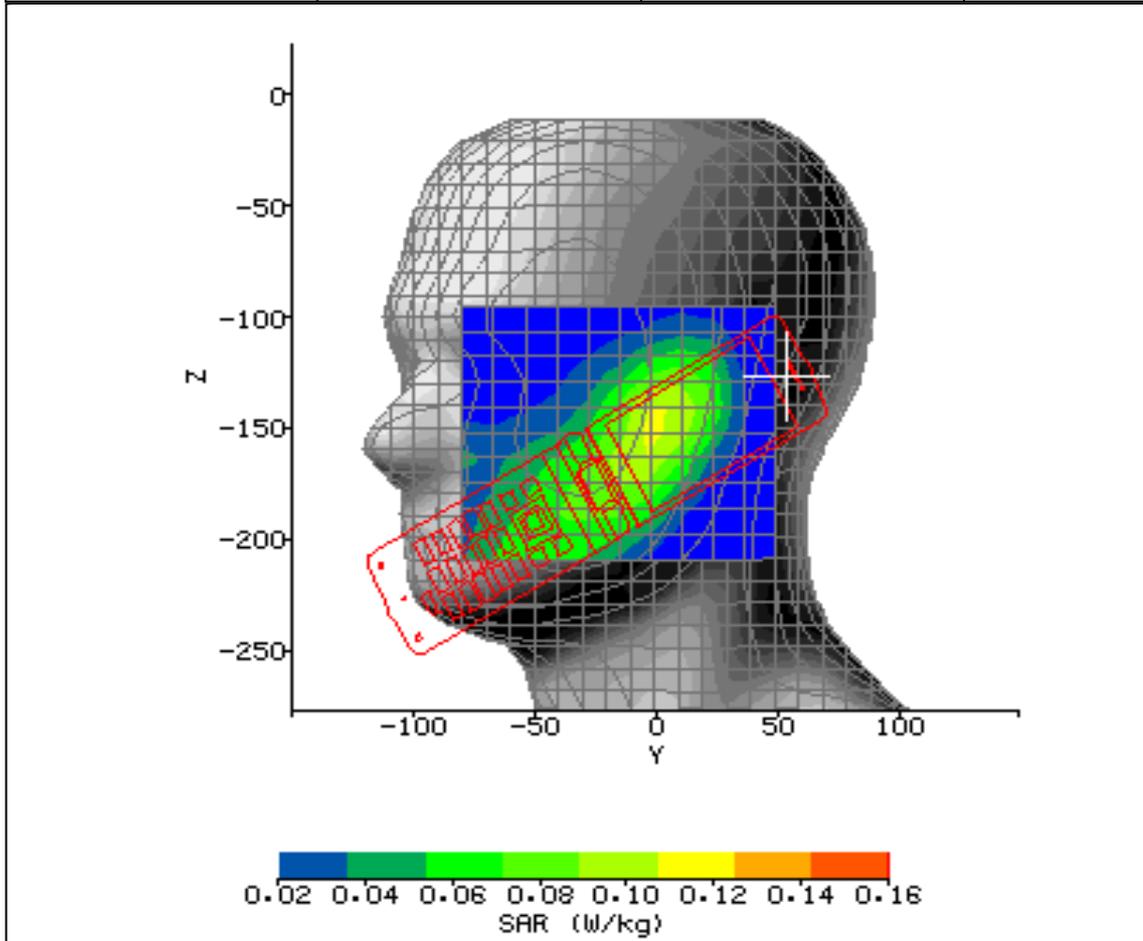


Figure 9: SAR Head Testing Results for the SH011 Mobile Handset at 824.7MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	08/11/2010 15:37:31	DUT BATTERY MODEL/NO:	SH009UAA
FILENAME:	03.txt	PROBE SERIAL NUMBER:	170
AMBIENT TEMPERATURE:	23.20°C	LIQUID SIMULANT:	850Head
DEVICE UNDER TEST:	SH011	RELATIVE PERMITTIVITY:	39.94
RELATIVE HUMIDITY:	37.40%	CONDUCTIVITY:	0.880
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	210°	MAX SAR Y-AXIS LOCATION:	47.50mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-170.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	22.39 V/m
TEST FREQUENCY:	824.7MHz	SAR 1g:	0.393 W/kg
AIR FACTORS:	425.2 / 368 / 406.8	SAR 10g:	0.273 W/kg
CONVERSION FACTORS:	0.267 / 0.267 / 0.267	SAR START:	0.188 W/kg
TYPE OF MODULATION:	64-RAY Orthogonal	SAR END:	0.190 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.990 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	08/11/2010
INPUT POWER LEVEL:	23Bm	EXTRAPOLATION:	poly4

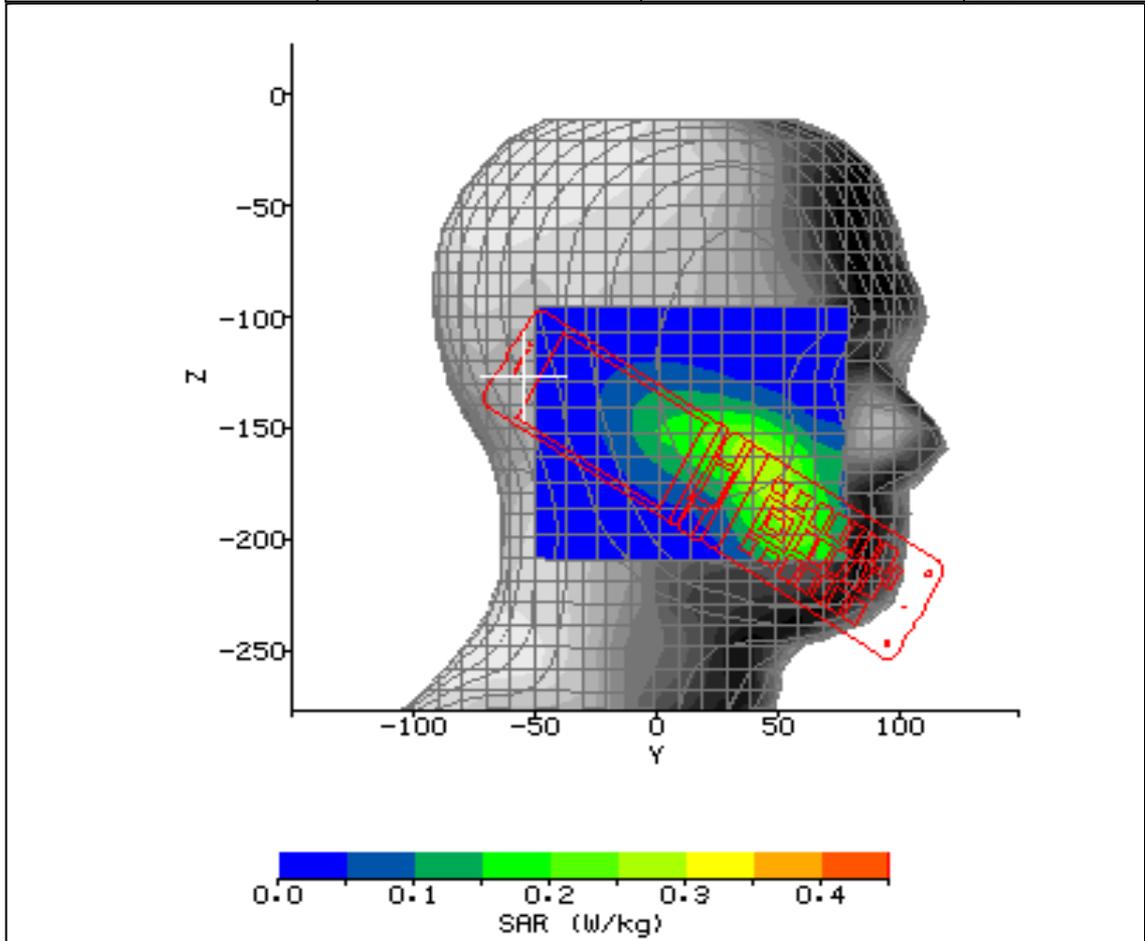


Figure 10: SAR Head Testing Results for the SH011 Mobile Handset at 824.7MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	08/11/2010 16:03:22	DUT BATTERY MODEL/NO:	SH009UAA
FILENAME:	04.txt	PROBE SERIAL NUMBER:	170
AMBIENT TEMPERATURE:	23.20°C	LIQUID SIMULANT:	850Head
DEVICE UNDER TEST:	SH011	RELATIVE PERMITTIVITY:	39.94
RELATIVE HUMIDITY:	36.30%	CONDUCTIVITY:	0.880
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.60°C
PHANTOM ROTATION:	210°	MAX SAR Y-AXIS LOCATION:	-3.20mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-145.60mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	11.91 V/m
TEST FREQUENCY:	824.7MHz	SAR 1g:	0.125 W/kg
AIR FACTORS:	425.2 / 368 / 406.8	SAR 10g:	0.090 W/kg
CONVERSION FACTORS:	0.267 / 0.267 / 0.267	SAR START:	0.073 W/kg
TYPE OF MODULATION:	64-RAY Orthogonal	SAR END:	0.075 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	2.860 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	08/11/2010
INPUT POWER LEVEL:	23Bm	EXTRAPOLATION:	poly4

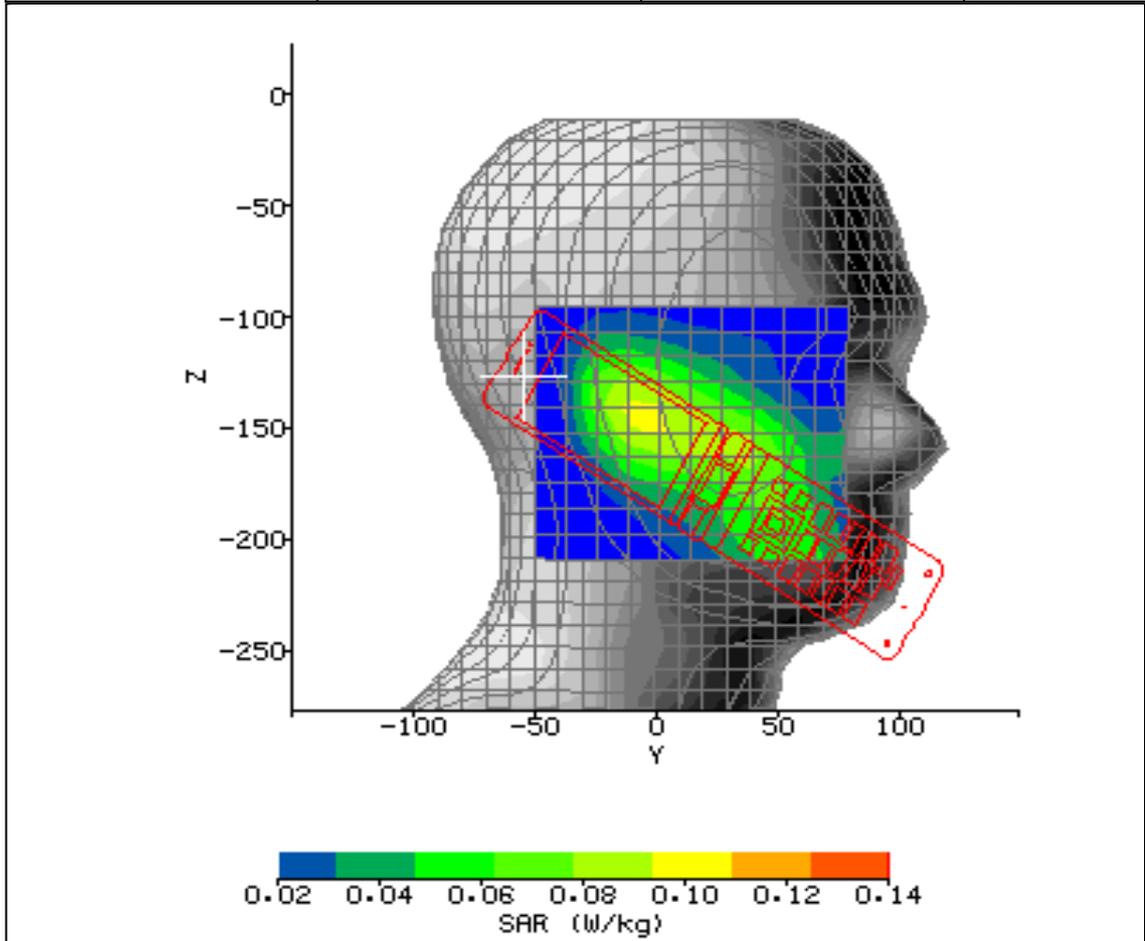


Figure 11: SAR Head Testing Results for the SH011 Mobile Handset at 824.7MHz.



2.3 CELLULAR CDMA 2000 BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	09/11/2010 08:55:50	DUT BATTERY MODEL/NO:	SH009JAA
FILENAME:	05.txt	PROBE SERIAL NUMBER:	170
AMBIENT TEMPERATURE:	23.10°C	LIQUID SIMULANT:	850Body
DEVICE UNDER TEST:	SH011	RELATIVE PERMITTIVITY:	54.69
RELATIVE HUMIDITY:	42.30%	CONDUCTIVITY:	0.975
PHANTOM S/NO:	HeadBox01.csv	LIQUID TEMPERATURE:	22.80°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-18.00mm
DUT POSITION:	15mm-Front Facing	MAX SAR Y-AXIS LOCATION:	-5.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	15.45 V/m
TEST FREQUENCY:	824.7MHz	SAR 1g:	0.252 W/kg
AIR FACTORS:	425.2 / 368 / 406.8	SAR 10g:	0.178 W/kg
CONVERSION FACTORS:	0.267 / 0.267 / 0.267	SAR START:	0.084 W/kg
TYPE OF MODULATION:	BPSK	SAR END:	0.083 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-1.160 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	09/11/2010
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

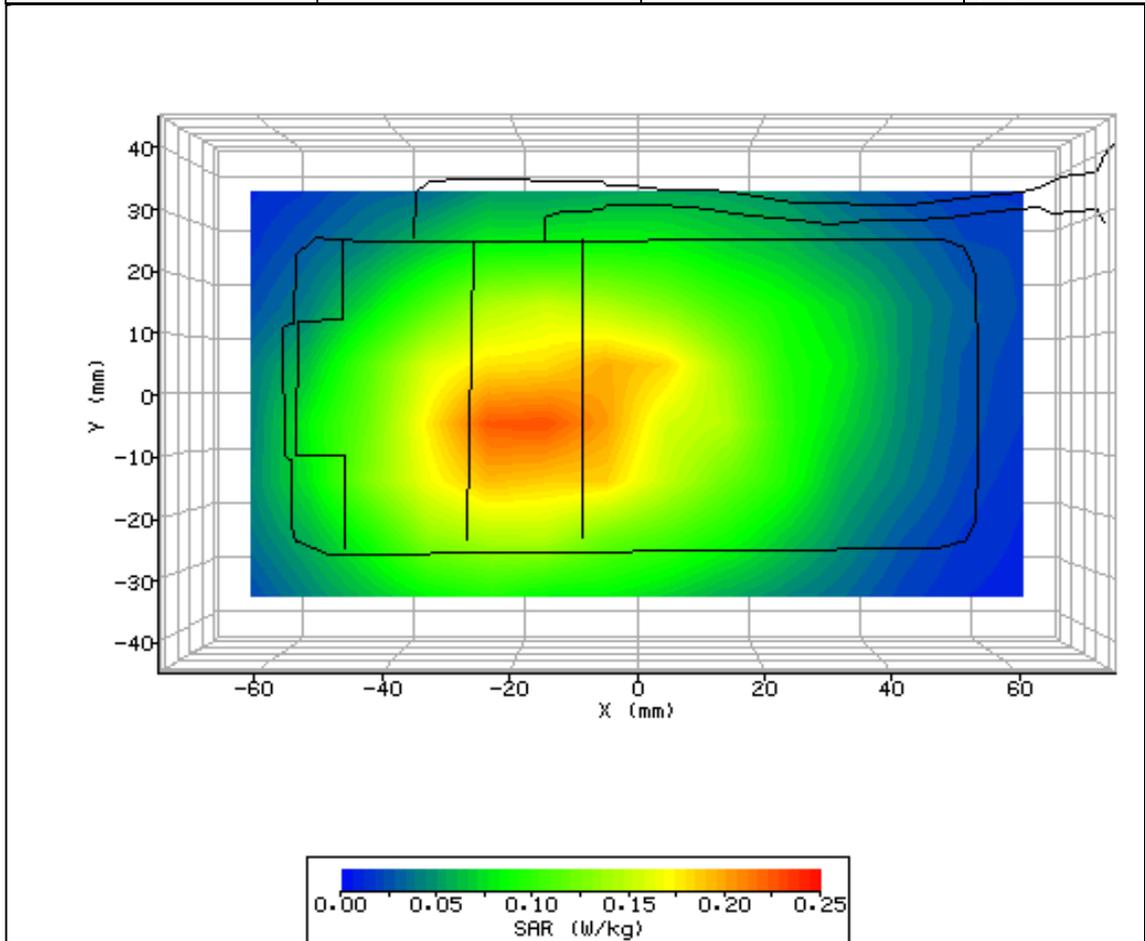


Figure 12: SAR Body Testing Results for the SH011 Mobile Handset at 824.7MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	09/11/2010 09:40:46	DUT BATTERY MODEL/NO:	SH009UAA
FILENAME:	06.txt	PROBE SERIAL NUMBER:	170
AMBIENT TEMPERATURE:	23.10°C	LIQUID SIMULANT:	850Body
DEVICE UNDER TEST:	SH011	RELATIVE PERMITTIVITY:	54.69
RELATIVE HUMIDITY:	40.20%	CONDUCTIVITY:	0.975
PHANTOM S/NO:	HeadBox01.csv	LIQUID TEMPERATURE:	22.80°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-15.00mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	3.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	23.47 V/m
TEST FREQUENCY:	824.7MHz	SAR 1g:	0.606 W/kg
AIR FACTORS:	425.2 / 368 / 406.8	SAR 10g:	0.428 W/kg
CONVERSION FACTORS:	0.267 / 0.267 / 0.267	SAR START:	0.198 W/kg
TYPE OF MODULATION:	BPSK	SAR END:	0.199 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.370 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	09/11/2010
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

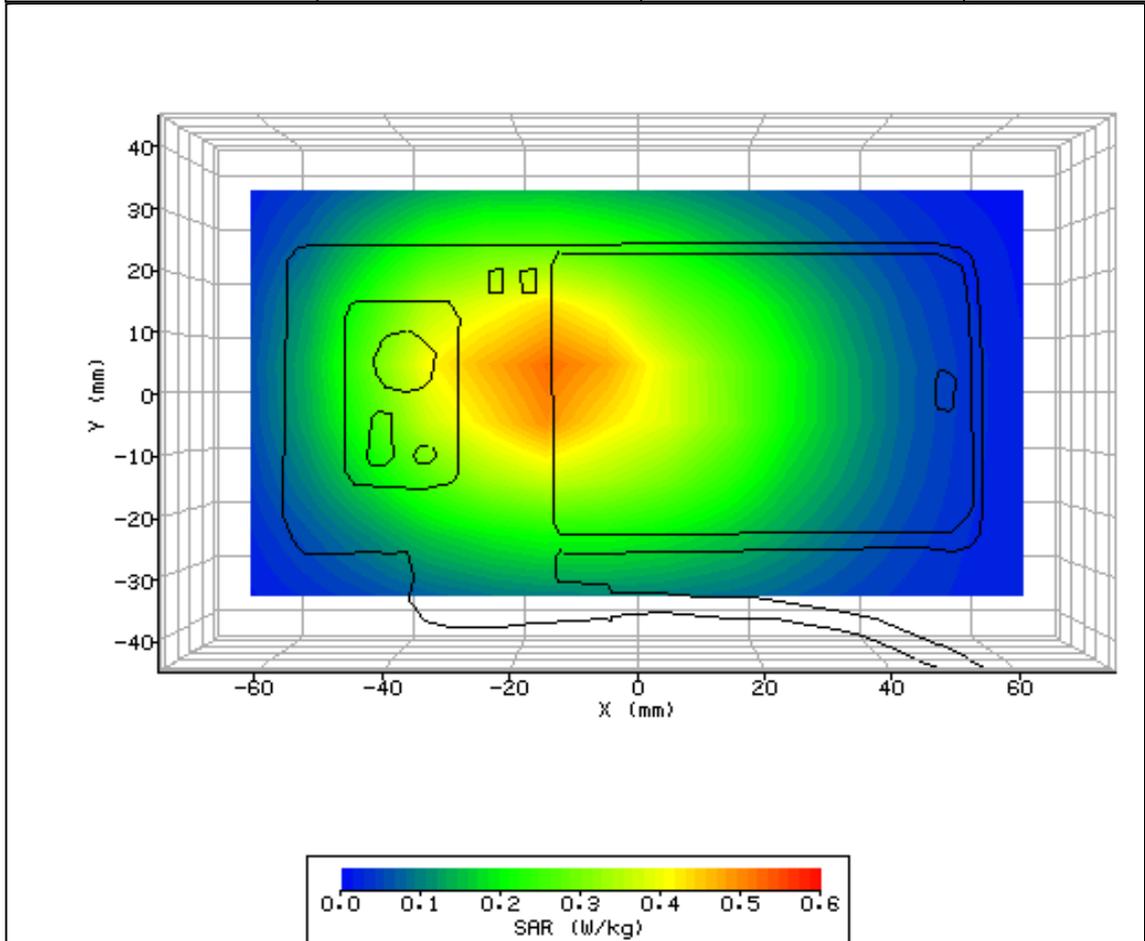


Figure 13: SAR Body Testing Results for the SH011 Mobile Handset at 824.7MHz.



Product Service

SECTION 3

TEST EQUIPMENT USED



Product Service

3.1 TEST EQUIPMENT USED

The following test equipment was used at TUV Product Service Ltd:

Instrument Description	Manufacturer	Model Type	TE Number	Cal Period (months)	Calibration Due Date
Signal Generator	Hewlett Packard	ESG4000A	38	12	17-May-11
Power Sensor	Rohde & Schwarz	NRV-Z1	60	12	08-Jun-11
Industrial Robot	Mitsubishi	RV-E2/CR-E116	63	-	TU
Thermometer	Digitron	T208	64	12	21-Apr-11
Thermocouple (Type K)	TUV	TYPE K	65	12	21-Apr-11
Attenuator (20dB, 20W)	Narda	766F-20	483	12	09-Jun-11
Immersible SAR Probe	IndexSar Ltd	IXP-050	1555	12	24-Dec-10
Fast Probe Amplifier (3 channels)	IndexSar Ltd	IFA-010	1558	-	TU
SAM Head Phantom	Antennessa	Head_04_35.csv	1561	-	TU
200mm ³ Box Phantom 1	IndexSar Ltd	IXB-070	1565	-	TU
Side Bench 2 Chamber 2	IndexSar Ltd	IXM-030	1571	-	TU
Bi-directional Coupler	IndexSar Ltd	7401 (VDC0830-20)	2414	-	TU
Validation Amplifier (10MHz - 2.5GHz)	IndexSar Ltd	VBM2500-3	2415	-	TU
Thermohygrometer	Rotronic	A1	2749	12	08-Dec-10
Power Sensor	Rohde & Schwarz	NRV- Z5	2878	12	08-Jun-11
Antenna (Omnidirectional)	Katherin Scala Division	OG-890/1990/DC	2905	-	TU
Dual Channel Power Meter	Rohde & Schwarz	NRVD	3259	12	08-Jun-11
Communications Tester	Rohde & Schwarz	CMU200	Hire	12	23-Dec10
835 MHz Head Fluid	TUV Product Service	Batch 16	N/A	1	26-Nov-10
835 MHz Body Fluid	TUV Product Service	Batch 10	N/A	1	26-Nov-10

TU – Traceability Unscheduled



Product Service

3.2 TEST SOFTWARE

The following software was used to control the TÜV Product Service SARA2 System.

Instrument	Version Number	Date
SARA2 system	v.2.5.3 VPM	28 November 2006
Mitsubishi robot controller firmware revision	RV-E2 Version C9a	-
IFA-10 Probe amplifier	Version 2	-



3.3 DIELECTRIC PROPERTIES OF SIMULANT LIQUIDS

The fluid properties of the simulant fluids used during routine SAR evaluation meet the dielectric properties required by OET 65(C) – 2001.

The fluids were calibrated in our Laboratory and re-checked prior to any measurements being made against reference fluids stated in IEEE 1528-2003 of 0.9% NaCl (Salt Solution) at 23°C and also for Dimethylsulphoxide (DMS) at 21°C.

IEEE 1528 Recipes

Frequency (MHz)	300	450		835	900			1450	1800			1900	1950	2000	2100	2450		3000				
Recipe#	1	1	3	1	1	2	3	1	1	2	2	3	1	2	4	1	1	2	2	3	2	
Ingredients (% by weight)																						
1, 2-Propanediol						64.81																
Bactericide	0.19	0.19	0.50	0.10	0.10		0.50														0.50	
Diacetin			48.90				49.20															49.45
DGBE								45.41	47.00	13.84	44.92		44.94	13.84	45.00	50.00	50.00	7.99	7.99		7.99	
HEC	0.98	0.96		1.00	1.00																	
NaCl	5.95	3.95	1.70	1.45	1.48	0.79	1.10	0.67	0.36	0.35	0.18	0.64	0.18	0.35					0.16	0.16	0.16	
Sucrose	55.32	56.32		57.00	56.50																	
Triton X-100										30.45			30.45						19.97	19.97		19.97
Water	37.56	38.56	48.90	40.45	40.92	34.40	49.20	53.80	52.64	55.36	54.90	49.43	54.90	55.36	55.00	50.00	50.00	71.88	71.88	49.75	71.88	
Measured dielectric parameters																						
ϵ_r	46.00	43.40	44.30	41.60	41.20	41.80	42.70	40.9	39.3	41.00	40.40	39.20	39.90	41.00	40.10	37.00	36.80	41.10	40.30	39.20	37.90	
σ (S/m)	0.86	0.85	0.90	0.90	0.98	0.97	0.99	1.21	1.39	1.38	1.40	1.40	1.42	1.38	1.41	1.40	1.51	1.55	1.88	1.82	2.46	
Temp (°C)	22	22	20	22	22	22	20	22	22	21	22	20	21	21	20	22	22	20	20	20	20	
Target dielectric parameters (Table 2)																						
ϵ_r	45.30	43.50		41.5		41.50		40.50		40.00							39.80		39.20		38.50	
σ (S/m)	0.87	0.87		0.9		0.97		1.20		1.40							1.49		1.80		2.40	

NOTE – Multiple columns for any single frequency are optional recipe #, reference: 1 (Kanda et al. [B185]), 2 (Vigneras [B143]), 3 (Peyman and Gabriel [B119]), 4 (Fukunaga et al [B50])

The dielectric properties of the tissue simulant liquids used for the SAR testing at TÜV Product Service Ltd are as follows:-

Fluid Type and Frequency	Relative Permittivity ϵ_R (ϵ') Target	Relative Permittivity ϵ_R (ϵ') Measured	Conductivity σ Target	Conductivity σ Measured
850 MHz Head	41.5	39.94	0.90	0.880
850 MHz Body	55.0	54.69	0.97	0.975

3.4 TEST CONDITIONS

3.4.1 Test Laboratory Conditions

Ambient temperature: Within +15°C to +35°C.
 The actual temperature during the testing ranged from 23°C to 23.2°C.
 The actual humidity during the testing ranged from 36.3% to 42.3% RH.



Product Service

3.4.2 Test Fluid Temperature Range

Frequency	Body / Head Fluid	Min Temperature	Max Temperature
835 MHz	Head	22.4	22.6
835 MHz	Body	22.8	22.8

3.4.3 SAR Drift

The SAR Drift was within acceptable limits during scans. The maximum SAR Drift, drift due to the handset electronics, was recorded as 3.74% (0.16 dB) for all of the testing. The value of 3.74% has been included in the measurement uncertainty budget for this assessment.



3.5 MEASUREMENT UNCERTAINTY

Head SAR Measurements.

Source of Uncertainty	Description	Tolerance / Uncertainty ± %	Probability distribution	Div	c_i (1g)	Standard Uncertainty ± % (1g)	V_i or V_{eff}
<i>Measurement System</i>							
Probe calibration	7.2.1	8.73	N	1	1	8.73	∞
Isotropy	7.2.1.2	3.18	R	1.73	1	1.84	∞
Probe angle >30deg	additional	12.00	R	1.73	1	6.93	∞
Boundary effect	7.2.1.5	0.49	R	1.73	1	0.28	∞
Linearity	7.2.1.3	1.00	R	1.73	1	0.58	∞
Detection limits	7.2.1.4	0.00	R	1.73	1	0.00	∞
Readout electronics	7.2.1.6	0.30	N	1	1	0.30	∞
Response time	7.2.1.7	0.00	R	1.73	1	0.00	∞
Integration time (equiv.)	7.2.1.8	1.38	R	1.73	1	0.80	∞
RF ambient conditions	7.2.3.6	3.00	R	1.73	1	1.73	∞
Probe positioner mech. restrictions	7.2.2.1	5.35	R	1.73	1	3.09	∞
Probe positioning with respect to phantom shell	7.2.2.3	5.00	R	1.73	1	2.89	∞
Post-processing	7.2.4	7.00	R	1.73	1	4.04	∞
<i>Test sample related</i>							
Test sample positioning	7.2.2.4	1.50	R	1.73	1	0.87	∞
Device holder uncertainty	7.2.2.4.2	1.73	R	1.73	1	1.00	∞
Drift of output power	7.2.3.4	3.74	R	1.73	1	2.16	∞
<i>Phantom and set-up</i>							
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	2.01	R	1.73	1	1.16	∞
Liquid conductivity (target)	7.2.3.3	5.00	R	1.73	0.64	1.85	∞
Liquid conductivity (meas.)	7.2.3.3	5.00	N	1	0.64	3.20	∞
Liquid permittivity (target)	7.2.3.4	5.00	R	1.73	0.6	1.73	∞
Liquid permittivity (meas.)	7.2.3.4	3.00	N	1	0.6	1.80	∞
Combined standard uncertainty			RSS			13.91	
Expanded uncertainty (95% confidence interval)			K=2			27.83	



Body SAR Measurements.

Source of Uncertainty	Description	Tolerance / Uncertainty ± %	Probability distribution	Div	c_i (1g)	Standard Uncertainty ± % (1g)	V_i or V_{eff}
<i>Measurement System</i>							
Probe calibration	7.2.1	8.73	N	1	1	8.73	∞
Isotropy	7.2.1.2	3.18	R	1.73	1	1.84	∞
Boundary effect	7.2.1.5	0.49	R	1.73	1	0.28	∞
Linearity	7.2.1.3	1.00	R	1.73	1	0.58	∞
Detection limits	7.2.1.4	0.00	R	1.73	1	0.00	∞
Readout electronics	7.2.1.6	0.30	N	1	1	0.30	∞
Response time	7.2.1.7	0.00	R	1.73	1	0.00	∞
Integration time (equiv.)	7.2.1.8	1.38	R	1.73	1	0.80	∞
RF ambient conditions	7.2.3.6	3.00	R	1.73	1	1.73	∞
Probe positioner mech. restrictions	7.2.2.1	0.60	R	1.73	1	0.35	∞
Probe positioning with respect to phantom shell	7.2.2.3	2.00	R	1.73	1	1.15	∞
Post-processing	7.2.4	7.00	R	1.73	1	4.04	∞
<i>Test sample related</i>							
Test sample positioning	7.2.2.4	1.50	R	1.73	1	0.87	∞
Device holder uncertainty	7.2.2.4.2	1.73	R	1.73	1	1.00	∞
Drift of output power	7.2.3.4	1.160	R	1.73	1	2.89	∞
<i>Phantom and set-up</i>							
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	2.01	R	1.73	1	1.16	∞
Liquid conductivity (target)	7.2.3.3	5.00	R	1.73	0.64	1.85	∞
Liquid conductivity (meas.)	7.2.3.3	5.00	N	1	0.64	3.20	∞
Liquid permittivity (target)	7.2.3.4	5.00	R	1.73	0.6	1.73	∞
Liquid permittivity (meas.)	7.2.3.4	3.00	N	1	0.6	1.80	∞
Combined standard uncertainty			RSS			10.83	
Expanded uncertainty (95% confidence interval)			K=2			21.66	



Product Service

SECTION 4

PHOTOGRAPHS



4.1 TEST POSITIONAL PHOTOGRAPHS

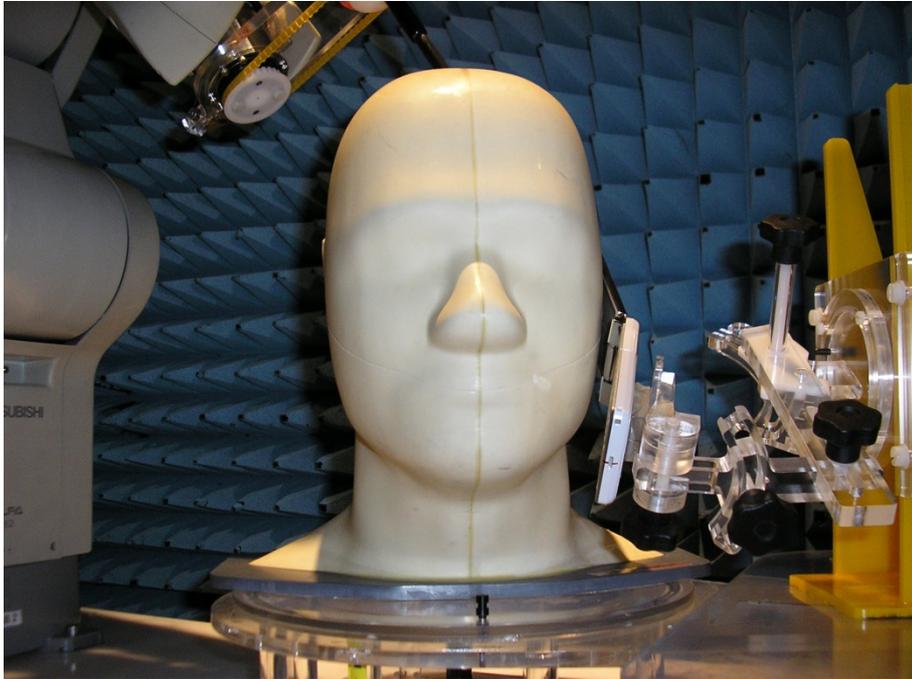


Figure 14
Handset in LH-Cheek Position

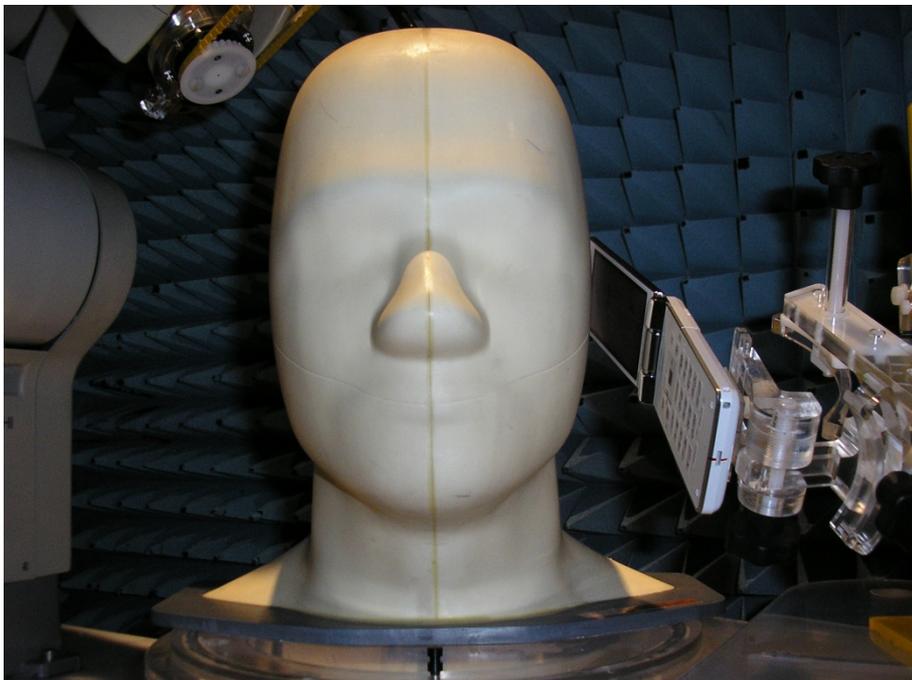


Figure 15
Handset in LH-Cheek 15°

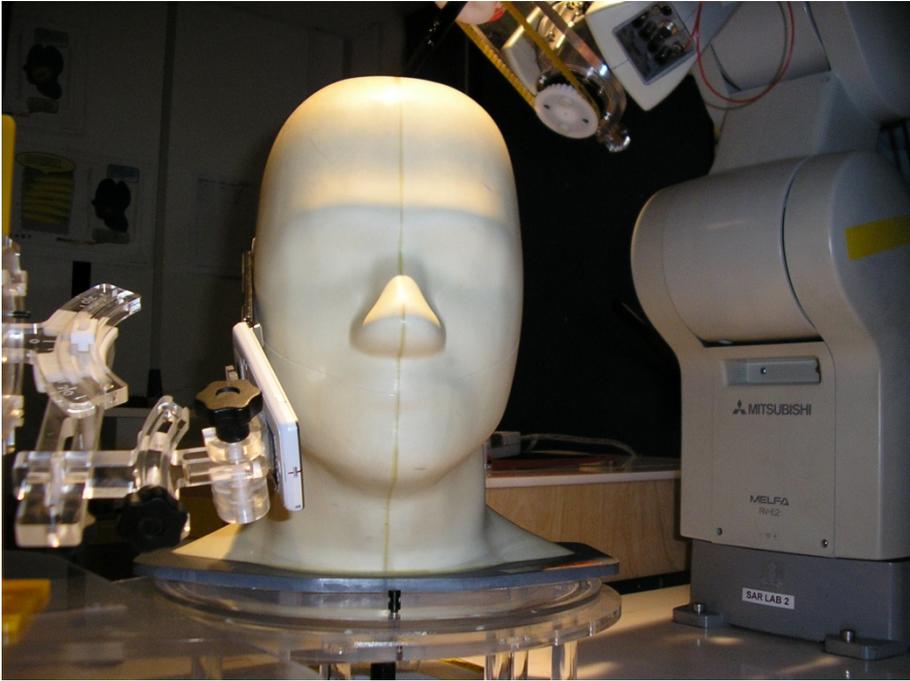


Figure 16
Handset in RH-Cheek Position

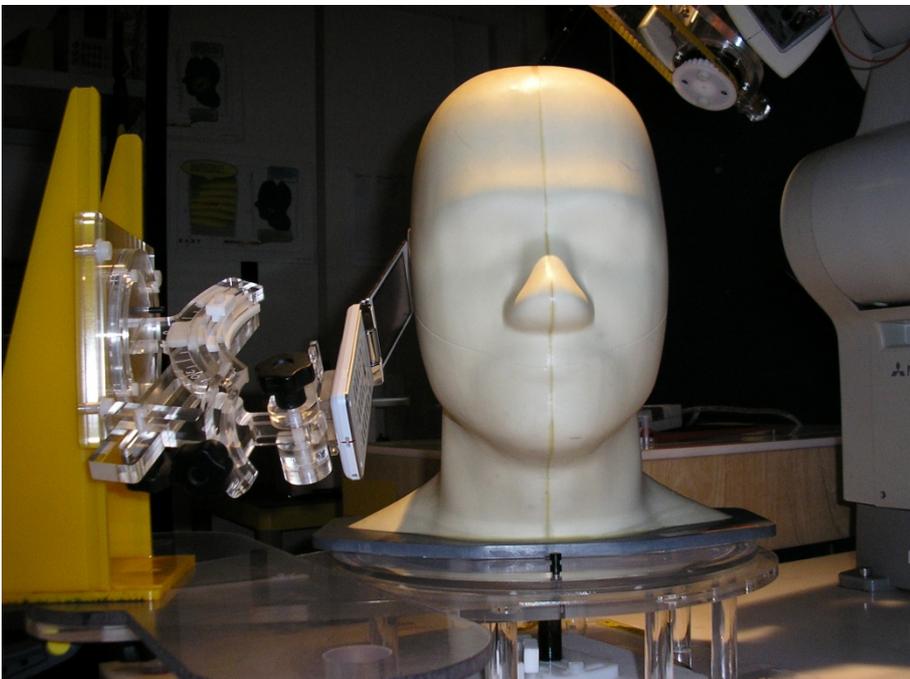


Figure 17
Handset in RH-Cheek 15° Position



Figure 18
Handset in Front Facing Position



Figure 19
Handset in Rear Facing Position



4.2 PHOTOGRAPHS OF EQUIPMENT UNDER TEST (EUT)



Figure 20
Front View - SH011 Closed Configuration



Figure 21
Front View - SH011 Open Configuration



Figure 22
Rear View - SH011



Figure 23
Rear View – SH011 Battery Removed



Product Service



Figure 24
Front View – Simple headset kit



Product Service

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV Product Service Limited

© 2010 TÜV Product Service Limited

ANNEX A

PROBE CALIBRATION REPORT




IMMERSIBLE SAR PROBE

CALIBRATION REPORT

Part Number: IXP – 050

S/N 0170

February 2010

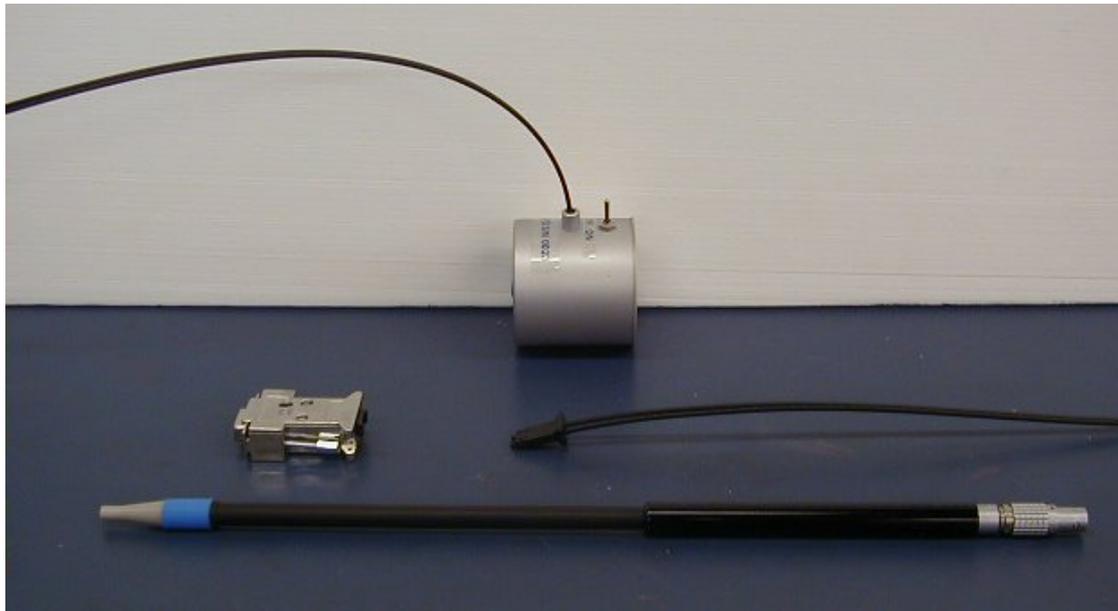

Indexsar Limited

Oakfield House

Cudworth Lane

Newdigate

Surrey RH5 5BG

Tel: +44 (0) 1306 632 870

Fax: +44 (0) 1306 631 834

e-mail: enquiries@indexsar.com

Reproduction of this report is authorized by Indexsar Ltd provided the report is reproduced in its entirety



Indexsar Limited
Oakfield House
Cudworth Lane
Newdigate
Surrey RH5 5BG
Tel: +44 (0) 1306 632 870
Fax: +44 (0) 1306 631 834
e-mail: enquiries@indexsar.com

Calibration Certificate 1002/0170
Date of Issue: 11th February 2010
Immersible SAR Probe

Type:	IXP-050
Manufacturer:	IndexSAR, UK
Serial Number:	0170
Place of Calibration:	IndexSAR, UK
Date of Receipt of Probe:	16 th November 2009
Calibration Dates:	17 th November — 24 th December 2009
Customer:	TUV Product Service Ltd

IndexSAR Ltd hereby declares that the IXP-050 Probe named above has been calibrated for conformity to the IEEE 1528 and BSEN 62209-1 standards using the methods described in this calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated by:  Technical Manager

Approved by:  Director

Please keep this certificate with the calibration document. When the probe is sent for a calibration check, please include the calibration document.

INTRODUCTION

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N 0170) only and describes the procedures used for characterisation and calibration.

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of BSEN 62209-1 [Ref 1] & IEEE [Ref 2] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

CALIBRATION PROCEDURE

1. Objectives

The calibration process comprises four stages

- 1) Determination of the channel sensitivity factors which optimise the probe's overall rotational isotropy in 900MHz brain fluid
- 2) Determination of the channel sensitivity factors and angular offset of the X channel which together optimise the probe's spherical isotropy in 900MHz brain fluid
- 3) Numerical combination of the two sets of channel sensitivity factors to give both acceptable rotational isotropy and acceptable spherical isotropy values
- 4) At each frequency of interest, application of these channel sensitivity factors to model the exponential decay of SAR in a waveguide fluid cell, and hence derive the liquid conversion factors at that frequency

2. Probe output

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:

$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where U_{lin} is the linearised signal, $U_{o/p}$ is the raw output signal in mV and DCP is the diode compression potential in similar voltage units.

DCP is determined from fitting equation (1) to measurements of U_{lin} versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the Schottky diodes used as the sensors. For the IXP-050 probes with CW signals the DCP values are typically 100mV.

In turn, measurements of E-field are determined using the following equation (where output voltages are also in units of mV):

$$E_{liq}^2 \text{ (V/m)} = U_{linx} * \text{Air Factor}_x * \text{Liq Factor}_x + U_{liny} * \text{Air Factor}_y * \text{Liq Factor}_y + U_{linz} * \text{Air Factor}_z * \text{Liq Factor}_z \quad (3)$$

Here, "Air Factor" represents each channel's sensitivity, while "Liq Factor" represents the enhancement in signal level when the probe is immersed in tissue-simulant liquids at each frequency of interest.

3. Selecting channel sensitivity factors to optimise isotropic response

After manufacture, the first stage of the calibration process is to balance the three channels' Air Factor values, thereby optimising the probe's overall axial response ("rotational isotropy").

To do this, a 900MHz waveguide containing head-fluid simulant is selected. Like all waveguides used during probe calibration, this particular waveguide contains two distinct sections: an air-filled launcher

section, and a liquid cell section, separated by a dielectric matching window designed to minimise reflections at the air-liquid interface.

The waveguide stands in an upright position and the liquid cell section is filled with 900MHz brain fluid to within 10 mm of the open end. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects.

During the measurement, a TE_{01} mode is launched into the waveguide by means of an N-type-to-waveguide adapter. The probe is then lowered vertically into the liquid until the tip is exactly 10mm above the centre of the dielectric window. This particular separation ensures that the probe is operating in a part of the waveguide where boundary corrections are not necessary.

Care must also be taken that the probe tip is centred while rotating.

The exact power applied to the input of the waveguide during this stage of the probe calibration is immaterial since only relative values are of interest while the probe rotates. However, the power must be sufficiently above the noise floor and free from drift.

The dedicated Indexasar calibration software rotates the probe in 10 degree steps about its axis, and at each position, an Indexasar 'Fast' amplifier samples the probe channels 500 times per second for 0.4 s. The raw $U_{o/p}$ data from each sample are packed into 10 bytes and transmitted back to the PC controller via an optical cable. U_{linx} , U_{liny} and U_{linz} are derived from the raw $U_{o/p}$ values and written to an Excel template.

Once data have been collected from a full probe rotation, the Air Factors are adjusted using a special Excel Solver routine to equalise the output from each channel and hence minimise the rotational isotropy. This automated approach to optimisation removes the effect of human bias.

Figure 5 represents the output from each diode sensor as a function of probe rotation angle.

4. Measurement of Spherical Isotropy

The setup for measuring the probe's spherical isotropy is shown in Figure 2.

A box phantom containing 900MHz head fluid is irradiated by a vertically-polarised, tuned dipole, mounted to the side of the phantom on the robot's seventh axis. During calibration, the spherical response is generated by rotating the probe about its axis in 20 degree steps and changing the dipole polarisation in 10 degree steps.

By using the VPM technique discussed below, an allowance can also be made for the effect of E-field gradient across the probe's spatial extent. This permits values for the probe's effective tip radius and X-channel angular offset to be modelled until the overall spherical isotropy figure is optimised.

The dipole is connected to a signal generator and amplifier via a directional coupler and power meter. As with the determination of rotational isotropy, the absolute power level is not important as long as it is stable.

The probe is positioned within the fluid so that its sensors are at the same vertical height as the centre of the source dipole. The line joining probe to dipole should be perpendicular to the phantom wall, while the horizontal separation between the two should be small enough for VPM corrections to be applicable, without encroaching near the boundary layer of the phantom wall. VPM corrections require a knowledge of the fluid skin depth. This is measured during the calibration by recording the E-field strength while systematically moving the probe away from the dipole in 2mm steps over a 20mm range.

The directionality of the orthogonally-arranged sensors can be checked by analysing the data using dedicated Indexasar software, which displays the data in 3D format, a representative image of which is shown in Figure 3. The left-hand side of this diagram shows the individual channel outputs after linearisation (see above). The program uses these data to balance the channel outputs and then applies an optimisation process, which makes fine adjustments to the channel factors for optimum isotropic response.

5. Determination of Conversion ("Liquid") Factors at each frequency of interest

A lookup table of conversion factors for a probe allows a SAR value to be derived at the measured frequencies, and for either brain or body fluid-simulant.

The method by which the conversion factors are assessed is based on the comparison between measured and analytical rates of decay of SAR with height above a dielectric window. This way, not only can the conversion factors for that frequency/fluid combination be determined, but an allowance can also be made for the scale and range of boundary layer effects.

The theoretical relationship between the SAR at the cross-sectional centre of the lossy waveguide as a function of the longitudinal distance (z) from the dielectric separator is given by Equation 4:

$$SAR(z) = \frac{4(P_f - P_b)}{\rho ab \delta} e^{-2z/\delta} \quad (4)$$

Here, the density ρ is conventionally assumed to be 1000 kg/m³, ab is the cross-sectional area of the waveguide, and P_f and P_b are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth δ (which is the reciprocal of the waveguide-mode attenuation coefficient) is a property of the lossy liquid and is given by Equation (5).

$$\delta = \left[\text{Re} \left\{ \sqrt{(\pi/a)^2 + j\omega\mu_o(\sigma + j\omega\epsilon_o\epsilon_r)} \right\} \right]^{-1} \quad (5)$$

where σ is the conductivity of the tissue-simulant liquid in S/m, ϵ_r is its relative permittivity, and ω is the radial frequency (rad/s). Values for σ and ϵ_r are obtained prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2]. σ and ϵ_r are both temperature- and fluid-dependent, so are best measured using a sample of the tissue-simulant fluid immediately prior to the actual calibration.

Wherever possible, all DiLine and calibration measurements should be made in the open laboratory at 22 ± 2.0°C; if this is not possible, the values of σ and ϵ_r should reflect the actual temperature. Values employed for calibration are listed in the tables below.

By ensuring the liquid height in the waveguide is at least three penetration depths, reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is therefore determined solely from the waveguide forward and reflected power.

Different waveguides are used for 835/900MHz, 1800/1900MHz, 2100/2450/2600MHz and 5200/5800MHz measurements. Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 20 dB at the most important frequencies used for personal wireless communications, and better than 15dB for frequencies greater than 5GHz. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 5800 MHz because of the waveguide size is not severe in the context of compliance testing.

During calibration, the probe is lowered carefully until it is just touching the cross-sectional centre of the dielectric window. 200 samples are then taken and written to an Excel template file before moving the probe vertically upwards. This cycle is repeated 150 times. The vertical separation between readings is determined from practical considerations of the expected SAR decay rate, and range from 0.2mm steps at low frequency, through 0.1mm at 2450MHz, down to 0.05mm at 5GHz.

Once the data collection is complete, a Solver routine is run which optimises the measured-theoretical fit by varying the conversion factor, and the boundary correction size and range.

For 450 MHz calibrations, a slightly different technique must be used — the equatorial response of the probe-under-test is compared with the equivalent response of a probe whose 450MHz characteristics

have already been determined by NPL. The conversion factor of the probe-under-test can then be deduced.

VPM (Virtual Probe Miniaturisation)

SAR probes with 3 diode-sensors in an orthogonal arrangement are designed to display an isotropic response when exposed to a uniform field. However, the probes are ordinarily used for measurements in non-uniform fields and isotropy is not assured when the field gradients are significant compared to the dimensions of the tip containing the three orthogonally-arranged dipole sensors.

It becomes increasingly important to assess the effects of field gradients on SAR probe readings when higher frequencies are being used. For Indexsar IXP-050 probes, which are of 5mm tip diameter, field gradient effects are minor at GSM frequencies, but are major above 5GHz. Smaller probes are less affected by field gradients and so probes, which are significantly less than 5mm diameter, would be better for applications above 5GHz.

The IndexSAR report IXS0223 describes theoretical and experimental studies to evaluate the issues associated with the use of probes at arbitrary angles to surfaces and field directions. Based upon these studies, the procedures and uncertainty analyses referred to in P1528 are addressed for the full range of probe presentation angles.

In addition, generalized procedures for correcting for the finite size of immersible SAR probes are developed. Use of these procedures enables application of schemes for virtual probe miniaturization (VPM) – allowing probes of a specific size to be used where physically-smaller probes would otherwise be required.

Given the typical dimensions of 3-channel SAR probes presently available, use of the VPM technique extends the satisfactory measurement range to higher frequencies.

CALIBRATION FACTORS MEASURED FOR PROBE S/N 0170

The probe can be calibrated at 450, 835, 900, 1800, 1900, 2100, 2450, 5200 and 5800 MHz, in liquid samples representing brain and body liquid at these frequencies.

The calibration is for CW signals only, with the axis of the probe parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe is measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.

The reference point for the calibration is in the centre of the probe’s cross-section at a distance of 2.7 mm from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software. The distance of 2.7mm for assembled probes has been confirmed by taking X-ray images of the probe tips (see Figure 9).

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

CALIBRATION EQUIPMENT

The table on page 21 indicates the calibration status of all test equipment used during probe calibration.

MEASUREMENT UNCERTAINTIES

A complete measurement uncertainty analysis for the SARA2 measurement system has been published in Reference [3]. Table 10 from that document is re-created below, and lists the uncertainty factors associated just with the calibration of probes.

Source of uncertainty	Uncertainty value \pm %	Probability distribution	Divisor	c_i	Standard uncertainty $u_i \pm$ %	v_i or v_{eff}
Incident or forward power	5.743	N	1.00	1	5.743	∞

Source of uncertainty	Uncertainty value \pm %	Probability distribution	Divisor	c_i	Standard uncertainty $u_i \pm$ %	ν_i or ν_{eff}
Reflected power	5.773	N	1.00	1	5.773	∞
Liquid conductivity	1.120	N	1.00	1	1.120	∞
Liquid permittivity	1.085	N	1.00	1	1.085	∞
Field homogeneity	0.002	R	1.73	1	0.001	∞
Probe positioning: +/- 0.05mm	0.55	R	1.73	1	0.318	
Influence on Probe pos: 11%/mm						
Field probe linearity	4.7	R	1.73	1	2.714	∞
Combined standard uncertainty		RSS			8.729	

At the 95% confidence level, therefore, the expanded uncertainty is 17.1%

SUMMARY OF CALIBRATION FACTORS
(for use with SARA C & HACSAR)

	X	Y	Z	Units
Air Factors	85.04	73.60	81.36	(V/m) ² /mV
CW DCPs	100	100	100	mV

Freq (MHz)	Head			Body		
	SAR Conv Factor	Bound Corrn. – f(0)	Bound Corrn. – d(mm)	SAR Conv Factor	Bound Corrn. – f(0)	Bound Corrn. – d(mm)
450	0.302	0.0	1.0	0.306	0.0	1.0
835	0.267	1.1	1.3	0.283	1.1	1.3
900	0.275	1.1	1.3	0.294	0.9	1.4
1800	0.324	0.8	1.6	0.356	0.8	1.6
1900	0.341	0.8	1.6	0.374	0.7	1.7
2100	0.345	0.7	1.7	0.388	0.6	2.0
2450	0.363	0.8	1.5	0.420	0.6	2.0
5200	.639	0.5	15	0.861	0.7	20
5800	0.676	0.6	17	1.283	0.8	20

Miscellaneous	
Sensor offset	2.7 mm
X Ch. Angle to red dot	+3.5°

Measured Isotropy at 900MHz	(+/-) dB
Spherical Isotropy	0.22
Axial Isotropy	0.12

SUMMARY OF CALIBRATION FACTORS
(for use with SARA 2)

	X	Y	Z	Units
Air Factors	425	368	407	$(V/m)^2/(V*200)$
CW DCPs	20	20	20	V*200

Freq (MHz)	Head			Body		
	SAR Conv Factor	Bound Corr. – f(0)	Bound Corr. – d(mm)	SAR Conv Factor	Bound Corr. – f(0)	Bound Corr. – d(mm)
450	0.302	0.0	1.0	0.306	0.0	1.0
835	0.267	1.1	1.3	0.283	1.1	1.3
900	0.275	1.1	1.3	0.294	0.9	1.4
1800	0.324	0.8	1.6	0.356	0.8	1.6
1900	0.341	0.8	1.6	0.374	0.7	1.7
2100	0.345	0.7	1.7	0.388	0.6	2.0
2450	0.363	0.8	1.5	0.420	0.6	2.0
5200	.639	0.5	15	0.861	0.7	20
5800	0.676	0.6	17	1.283	0.8	20

Miscellaneous	
Tip radius	1.25 mm
X Ch. Angle to red dot	+3.5°

Measured Isotropy at 900MHz	(+/-) dB
Spherical Isotropy	0.22
Axial Isotropy	0.12

PROBE SPECIFICATIONS

Indexsar probe 0170, along with its calibration, is compared with BSEN 62209-1 and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

1.1.1 Dimensions	S/N 0170	BSEN [1]	IEEE [2]
Overall length (mm)	350		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

1.1.2 Dynamic range	S/N 0170	BSEN [1]	IEEE [2]
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg) N.B. only measured to > 100 W/kg on representative probes	>100	>100	100

1.1.3 Isotropy (measured at 900MHz)	S/N 0170	BSEN [1]	IEEE [2]
Axial rotation with probe normal to source (+/- dB)	0.12	0.5	0.25
Spherical isotropy covering all orientations to source (+/- dB)	0.22	1.0	0.50

1.1.4 Construction	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. No adhesives are used in the immersed section. Outer case materials are PEEK and heat-shrink sleeving.
1.1.5 Chemical resistance	Tested to be resistant to TWEEN20 and sugar/salt-based simulant liquids but probes should be removed, cleaned and dried when not in use. NOT recommended for use with glycol or soluble oil-based liquids.

REFERENCES

[1] BSEN 62209-1:2006. Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices — Human models, instrumentation, and procedures — Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

[2] IEEE 1528, 2003 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

[3] Indexsar Report IXS-0300, October 2007. Measurement uncertainties for the SARA2 system assessed against the recommendations of BS EN 62209-1:2006

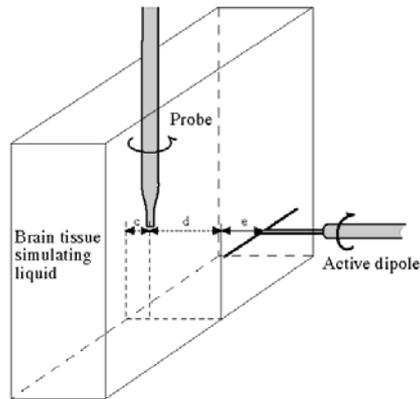


Figure 1. Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

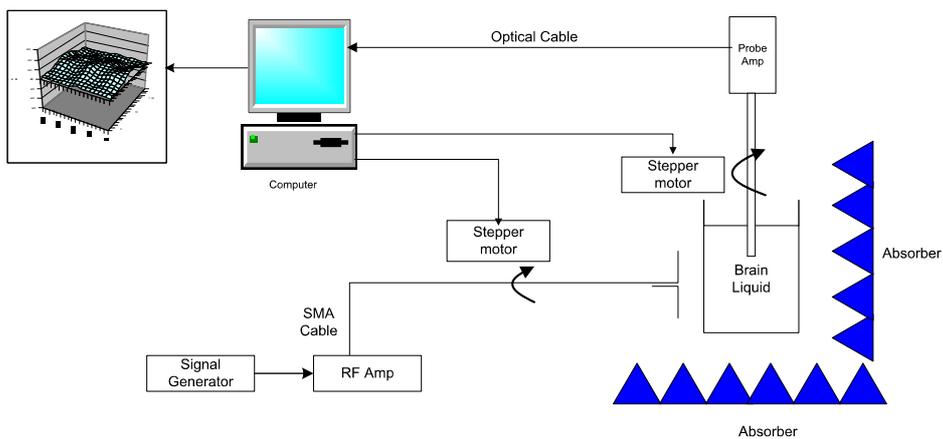


Figure 2. Schematic diagram of the test geometry used for isotropy determination

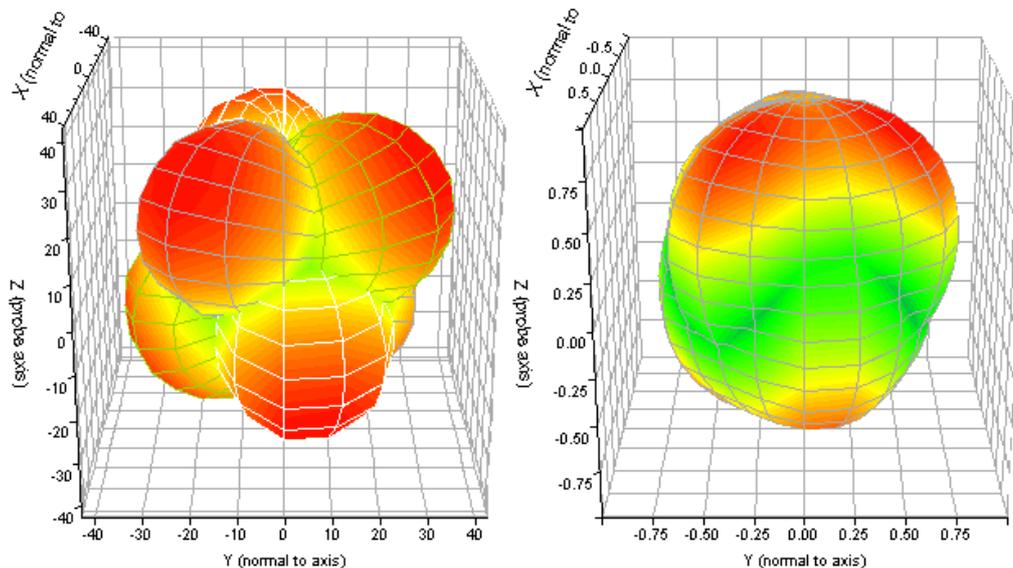


Figure 3. Graphical representation of a probe's response to fields applied from each direction. The diagram on the left shows the individual response characteristics of each of the three channels and the diagram on the right shows the resulting probe sensitivity in each direction. The colour range in the figure images the lowest values as blue and the maximum values as red. For probe S/N 0170, this range is (+/-) 0.22dB.

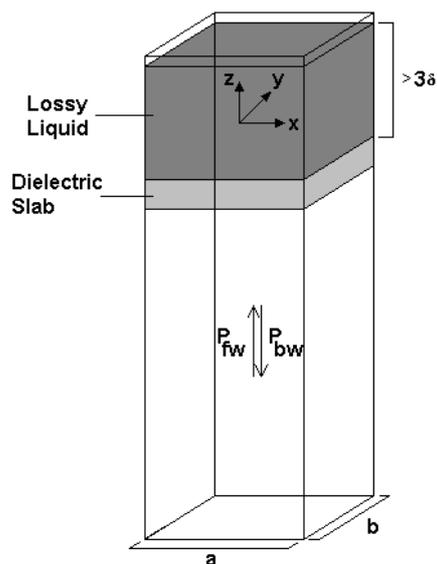


Figure 4. Geometry used for waveguide calibration (after Ref [2]. Section A.3.2.2)

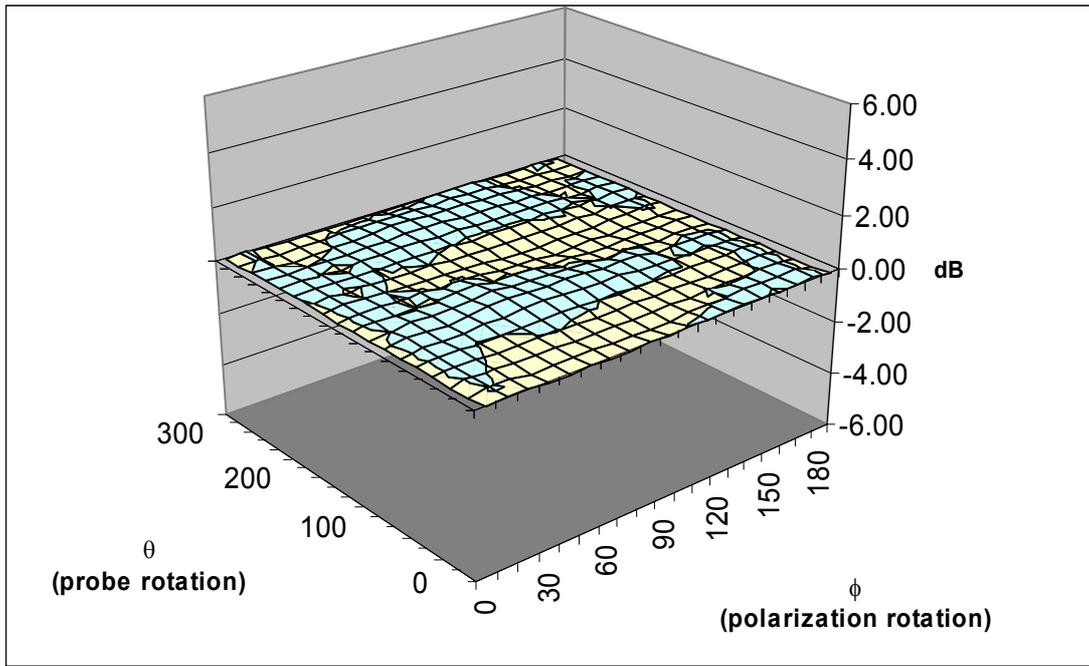


Figure 1 Surface Isotropy diagram of IXP-050 Probe S/N 0206 at 900MHz (rotational isotropy axial +/-0.12dB, spherical isotropy +/-0.22dB)

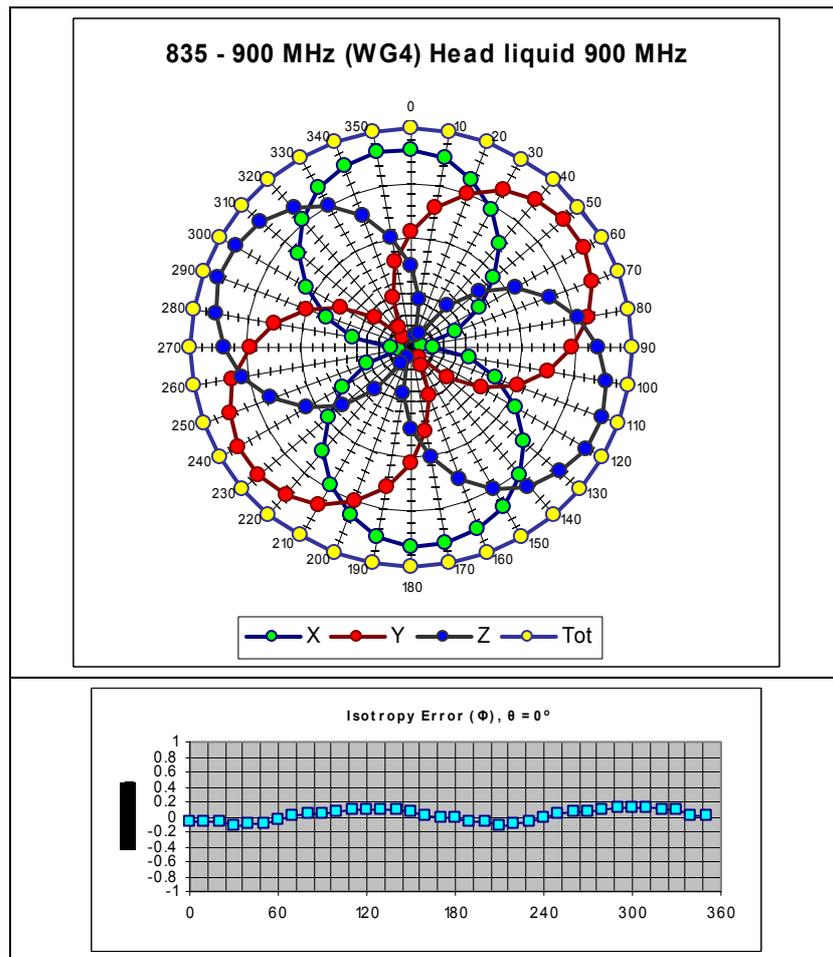


Figure 5. The rotational isotropy of probe S/N 0170 obtained by rotating the probe in a liquid-filled waveguide at 900 MHz.

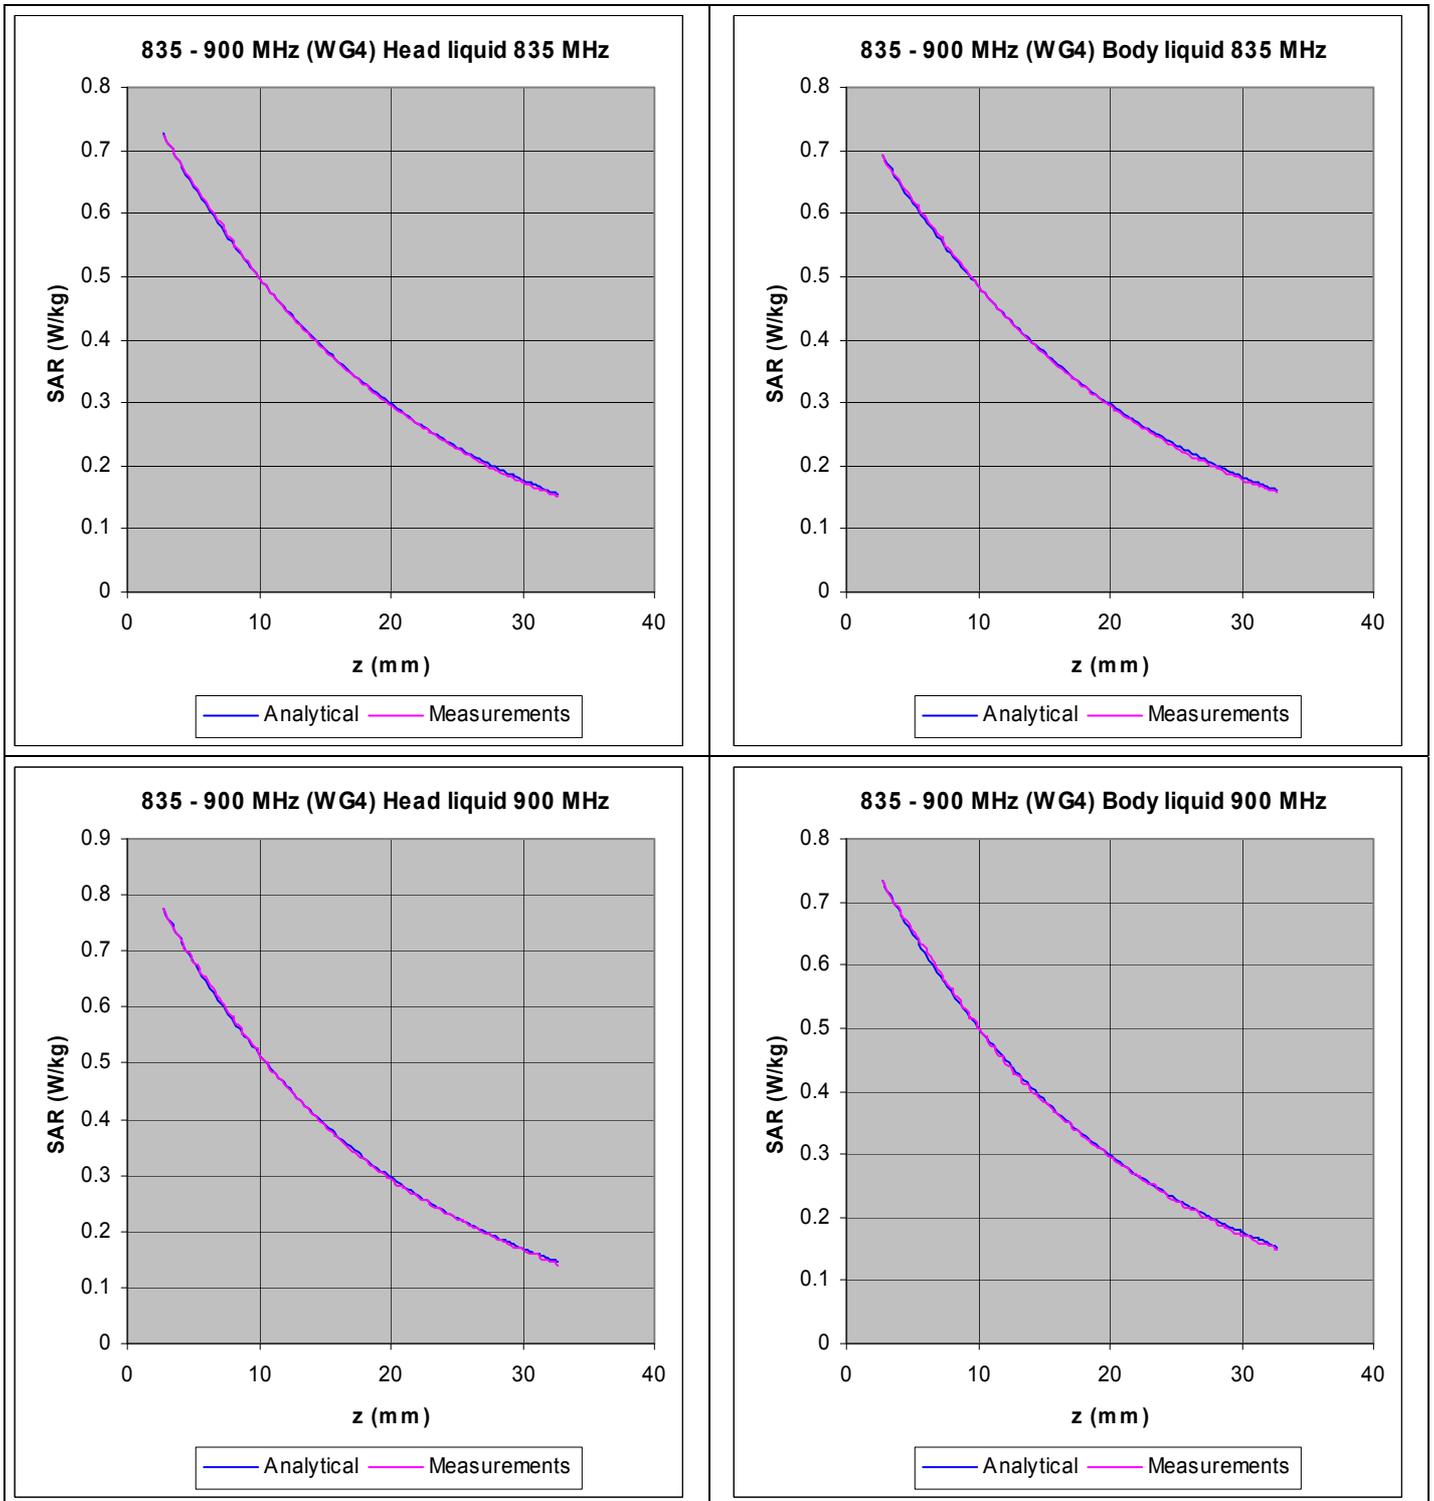
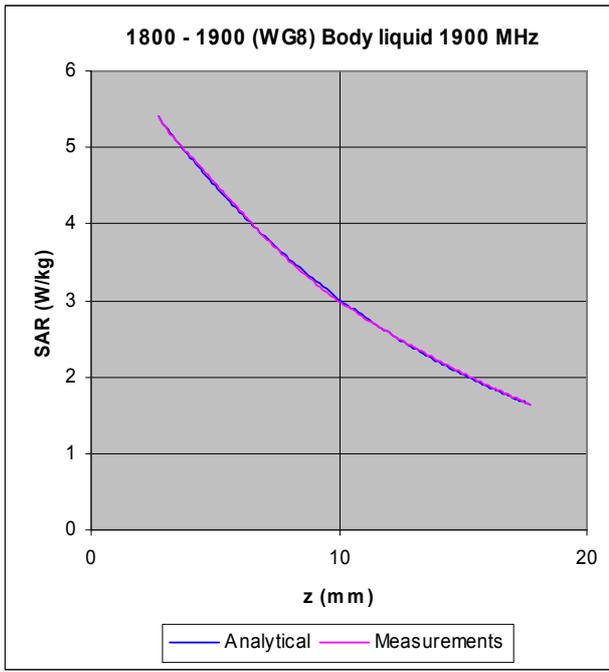
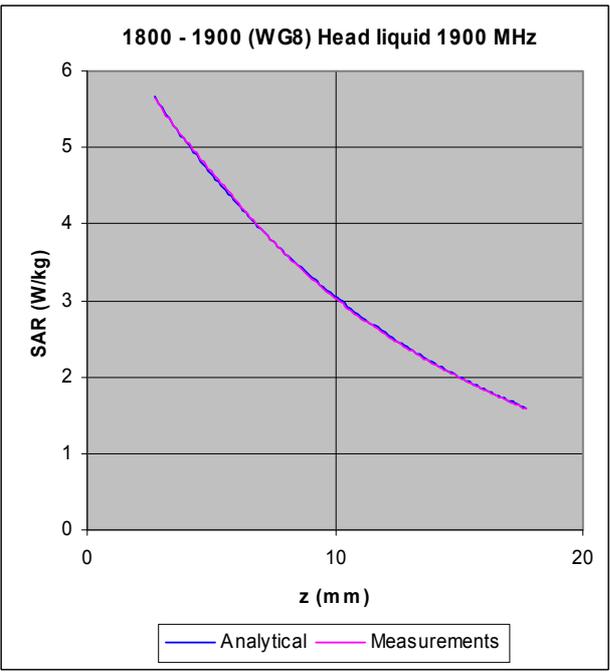
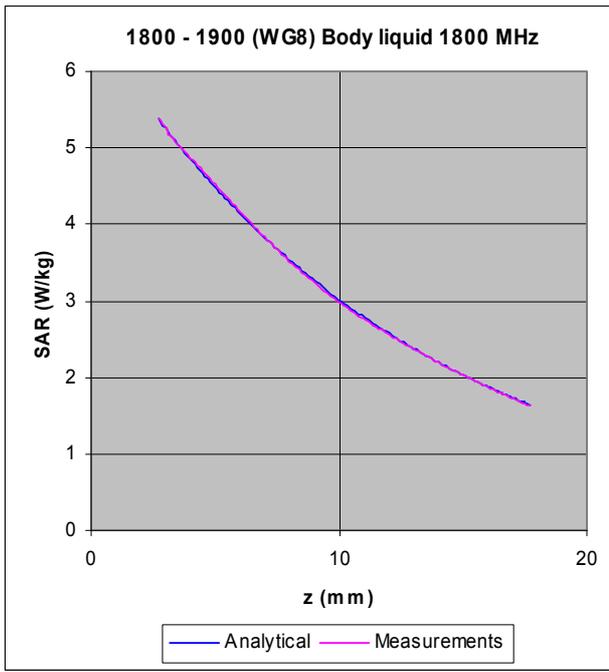
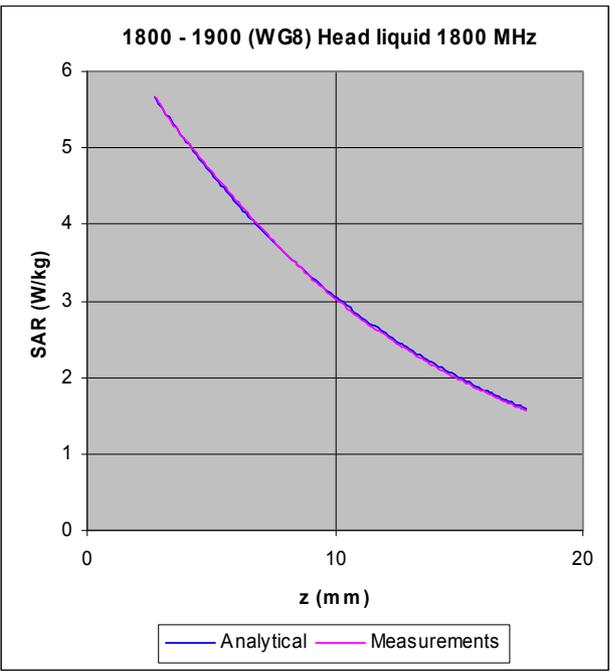


Figure 6. The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.



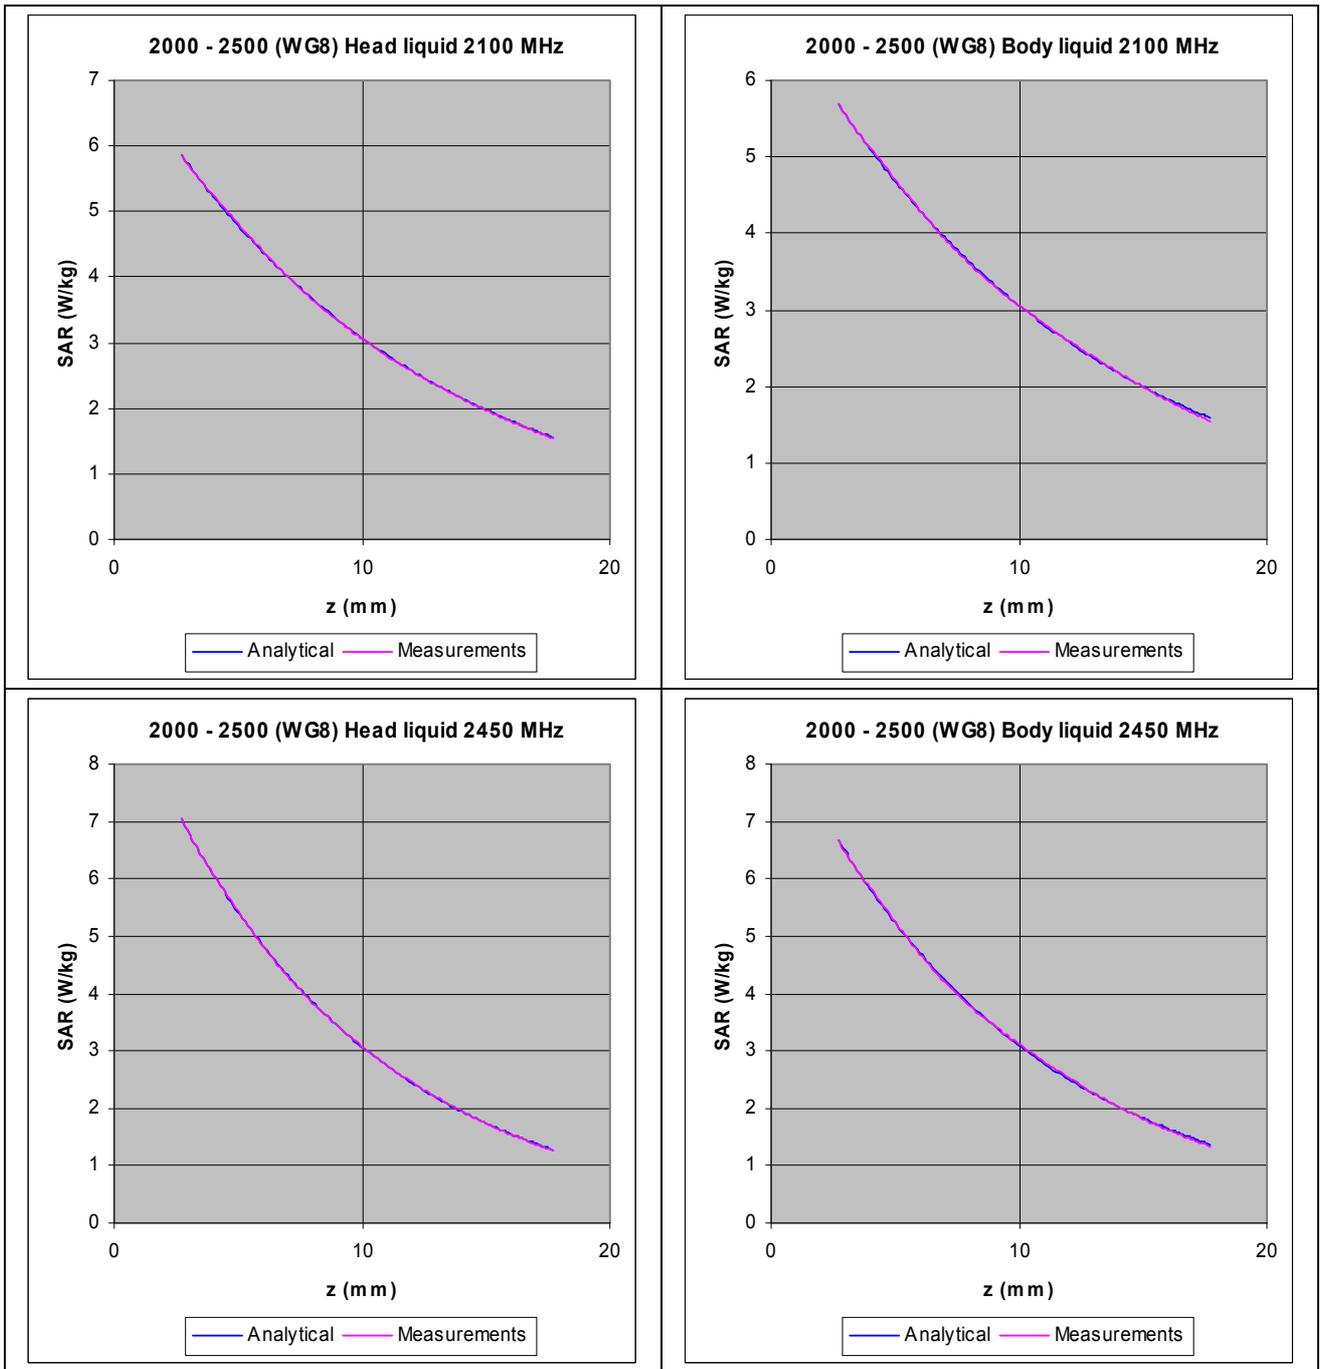


Figure 7. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

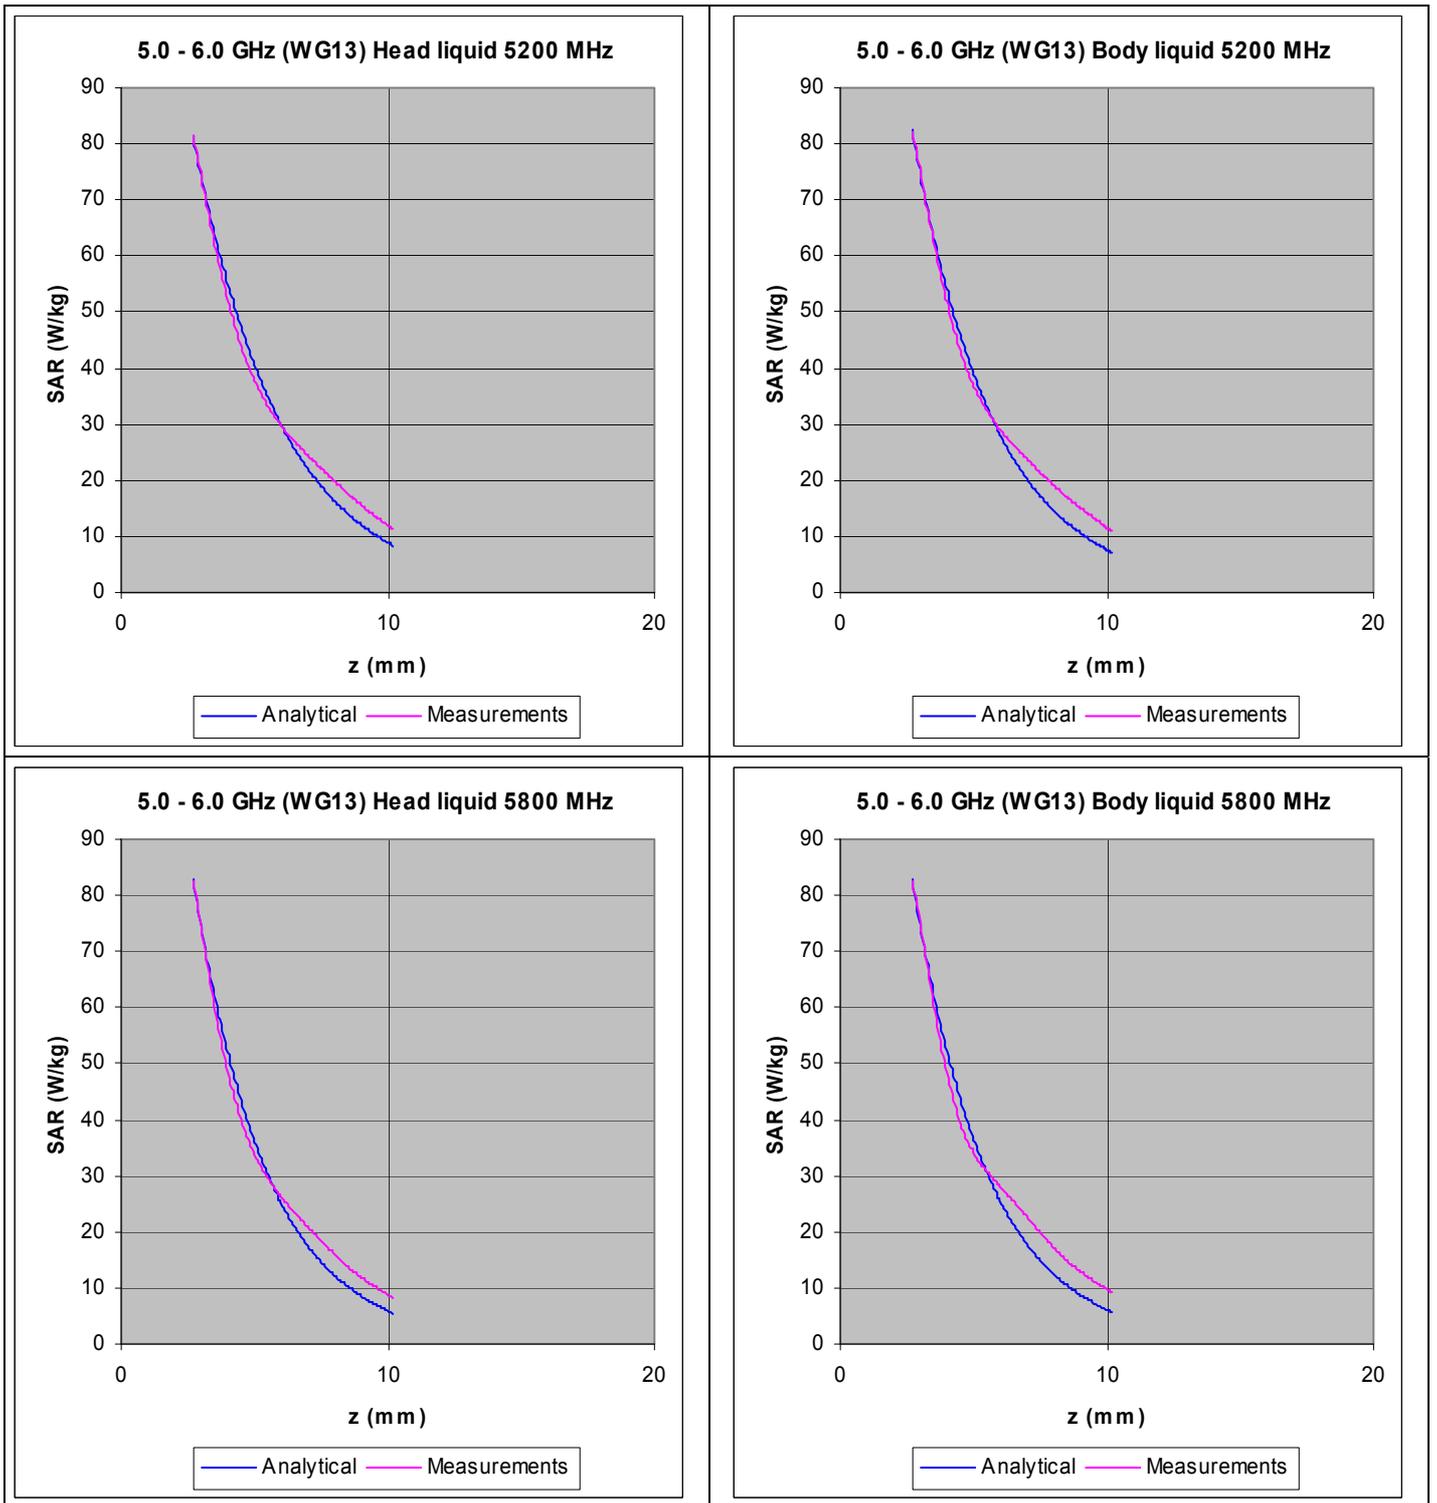


Figure 8 The measured SAR decay function along the centreline of the WG13 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed

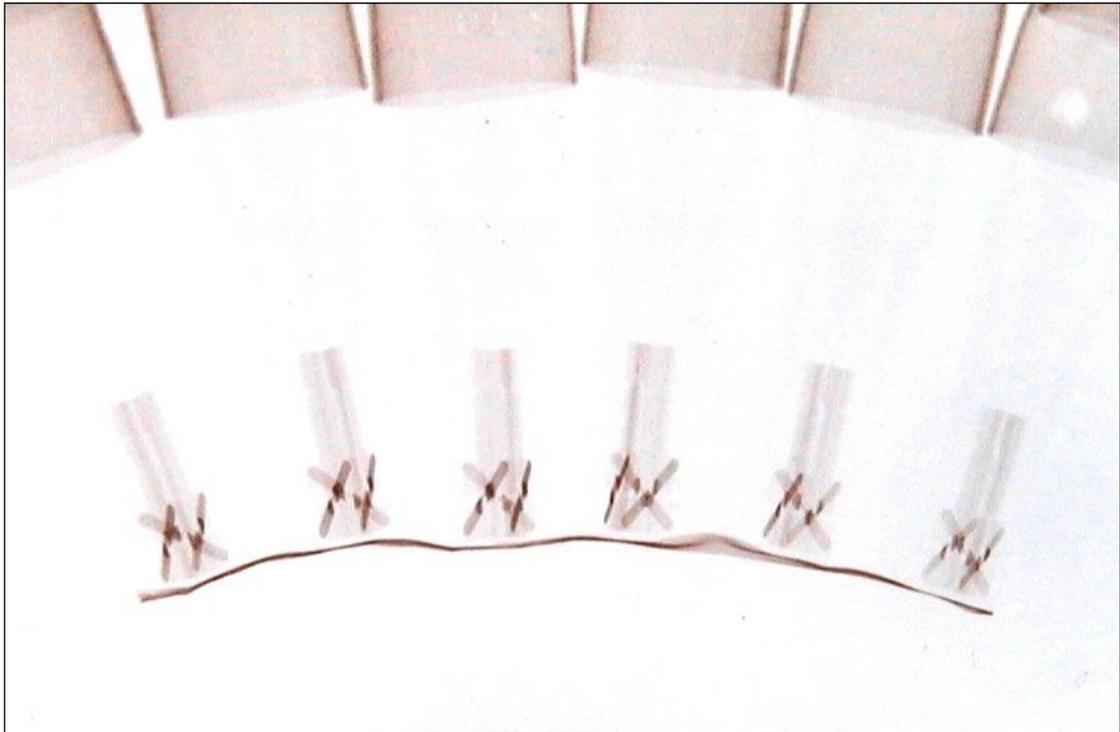


Figure 9: X-ray positive image of 5mm probes

Table indicating the dielectric parameters of the liquids used for calibrations at each frequency

Frequency (MHz)	BRAIN		BODY	
	Relative permittivity (measured)	Conductivity (S/m) (measured)	Relative permittivity (measured)	Conductivity (S/m) (measured)
450	44.28	0.85	57.57	0.86
835	42.28	0.92	56.00	0.99
900	41.15	0.98	55.40	1.05
1800	38.98	1.44	53.14	1.56
1900	39.67	1.44	54.16	1.58
2100	39.32	1.50	53.64	1.68
2450	37.80	1.89	52.54	2.05
5200	35.03	4.94	43.91	5.92
5800	33.19	5.75	43.24	6.43

Table of test equipment calibration status

Instrument description	Supplier / Manufacturer	Model	Serial No.	Last calibration date	Calibration due date
Power sensor	Rohde & Schwarz	NRP-Z23	100063	16/06/2008	16/6/2010
Dielectric property measurement	Indexasar	DiLine (sensor lengths: 160mm, 80mm and 60mm)	N/A	(absolute) – checked against NPL values using reference liquids	N/A
Vector network analyser	Anritsu	MS6423B	003102	09/10/2008	12/01/2010
SMA autocalibration module	Anritsu	36581KKF/1	001902	09/10/2008	12/01/2010