
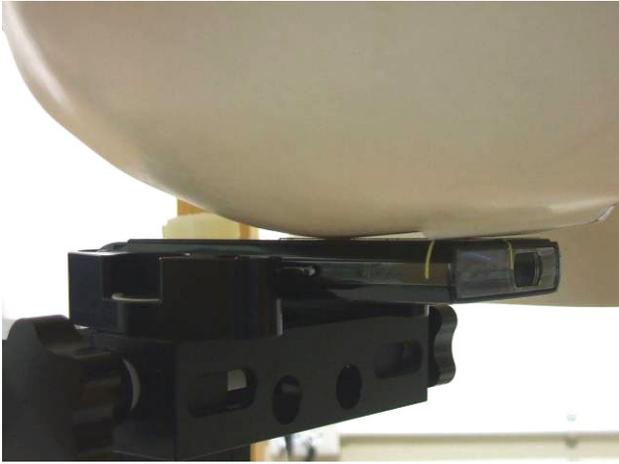
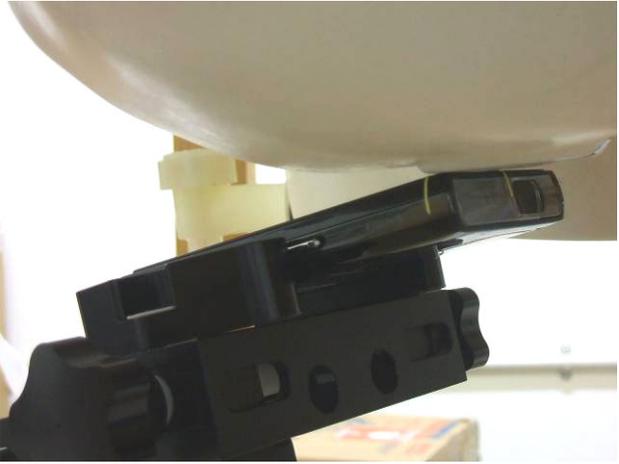


### A.3 SAR Measurement Data

#### A.3.1 Left Head

|    |           |  |                |                          |              |                 |                   |
|---|-----------|--|----------------|--------------------------|--------------|-----------------|-------------------|
| <b>Cheek/Touch Position</b>   |           | <b>Ear/Tilt Position</b>   |                |                          |              |                 |                   |
| WCDMA Band V (Duty Cycle: 100 %, Crest Factor: 1)   |           |  |                | Date : November 19, 2010 |              |                 |                   |
| Test Position   | Frequency |  | Tx Power [dBm] | Power Drift [dB]         | Limit [mW/g] | SAR (1g) [mW/g] | Tissue Temp. [°C] |
|   | Channel   | MHz  |                |                          |              |                 |                   |
| Cheek/Touch   | 4132      | 826.40   | 23.13          | -0.062                   | 1.6          | 0.753           | 22.0              |
|   | 4182      | 836.40   | 22.90          | -0.080                   |              | 0.707           | 22.0              |
|   | 4233      | 846.60   | 23.21          | -0.031                   |              | 0.809           | 22.0              |
| Ear/Tilt  | 4182      | 836.40   | 22.90          | +0.009                   | 1.6          | 0.354           | 22.0              |
| NOTES :<br>1. Depth of Liquid : 15.0 cm<br>2. Transmitter power was measured at the antenna-conducted terminal.<br>3. SAR is measured using a 12.2 kbps RMC.<br>4. Please refer to attachment for the result presentation in plot format. |           |  |                |                          |              |                 |                   |

**A.3.2 Right Head**

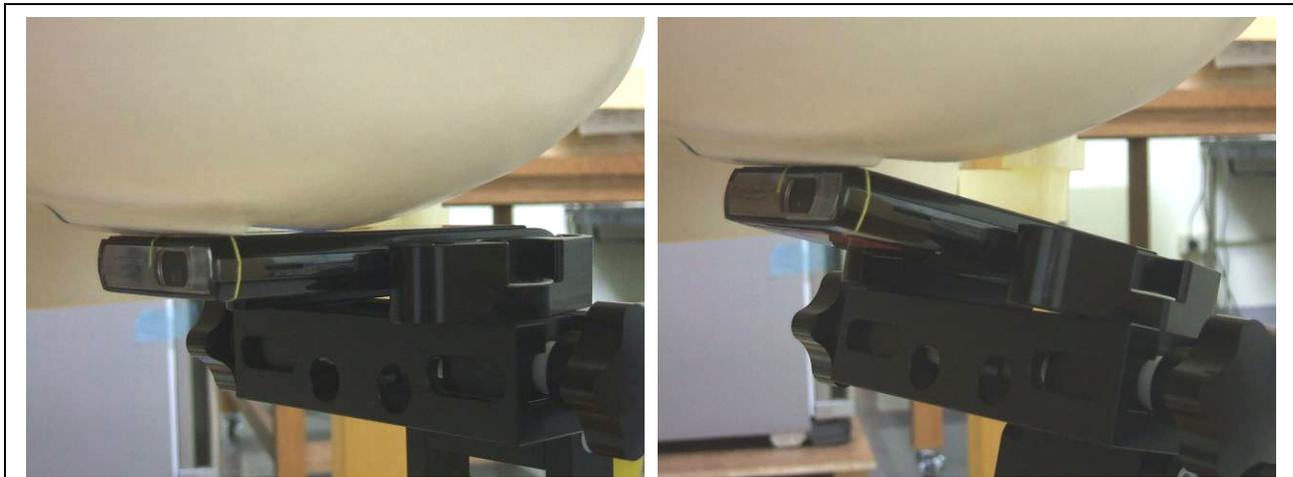


**Cheek/Touch Position**

**Ear/Tilt Position**

| WCDMA Band V (Duty Cycle: 100 %, Crest Factor: 1)                         |           |        |                |                  | Date : November 19, 2010 |                 |                   |
|---|-----------|--------|----------------|------------------|--------------------------|-----------------|-------------------|
| Test Position   | Frequency |        | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g]             | SAR (1g) [mW/g] | Tissue Temp. [°C] |
|   | Channel   | MHz    |                |                  |                          |                 |                   |
| Cheek/Touch   | 4182      | 836.40 | 22.90          | +0.042           | 1.6                      | 0.633           | 22.0              |
| Ear/Tilt  | 4182      | 836.40 | 22.90          | +0.061           | 1.6                      | 0.364           | 22.0              |
| NOTES :   |           |        |                |                  |                          |                 |                   |
| 1. Depth of Liquid : 15.0 cm  |           |        |                |                  |                          |                 |                   |
| 2. Transmitter power was measured at the antenna-conducted terminal.      |           |        |                |                  |                          |                 |                   |
| 3. SAR is measured using a 12.2 kbps RMC.                                 |           |        |                |                  |                          |                 |                   |
| 4. Please refer to attachment for the result presentation in plot format. |           |        |                |                  |                          |                 |                   |

**A.3.3 Body-worn Position**

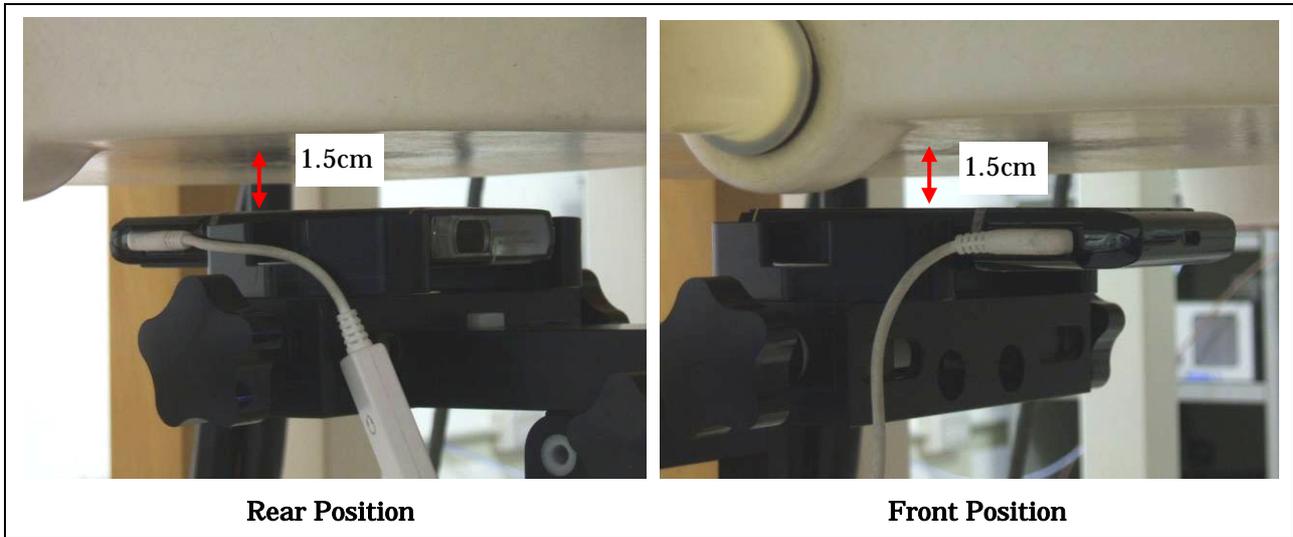

| WCDMA Band V (Duty Cycle: 100 %, Crest Factor: 1) |           |        |                |                  | Date : November 22, 2010 |                 |                   |
|---|-----------|--------|----------------|------------------|--------------------------|-----------------|-------------------|
| Test Position                                     | Frequency |        | Tx Power [dBm] | Power Drift [dB] | Limit [mW/g]             | SAR (1g) [mW/g] | Tissue Temp. [°C] |
|   | Channel   | MHz    |                |                  |                          |                 |                   |
| Front   | 4182      | 836.40 | 22.90          | -0.040           | 1.6                      | 0.504           | 22.0              |
| Rear  | 4132      | 826.40 | 23.13          | -0.004           | 1.6                      | <b>0.581</b>    | 22.0              |
|   | 4182      | 836.40 | 22.90          | +0.063           |                          | 0.549           | 22.0              |
|   | 4233      | 846.60 | 23.21          | -0.047           |                          | 0.562           | 22.0              |

- NOTES :
1. Depth of Liquid : 15.0 cm
  2. Transmitter power was measured at the antenna-conducted terminal.
  3. SAR is measured using a 12.2 kbps RMC.
  4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
  5. Please refer to attachment for the result presentation in plot format.