


### A.3 SAR Measurement Data

#### A.3.1 Left Head

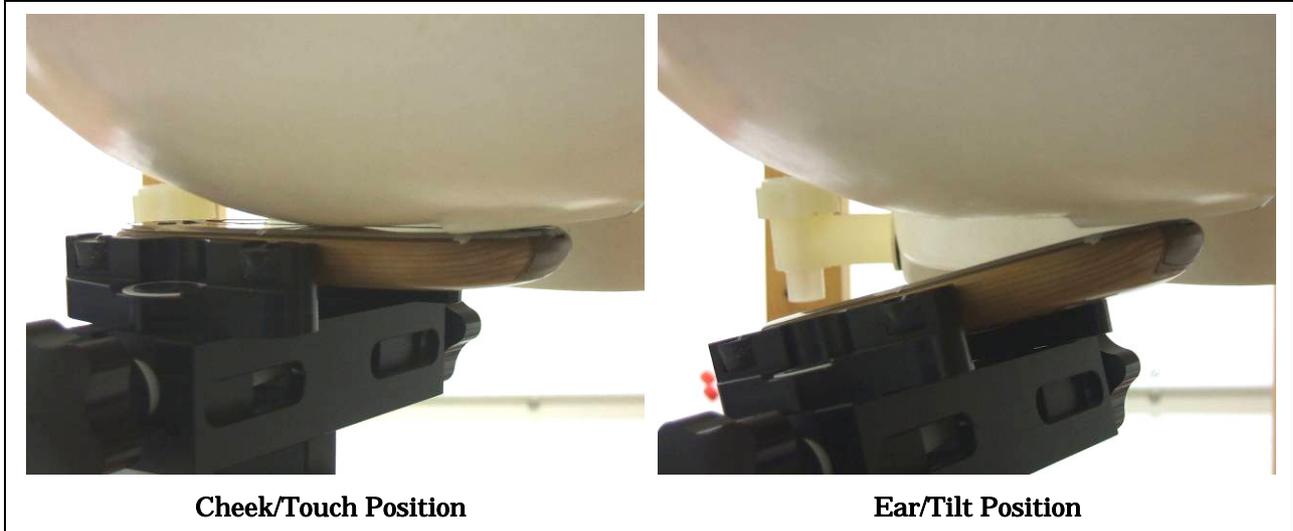


WCDMA Band V (Duty Cycle: 100 %, Crest Factor: 1)						Date : January 11, 2011	
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4132	826.40	23.16	-0.038	1.6	0.612	22.0
	4182	836.40	22.92	+0.061		0.710	22.0
	4233	846.60	23.00	-0.127		<b>0.780</b>	22.0
Ear/Tilt	4182	836.40	22.92	+0.089	1.6	0.432	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. Please refer to attachment for the result presentation in plot format.

**A.3.2 Right Head**

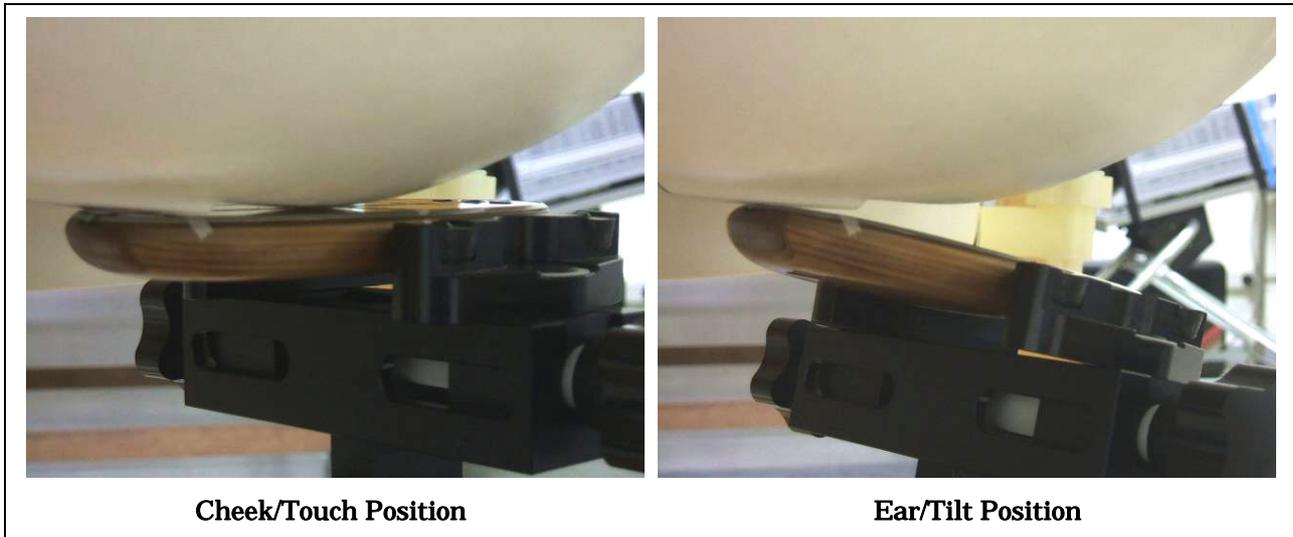


WCDMA Band V (Duty Cycle: 100 %, Crest Factor: 1)							Date : January 11, 2011
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Cheek/Touch	4182	836.40	22.92	-0.086	1.6	0.681	22.0
Ear/Tilt	4182	836.40	22.92	-0.025	1.6	0.469	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. Please refer to attachment for the result presentation in plot format.

**A.3.3 Body-worn Position**

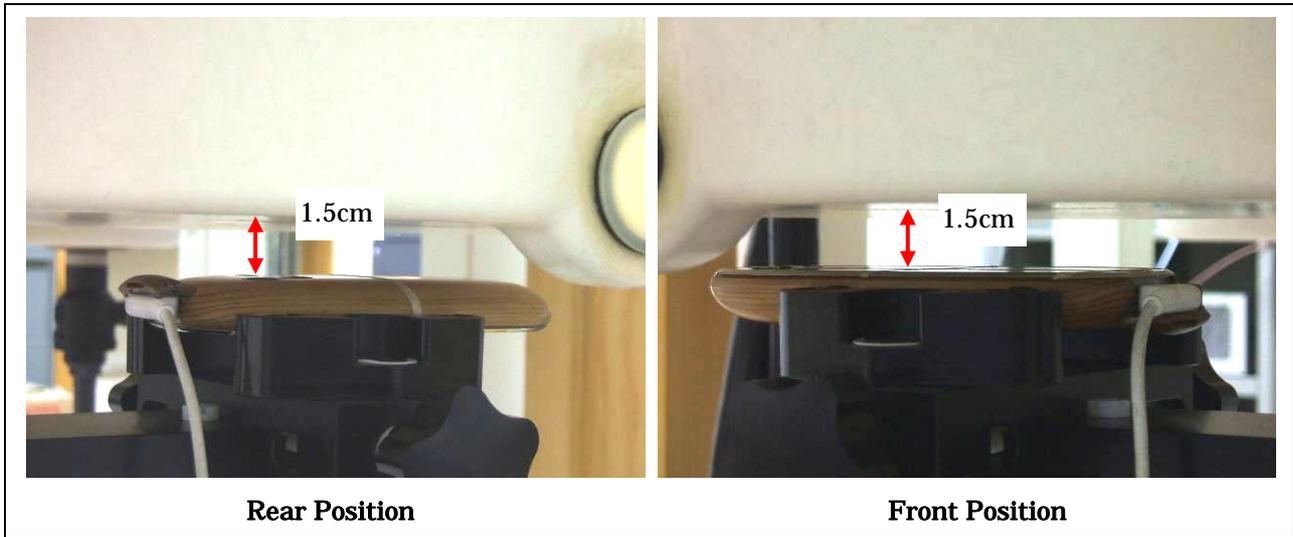

WCDMA Band V (Duty Cycle: 100 %, Crest Factor: 1)						Date : January 12, 2011	
Test Position	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
Rear	4132	826.40	23.16	-0.004	1.6	0.435	22.0
	4182	836.40	22.92	+0.089		0.523	22.0
	4233	846.60	23.00	-0.018		<b>0.535</b>	22.0
Front	4182	836.40	22.92	+0.014	1.6	0.407	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
  2. Transmitter power was measured at the antenna-conducted terminal.
  3. SAR is measured using a 12.2 kbps RMC.
  4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
  5. Please refer to attachment for the result presentation in plot format.