
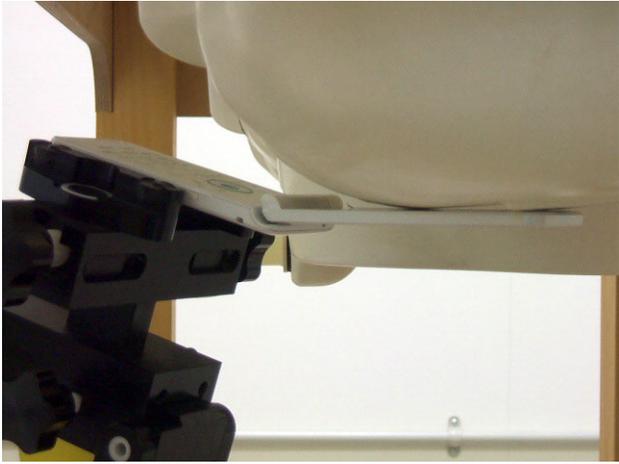


A.3 SAR Measurement Data

A.3.1 Left Head

							
Cheek/Touch Position				Ear/Tilt Position			
R99 12.2kbps RMC (Duty Cycle: 100 %, Crest Factor: 1)						Date : March 31, 2011	
Test Position	Ch No.	Frequency [MHz]	Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	1g SAR [mW/g]	Tissue Temp. [°C]
Cheek/Touch	4132	826.40	22.64	-0.036	1.6	0.918	22.0
	4182	836.40	22.65	-0.026		0.900	22.0
	4233	846.60	23.04	-0.034		0.845	22.0
Ear/Tilt	4182	836.40	22.65	-0.003	1.6	0.357	22.0
NOTES : 1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. Please refer to attachment for the result presentation in plot format.							

A.3.2 Right Head

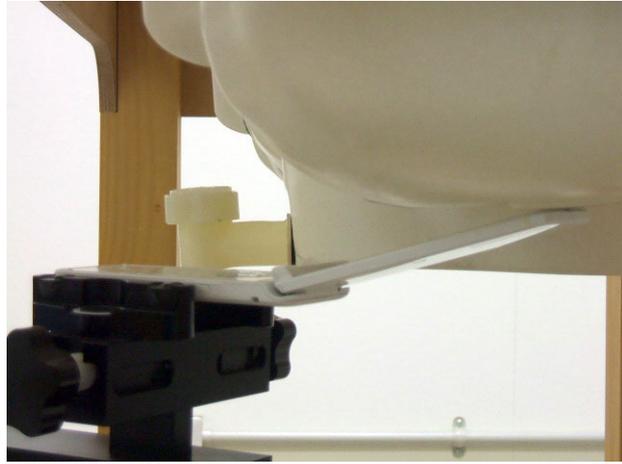

Cheek/Touch Position


Ear/Tilt Position

R99 12.2kbps RMC (Duty Cycle: 100 %, Crest Factor: 1)						Date : March 31, 2011	
Test Position	Ch No.	Frequency [MHz]	Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	1g SAR [mW/g]	Tissue Temp. [°C]
Cheek/Touch	4182	836.40	22.65	-0.053	1.6	0.722	22.0
Ear/Tilt	4182	836.40	22.65	-0.057	1.6	0.315	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. Please refer to attachment for the result presentation in plot format.

A.3.3 Body-worn Position

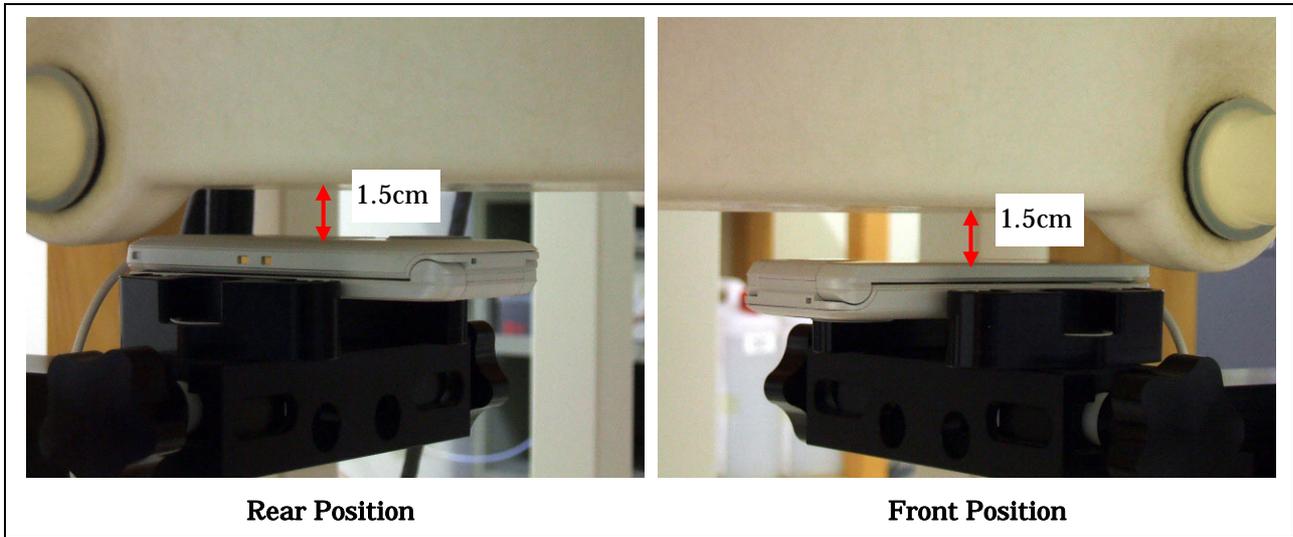

R99 12.2kbps RMC (Duty Cycle: 100 %, Crest Factor: 1)						Date : April 1, 2011	
Test Position	Ch No.	Frequency [MHz]	Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	1g SAR [mW/g]	Tissue Temp. [°C]
Rear	4132	826.40	22.64	-0.015	1.6	0.629	22.0
	4182	836.40	22.65	-0.038		0.555	22.0
	4233	846.60	23.04	-0.026		0.586	22.0
Front	4182	836.40	22.65	-0.005	1.6	0.236	22.0

- NOTES :
1. Depth of Liquid : 15.0 cm
 2. Transmitter power was measured at the antenna-conducted terminal.
 3. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
 4. Please refer to attachment for the result presentation in plot format.