

## TEST REPORT

**APPLICANT** : Sharp Corporation, Communication Systems Group  
**ADDRESS** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN  
**PRODUCTS** : Cellular Phone  
**MODEL NO.** : SH-12C  
**SERIAL NO.** : 004401113265330  
**FCC ID** : APYHRO00147  
**TEST STANDARD** : CFR 47 FCC Rules and Regulations Part 15  
**TESTING LOCATION** : Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan  
**TEST RESULTS** : **Passed**  
**DATE OF TEST** : March 21, 2011 ~ March 28, 2011

This report must not be used by the client to claim product endorsement by NVLAP or NIST or any agency of the U.S. Government.



NVLAP LAB CODE 200191-0

Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

Testing Dept. EMC Division

1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.

**TABLE OF CONTENTS****Page**

|                                                         |           |
|---------------------------------------------------------|-----------|
| <b>Documentation .....</b>                              | <b>3</b>  |
| 1 Test Regulation.....                                  | 3         |
| 2 Test Location.....                                    | 3         |
| 3 Recognition of Test Laboratory.....                   | 3         |
| 4 Description of the Equipment Under Test.....          | 4         |
| 5 Test Condition.....                                   | 5         |
| 6 Preliminary Test and Test Setup .....                 | 7         |
| 7 Equipment Under Test Modification.....                | 12        |
| 8 Responsible Party .....                               | 12        |
| 9 Deviation from Standard.....                          | 12        |
| 10 Test Results.....                                    | 13        |
| 11 Summary .....                                        | 16        |
| 12 Operating Condition.....                             | 17        |
| 13 Test Configuration.....                              | 17        |
| 14 Equipment Under Test Arrangement (Drawings) .....    | 17        |
| <b>Appendix A: Test Data .....</b>                      | <b>18</b> |
| <b>Appendix B: Test Arrangement (Photographs) .....</b> | <b>24</b> |
| <b>Appendix C: Test Instruments.....</b>                | <b>26</b> |

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT**

**EUT** : Equipment Under Test  
**AE** : Associated Equipment  
**N/A** : Not Applicable  
**N/T** : Not Tested

**EMC** : Electromagnetic Compatibility  
**EMI** : Electromagnetic Interference  
**EMS** : Electromagnetic Susceptibility

- ☒ - indicates that the listed condition, standard or equipment is applicable for this report.  
☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

## Documentation

### 1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

Test Requirements : §15.225, §15.207 and §15.209

Test Procedure : ANSI C63.4–2003

### 2 Test Location

KITA-KANSAI Testing Center  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan  
KAMEOKA EMC Branch  
9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto 621-0126, Japan

### 3 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center Testing Department EMC Division is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : March 30, 2012)

NVLAP Lab Code : 200191-0 (Effective through : June 30, 2011)

BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006  
(Effective through : September 14, 2013)

VCCI Registration No. : R-008, C-006, C-007, C-1674, C-2143, C-3685, T-1418, T-1419, T-1819, T-1820,  
T-1821, G-172, G-173  
(Effective through : March 30, 2012)

IC Registration No. : 2079E-1, 2079E-2 (Effective through : January 25, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Effective through : February 22, 2012)

## 4 Description of the Equipment Under Test

### 4.1 General Information

1. Manufacturer : Sharp Corporation, Communication Systems Group  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH-12C
4. Serial No. : 004401113265330
5. Product Type : Pre-production
6. Date of Manufacture : March, 2011
7. Transmitting Frequency : 13.560 MHz
8. Receiving Frequency : 13.560 MHz
9. Power Rating : 4.0VDC (Lithium-ion Battery Pack SH28 1240mAh)
10. EUT Grounding : None
11. EUT Authorization : Certification
12. Receive Date of EUT : March 19, 2011

## 5 Test Condition

### 5.1 AC Powerline Conducted Emission

The requirements are ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]  
☒ - Not Applicable

Test site : KITA-KANSAI ☐ - Shielded room ☐ - Anechoic chamber  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility  
☐ - 1st open site

Test instruments : Refer to Appendix C.

### 5.2 Radiated Emission

#### 5.2.1 Radiated Emission 9 kHz – 30 MHz

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : ☒ - KAMEOKA 1st open site ☒ - 3 m ☐ - 10 m  
☐ - KAMEOKA 2nd open site ☐ - 3 m ☐ - 10 m

Test instruments : Refer to Appendix C.

#### 5.2.2 Radiated Emission 30 MHz – 1000 MHz

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : ☒ - KAMEOKA 1st open site ☒ - 3 m ☐ - 10 m  
☐ - KAMEOKA 2nd open site ☐ - 3 m ☐ - 10 m

Test instruments : Refer to Appendix C.

#### 5.2.3 Radiated Emission above 1 GHz

The requirements are ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]  
☒ - Not Applicable

Test site : ☐ - KAMEOKA 1st open site ☐ - 3 m ☐ - 10 m  
☐ - KAMEOKA 2nd open site ☐ - 3 m ☐ - 10 m

Test instruments : Refer to Appendix C.

**5.3 Occupied Bandwidth**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.4 Band-Edge Emission**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI ☒ - Shielded room ☐ - 2<sup>nd</sup> Shielded room  
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.5 Frequency Stability**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

Test site : KITA-KANSAI Environment Testing Room

Test instruments : Refer to Appendix C.

## 6 Preliminary Test and Test Setup

### 6.1 AC Powerline Conducted Emission

Not Applicable

### 6.2 Radiated Emission


#### 6.2.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

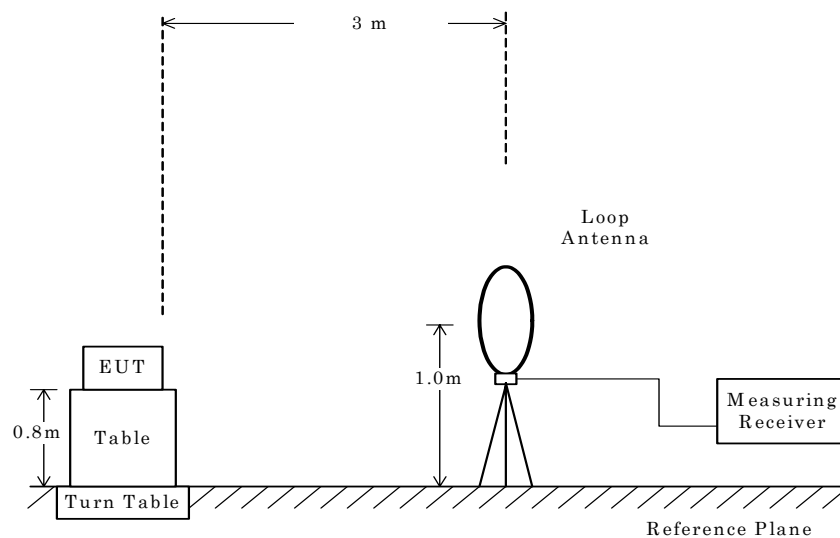


## 6.2.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

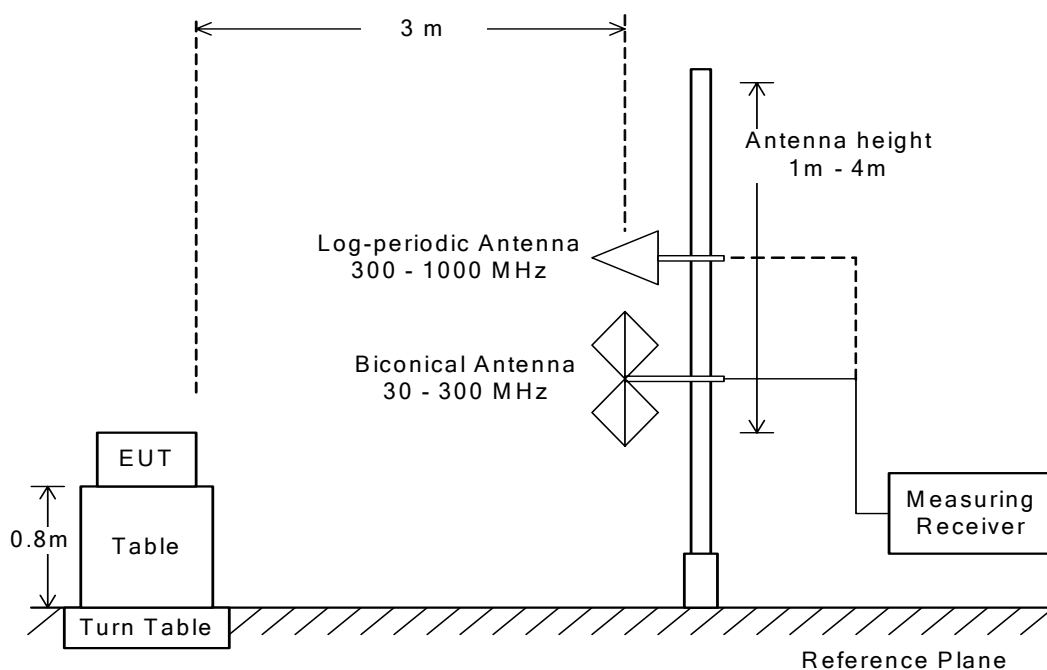


**6.2.3 Radiated Emission above 1 GHz**

Not Applicable

**6.3 Occupied Bandwidth**

The test system is shown as follows:

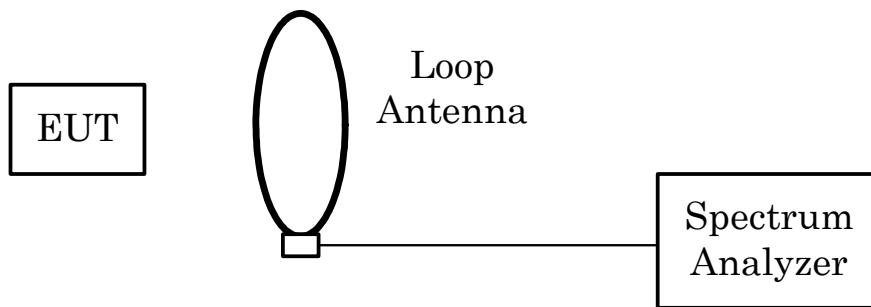


The setting of the spectrum analyzer are shown as follows:

|                 |         |
|-----------------|---------|
| Res. Bandwidth  | 1 kHz   |
| Video Bandwidth | 3 kHz   |
| Span            | 30 kHz  |
| Sweep Time      | AUTO    |
| Trace           | Maxhold |

#### 6.4 Band-Edge Emission

The test system is shown as follows:

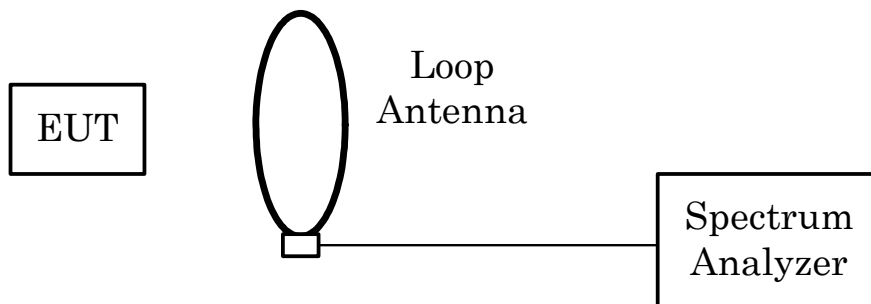


The setting of the spectrum analyzer are shown as follows:

|                     |                         |
|---------------------|-------------------------|
| TX Frequency        | 13.560 MHz              |
| Band-Edge Frequency | 13.110 MHz / 14.010 MHz |
| Res. Bandwidth      | 10 kHz                  |
| Video Bandwidth     | 10 kHz                  |
| Span                | 1 MHz                   |
| Sweep Time          | AUTO                    |
| Trace               | Maxhold                 |

## 6.5 Frequency Stability

### Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from  $-30$  to  $+50$  degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from  $-20$ ,  $+20$  and  $+50$  degrees Celsius.

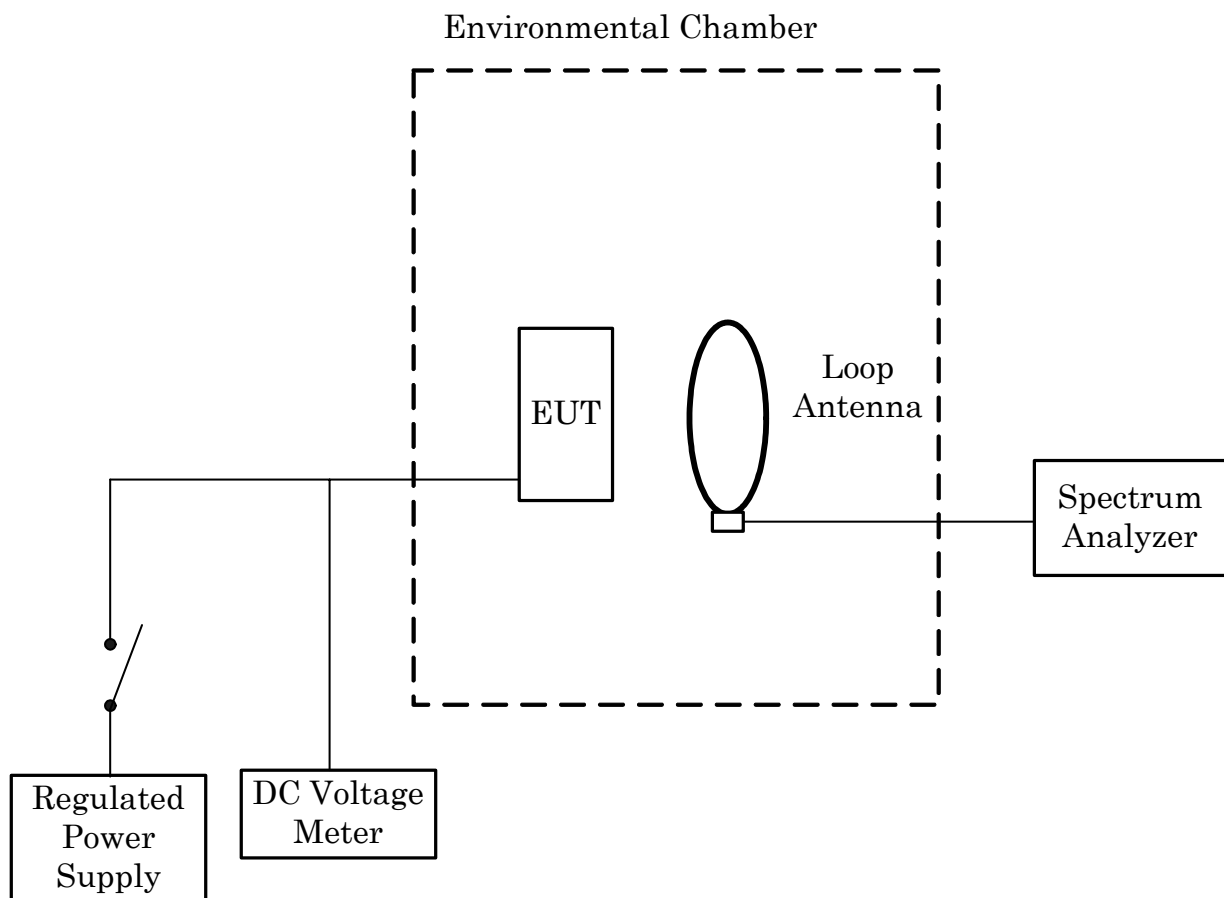

**7 Equipment Under Test Modification**

- ☒ - No modifications were conducted by JQA to achieve compliance to the limitations.  
☐ - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory : Not Applicable

**8 Responsible Party**Responsible Party of Test Item (Product)

Responsible Party :

Contact Person :

\_\_\_\_\_  
Signatory

**9 Deviation from Standard**

- ☒ - No deviations from the standard described in clause 1.  
☐ - The following deviations were employed from the standard described in clause 1.

\_\_\_\_\_

**10 Test Results****10.1 AC Powerline Conducted Emission**

The requirements are ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]  
☒ - Not Applicable

☐ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Max. Limit Exceeding (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results \_\_\_\_\_ dB(2 $\sigma$ )

Remarks : When the cellular phone is connected to the AC Charger and Stereo Handsfree, the RF(13.56MHz) communicating function is not available.

**10.2 Radiated Emission****10.2.1 Radiated Emission (§15.225(a)(b)(c))**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Max. Limit Margin (Quasi-Peak) 71.0 dB at 13.560 MHz

Max. Limit Exceeding (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results 9 kHz – 30 MHz +/-1.7 dB(2 $\sigma$ )

Remarks : The Radited Emission at 30m of 13.560 MHz is 13.0dB(uV/m).

**10.2.2 Radiated Emission (§15.225(d))**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Quasi-Peak) 11.5 dB at 556.0 MHz

Max. Limit Exceeding (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

|                                    |                    |               |                 |
|------------------------------------|--------------------|---------------|-----------------|
| Uncertainty of Measurement Results | 9 kHz – 30 MHz     | <u>+/-1.7</u> | dB(2 $\sigma$ ) |
|                                    | 30 MHz – 300 MHz   | <u>+/-4.3</u> | dB(2 $\sigma$ ) |
|                                    | 300 MHz – 1000 MHz | <u>+/-4.5</u> | dB(2 $\sigma$ ) |
|                                    | above 1 GHz        | _____         | dB(2 $\sigma$ ) |

Remarks : When the cellular phone is connected to the AC Charger and Stereo Handsfree, the RF(13.56MHz) communicating function is not available.

**10.3 Occupied Bandwidth**

The requirements are ☒ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Uncertainty of Measurement Results +/-0.9 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.4 Band-Edge Emission**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Uncertainty of Measurement Results +/-1.0 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.5 Frequency Stability**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]  
☐ - Not Applicable

The Frequency Stability level is + 0.001079 % at 13.560 MHz

Min. Limit Margin + 0.008921 % at 13.560 MHz

Max. Limit Exceeding \_\_\_\_\_ % at \_\_\_\_\_ MHz

Uncertainty of Measurement Results +/-1.6 ppm(2 $\sigma$ )

Remarks : \_\_\_\_\_

## 11 Summary

### General Remarks :

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 15

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### Test Results :

The "as received" sample;

- ☒ - fulfill the test requirements of the regulation mentioned on clause 1.
- ☐ - doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:



Shigeru Kinoshita  
Deputy Manager  
Testing Dept. EMC Div.  
JQA KITA-KANSAI Testing Center

Tested by:



Akio Hosoda  
Advisor  
Testing Dept. EMC Div.  
JQA KITA-KANSAI Testing Center

## 12 Operating Condition

The test were carried under one modulation type shown as follows:

Modulation : ASK

The Radiated Emission test were carried under one test configuration shown in clause 14.

In all tests, the fully charged battery is used for the EUT.

Detailed Transmitter portion:

Transmitter frequency : 13.560 MHz

Detailed Receiver portion:

Receiver frequency : 13.560 MHz

Other Clock Frequency

32.768 kHz, 27.12 MHz, 19.2MHz

## 13 Test Configuration

The equipment under test (EUT) consists of :

|   | Item                | Manufacturer | Model No.            | Serial No.      | FCC ID      |
|---|---------------------|--------------|----------------------|-----------------|-------------|
| A | Cellular Phone      | Sharp        | SH-12C               | 004401113265330 | APYHRO00147 |
| B | Lithium-ion Battery | Sharp        | Battery Pack<br>SH28 | --              | N/A         |

The auxiliary equipment used for testing :


None

Type of Cable:

None

## 14 Equipment Under Test Arrangement (Drawings)

a) Single Unit



## Appendix A: Test Data

### A.1 AC Powerline Conducted Emission

Not Applicable

### A.2 Radiated Emission

#### A.2.1 Radiated Emission (§15.225(a)(b)(c) & §15.209(a))

Test condition : Transmitting Test Date: March 28, 2011  
Temp.: 20 °C, Humi: 30 %

| Frequency<br>[MHz] | Correction<br>Factor<br>[dB(1/m)] | Meter Readings<br>at 3 m<br>[dB(μV)] | Limits<br>[dB(μV/m)] | Specified<br>Distance<br>[m] | Extrapolated<br>Results<br>[dB(μV/m)] | Margin<br>[dB] | Remarks |
|--------------------|-----------------------------------|--------------------------------------|----------------------|------------------------------|---------------------------------------|----------------|---------|
| 13.560             | 0.2                               | 52.8                                 | 84.0                 | 30.0                         | 13.0                                  | +71.0          | -       |
| 27.12              | 2.3                               | < 30.0                               | 29.5                 | 30.0                         | < - 7.7                               | > +37.2        | -       |

#### NOTES

- Test Distance : 3 m
- The correction factor includes the antenna factor and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.  
The above Meter Reading was maximum emission level.
- Calculation:

For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).

Fundamental : Correction Factor + Meter Reading = 0.2 + 52.8 = 53.0 dB(μV/m)

Result at 30 m = -40 + 53.0 = 13.0 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for fundamental(§15.225(a)) =  $20\log_{10}(15848) = 84.0$  dBμV/m

Harmonic : Correction Factor + Meter Reading = 2.3 + <30.0 = <32.3 dB(μV/m)

Result at 30 m = -40 + <32.3 = <-7.7 dB(μV/m) (Conversion Factor : 40dB/decade)

Limits for fundamental(§15.209(a)) =  $20\log_{10}(30) = 29.5$  dBμV/m

- Test receiver setting(s) :

Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

Average Detector, IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)


### A.2.2.1 Radiated Emission (§15.209(a))(9kHz – 30MHz)

Test condition : Transmitting

Test Date: March 28, 2011

Temp.: 20 °C, Humi: 30 %

| Frequency<br>[MHz] | Correction<br>Factor<br>[dB(1/m)] | Meter Readings<br>at 3 m<br>[dB(μV)] | Limits<br>[dB(μV/m)] | Specified<br>Distance<br>[m] | Extrapolated<br>Results<br>[dB(μV/m)] | Margin<br>[dB] | Remarks |
|--------------------|-----------------------------------|--------------------------------------|----------------------|------------------------------|---------------------------------------|----------------|---------|
| 0.009              | -0.1                              | < 35.0                               | 48.5                 | 300.0                        | < -45.1                               | > +93.6        | -       |
| 0.01               | -0.1                              | < 35.0                               | 47.6                 | 300.0                        | < -45.1                               | > +92.7        | -       |
| 0.05               | -0.4                              | < 35.0                               | 33.6                 | 300.0                        | < -45.4                               | > +79.0        | -       |
| 0.10               | -0.3                              | < 35.0                               | 27.6                 | 300.0                        | < -45.3                               | > +72.9        | -       |
| 0.50               | -0.4                              | < 30.0                               | 33.6                 | 30.0                         | < -10.4                               | > +44.0        | -       |
| 1.00               | -0.2                              | < 30.0                               | 27.6                 | 30.0                         | < -10.2                               | > +37.8        | -       |
| 5.00               | -0.1                              | < 30.0                               | 29.5                 | 30.0                         | < -10.1                               | > +39.6        | -       |
| 10.00              | 0.0                               | < 30.0                               | 29.5                 | 30.0                         | < -10.0                               | > +39.5        | -       |
| 20.00              | 1.1                               | < 30.0                               | 29.5                 | 30.0                         | < - 8.9                               | > +38.4        | -       |
| 30.00              | 2.5                               | < 30.0                               | 29.5                 | 30.0                         | < - 7.5                               | > +37.0        | -       |

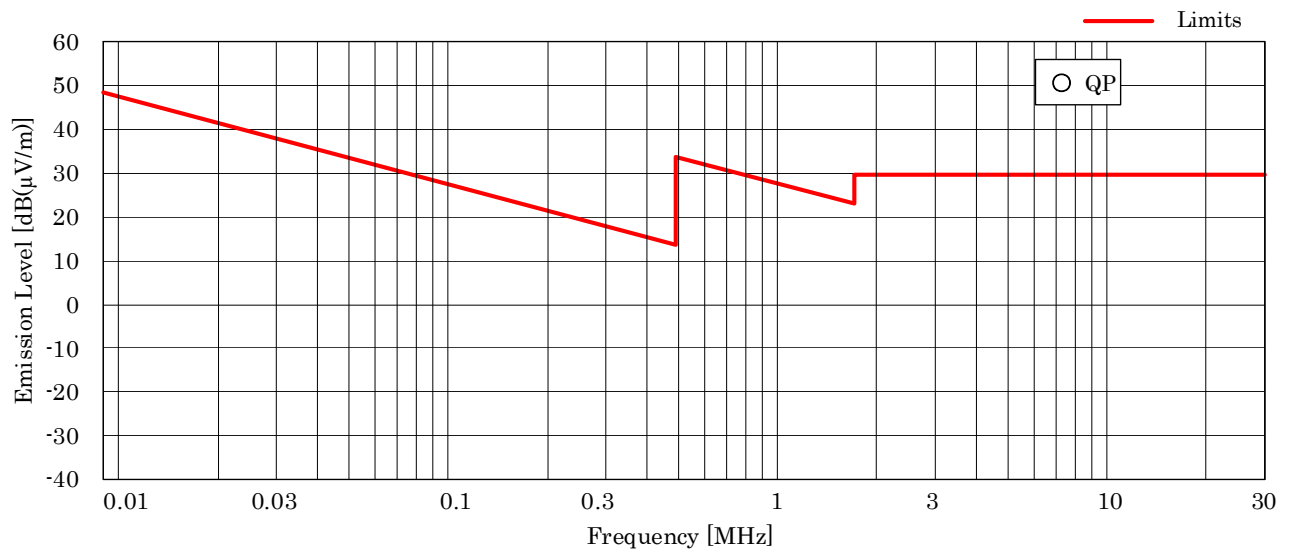

#### NOTES


- Test Distance : 3 m
- The spectrum was checked from 9 kHz to 30 MHz.
- The correction factor includes the antenna factor and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Calculated result at 30.00 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading = 2.5 + <30.0 = <32.5 dB(μV/m)  
Result at 30 m = -40.0 + <32.5 = <-7.5 dB(μV/m) (Conversion Factor : 40dB/decade)
- Test receiver setting(s) :  
Quasi-Peak Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)  
Average Detector, IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)

### A.2.2.2 Radiated Emission (§15.209(a))( 30MHz – 1000MHz)

Test Date: March 28, 2010

Temp.: 20 °C, Humi: 30 %

| Frequency<br>[MHz] | Antenna<br>Factor<br>[dB(1/m)] | Cable<br>Loss<br>[dB] | Meter Readings<br>[dB(μV)] |       | Limits<br>[dB(μV/m)] | Results<br>[dB(μV/m)] |        | Margin<br>[dB] | Remarks |
|--------------------|--------------------------------|-----------------------|----------------------------|-------|----------------------|-----------------------|--------|----------------|---------|
|                    |                                |                       | Hori.                      | Vert. |                      | Hori.                 | Vert.  |                |         |
| 40.7               | 15.7                           | 1.1                   | < 0.0                      | 1.9   | 40.0                 | < 16.8                | 18.7   | +21.3          | -       |
| 108.5              | 10.9                           | 1.9                   | 2.5                        | 10.5  | 43.5                 | 15.3                  | 23.3   | +20.2          | -       |
| 122.0              | 12.5                           | 2.0                   | < 0.0                      | 10.2  | 43.5                 | < 14.5                | 24.7   | +18.8          | -       |
| 325.4              | 14.2                           | 3.6                   | 11.9                       | 9.4   | 46.0                 | 29.7                  | 27.2   | +16.3          | -       |
| 352.6              | 14.7                           | 3.8                   | 13.0                       | 8.4   | 46.0                 | 31.5                  | 26.9   | +14.5          | -       |
| 433.9              | 16.6                           | 4.3                   | 5.2                        | 3.9   | 46.0                 | 26.1                  | 24.8   | +19.9          | -       |
| 515.3              | 17.8                           | 4.9                   | 2.1                        | 1.5   | 46.0                 | 24.8                  | 24.2   | +21.2          | -       |
| 528.8              | 18.0                           | 4.9                   | 4.8                        | 4.2   | 46.0                 | 27.7                  | 27.1   | +18.3          | -       |
| 542.4              | 18.2                           | 5.0                   | 6.3                        | 5.4   | 46.0                 | 29.5                  | 28.6   | +16.5          | -       |
| 556.0              | 18.5                           | 5.0                   | 11.0                       | 10.0  | 46.0                 | 34.5                  | 33.5   | +11.5          | -       |
| 569.5              | 18.7                           | 5.1                   | 8.7                        | 8.3   | 46.0                 | 32.5                  | 32.1   | +13.5          | -       |
| 583.1              | 18.9                           | 5.1                   | 8.5                        | 7.6   | 46.0                 | 32.5                  | 31.6   | +13.5          | -       |
| 596.6              | 19.1                           | 5.2                   | 1.2                        | < 0.0 | 46.0                 | 25.5                  | < 24.3 | +20.5          | -       |
| 610.2              | 19.2                           | 5.2                   | 4.0                        | 2.3   | 46.0                 | 28.4                  | 26.7   | +17.6          | -       |
| 637.3              | 19.5                           | 5.3                   | 0.4                        | < 0.0 | 46.0                 | 25.2                  | < 24.8 | +20.8          | -       |

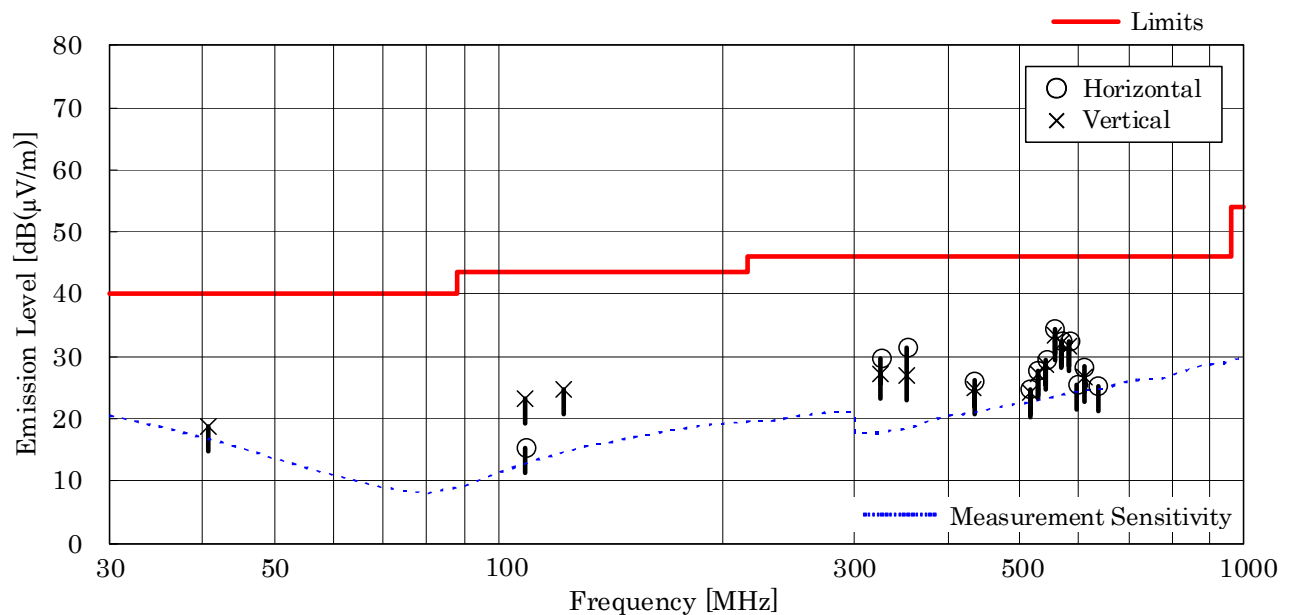


#### NOTES

- Test Distance : 3 m
- The spectrum was checked from 30 MHz to 1000 MHz.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Calculated result at 556.0 MHz, as the worst point shown on underline:  
Antenna Factor + Cable Loss + Meter Reading = 18.5 + 5.0 + 11.0 = 34.5 dB(μV/m)
- Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

### A.3 Occupied Bandwidth

Test Date : March 25, 2011

Temp.:20°C, Humi:37%

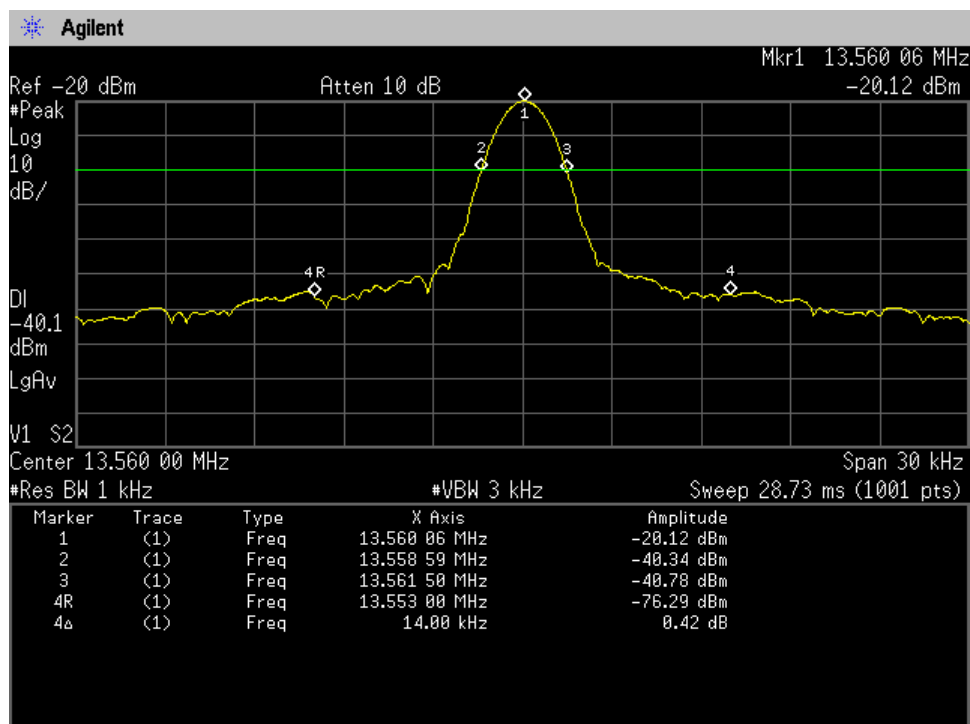


#### A.4 Band-Edge Emission


Test Date : March 25, 2011

Temp.:20°C, Humi:37%

##### Band-Edge Emission

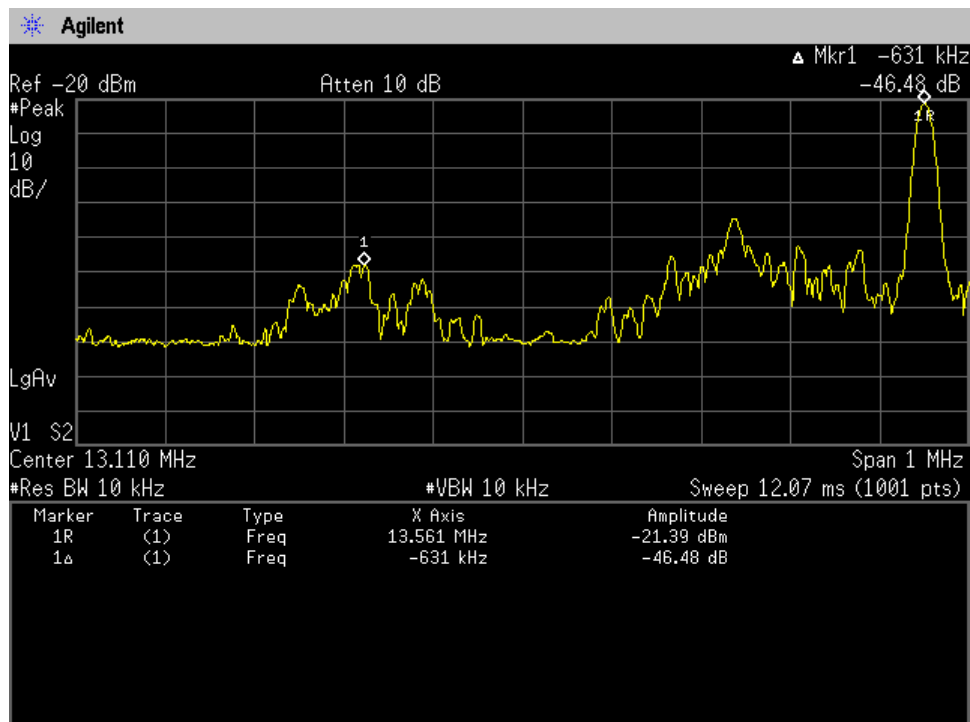

##### Band-Edge Emission

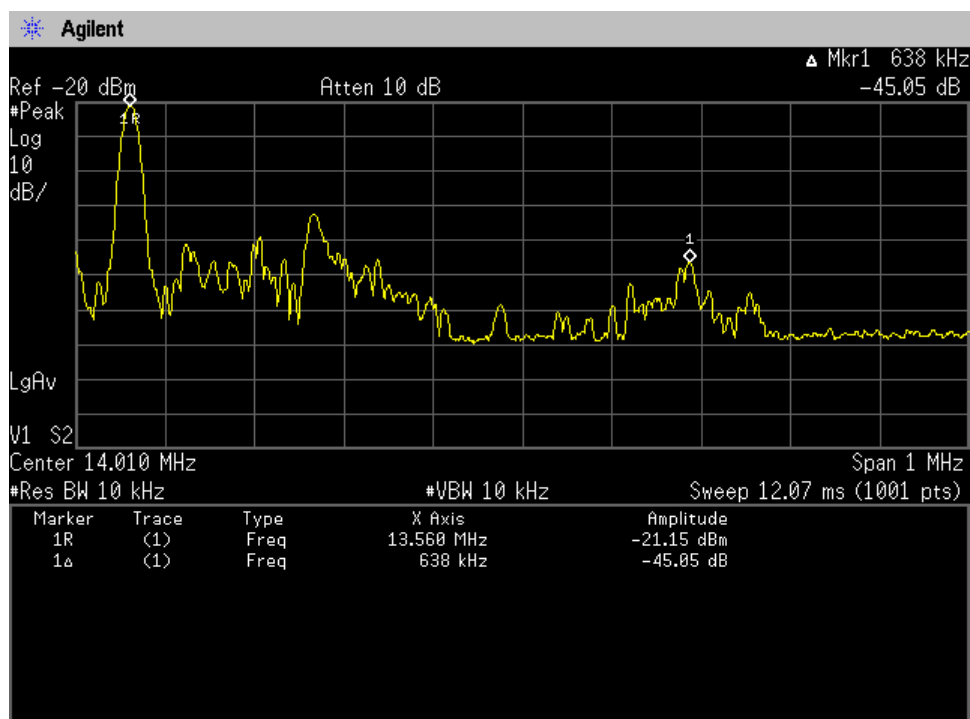

## A.5 Frequency Stability

Test Date: March 21, 2011

Transmitting Frequency : 13.560 MHz  
DC Supply Voltage : 4.0 VDC

| Ambient<br>Temperature<br>[°C] | Startup   | Frequency with time elapse[MHz] |           |            |
|--------------------------------|-----------|---------------------------------|-----------|------------|
|                                |           | 2 minutes                       | 5 minutes | 10 minutes |
| -20                            | 13.560096 | 13.560111                       | 13.560116 | 13.560119  |
| 20                             | 13.560146 | 13.560136                       | 13.560132 | 13.560127  |
| 50                             | 13.559947 | 13.559928                       | 13.560132 | 13.559917  |

| Ambient<br>Temperature<br>[°C] | Startup           | Deviation with time elapse[%] |            |            | Limits<br>[%] | Margin<br>[%] |
|--------------------------------|-------------------|-------------------------------|------------|------------|---------------|---------------|
|                                |                   | 2 minutes                     | 5 minutes  | 10 minutes |               |               |
| -20                            | + 0.000706        | + 0.000821                    | + 0.000858 | + 0.000878 | 0.01          | + 0.009122    |
| 20                             | <b>+ 0.001079</b> | + 0.001005                    | + 0.000975 | + 0.000936 | 0.01          | + 0.008921    |
| 50                             | - 0.000394        | - 0.000534                    | + 0.000975 | - 0.000615 | 0.01          | + 0.009025    |

Sample of calculated result at 13.560 MHz, as the Minimum Margin point:

Ambient Temperature : 20 °C / Startup

DC Supply Voltage 4.0V

Minimum Margin:  $0.010000 - 0.001079 = 0.008921$  (%)

The point shown on “      ” is the Minimum Margin Point. The Maximum Deviation Point is shown on a thick letter.

Note: The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.

**Appendix B: Test Arrangement (Photographs)****B.1 AC Powerline Conducted Emission**

Not Applicable

**B.2 Radiated Emission**

*This page is CONFIDENTIAL.*

*This page is CONFIDENTIAL.*

**Appendix C: Test Instruments****C.1 AC Powerline Conducted Emission**

Not Applicable

**C.2 Radiated Emission****C.2.1 Radiated Emission 9 kHz – 30 MHz**

| Type          | Model   | Manufacturer    | ID No. | Last Cal. | Interval |
|---------------|---------|-----------------|--------|-----------|----------|
| Test Receiver | ESCS 30 | Rohde & Schwarz | A-1    | 2011/2    | 1 Year   |
| Loop Antenna  | HFH2-Z2 | Rohde & Schwarz | C-3    | 2010/8    | 1 Year   |
| RF Cable      | RG213/U | Rohde & Schwarz | H-29   | 2010/8    | 1 Year   |

**C.2.2 Radiated Emission 30MHz – 1000 MHz**

| Type                 | Model            | Manufacturer    | ID No. | Last Cal. | Interval |
|----------------------|------------------|-----------------|--------|-----------|----------|
| Test Receiver        | ESCS 30          | Rohde & Schwarz | A-1    | 2011/2    | 1 Year   |
| Biconical Antenna    | VHA9103/FBAB9177 | Schwarzbeck     | C-25   | 2010/5    | 1 Year   |
| Log-periodic Antenna | UHALP9108-A1     | Schwarzbeck     | C-28   | 2010/5    | 1 Year   |
| RF Cable             | --               | ----            | H-1    | 2010/5    | 1 Year   |
| Site Attenuation     | --               | ----            | H-11   | 2010/11   | 1 Year   |

**C.3 Modulation Characteristics**

Not Applicable

**C.3 Occupied Bandwidth**

| Type              | Model   | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|---------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A  | Agilent      | A-39   | 2010/9    | 1 Year   |
| Loop Antenna      | LU-100A | TEXIO        | C-33   | N/A       | N/A      |

**C.4 Band-Edge Emission**

| Type              | Model   | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|---------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A  | Agilent      | A-39   | 2010/9    | 1 Year   |
| Loop Antenna      | LU-100A | TEXIO        | C-33   | N/A       | N/A      |

**C.5 Frequency Stability**

| Type                  | Model                              | Manufacturer    | ID No. | Last Cal. | Interval |
|-----------------------|------------------------------------|-----------------|--------|-----------|----------|
| Spectrum Analyzer     | FSL3                               | Rohde & Schwarz | A-40   | 2011/2    | 1 Year   |
| Loop Antenna          | LU-100A                            | TEXIO           | C-33   | N/A       | N/A      |
| DC Voltage Meter      | 2011-39                            | YEW             | B-33   | 2010/4    | 1 Year   |
| Environmental Chamber | PL-4KPH<br>(S/N:14007470)          | TABAI ESPEC     | --     | N/A       | N/A      |
| Temperature Recorder  | SRF106AS00000M11<br>(S/N:01400909) | TABAI ESPEC     | --     | 2010/8    | 1 Year   |