



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the
Sharp CDMA SHX11 Tri-Band CDMA (BC0, BC3 and BC6) and Tri-
Band GSM (900 MHz, 1800 MHz and 1900 MHz) Dual Mode Cellular
Phone with Bluetooth, WLAN, FeliCa and GPS

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00151

Document 75913577 Report 12 Issue 1

June 2011



Product Service

TUV Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp CDMA SHX11 Tri-Band CDMA (BC0, BC3 and BC6) and Tri-
Band GSM (900 MHz, 1800 MHz and 1900 MHz) Dual Mode Cellular
Phone with Bluetooth, WLAN, FeliCa and GPS

Document 75913577 Report 12 Issue 1

June 2011

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY

N Bennett
Senior Administrator

APPROVED BY

M Jenkins
Authorised Signatory

DATED

21 June 2011

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47: Part 15.225. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

R Henley

A R Hubbard





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 6
1.4	Product Information 7
1.5	Test Conditions 8
1.6	Deviations From the Standard 8
1.7	Modification Record 8
2	TEST DETAILS 9
2.1	EIRP Peak Power 10
2.2	Occupied Bandwidth 14
2.3	Frequency Stability Under Temperature Variations 16
3	TEST EQUIPMENT USED 18
3.1	Test Equipment Used 19
3.2	Measurement Uncertainty 20
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 21
4.1	Accreditation, Disclaimers and Copyright 22



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp CDMA SHX11 Tri-Band CDMA (BC0, BC3 and BC6) and Tri-Band GSM (900 MHz, 1800
MHz and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS



1.1 INTRODUCTION

The information contained in this report is intended to show verification of Sharp CDMA SHX11 Tri-Band CDMA (BC0, BC3 and BC6) and Tri-Band GSM (900 MHz, 1800 MHz and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS to the requirements of FCC CFR 47 Part 15.255.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	CDMA SHX11
Serial Number(s)	IMEI 004401113358184
Software Version	D3291
Hardware Version	PP1
Number of Samples Tested	One
Test Specification/Issue/Date	FCC CFR 47 Part 15C: 2010
Incoming Release Date	Application Form 14 June 2011
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	8492 14 April 2011
Start of Test	09 June 2011
Finish of Test	21 June 2011
Name of Engineer(s)	A R Hubbard R Henley
Related Document(s)	ANSI C63.4: 2003



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 15.255 is shown below.

Configuration 1: Handset						
Section	Spec Clause	Test Description	Mode	Mod State	Result	Base Standard
2.1	15.225(a)(b)(c)(d)	EIRP Peak Power	Active	0	Pass	ANSI C63.4
2.2	15.225, 15.215 (c)	Occupied Bandwidth	Active	0	Pass	ANSI C63.4
2.3	15.225(e)	Frequency Stability Under Temperature Variations	Active	0	Pass	ANSI C63.4

N/A – Not Applicable



Product Service

1.3 APPLICATION FORM

APPLICANT'S DETAILS			
COMPANY NAME :	Sharp Telecommunications of Europe Ltd		
ADDRESS :	Azure House, Bagshot Road Bracknell, Berkshire RG12 7QY		
NAME FOR CONTACT PURPOSES :	Ken Newman		
TELEPHONE NO: 01344 301 883	FAX NO:	01344 300 293	
	E-MAIL:	ken.newman@sharp.eu	

EQUIPMENT INFORMATION			
<u>Equipment designator:</u>			
Model name/number	CDMA SHX11	Identification number	APYHRO00151
<u>Supply Voltage:</u>			
<input type="checkbox"/>	AC mains	State AC voltage V	and AC frequency Hz
<input type="checkbox"/>	DC (external)	State DC voltage V	and DC current A
<input checked="" type="checkbox"/>	DC (internal)	State DC voltage 3.7 V	and Battery type Li-ion
<u>Frequency characteristics:</u>			
Frequency range	13.56 MHz to 13.56 MHz	Channel spacing	(if channelized)
Designated test frequencies:			
Bottom: MHz	Middle: MHz	Top: MHz	
<u>Power characteristics:</u>			
Maximum transmitter power W	Minimum transmitter power W
<input checked="" type="checkbox"/>	Continuous transmission	(if variable)	
<input type="checkbox"/>	Intermittent transmission	State duty cycle	
	If intermittent, can transmitter be set to continuous transmit test mode? Y/N		
<u>Antenna characteristics:</u>			
<input type="checkbox"/>	Antenna connector	State impedance	ohm
<input type="checkbox"/>	Temporary antenna connector	State impedance	ohm
<input checked="" type="checkbox"/>	Integral antenna	State gain 0 dBi	
<u>Modulation characteristics:</u>			
<input checked="" type="checkbox"/>	Amplitude	<input type="checkbox"/>	Other
<input type="checkbox"/>	Frequency	Details:	
<input type="checkbox"/>	Phase		
Can the transmitter operate un-modulated?		N	
ITU Class of emission:			
<u>Extreme conditions:</u>			
Maximum temperature	+60 °C	Minimum temperature	-20 °C
Maximum supply voltage	4.0 V	Minimum supply voltage	3.7 V

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature : *T. Taki*
 Name : Tetsuya Taki
 Position held : Manager
 Date : 14 June 2011



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was an Sharp CDMA SHX11 Tri-Band CDMA (BC0, BC3 and BC6) and Tri-Band GSM (900 MHz, 1800 MHz and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS. A full technical description can be found in the manufacturer's documentation.

1.4.2 Test Configuration

Configuration 1: Handset

The EUT was configured in accordance with FCC CFR 47 Part 15.225.

1.4.3 Modes of Operation

Modes of operation of each EUT during testing were as follows:

Mode 1 – Active

Information on the specific test modes utilised are detailed in the test procedure for each individual test.



Product Service

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure or test laboratories as appropriate.

The EUT was powered from either a 3.7 V DC Supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.7 MODIFICATION RECORD

No modifications were made to the EUT during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp CDMA SHX11 Tri-Band CDMA (BC0, BC3 and BC6) and Tri-Band GSM (900 MHz, 1800
MHz and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS



Product Service

2.1 EIRP PEAK POWER

2.1.1 Specification Reference

FCC CFR 47 Part 15, Clause 15.225(a)(b)(c)(d)

2.1.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113358184

2.1.3 Date of Test and Modification State

09 June 2011 - Modification State 0

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

The EUT was placed on a remotely controlled turntable within a semi-anechoic chamber. Measurements of the carrier frequency from the EUT were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The measurement was performed with a peak detector and the trace set to max hold using a Resolution and Video bandwidth of 1 MHz.

A substitution was then performed by replacing the EUT with a substitution antenna and signal generator. The signal generator level was increased to achieve the same raw result as the EUT. Cable loss and antenna gain was included to obtain the result.

A wideband power meter was then used to apply a correction factor to achieve the final result.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1

2.1.6 Environmental Conditions

09 June 2011

Ambient Temperature 20.4°C

Relative Humidity 37.0%



Product Service


2.1.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15.225 for EIRP Peak Power.

The test results are shown below.

Configuration 1 – Modes 1

Carrier

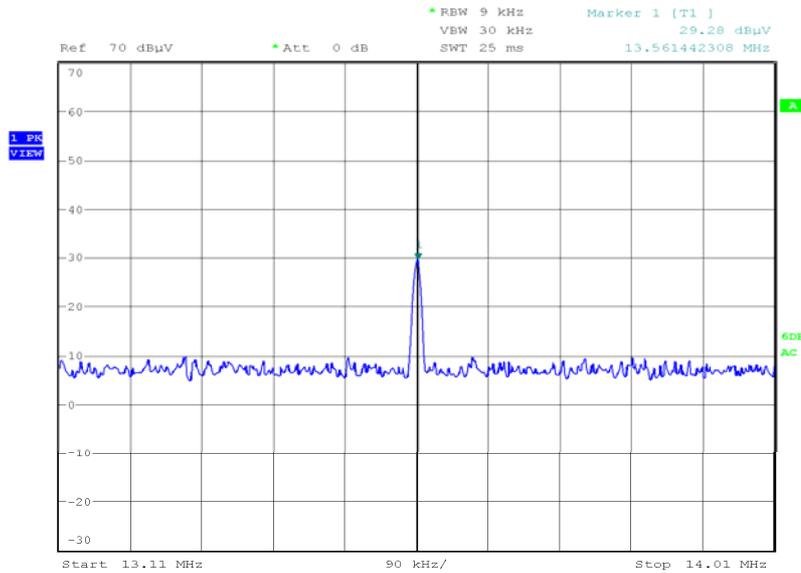


Date: 9.JUN.2011 15:38:12

Frequency (MHz)	QP Level (dBuV/m) at 3m	QP Level (uV/m) at 3m	QP Limit (dBuV/m) at 30m	QP Limit (uV/m) at 30m	Angle (Deg)	Height (m)	Polarity
13.561	46.81	219.03	84.0	15843	0	1.50	Face On




9kHz to 150kHz

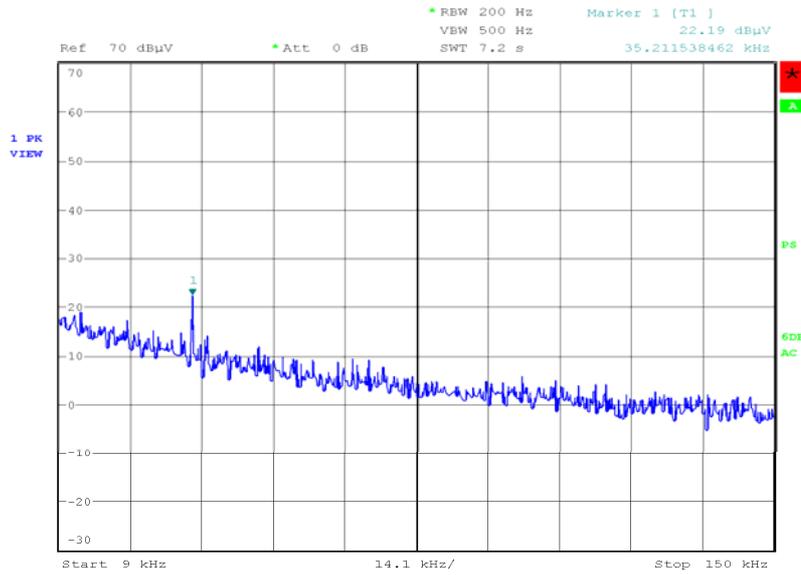

Date: 9.JUN.2011 15:50:33

The emission at 35.211kHz is an ambient


150kHz to 30MHz

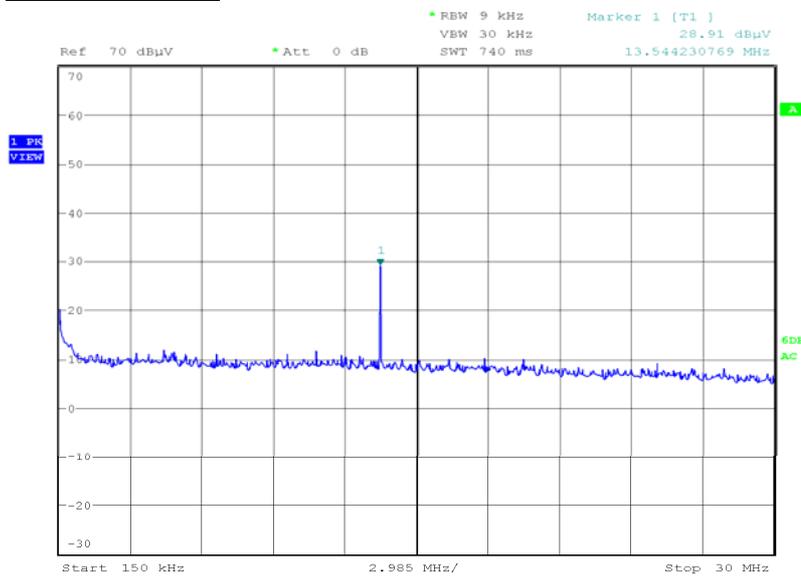

Date: 9.JUN.2011 15:32:54



30 MHz to 1 GHz

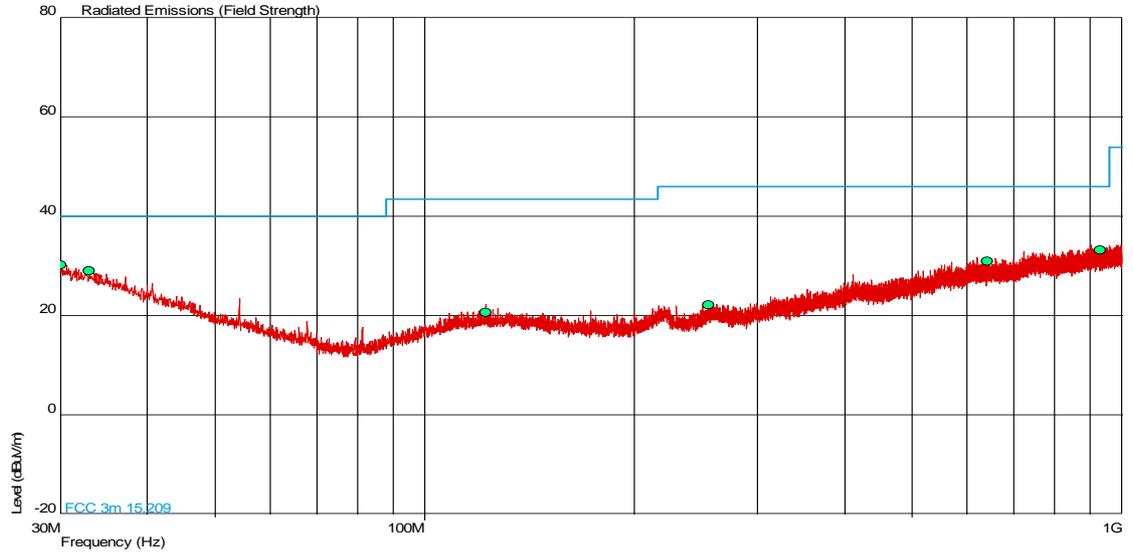

Frequency (MHz)	QP Level (dBuV/m)	QP Level (uV/m)	QP Limit (dBuV/m)	QP Limit (uV/m)	QP Margin (dBuV/m)	QP Margin (uV/m)	Angle (Deg)	Height (m)	Polarity
30.048	30.2	32.4	40.0	100.0	-9.8	-67.6	188	1.00	Vertical
33.060	29.0	28.2	40.0	100.0	-11.0	-71.8	115	1.00	Vertical
122.251	20.6	10.7	43.5	150.0	-22.9	-139.3	135	1.00	Vertical
255.032	22.1	12.7	46.0	200.0	-23.9	-187.3	173	2.98	Vertical
641.754	31.0	35.5	46.0	200.0	-15.0	-164.5	298	3.38	Vertical
929.899	33.3	46.2	46.0	200.0	-12.7	153.8	22	1.00	Vertical



Product Service

2.2 OCCUPIED BANDWIDTH

2.2.1 Specification Reference

FCC CFR 47 Part 15, Clause 15.225, 15.215(c)

2.2.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113358184

2.2.3 Date of Test and Modification State

21 June 2011 - Modification State 0

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15 and ANSI C63.10.

The EUT was transmitting at maximum power, at all data rates via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen. The peak point of the trace was measured and the markers positioned to give the -20dBc points of the displayed spectrum. The test was performed with an unmodulated carrier.

The plot of the following pages shows the resultant display from the Spectrum Analyser.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1

2.2.6 Environmental Conditions

	21 June 2011
Ambient Temperature	22.2°C
Relative Humidity	56.6%



Product Service

2.2.7 Test Results


For the period of test the EUT met the requirements of FCC CFR 47 Part 2 and 22 for Occupied Bandwidth.

The test results are shown below.

4 V DC Supply

Frequency (MHz)	20dB Bandwidth (Hz)
13.56	25.56

Configuration 1 – Mode 1

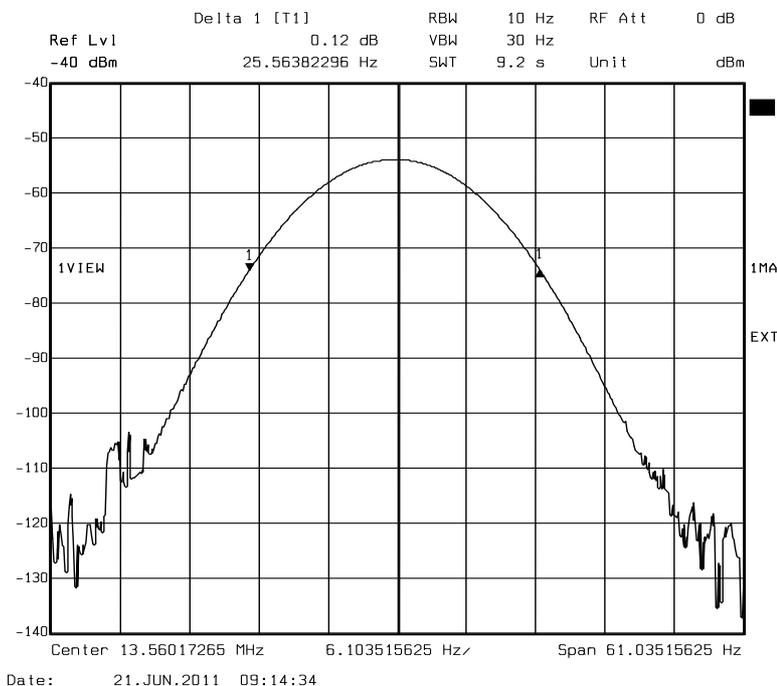



Product Service

2.3 FREQUENCY STABILITY UNDER TEMPERATURE VARIATIONS

2.3.1 Specification Reference

FCC CFR 47 Part 15, Clause 15.225(e)

2.3.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113358184

2.3.3 Date of Test and Modification State

21 June 2011 - Modification State 0

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.225(e).

The EUT was set to transmit on maximum power with normal modulation. A frequency counter, was used to measure the frequency error. The temperature was adjusted between -20°C and +50°C in 10° steps as per 15.225(e).

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1

2.3.6 Environmental Conditions

	21 June 2011
Ambient Temperature	22.2°C
Relative Humidity	56.6%



2.3.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15.225 for Frequency Stability Under Temperature Variations.

The test results are shown below.

Configuration 1 - Mode 1

4 V DC Supply

Temperature Interval (°C)	Test Frequency (MHz)	Test Voltage	Mode	Deviation (%)	Limit
-20	13.56	4.0	RFID	0.0024	±0.01%
-10	13.56	4.0	RFID	0.0025	±0.01%
0	13.56	4.0	RFID	0.0026	±0.01%
+10	13.56	4.0	RFID	0.0023	±0.01%
+20	13.56	4.0	RFID	0.0020	±0.01%
+20	13.56	4.0	RFID	0.0019	±0.01%
+20	13.56	4.0	RFID	0.0018	±0.01%
+30	13.56	4.0	RFID	0.0013	±0.01%
+40	13.56	4.0	RFID	0.0009	±0.01%
+50	13.56	4.0	RFID	0.0002	±0.01%

Limit Clause

The frequency tolerance of the carrier signal shall be maintained within ±0.01% of the operating frequency.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 – EIRP Peak Power					
Antenna (Bilog)	Schaffner	CBL6143	287	24	19-Jan-2012
Antenna (Active Loop, 9kHz-30MHz)	Rohde & Schwarz	HFH2-Z2	333	24	20-Sep-2012
Screened Room (5)	Rainford	Rainford	1545	24	3-Feb-2014
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	9-Sep-2011
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Section 2.2 – Occupied Bandwidth					
Spectrum Analyser	Rohde & Schwarz	FSEM	37	12	18-Apr-2012
Multimeter	White Gold	WG022	190	12	26-Oct-2011
Termination 50ohm/50W	Bird	8085	389	12	3-Sep-2011
RF Coupler	TUV	TUV	415	-	TU
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	23-Jun-2011
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	06-Jun-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Spectrum Analyser	Agilent	E7405A	1410	12	29-Mar-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	3-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygrometer	Rotronic	A1	2677	12	20-Jan-2012
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Signal Generator, 9kHz to 3GHz	Rohde & Schwarz	SMA 100A	3494	12	25-Jan-2012
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	8-Feb-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Jan-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012
Combiner/Splitter	Weinschel	1506A	3880	12	22-Feb-2012
Section 2.3 – Frequency Stability Under Temperature Variations					
Spectrum Analyser	Rohde & Schwarz	FSEM	37	12	18-Apr-2012
Radiocommunications Tester	Rohde & Schwarz	CMU 200	39	12	18-Nov-2011
Climatic Chamber	Votsch	VT4002	161	-	O/P Mon
Multimeter	White Gold	WG022	190	12	26-Oct-2011
RF Coupler	TUV	TUV	415	-	TU
Temperature Chamber	Montford	2F3	467	-	O/P Mon
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	23-Jun-2011
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Thermocouple Thermometer	Fluke	51	3172	12	12-Jul-2011
Thermocouple Thermometer	Fluke	51	3173	12	12-Jul-2011
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	11-Jan-2012
Combiner/Splitter	Weinschel	1506A	3880	12	22-Feb-2012

TU – Traceability Unscheduled

O/P Mon – Output monitored using calibrated equipment.



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Conducted Emissions, LISN	150kHz to 30MHz Amplitude	3.2dB*
Conducted Emissions, ISN	150kHz to 30MHz Amplitude	2.1dB
Substitution Antenna, Radiated Field	30MHz to 18GHz Amplitude	2.6dB
Discontinuous Interference	150kHz to 30MHz Amplitude	3.0dB*
Interference Power	30MHz to 300MHz Amplitude	3.0dB*
Radiated E-Field Susceptibility	10MHz to 6GHz Test Amplitude	2.0dB†
Conducted Susceptibility RF	50kHz to 1000MHz Amplitude	3.1dB•
	EM Clamp Method of Test	1.2dB•
	CDN Method of Test	1.1dB•
	BCI Clamp Method of Test	1.2dB•
Conducted Susceptibility LF	DC to 150kHz	1.0%†
Power Frequency Magnetic Field	50Hz/60Hz Amplitude	0.45%
Magnetic Emissions	9kHz to 30MHz Amplitude	3.4dB*
Magnetic Field/Flux iaw EN 50366	10Hz to 400kHz	2.64%
Harmonics and Flicker	The test was applied using proprietary equipment that meets the requirements of EN 61000-3-2 and EN 61000-3-3	—
Mains Voltage Variations and Interrupts	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-11	—
Fast Transient Burst	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-4	—
Electrostatic Discharge	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-2	—
Surge	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-5	—
Vehicle Transients	The test was applied using proprietary equipment that meets the requirements of ISO 7637-1 and 2	—
Compass Safe Distance	Azimuth Accuracy	0.10°
Channel Occupancy/Separation	19.1kHz	N/A
Maximum Output Power	Not Applicable	±0.5dB
Number of Channels	Not Applicable	N/A
20dB Bandwidth	19.1kHz	±0.5dB

Worst case error for both Time and Frequency measurement 12 parts in 10⁶.

- * In accordance with CISPR 16-4-2
- † In accordance with UKAS Lab 34
- In accordance with EN61000-4-6



Product Service

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service Limited

© 2011 TÜV SÜD Product Service Limited