



Product Service

---

**Choose certainty.  
Add value.**

## Report On

FCC Testing of the Sharp CDMA SHX11  
Tri-band CDMA (850MHz\_BC0/BC3, 1900MHz\_BC6) & Tri-band GSM  
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with  
Bluetooth, WLAN, FeliCa and GPS  
In accordance with FCC CFR 47 Part 15C (Bluetooth)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00151

Document 75913577 Report 11 Issue 1

June 2011



Product Service

TUV Product Service Ltd, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuvps.co.uk](http://www.tuvps.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC Testing of the Sharp CDMA SHX11 Tri-band CDMA  
(850MHz\_BC0/BC3, 1900MHz\_BC6) & Tri-band GSM  
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with  
Bluetooth, WLAN, FeliCa and GPS  
In accordance with FCC CFR 47 Part 15C (Bluetooth)

Document 75913577 Report 11 Issue 1

June 2011

**PREPARED FOR**

Sharp Communication Compliance Limited  
Azure House  
Bagshot Road  
Bracknell  
Berkshire  
RG12 7QY

**PREPARED BY**

**N Bennett**  
Senior Administrator

**APPROVED BY**

**M Jenkins**  
Authorised Signatory

**DATED**

20 June 2011

---

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

B Airs

G Lawler



0141

R Henley



## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Application Form ..... 6
1.4	Product Information ..... 7
1.5	Test Conditions ..... 8
1.6	Deviations From the Standard ..... 8
1.7	Modification Record ..... 8
<b>2</b>	<b>TEST DETAILS ..... 9</b>
2.1	20dB Bandwidth ..... 10
2.2	Channel Separation ..... 18
2.3	Channel Dwell Time ..... 20
2.4	Number of Hopping Channels ..... 27
2.5	Radiated Emissions (Enclosure Port) ..... 29
2.6	Maximum Peak Conducted Output Power ..... 39
2.7	EIRP Peak Power ..... 41
2.8	Spurious Emissions ..... 45
2.9	Band Edge Emissions ..... 47
<b>3</b>	<b>TEST EQUIPMENT USED ..... 50</b>
3.1	Test Equipment Used ..... 51
3.2	Measurement Uncertainty ..... 54
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 55</b>
4.1	Accreditation, Disclaimers and Copyright ..... 56



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC Testing of the Sharp CDMA SHX11  
Tri-band CDMA (850MHz\_BC0/BC3, 1900MHz\_BC6) & Tri-band GSM  
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and  
GPS In accordance with FCC CFR 47 Part 15C (Bluetooth)



Product Service

## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of Sharp CDMA SHX11 Tri-band CDMA (850MHz\_BC0/BC3, 1900MHz\_BC6) & Tri-band GSM (GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS to the requirements of FCC CFR 47 Part 15C.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Manufacturing Description	Tri-band CDMA (850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM (GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS
Model Number(s)	CDMA SHX11
Serial Number(s)	IMEI 004401113359901 IMEI 004401113357947
Software Version	PP1
Hardware Version	C3251
Number of Samples Tested	Two
Test Specification/Issue/Date	FCC CFR 47 Part 15C: 2010
Incoming Release Date	Application Form 14 June 2011
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	8492 14 April 2011
Start of Test	24 April 2011
Finish of Test	23 May 2011
Name of Engineer(s)	B Airs G Lawler R Henley
Related Document(s)	ANSI C63.4: 2003



Product Service

**1.2 BRIEF SUMMARY OF RESULTS**

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 15C is shown below.

Configuration 1: Bluetooth with EDR						
Section	Spec Clause	Test Description	Mode	Mod State	Result	Base Standard
2.1	15.247 (a)(1)	20dB Bandwidth	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	0	Pass	
2.2	15.247 (a)(1)	Channel Separation	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	0	Pass	
2.3	15.247 (a)(1)(iii)	Channel Dwell Time	2402 MHz Tx	-	N/A	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	-	N/A	
2.4	15.247 (a)(1)(iii)	Number of Hopping Channels	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	0	Pass	
2.5	15.247(a)(2)	Radiated Emissions (Enclosure Port)	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	0	Pass	
2.6	15.247 (b)(3)	Maximum Peak Conducted Output Power	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	0	Pass	
2.7	15.247 (b)(4)	EIRP Peak Power	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	0	Pass	
2.8	15.247(d)	Spurious Emissions	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	0	Pass	
			2480 MHz Tx	0	Pass	
2.9	15.247(d)	Band Edge Emissions	2402 MHz Tx	0	Pass	ANSI C63.4
			2441 MHz Tx	-	N/A	
			2480 MHz Tx	0	Pass	

N/A – Not Applicable



Product Service

**1.3 APPLICATION FORM**

APPLICANT'S DETAILS			
COMPANY NAME :	Sharp Telecommunications of Europe Ltd		
ADDRESS :	Azure House, Bagshot Road Bracknell, Berkshire RG12 7QY		
NAME FOR CONTACT PURPOSES :	Ken Newman		
TELEPHONE NO: 01344 301 883	FAX NO:	01344 300 293	
	E-MAIL:	ken.newman@sharp.eu	

EQUIPMENT INFORMATION			
<u>Equipment designator:</u>			
Model name/number	CDMA SHX11	Identification number	APYHRO00151
<u>Supply Voltage:</u>			
<input type="checkbox"/>	AC mains	State AC voltage ..... V	and AC frequency ..... Hz
<input type="checkbox"/>	DC (external)	State DC voltage ..... V	and DC current ..... A
<input checked="" type="checkbox"/>	DC (internal)	State DC voltage 3.7 V	and Battery type Li-ion
<u>Frequency characteristics:</u>			
Frequency range	2402 MHz to 2480 MHz	Channel spacing	1MHz (if channelized)
Designated test frequencies:	Bottom: 2402 MHz	Middle: 2441 MHz	Top: 2480 MHz
<u>Power characteristics:</u>			
Maximum transmitter power	6 dBm	Minimum transmitter power (if variable)	..... W
<input checked="" type="checkbox"/>	Continuous transmission		
<input type="checkbox"/>	Intermittent transmission		State duty cycle .....
	If intermittent, can transmitter be set to continuous transmit test mode? Y/N		
<u>Antenna characteristics:</u>			
<input type="checkbox"/>	Antenna connector	State impedance ..... ohm	
<input checked="" type="checkbox"/>	Temporary antenna connector	State impedance 50 ohm	
<input type="checkbox"/>	Integral antenna	State gain 2.14 dBi	
<u>Modulation characteristics:</u>			
<input type="checkbox"/>	Amplitude	<input type="checkbox"/>	Other
<input checked="" type="checkbox"/>	Frequency	Details: .....	
<input checked="" type="checkbox"/>	Phase		
Can the transmitter operate un-modulated?	N		
ITU Class of emission: .....			
<u>Extreme conditions:</u>			
Maximum temperature	+60 °C	Minimum temperature	-20 °C
Maximum supply voltage	4.0 V	Minimum supply voltage	3.7 V

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete

Signature :   
 Name : Tetsuya Taki  
 Position held : Manager  
 Date : 14 June 2011



Product Service

## 1.4 PRODUCT INFORMATION

### 1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp CDMA SHX11 Tri-band CDMA (850MHz\_BC0/BC3, 1900MHz\_BC6) & Tri-band GSM (GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS. A full technical description can be found in the manufacturer's documentation.

### 1.4.2 Test Configuration

#### Configuration 1: Bluetooth with EDR

The EUT was configured in accordance with FCC CFR 47 Part 15C.

### 1.4.3 Modes of Operation

Modes of operation of each EUT during testing were as follows:

Mode 1 – 2402 MHz Tx

Mode 2 – 2441 MHz Tx

Mode 3 – 2480 MHz Tx

Information on the specific test modes utilised are detailed in the test procedure for each individual test.



Product Service

## **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure or test laboratories as appropriate.

The EUT was powered from a 3.7 V DC Supply.

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

## **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standards or test plan were made during testing.

## **1.7 MODIFICATION RECORD**

No modifications were made to the EUT during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC Testing of the Sharp CDMA SHX11  
Tri-band CDMA (850MHz\_BC0/BC3, 1900MHz\_BC6) & Tri-band GSM  
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and  
GPS In accordance with FCC CFR 47 Part 15C (Bluetooth)



Product Service

## **2.1 20dB BANDWIDTH**

### **2.1.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)

### **2.1.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI: 004401113357947

### **2.1.3 Date of Test and Modification State**

06 May 2011 - Modification State 0

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen. The peak point of the trace was measured and the markers positioned to give the -6dBc points of the displayed spectrum.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
- Mode 2  
- Mode 3

### **2.1.6 Environmental Conditions**

	06 May 2011
Ambient Temperature	22.0°C
Relative Humidity	27.0%



Product Service

### 2.1.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for 20dB Bandwidth.

The test results are shown below.

4.0 V DC Supply

Configuration 1 – Modes 1, 2 and 3


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2402	3DH1	1215
	3DH3	1275
	3DH5	1265
2441	3DH1	1215
	3DH3	1275
	3DH5	1265
2480	3DH1	1215
	3DH3	1275
	3DH5	1265



Product Service

2402 MHz

3DH1

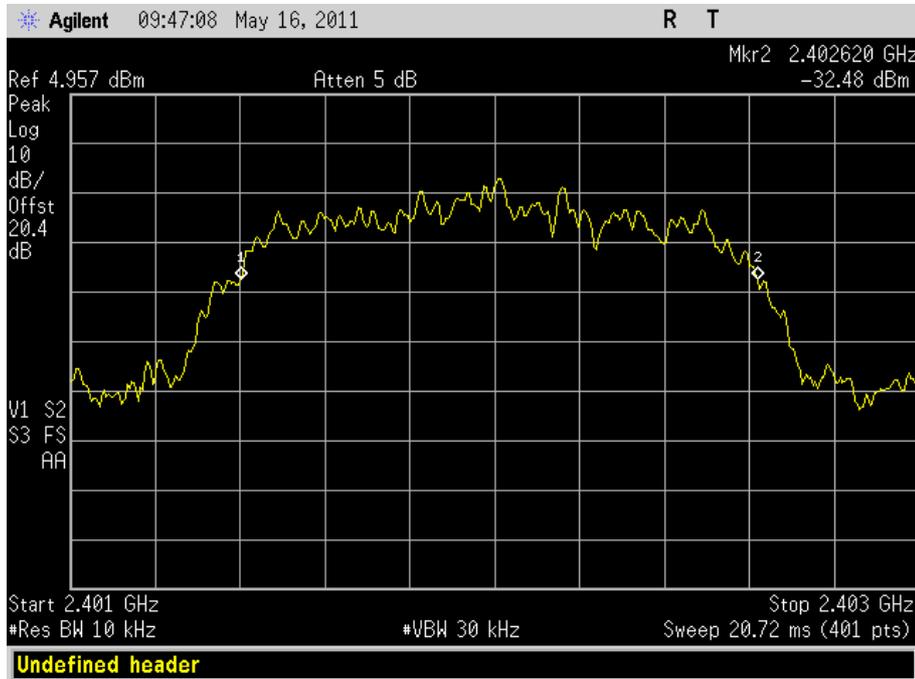


3DH3





Product Service

3DH5

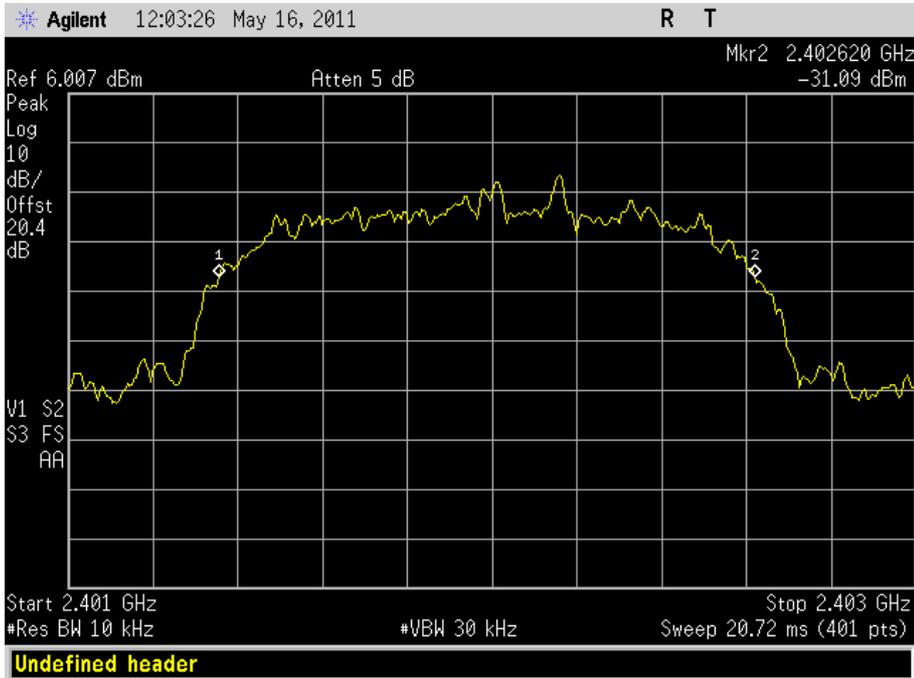





Product Service

2441 MHz

3DH1

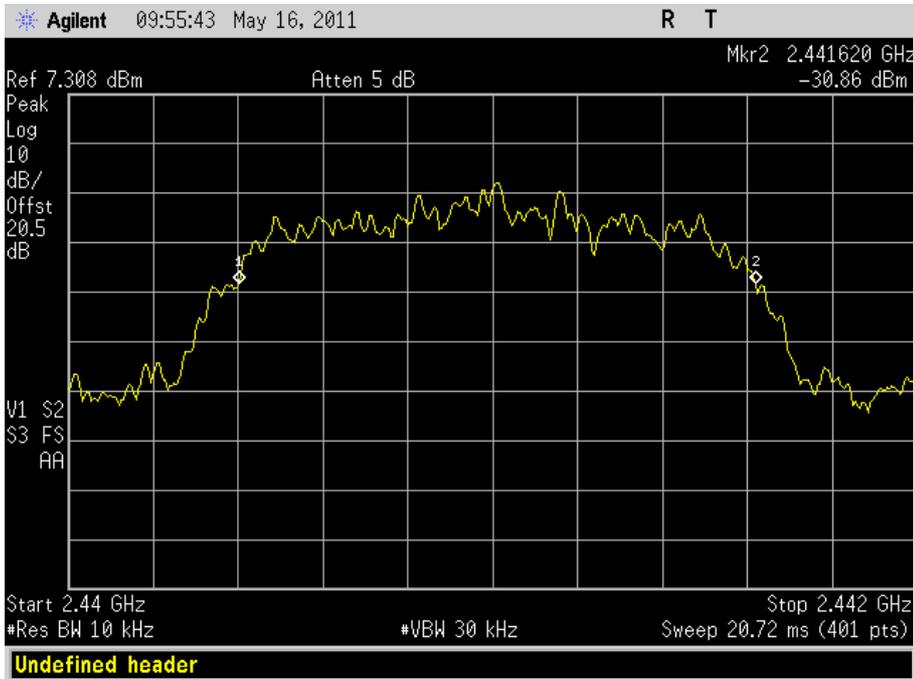


3DH3

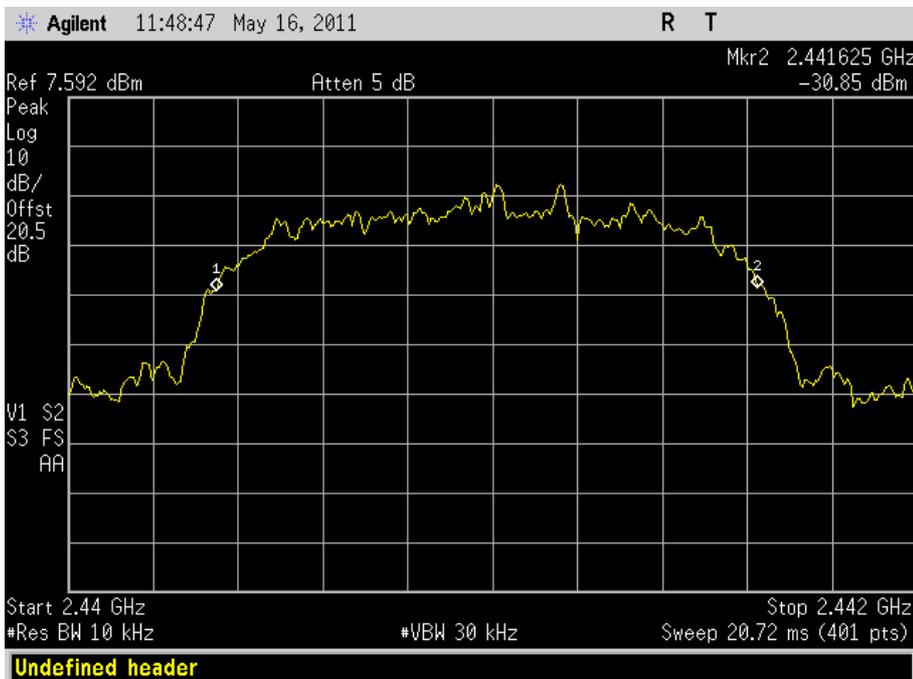



Product Service

3DH5

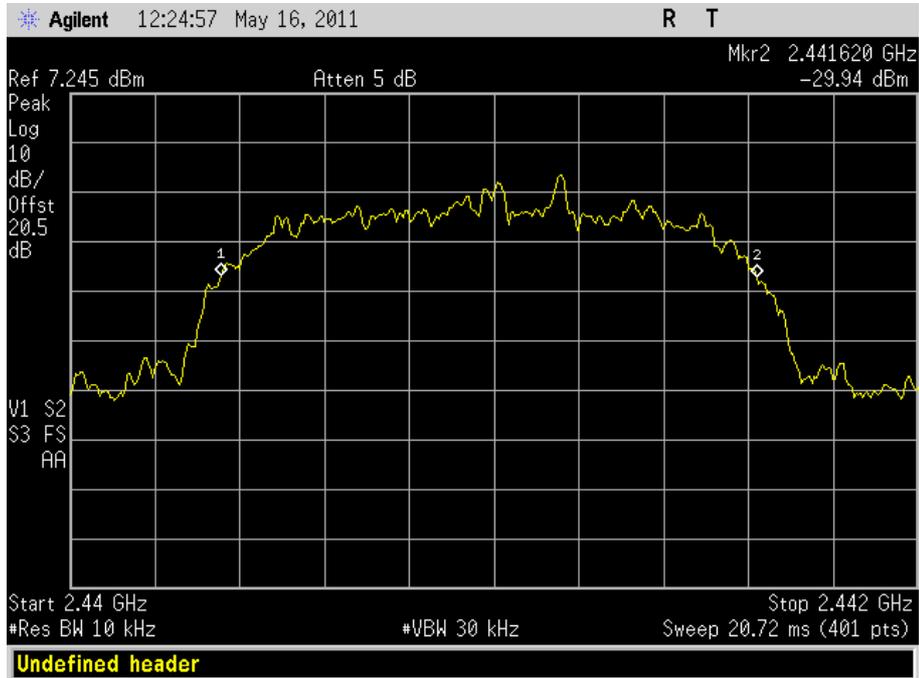





Product Service

2480 MHz

3DH1

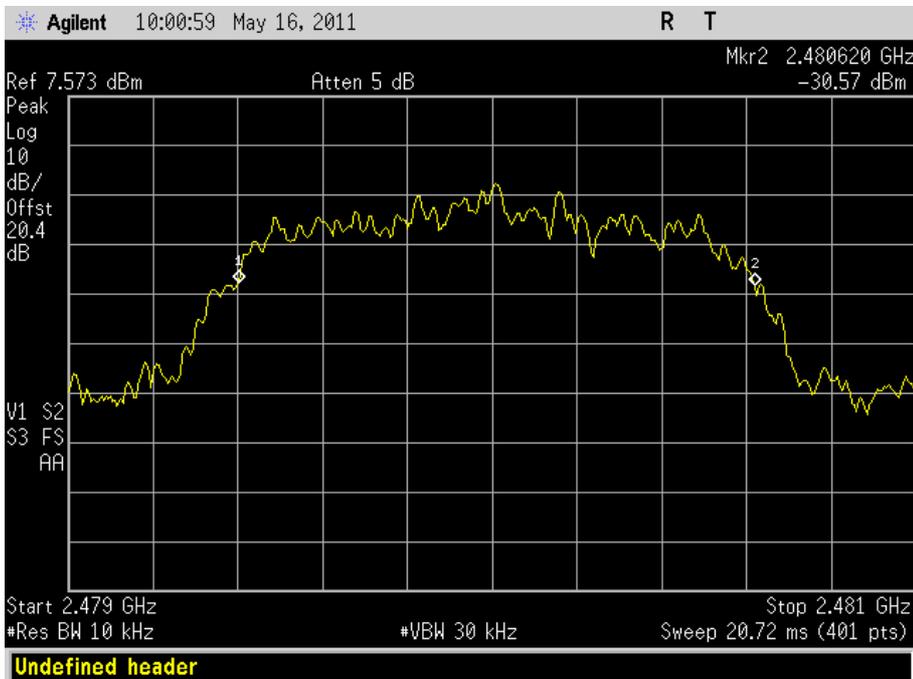


3DH3

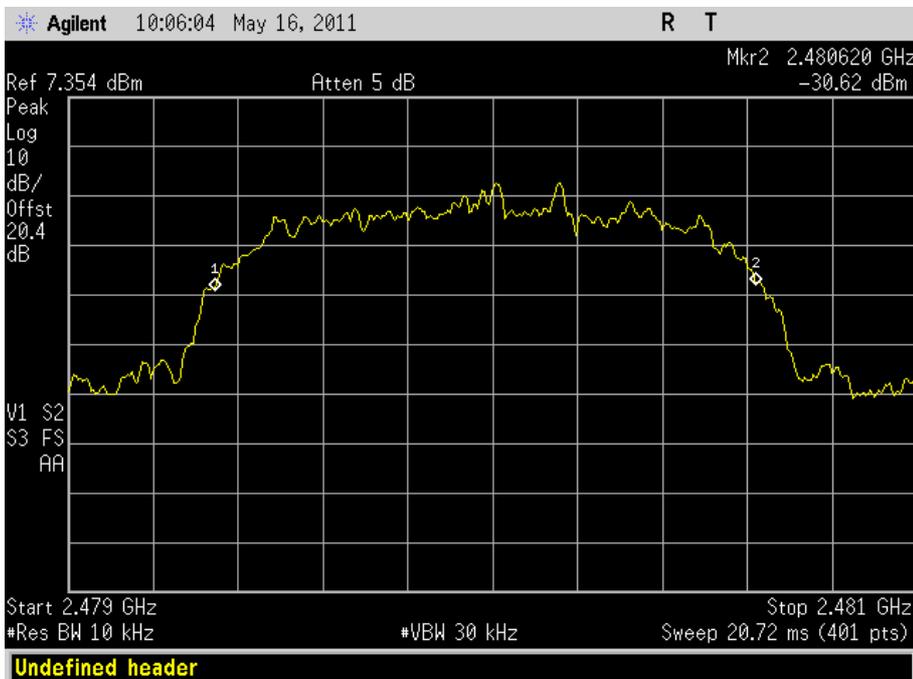



Product Service

3DH5

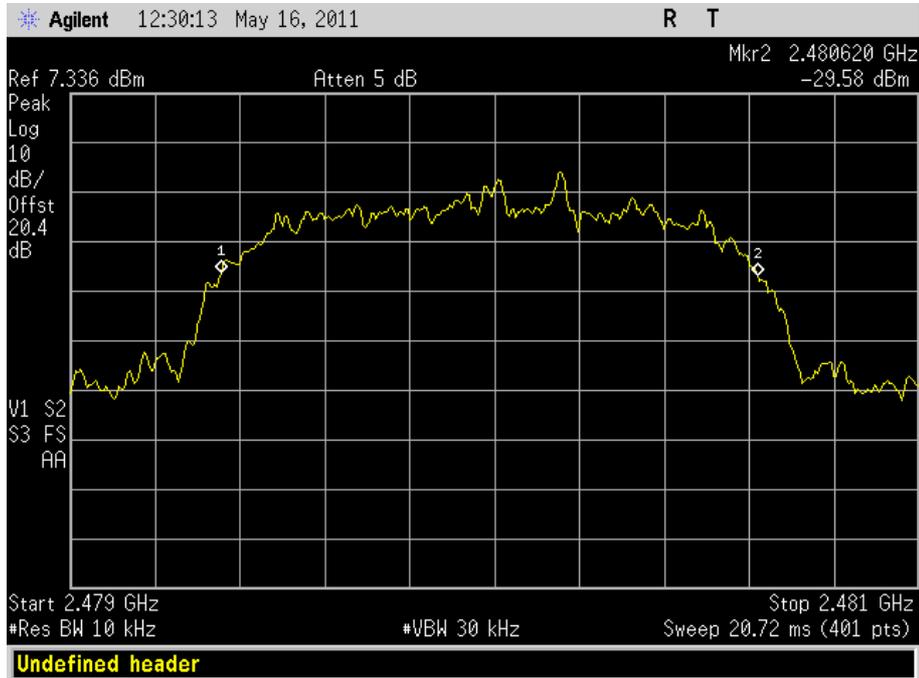

Limit Clause

The minimum 6 dB Bandwidth shall be at least 500 kHz.



Product Service

## **2.2 CHANNEL SEPARATION**

### **2.2.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)

### **2.2.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI: 004401113357947

### **2.2.3 Date of Test and Modification State**

28 April 2011 - Modification State 0

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

The EUT was transmitted at maximum power into a Spectrum Analyser. The trace was set to Max Hold to store several adjacent channels on screen. Using the marker delta function, the markers were positioned to show the separation between adjacent channels.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
                          - Mode 2  
                          - Mode 3

### **2.2.6 Environmental Conditions**

	28 April 2011
Ambient Temperature	21.8°C
Relative Humidity	27.4%



Product Service


**2.2.7 Test Results**

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Channel Separation.

The test results are shown below.

4.0 V DC Supply

Configuration 1 – Modes 1, 2 and 3

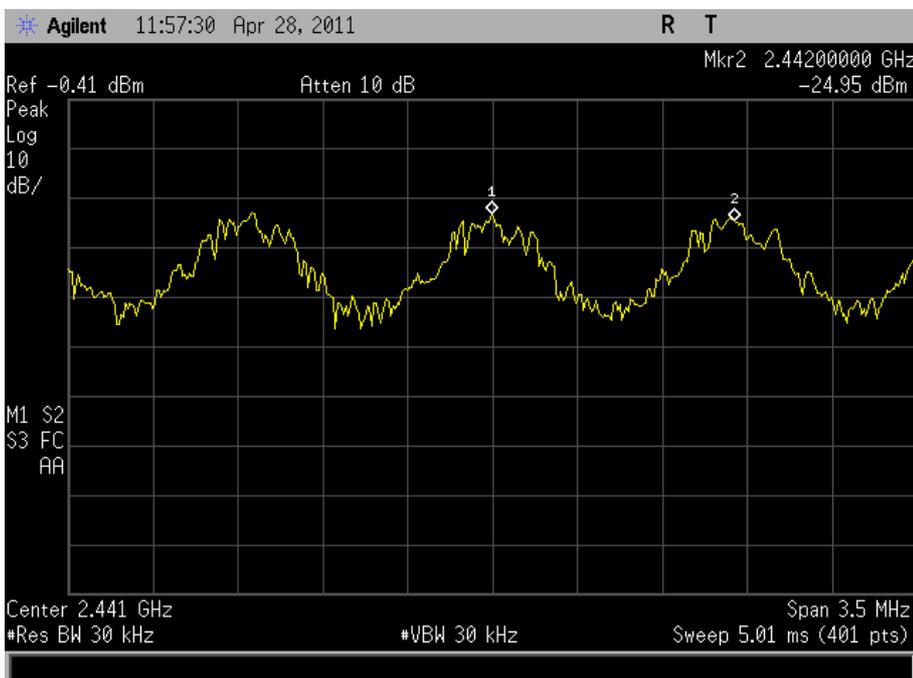

Limit Clause

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



Product Service

**2.3 CHANNEL DWELL TIME**

**2.3.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)(iii)

**2.3.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI: 004401113357947

**2.3.3 Date of Test and Modification State**

28 April 2011 - Modification State 0

**2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.3.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15 .

DH1


The Bluetooth system hops at a rate of 1600 times per second. Thus, this equates to 1600 timeslots in 1 second.

The DH1 data rate operates on a Transmit on 1 timeslot and Receive on 1 timeslot basis. Thus, in 1 second, there are 800 Transmit timeslots and 800 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

In 1 transmit timeslot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

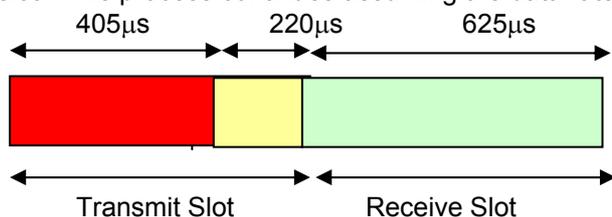



Product Service

DH1 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle

So, with 800 Tx and 800 Rx timeslots, the transmitter is on for  $800 \times 405\mu\text{s} = 0.324$  seconds.

$$\therefore \frac{\text{Total Tx Time On}}{\text{No of Channels}} = \frac{0.324}{79} = 4.10\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 4.10\text{ms} = 0.1312 \text{ seconds}$$

DH3


With data rate DH3, the data payload is higher and can use up to 3 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 3 slots, (ie. no receive slot in-between the 3 transmit slots). The  $220\mu\text{s}$  off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 3 transmit timeslots. 2 are  $625\mu\text{s}$  long and the final slot is transmitting for  $405\mu\text{s}$ .

The DH3 data rate operates on a Transmit on 3 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1200 Transmit timeslots and 400 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

The first 2 Transmit timeslots are transmitting for the complete  $625\mu\text{s}$ . In the third transmit slot, the transmit on time is only  $405\mu\text{s}$ .  $220\mu\text{s}$  is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

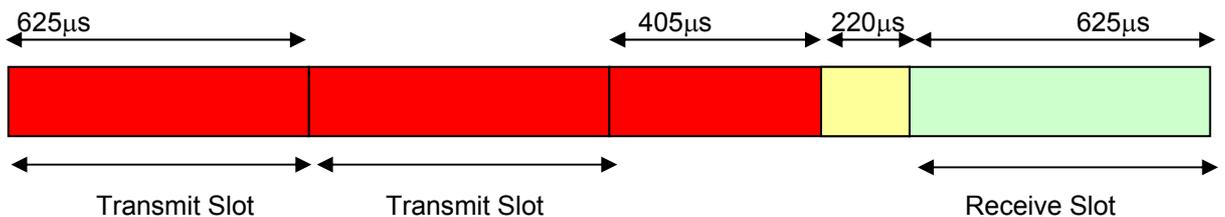



Product Service

DH3 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) = 1.655\text{ms}$$

So:

$$\begin{aligned} 800 \times 625\mu\text{s} &= 0.5 \text{ seconds} \\ 400 \times 405\mu\text{s} &= 0.162 \text{ seconds} \end{aligned}$$

Thus:  $0.5 + 0.162 = 0.662 \text{ seconds}$

$$\therefore \frac{\text{Total Tx Time On}}{\text{No Of Channels}} = \frac{0.662}{79} = 8.38\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 8.38\text{ms} = 0.2682 \text{ seconds}$$

DH5


With data rate DH5, the data payload is higher and can use up to 5 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 5 slots, (ie. no receive slot in-between the 5 transmit slots). The 220µs off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 5 transmit timeslots. 4 are 625µs long and the final slot is transmitting for 405µs.

The DH5 data rate operates on a Transmit on 5 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1333.3 Transmit timeslots and 266.7 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

The first 4 Transmit timeslots are transmitting for the complete 625µs. In the fifth transmit slot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

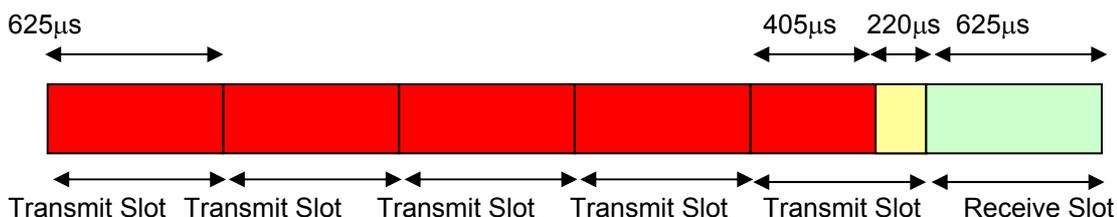



Product Service

DH5 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) \quad = \quad 2.905\text{ms}$$

So:

$$1066.7 \times 625\mu\text{s} \quad = \quad 0.666 \text{ seconds}$$

$$266.7 \times 405\mu\text{s} \quad = \quad 0.108 \text{ seconds}$$

$$\text{Thus:} \quad 0.666 + 0.108 = 0.774 \text{ seconds}$$

$$\therefore \quad \frac{\text{Total Tx Time On}}{\text{No Of Channels}} \quad = \quad \frac{0.774}{79} \quad = \quad 9.80\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 9.80\text{ms} \quad = \quad 0.3136 \text{ seconds}$$

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 2

### 2.3.6 Environmental Conditions

28 April 2011

Ambient Temperature 21.8°C

Relative Humidity 27.4%



Product Service

**2.3.7 Test Results**


For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Channel Dwell Time.

The test results are shown below.

4.0 V DC Supply

Configuration 1 - Mode 2


DH1

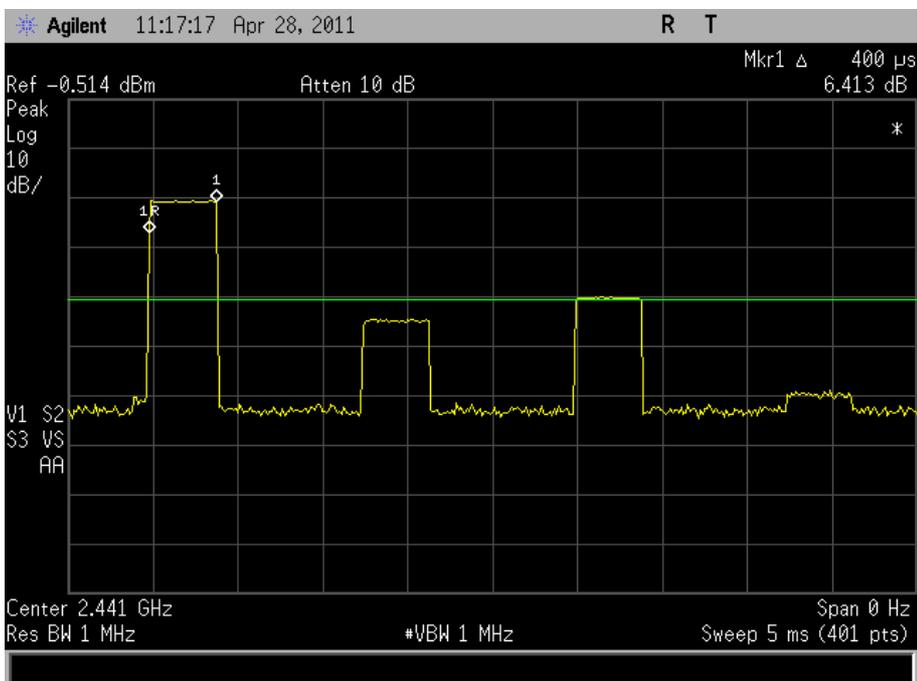




Product Service

DH3

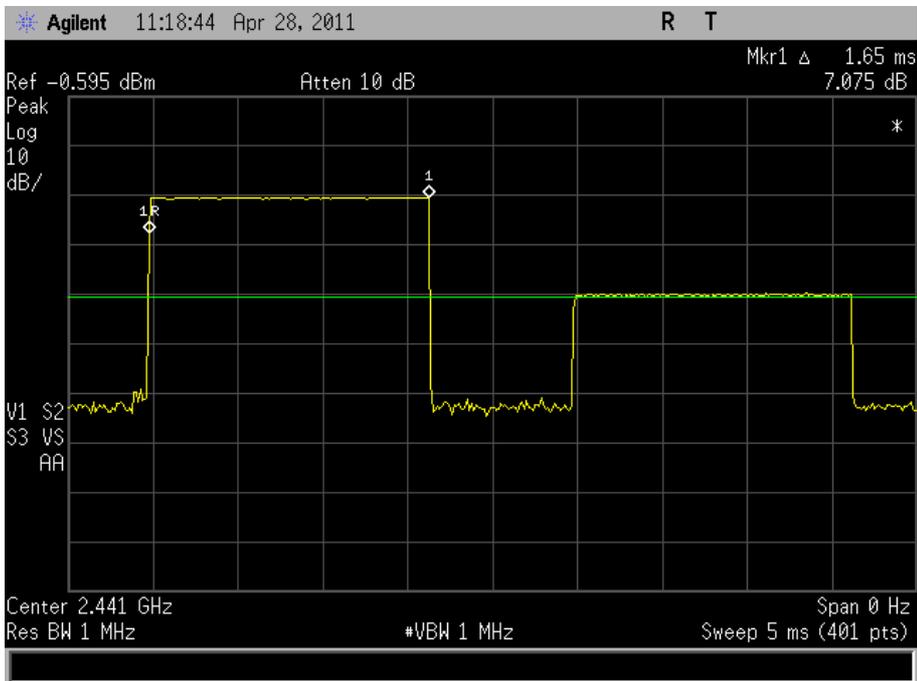

DH5

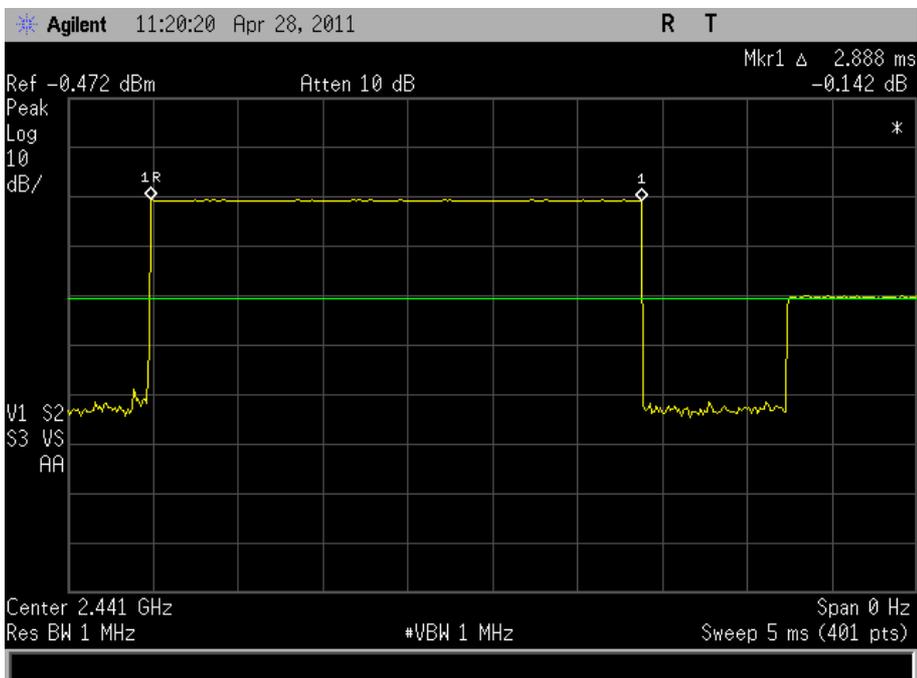



Product Service

Limit Clause

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.



Product Service

## **2.4 NUMBER OF HOPPING CHANNELS**

### **2.4.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)(iii)

### **2.4.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI: 004401113357947

### **2.4.3 Date of Test and Modification State**

03 May 2011 - Modification State 0

### **2.4.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

The EUT was connected to a Spectrum Analyser via a cable. The EUT was set to transmit on maximum power and hopping on all channels. The span was adjusted to show the individual channels. The display trace was set to Max Hold and the plots recorded.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
                          - Mode 2  
                          - Mode 3

### **2.4.6 Environmental Conditions**

	03 May 2011
Ambient Temperature	21.8°C
Relative Humidity	27.4%



Product Service

**2.4.7 Test Results**


For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Number of Hopping Channels.

The test results are shown below.

4.0 V DC Supply

Configuration 1 – Modes 1, 2 and 3

0 to 78

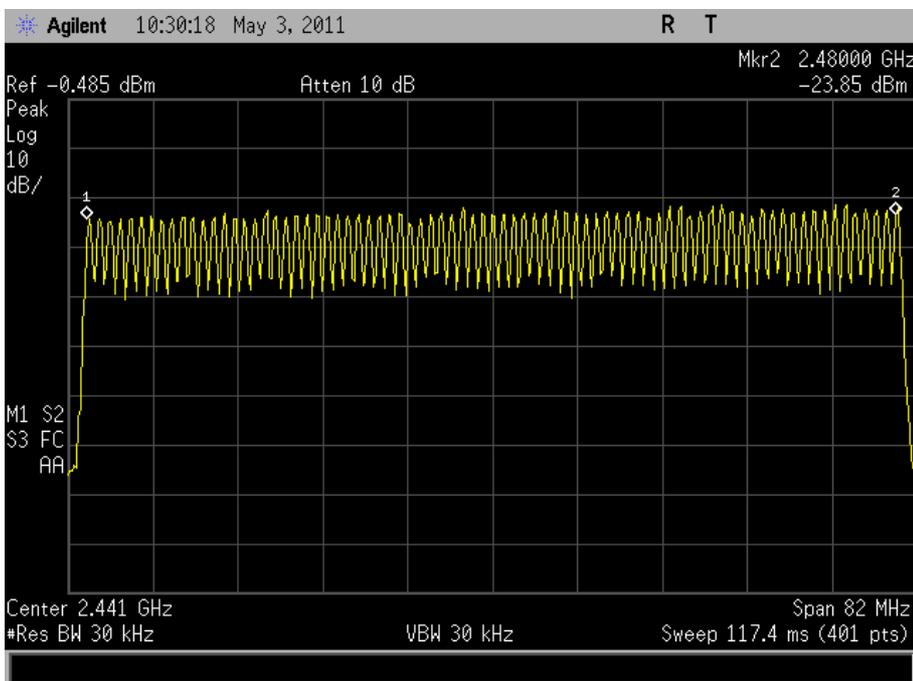

Limit

≥ 15 channels



Product Service

## **2.5 RADIATED EMISSIONS (ENCLOSURE PORT)**

### **2.5.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (a)(2)

### **2.5.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI: 004401113359901

### **2.5.3 Date of Test and Modification State**

23 May 2011 - Modification State 0

### **2.5.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of ANSI C63.4.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions within the restricted bands defined in 15.205 were measured in accordance with 15.209. Emissions measured below 1GHz employed a quasi peak detector, in accordance with 15.35(a). Emissions measured above 1GHz employed an average detector as defined in 15.35(b). The peak level of the emission was also measured to ensure that a difference of 20dB from the average level was not exceeded, as defined in 15.35(b). Emissions identified within the range 30MHz – 1GHz were then formally measured using a CISPR Quasi-Peak detector. Other emissions from 30MHz to 25GHz excluding the restricted bands were measured using a peak detector.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
                          - Mode 2  
                          - Mode 3



Product Service

**2.5.6 Environmental Conditions**

04 May 2011

Ambient Temperature 19.6°C

Relative Humidity 44.0%


**2.5.7 Test Results**

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Radiated Emissions (Enclosure Port).

The test results are shown below.

Configuration 1 - Mode 1


30 MHz to 1 GHz

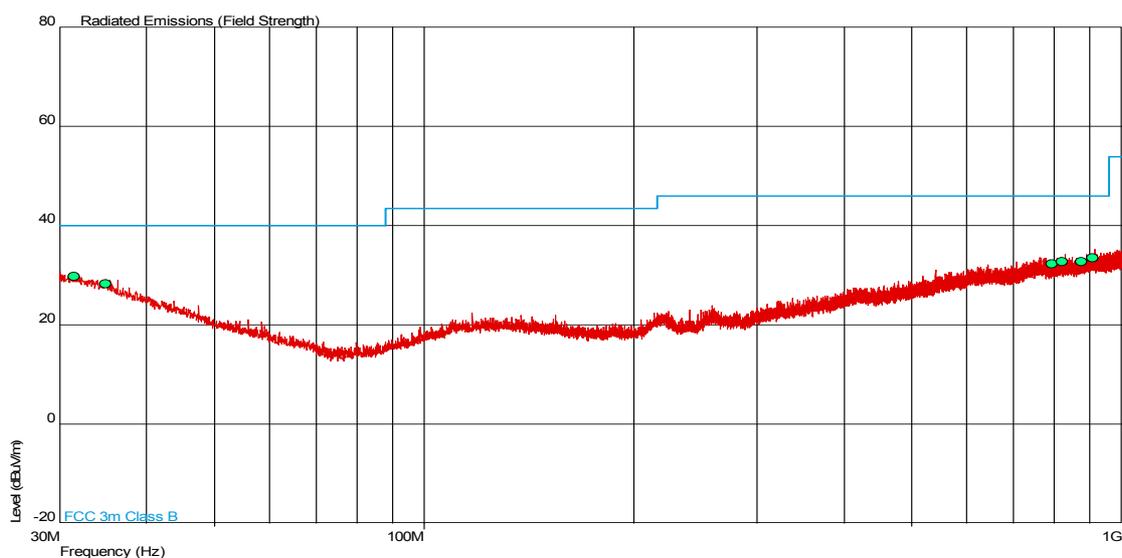

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
31.509	29.7	30.5	40.0	100	-10.3	69.5	109	1.00	Horizontal
34.991	28.3	26.0	40.0	100	-11.7	74.0	26	1.00	Vertical
793.556	32.3	41.2	46.0	200	-13.7	158.8	110	1.00	Vertical
820.466	32.7	43.2	46.0	200	-13.3	156.8	360	1.00	Vertical
874.684	32.7	43.2	46.0	200	-13.3	156.8	202	1.00	Horizontal
909.493	33.5	47.3	46.0	200	-12.5	152.7	336	1.00	Horizontal




1GHz to 3GHz

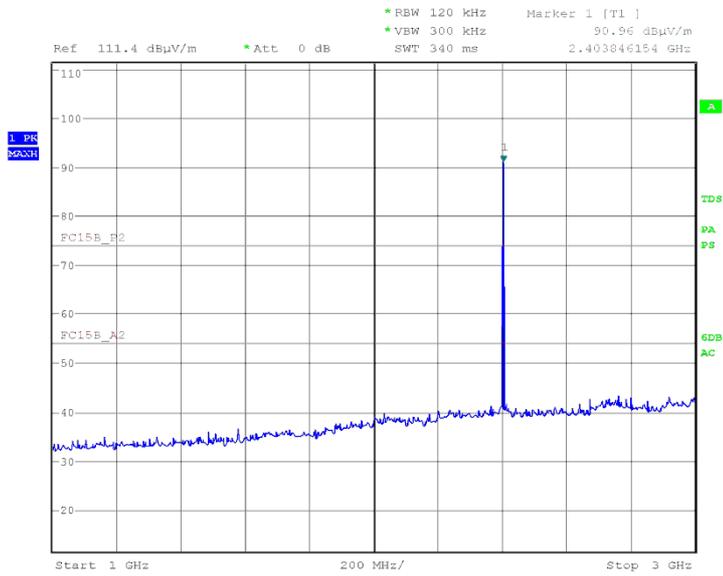

Date: 23.MAY.2011 20:22:33

3GHz to 8GHz

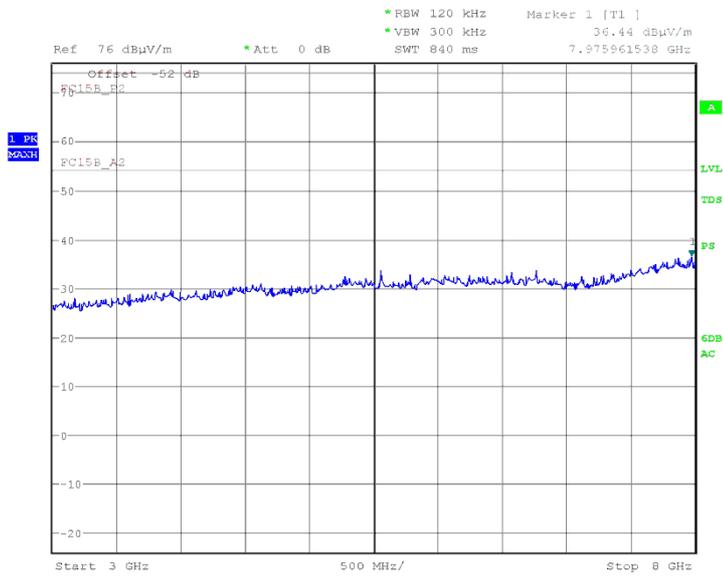


Date: 23.MAY.2011 22:24:15




Product Service

8GHz to 18GHz

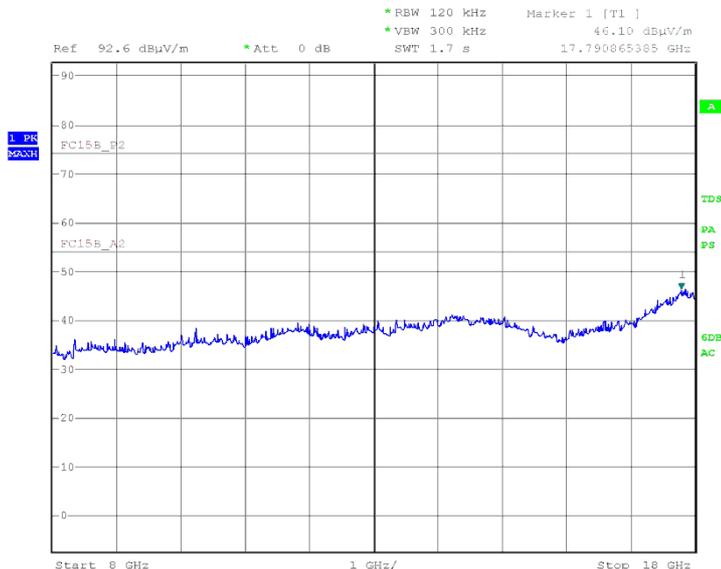

Date: 23.MAY.2011 23:03:17

18GHz to 25GHz

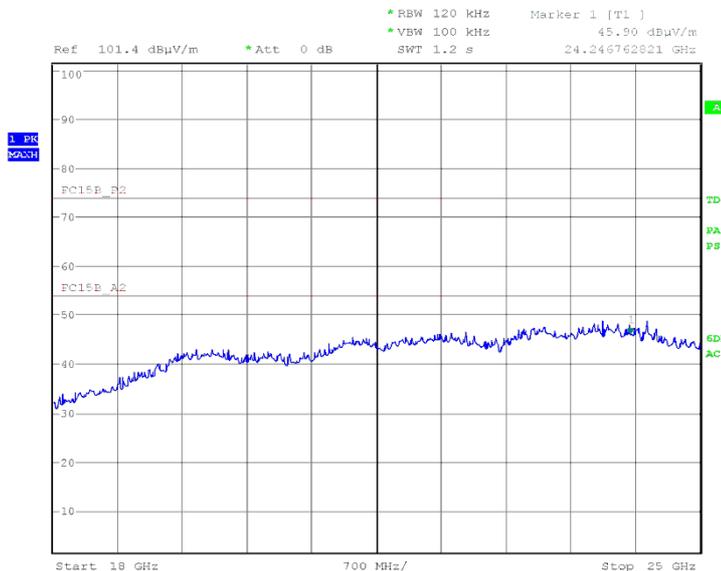


Date: 24.MAY.2011 23:30:18



Configuration 1 - Mode 2


30 MHz to 1 GHz

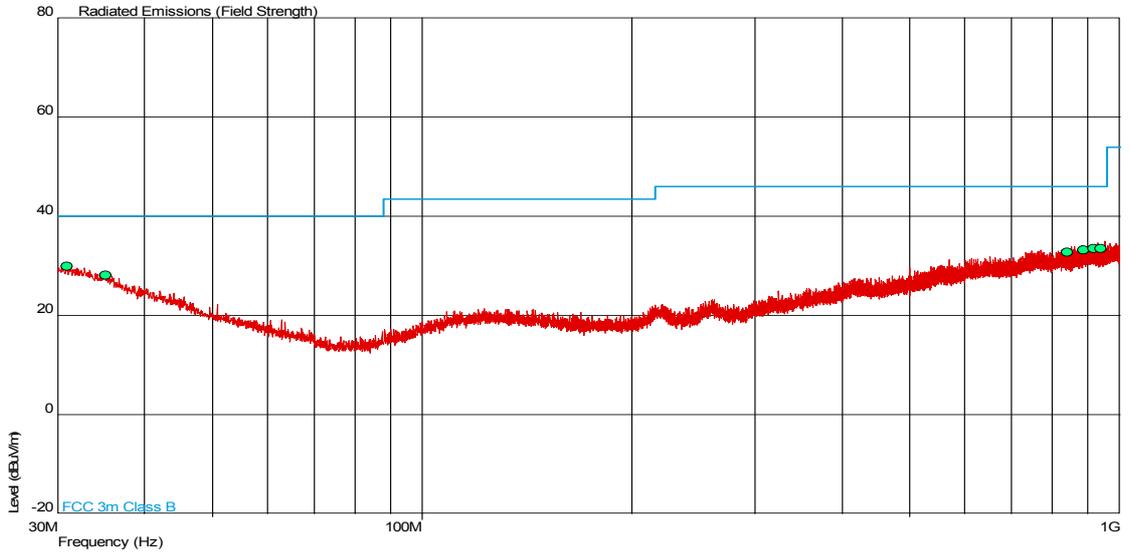

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
30.922	29.9	31.3	40.0	100	-10.1	68.7	0	1.00	Vertical
35.238	28.1	25.4	40.0	100	-11.9	74.6	0	1.00	Vertical
842.084	32.7	43.2	46.0	200	-13.3	156.8	90	1.00	Horizontal
887.044	33.2	45.7	46.0	200	-12.8	154.3	180	1.00	Vertical
917.550	33.5	47.3	46.0	200	-12.5	152.7	0	1.00	Horizontal
940.733	33.5	47.3	46.0	200	-12.5	152.7	180	1.00	Horizontal




1GHz to 3GHz

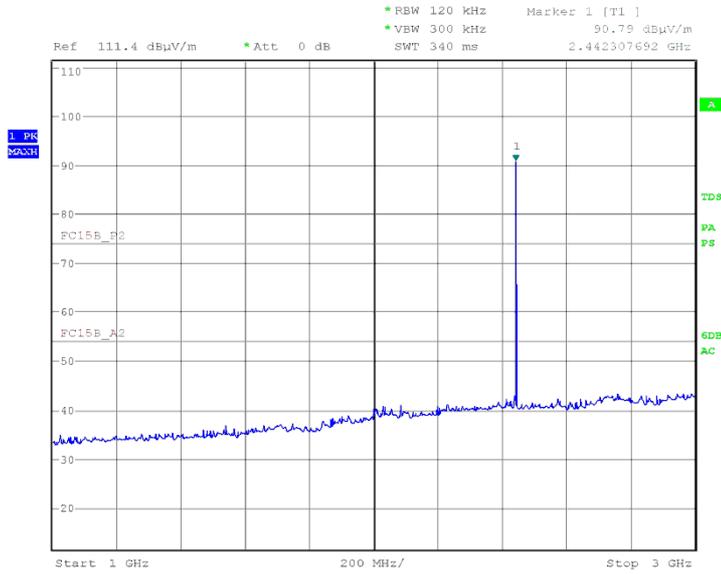

Date: 23.MAY.2011 20:31:06

3GHz to 8GHz

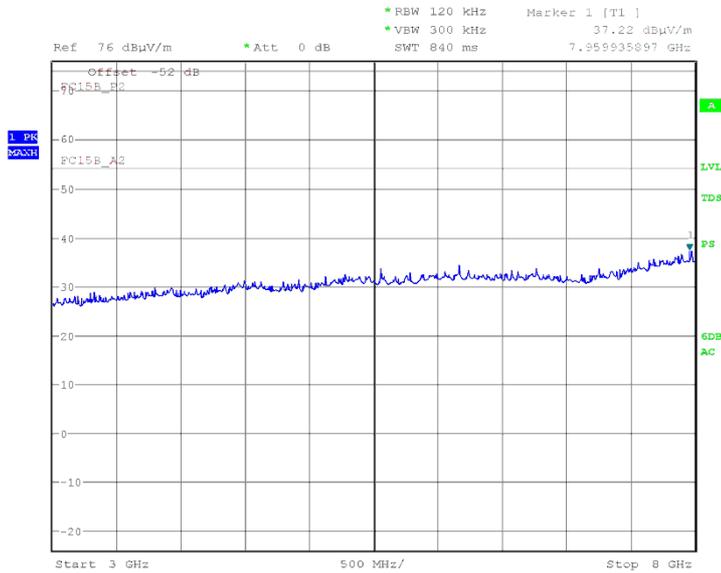


Date: 23.MAY.2011 22:25:03




Product Service

8GHz to 18GHz

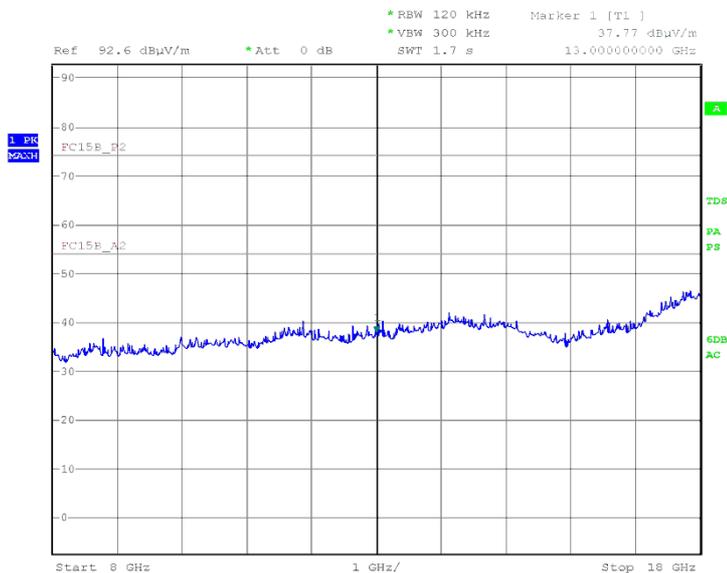

Date: 23.MAY.2011 23:19:00

18GHz to 25GHz

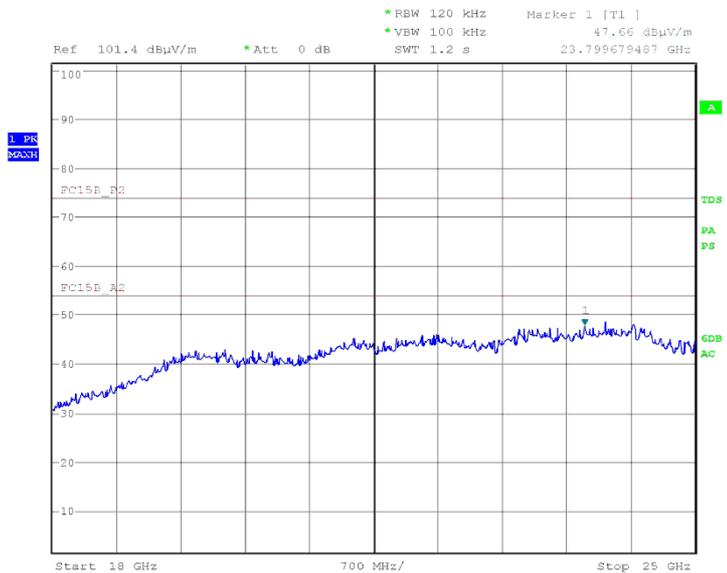


Date: 24.MAY.2011 23:37:28



Configuration 1 - Mode 3


30 MHz to 1 GHz

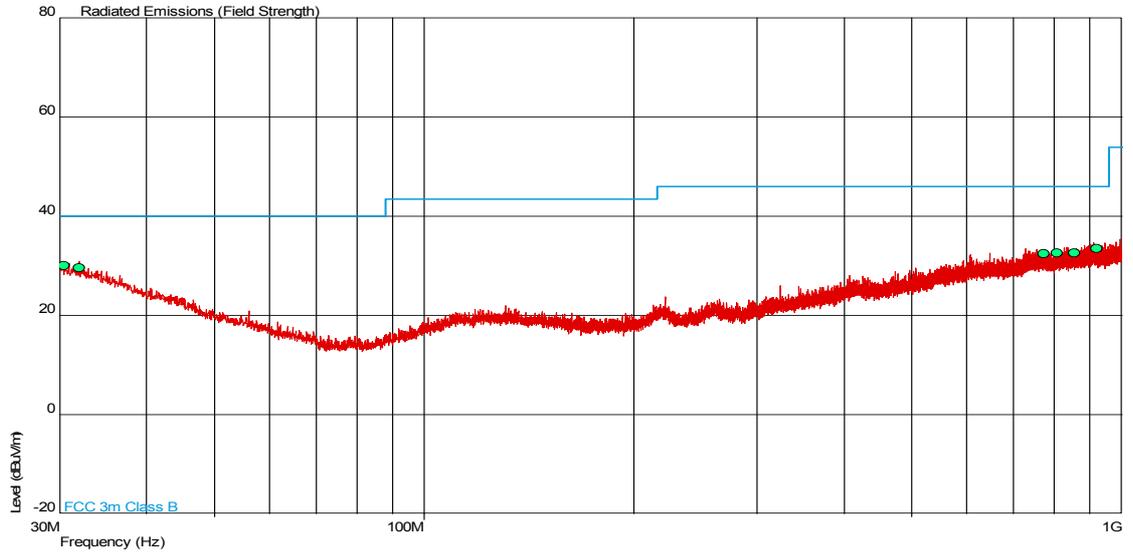

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
30.485	30.1	32.0	40.0	100	-9.9	68.0	0	1.00	Horizontal
32.037	29.6	30.2	40.0	100	-10.4	69.8	90	1.00	Horizontal
772.632	32.5	42.2	46.0	200	-13.5	157.8	180	1.00	Vertical
808.716	32.6	42.7	46.0	200	-13.4	157.3	0	1.00	Vertical
856.198	32.7	43.2	46.0	200	-13.3	156.8	0	1.00	Vertical
921.430	33.5	47.3	46.0	200	-12.5	152.7	90	1.00	Horizontal




1GHz to 3GHz

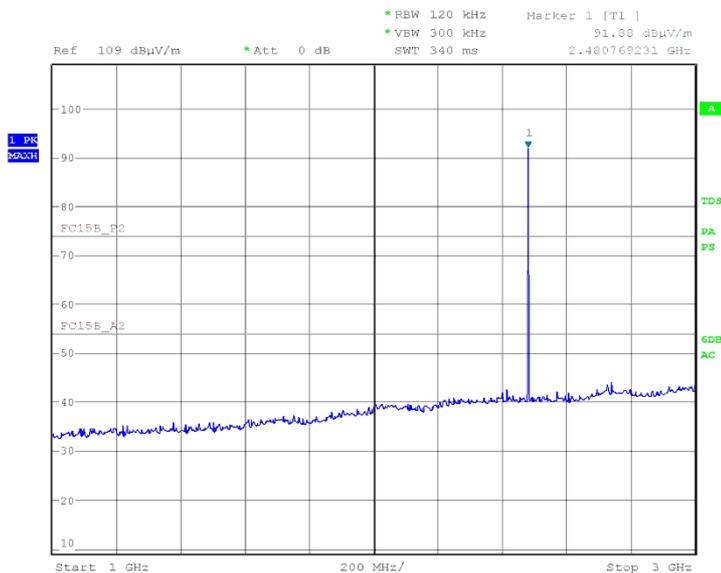

Date: 23.MAY.2011 20:59:54


3GHz to 8GHz

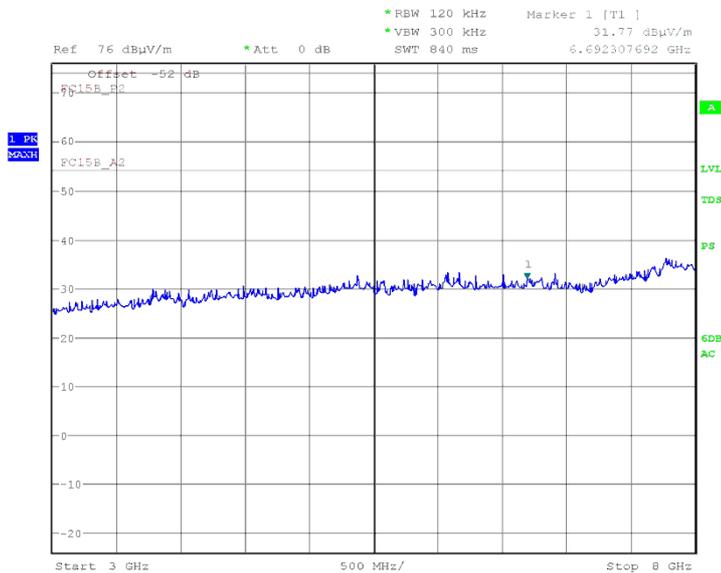

Date: 23.MAY.2011 22:30:34




8GHz to 18GHz

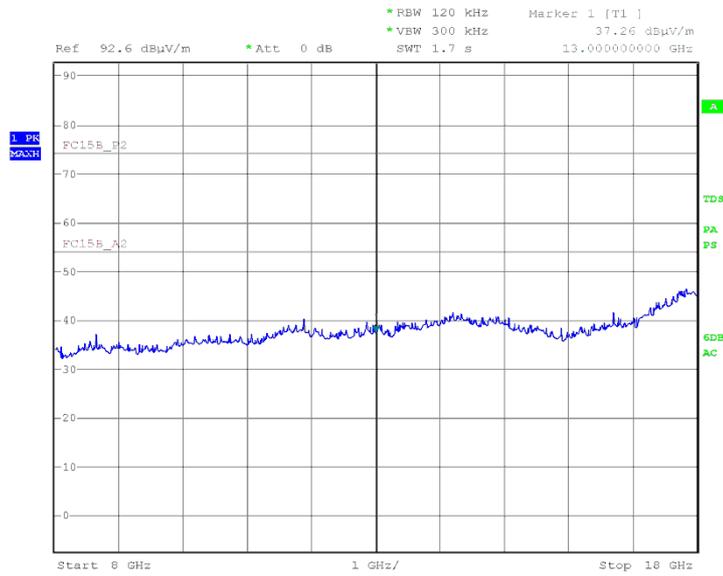

Date: 23.MAY.2011 23:29:58

18GHz to 25GHz

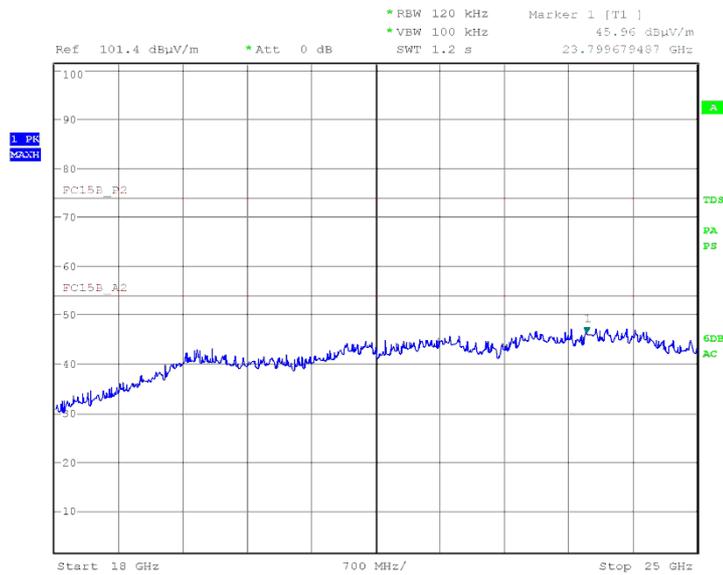

Date: 24.MAY.2011 23:58:06



Product Service

## **2.6 MAXIMUM PEAK CONDUCTED OUTPUT POWER**

### **2.6.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (b)(3)

### **2.6.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI: 004401113357947

### **2.6.3 Date of Test and Modification State**

06 May 2011 - Modification State 0

### **2.6.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.6.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

The EUT was transmitted at maximum power via a cable to the Peak Power Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a reference level offset was entered to account for the measurement path loss. The measurement bandwidth was set according to the signal being measured and the peak and average levels were recorded.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
                          - Mode 2  
                          - Mode 3

### **2.6.6 Environmental Conditions**

	06 May 2011
Ambient Temperature	22.0°C
Relative Humidity	27.0%



Product Service

### 2.6.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Maximum Peak Conducted Output Power.

The test results are shown below.

4.0 V DC Supply

Configuration 1 - Modes 1, 2 & 3

Modulation Data Rate (Mbps)	Maximum Peak Conducted Output Power					
	mW			dBm		
	2402 MHz	2441 MHz	2480 MHz	2402 MHz	2441 MHz	2480 MHz
3DH1	0.769	0.805	0.771	-1.14	-0.94	-1.13
3DH3	1.000	1.057	1.040	0.00	0.24	0.17
3DH5	1.091	1.175	1.148	0.38	0.70	0.60

#### Limit Clause

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.



Product Service

## **2.7 EIRP PEAK POWER**

### **2.7.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (b)(4)

### **2.7.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI: 004401113359901

### **2.7.3 Date of Test and Modification State**

23 May 2011 - Modification State 0

### **2.7.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.7.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of ANSI C63.4.

The EUT was placed on a remotely controlled turntable within a semi-anechoic chamber. Measurements of the carrier frequency from the EUT were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The measurement was performed with a peak detector and the trace set to max hold using a Resolution and Video bandwidth of 1 MHz.

A substitution was then performed by replacing the EUT with a substitution antenna and signal generator. The signal generator level was increased to achieve the same raw result as the EUT. Cable loss and antenna gain was included to obtain the result.

A wideband power metre was then used to apply a correction factor to achieve the final result.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
- Mode 2  
- Mode 3

### **2.7.6 Environmental Conditions**

	23 May 2011
Ambient Temperature	19.9°C
Relative Humidity	44.0%




**2.7.7 Test Results**

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for EIRP Peak Power.

The test results are shown below.

Configuration 1 - Mode 1

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.402	-4.5	36.0	0.355	4000

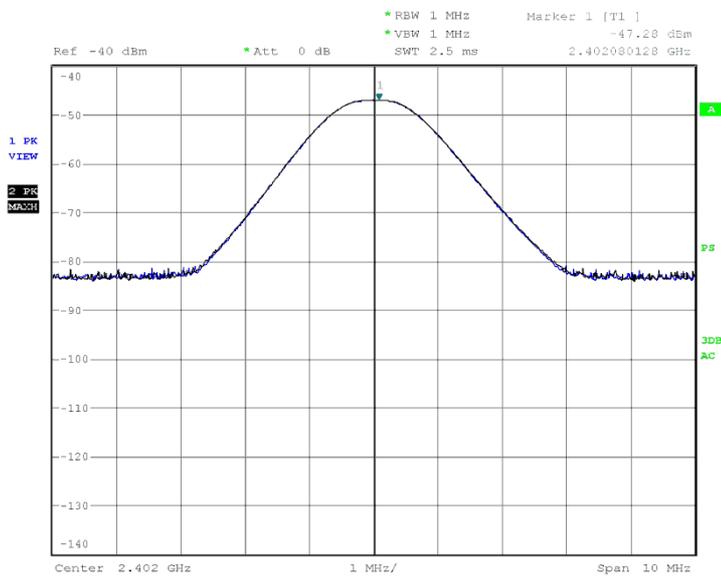


Date: 23.MAY.2011 20:17:31



Configuration 1 - Mode 2

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.441	-3.9	36.0	0.407	4000

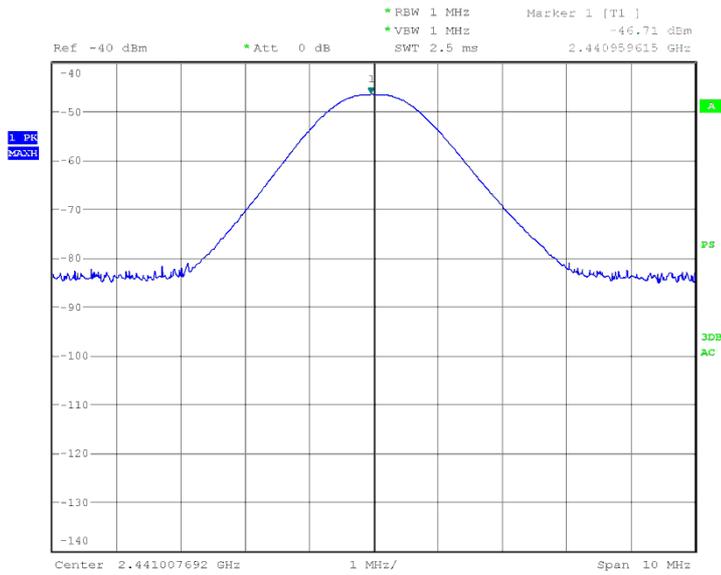


Date: 23.MAY.2011 20:38:26



Configuration 1 - Mode 3

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.480	-4.5	36.0	0.355	4000

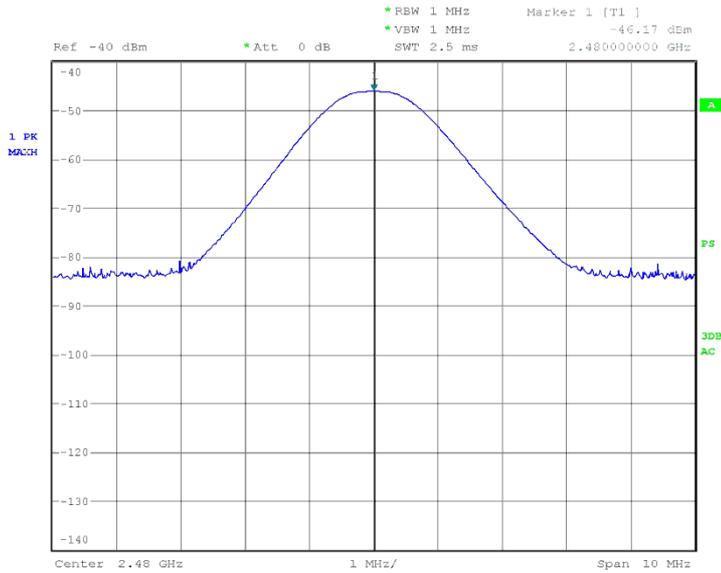

Date: 23.MAY.2011 20:48:48



Product Service

## 2.8 SPURIOUS EMISSIONS

### 2.8.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (d)

### 2.8.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113357947

### 2.8.3 Date of Test and Modification State

07 May 2011 - Modification State 0

### 2.8.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.8.5 Test Method and Operating Modes

The test was applied in accordance with FCC CFR 47 Part 15.

In accordance with Part 15.247(d), the Spurious Conducted Emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9 kHz to 25 GHz. The EUT was set to transmit on full power. The resolution and video bandwidths were set to 100 kHz in accordance with Part 15.247. The spectrum analyser detector was set to Max Hold.

With the EUT transmitting at maximum power, the Spectrum Analyser was set to Max Hold and the fundamental peak measured in a RBW and VBW of 100 kHz. This level was used to determine the limit line as displayed on the plots of -20dBc.

The maximum path loss across each measurement band was used as the reference level offset to ensure worst case results.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
- Mode 2  
- Mode 3

### 2.8.6 Environmental Conditions

	07 May 2011
Ambient Temperature	22.0°C
Relative Humidity	48.0%



**2.8.7 Test Results**


For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Spurious Emissions.

The test results are shown below.

4.0 V DC Supply

Configuration 1 – Modes 1, 2 and 3

9 kHz to 25 GHz

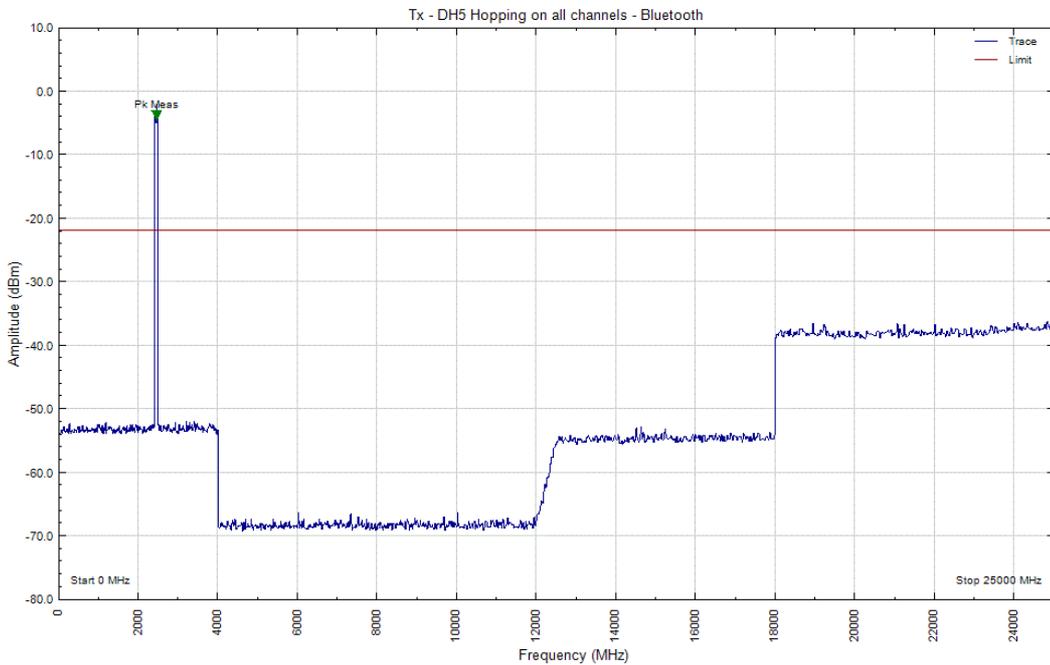

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.



Product Service

## **2.9 BAND EDGE EMISSIONS**

### **2.9.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (d)

### **2.9.2 Equipment Under Test**

CDMA SHX11, S/N: IMEI 004401113359901

### **2.9.3 Date of Test and Modification State**

23 May 2011 - Modification State 0

### **2.9.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.9.5 Test Method and Operating Modes**

The test was applied in accordance with the test method requirements of ANSI C63.4.

The band edge measurements were performed in accordance with ANSI C63.10, Clause 6.9.3. The results were analysed to ensure compliance with restricted bands. The EUT was set to the lowest and highest operating frequencies.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1  
                          - Mode 3

### **2.9.6 Environmental Conditions**

	23 May 2011
Ambient Temperature	19.6°C
Relative Humidity	44.0%



Product Service


**2.9.7 Test Results**

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Band Edge Emissions.

The test results are shown below.

Configuration 1 - Mode 1

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.402	Horizontal	43.6	74.0	35.8	54.0

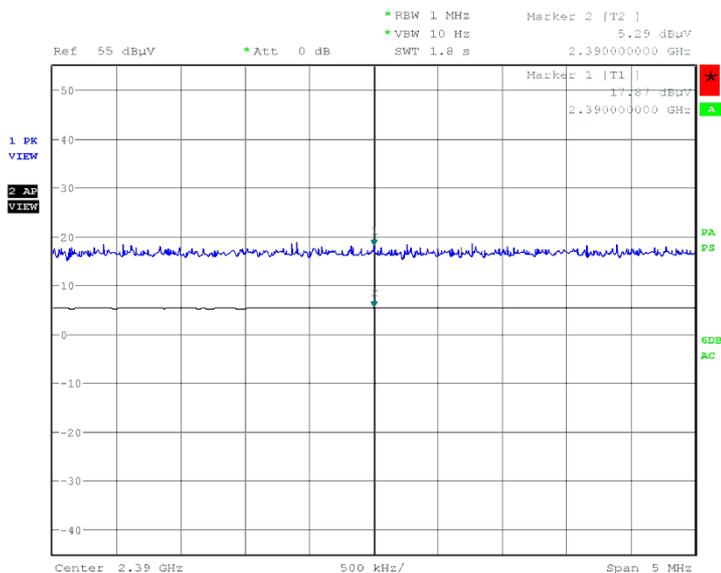


Date: 23.MAY.2011 18:52:09



Configuration 1 - Mode 3

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.480	Horizontal	44.1	74.0	32.4	54.0

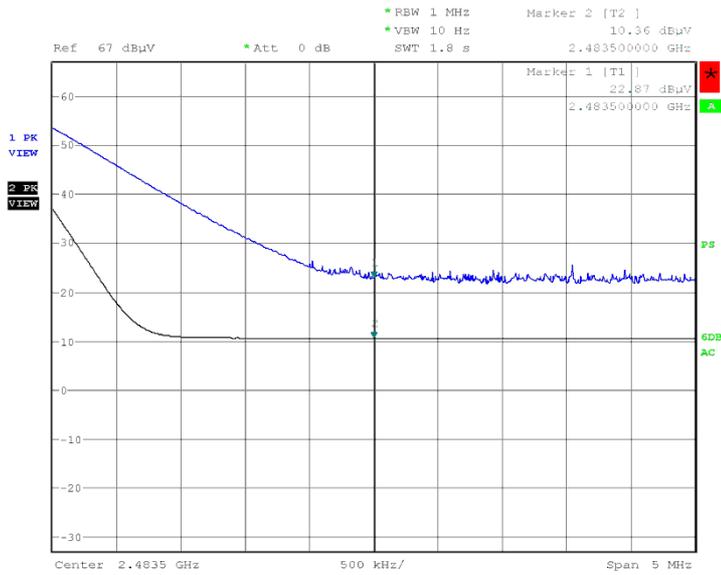

Date: 23.MAY.2011 20:53:53



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 – 20dB Bandwidth</b>					
Termination 50ohm/50W	Bird	8085	389	12	3-Sep-2011
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Spectrum Analyser	Agilent	E7405A	1410	12	29-Mar-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	3-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygromer	Rotronic	A1	2677	12	20-Jan-2012
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Signal Generator, 9kHz to 3GHz	Rohde & Schwarz	SMA 100A	3494	12	25-Jan-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Jan-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012
<b>Section 2.2 and 2.4 – Channel Separation and Number of Hopping Channels</b>					
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygromer	Rotronic	A1	2677	12	20-Jan-2012
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	2-Jun-2011
Wideband Power Sensor, 50MHz - 18GHz	Rohde & Schwarz	NRP-Z81	3492	12	19-Apr-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012
<b>Section 2.3 - Channel Dwell Time</b>					
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygromer	Rotronic	A1	2677	12	20-Jan-2012
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	2-Jun-2011
Wideband Power Sensor, 50MHz - 18GHz	Rohde & Schwarz	NRP-Z81	3492	12	19-Apr-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.5, 2.7 and 2.9 - Radiated Emissions (Enclosure Port, EIRP Peak Power and Band Edge Emissions)</b>					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	12-Nov-2011
Antenna (Bilog)	Schaffner	CBL6143	287	24	19-Jan-2012
Antenna (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	2-Aug-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	15-Sep-2011
Pre-Amplifier	Phase One	PSO4-0087	1534	12	22-Sep-2011
Screened Room (5)	Rainford	Rainford	1545	24	3-Feb-2014
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Turntable/Mast Controller	EMCO	2090	1607	-	TU
Comb Generator	Schaffner	RSG1000	3034	-	TU
Amplifier (1 - 8GHz)	Phase One	PS06-0060	3175	12	2-Jul-2011
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	9-Sep-2011
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	14-Apr-2012
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	10-Aug-2011
Tilt Antenna Mast	maturu GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturu GmbH	NCD	3917	-	TU
<b>Section 2.8 - Spurious Emissions</b>					
Radiocommunications Tester	Rohde & Schwarz	CMU 200	39	12	18-Nov-2011
Termination 50ohm/50W	Bird	8085	389	12	3-Sep-2011
Multimeter	Iso-tech	IDM-101	466	12	2-Mar-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	22-Sep-2011
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	3-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
High Pass Filter (4GHz)	RLC Electronics	F-100-4000-5-R	2773	12	6-Sep-2011
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	22-Dec-2011
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	8-Feb-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Jan-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.6 - Maximum Peak Conducted Output Power</b>					
Antenna (Double Ridge Guide)	EMCO	3115	34	12	17-Jul-2011
Spectrum Analyser	Rohde & Schwarz	FSEM	37	12	18-Apr-2012
Radiocommunications Tester	Rohde & Schwarz	CMU 200	39	12	18-Nov-2011
Power Meter	Hewlett Packard	436A	94	12	11-Oct-2011
Peak Power Analyser	Hewlett Packard	8990A	107	12	11-Feb-2012
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	12-Nov-2011
Power Sensor	Hewlett Packard	8484A	420	12	6-Sep-2011
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Spectrum Analyser	Agilent	E7405A	1410	12	29-Mar-2012
Attenuator	Hewlett Packard	11708A	1507	12	17-Dec-2011
Screened Room (5)	Rainford	Rainford	1545	24	3-Feb-2014
Screened Room (8)	Rainford	Rainford	1548	-	TU
Turntable/Mast Controller	EMCO	2090	1609	-	TU
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	3-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygrometer	Rotronic	A1	2677	12	20-Jan-2012
Power Sensor	Hewlett Packard	84812A	2743	-	TU
Hygrometer	Rotronic	I-1000	2882	12	10-Jul-2011
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	27-Apr-2012
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	12-Aug-2011
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	2-Jun-2011
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2011
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	9-Sep-2011
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Jan-2012
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	10-Aug-2011
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012
Mast Controller	maturo Gmbh	NCD	3917	-	TU

TU – Traceability Unscheduled

O/P Mon – Output monitored using calibrated equipment.



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Conducted Emissions, LISN	150kHz to 30MHz Amplitude	3.2dB*
Conducted Emissions, ISN	150kHz to 30MHz Amplitude	2.1dB
Substitution Antenna, Radiated Field	30MHz to 18GHz Amplitude	2.6dB
Discontinuous Interference	150kHz to 30MHz Amplitude	3.0dB*
Interference Power	30MHz to 300MHz Amplitude	3.0dB*
Radiated E-Field Susceptibility	10MHz to 6GHz Test Amplitude	2.0dB†
Conducted Susceptibility RF	50kHz to 1000MHz Amplitude	3.1dB•
	EM Clamp Method of Test	1.2dB•
	CDN Method of Test	1.1dB•
	BCI Clamp Method of Test	1.2dB•
Conducted Susceptibility LF	DC to 150kHz	1.0%†
Power Frequency Magnetic Field	50Hz/60Hz Amplitude	0.45%
Magnetic Emissions	9kHz to 30MHz Amplitude	3.4dB*
Magnetic Field/Flux iaw EN 50366	10Hz to 400kHz	2.64%
Harmonics and Flicker	The test was applied using proprietary equipment that meets the requirements of EN 61000-3-2 and EN 61000-3-3	—
Mains Voltage Variations and Interrupts	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-11	—
Fast Transient Burst	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-4	—
Electrostatic Discharge	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-2	—
Surge	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-5	—
Vehicle Transients	The test was applied using proprietary equipment that meets the requirements of ISO 7637-1 and 2	—
Compass Safe Distance	Azimuth Accuracy	0.10°
Channel Occupancy/Separation	19.1kHz	N/A
Maximum Output Power	Not Applicable	±0.5dB
Number of Channels	Not Applicable	N/A
20dB Bandwidth	19.1kHz	±0.5dB

Worst case error for both Time and Frequency measurement 12 parts in 10<sup>6</sup>.

- \* In accordance with CISPR 16-4-2
- † In accordance with UKAS Lab 34
- In accordance with EN61000-4-6



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service Limited

© 2011 TÜV SÜD Product Service Limited