



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the Sharp CDMA SHX11
Tri-band CDMA (850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with
Bluetooth, WLAN, FeliCa and GPS
In accordance with FCC CFR 47 Part 15C (WLAN)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00151

Document 75913577 Report 10 Issue 2

June 2011



Product Service

TUV Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the Sharp CDMA SHX11 Tri-band CDMA
(850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with
Bluetooth, WLAN, FeliCa and GPS
In accordance with FCC CFR 47 Part 15C (WLAN)

Document 75913577 Report 10 Issue 2

June 2011

PREPARED FOR

Sharp Communication Compliance Limited
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY


N Bennett
Senior Administrator

APPROVED BY


M Jenkins
Authorised Signatory

DATED


21 June 2011

This report has been up-issued to Issue 2 to correct typographical errors.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);


B. Airs


G. Lawler




R. Henley



CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 8
1.4	Product Information 9
1.5	Test Conditions 10
1.6	Deviations From the Standard 10
1.7	Modification Record 10
2	TEST DETAILS 11
2.1	6dB Bandwidth 12
2.2	Radiated Emissions (Enclosure Port) 46
2.3	Maximum Peak Conducted Output Power 75
2.4	EIRP Peak Power 78
2.5	Spurious Emissions 88
2.6	Power Spectral Density 95
2.7	Band Edge Emissions 129
3	TEST EQUIPMENT USED 136
3.1	Test Equipment Used 137
3.2	Measurement Uncertainty 140
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 141
4.1	Accreditation, Disclaimers and Copyright 142



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the Sharp CDMA SHX11
Tri-band CDMA (850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and
GPS In accordance with FCC CFR 47 Part 15C (WLAN)



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of Sharp CDMA SHX11 Tri-band CDMA (850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM (GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS to the requirements of FCC CFR 47 Part 15C.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Manufacturing Description	Tri-band CDMA (850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM (GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS
Model Number(s)	CDMA SHX11
Serial Number(s)	IMEI 004401113359901 IMEI 004401113358119 IMEI 004401113357913
Software Version	PP1
Hardware Version	C3251
Number of Samples Tested	Three
Test Specification/Issue/Date	FCC CFR 47 Part 15C: 2010
Incoming Release Date	Application Form 14 June 2011
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	8492 14 April 2011
Start of Test	04 May 2011
Finish of Test	10 May 2011
Name of Engineer(s)	B Airs G Lawler R Henley
Related Document(s)	ANSI C63.4: 2003



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 15C is shown below.

Configuration 1: 802.11(b)						
Section	Spec Clause	Test Description	Mode	Mod State	Result	Base Standard
2.1	15.247 (2)	6dB Bandwidth	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.2	15.247(a)(2)	Radiated Emissions (Enclosure Port)	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.3	15.247 (b)(3)	Maximum Peak Conducted Output Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.4	15.247 (b)(4)	EIRP Peak Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.5	15.247(d)	Spurious Emissions	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.6	15.247 (e)	Peak Spectral Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.7	15.247 (e)	Band Edge Measurements	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	-	N/A	
			2462 MHz Tx	0	Pass	



Configuration 1: 802.11(g)						
Section	Spec Clause	Test Description	Mode	Mod State	Result	Base Standard
2.1	15.247 (2)	6dB Bandwidth	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.2	15.247(a)(2)	Radiated Emissions (Enclosure Port)	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.3	15.247 (b)(3)	Maximum Peak Conducted Output Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.4	15.247 (b)(4)	EIRP Peak Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.5	15.247(d)	Spurious Emissions	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.6	15.247 (e)	Peak Spectral Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.7	15.247 (e)	Band Edge Measurements	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	-	N/A	
			2462 MHz Tx	0	Pass	



Configuration 1: 802.11(n)						
Section	Spec Clause	Test Description	Mode	Mod State	Result	Base Standard
2.1	15.247 (2)	6dB Bandwidth	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.2	15.247(a)(2)	Radiated Emissions (Enclosure Port)	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.3	15.247 (b)(3)	Maximum Peak Conducted Output Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.4	15.247 (b)(4)	EIRP Peak Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.5	15.247(d)	Spurious Emissions	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.6	15.247 (e)	Peak Spectral Power	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	0	Pass	
			2462 MHz Tx	0	Pass	
2.7	15.247 (e)	Band Edge Measurements	2412 MHz Tx	0	Pass	ANSI C63.4
			2437 MHz Tx	-	N/A	
			2462 MHz Tx	0	Pass	

N/A – Not Applicable



Product Service

1.3 APPLICATION FORM

APPLICANT'S DETAILS			
COMPANY NAME :	Sharp Telecommunications of Europe Ltd		
ADDRESS :	Azure House, Bagshot Road Bracknell, Berkshire RG12 7QY		
NAME FOR CONTACT PURPOSES :	Ken Newman		
TELEPHONE NO: 01344 301 883	FAX NO:	01344 300 293	
	E-MAIL:	ken.newman@sharp.eu	

EQUIPMENT INFORMATION			
<u>Equipment designator:</u>			
Model name/number	CDMA SHX11	Identification number	APYHRO00151
<u>Supply Voltage:</u>			
<input type="checkbox"/>	AC mains	State AC voltage V	and AC frequency Hz
<input type="checkbox"/>	DC (external)	State DC voltage V	and DC current A
<input checked="" type="checkbox"/>	DC (internal)	State DC voltage 3.7 V	and Battery type Li-ion
<u>Frequency characteristics:</u>			
Frequency range	2412 MHz to 2462 MHz	Channel spacing	(if channelized)
Designated test frequencies:	Bottom: 2412 MHz	Middle: 2437 MHz	Top: 2462 MHz
<u>Power characteristics:</u>			
Maximum transmitter power	17.3 dBm	Minimum transmitter power W
<input checked="" type="checkbox"/>	Continuous transmission	(if variable)	
<input type="checkbox"/>	Intermittent transmission	State duty cycle	
	If intermittent, can transmitter be set to continuous transmit test mode? Y/N		
<u>Antenna characteristics:</u>			
<input type="checkbox"/>	Antenna connector	State impedance	ohm
<input checked="" type="checkbox"/>	Temporary antenna connector	State impedance 50 ohm	
<input type="checkbox"/>	Integral antenna	State gain 2.14 dBi	
<u>Modulation characteristics:</u>			
<input type="checkbox"/>	Amplitude	<input type="checkbox"/>	Other
<input type="checkbox"/>	Frequency	Details:	
<input checked="" type="checkbox"/>	Phase		
Can the transmitter operate un-modulated?	N		
ITU Class of emission:			
<u>Extreme conditions:</u>			
Maximum temperature	+60 °C	Minimum temperature	-20 °C
Maximum supply voltage	4.0 V	Minimum supply voltage	3.7 V

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature : *T. Taki*
 Name : Tetsuya Taki
 Position held : Manager
 Date : 14th June 2011



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp CDMA SHX11 Tri-band CDMA (850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM (GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and GPS. A full technical description can be found in the manufacturer's documentation.

1.4.2 Test Configuration

Configuration 1: 802.11(b)

The EUT was configured in accordance with FCC CFR 47 Part 15C.

Configuration 2: 802.11(g)

The EUT was configured in accordance with FCC CFR 47 Part 15C.

Configuration 3: 802.11(n)

The EUT was configured in accordance with FCC CFR 47 Part 15C.

1.4.3 Modes of Operation

Modes of operation of each EUT during testing were as follows:

Mode 1 – 2412 MHz Tx

Mode 2 – 2437 MHz Tx

Mode 3 – 2462 MHz Tx

Information on the specific test modes utilised are detailed in the test procedure for each individual test.



Product Service

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure or test laboratories as appropriate.

The EUT was powered from a 3.7 V DC Supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.7 MODIFICATION RECORD

No modifications were made to the EUT during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the Sharp CDMA SHX11
Tri-band CDMA (850MHz_BC0/BC3, 1900MHz_BC6) & Tri-band GSM
(GSM900/DCS1800/PCS1900) Dual mode Cellular Phone with Bluetooth, WLAN, FeliCa and
GPS In accordance with FCC CFR 47 Part 15C (WLAN)



Product Service

2.1 6dB BANDWIDTH

2.1.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (2)

2.1.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113357913

2.1.3 Date of Test and Modification State

05 May 2011 - Modification State 0

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen. The peak point of the trace was measured and the markers positioned to give the -6dBc points of the displayed spectrum.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1 - Mode 1
- Mode 2
- Mode 3
- Configuration 2 - Mode 1
- Mode 2
- Mode 3
- Configuration 3 - Mode 1
- Mode 2
- Mode 3

2.1.6 Environmental Conditions

05 May 2011

Ambient Temperature 24.0°C

Relative Humidity 37.0%



Product Service

2.1.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for 6dB Bandwidth.

The test results are shown below.

4.0 V DC Supply

Configuration 1 – Modes 1, 2 and 3


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412	1	8600
	2	7700
	5	8600
	11	8420
2437	1	8600
	2	8280
	5	8050
	11	9190
2462	1	7830
	2	7880
	5	8240
	11	8280




Product Service

2412 MHz

1 Mbps

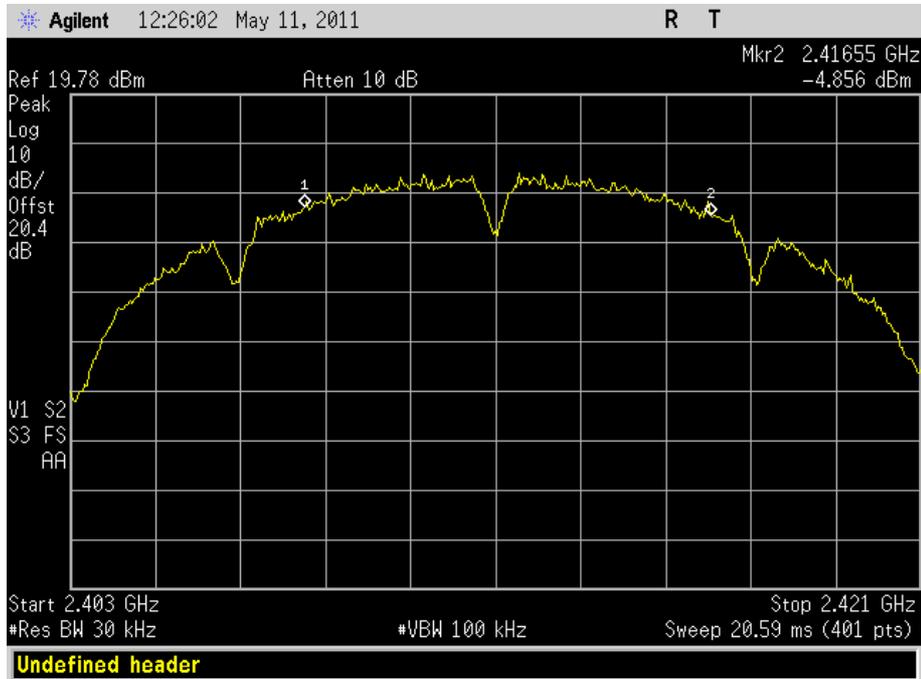


2 Mbps

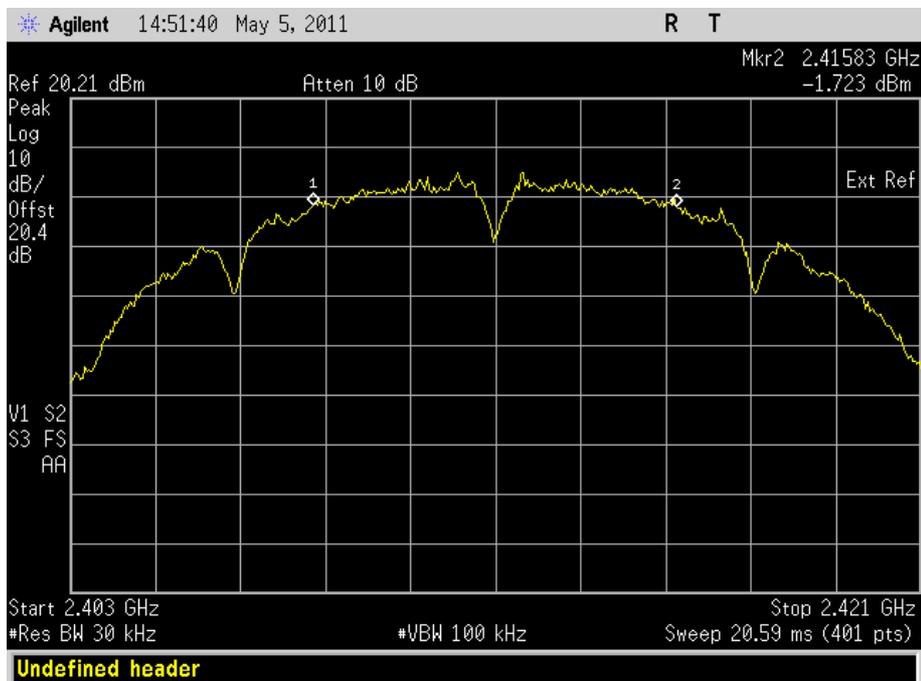




Product Service

5.5 Mbps

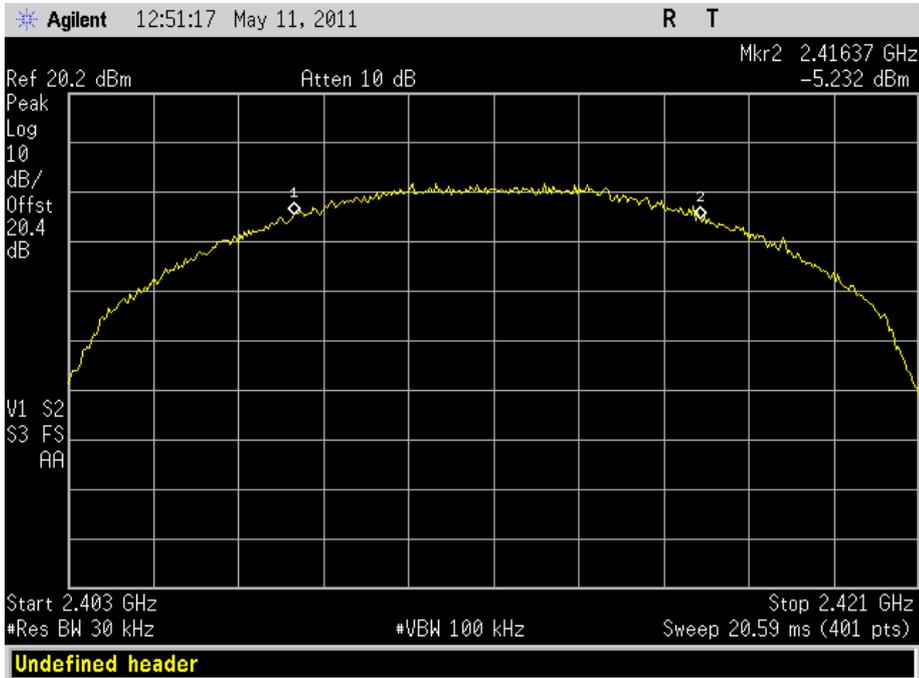

11 Mbps

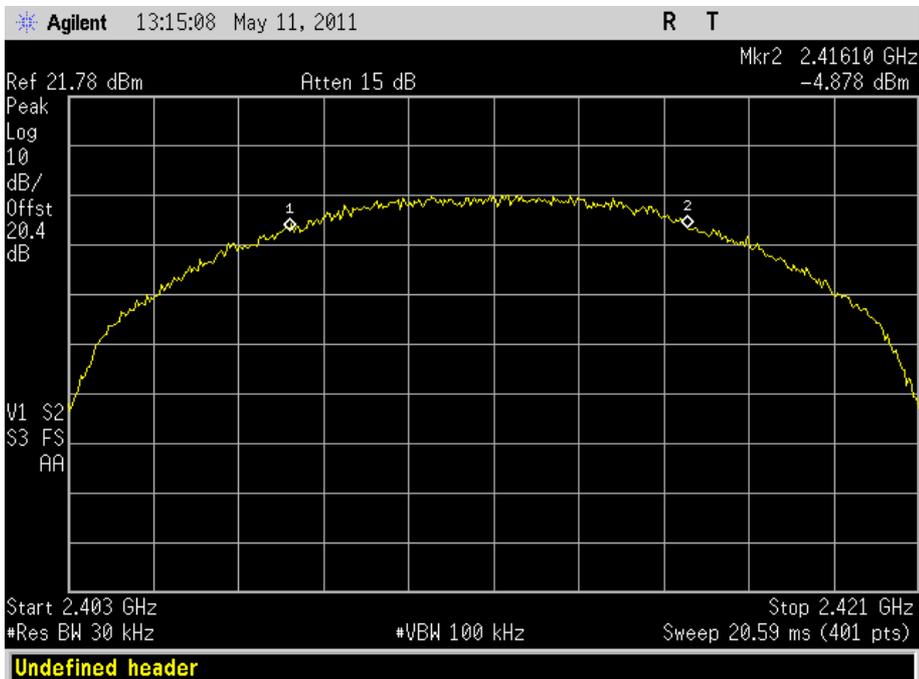





Product Service

2437 MHz

1 Mbps

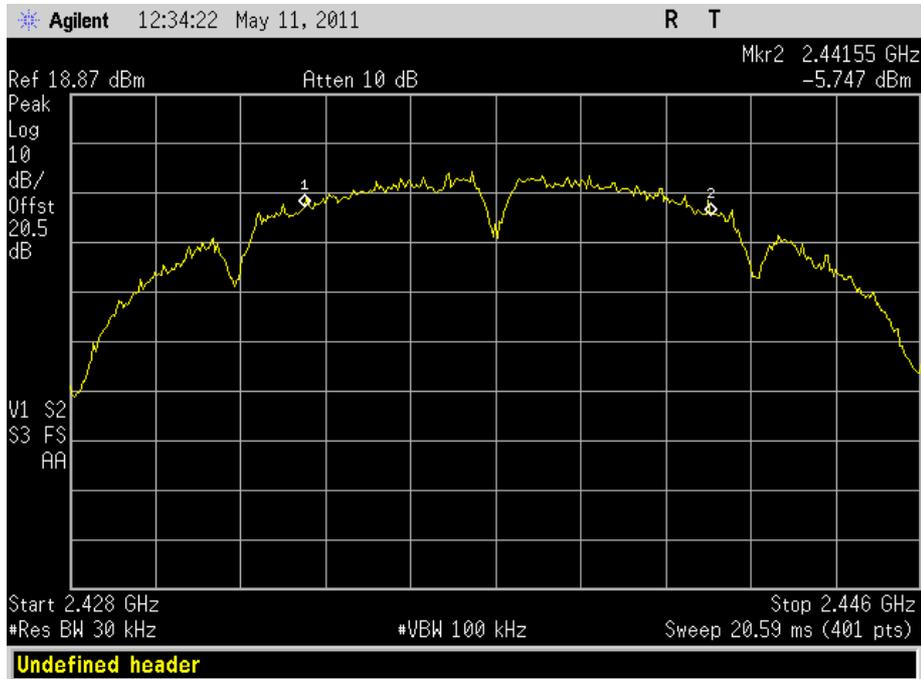


2 Mbps

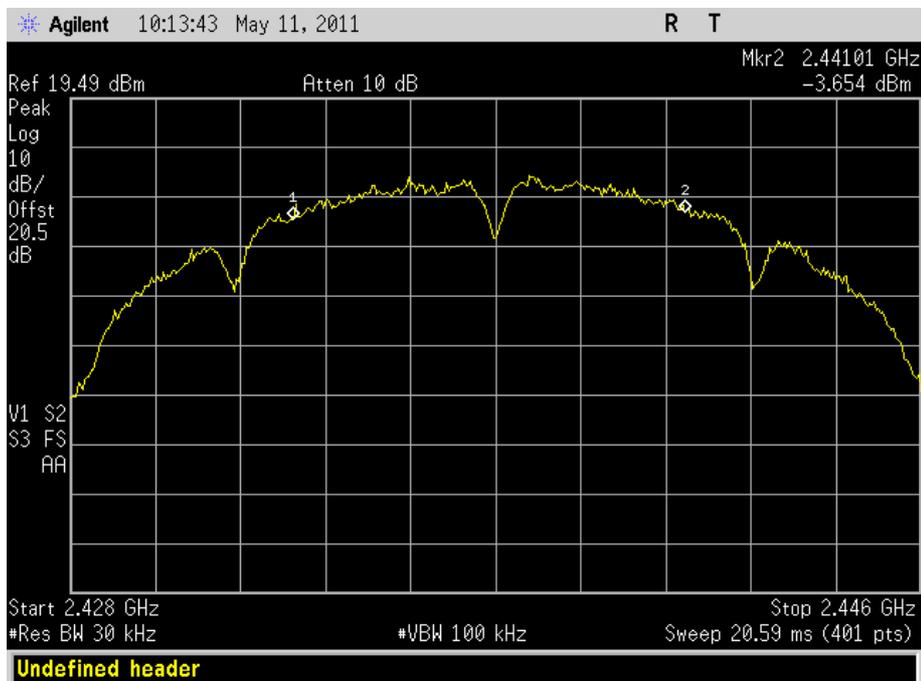




Product Service

5.5 Mbps

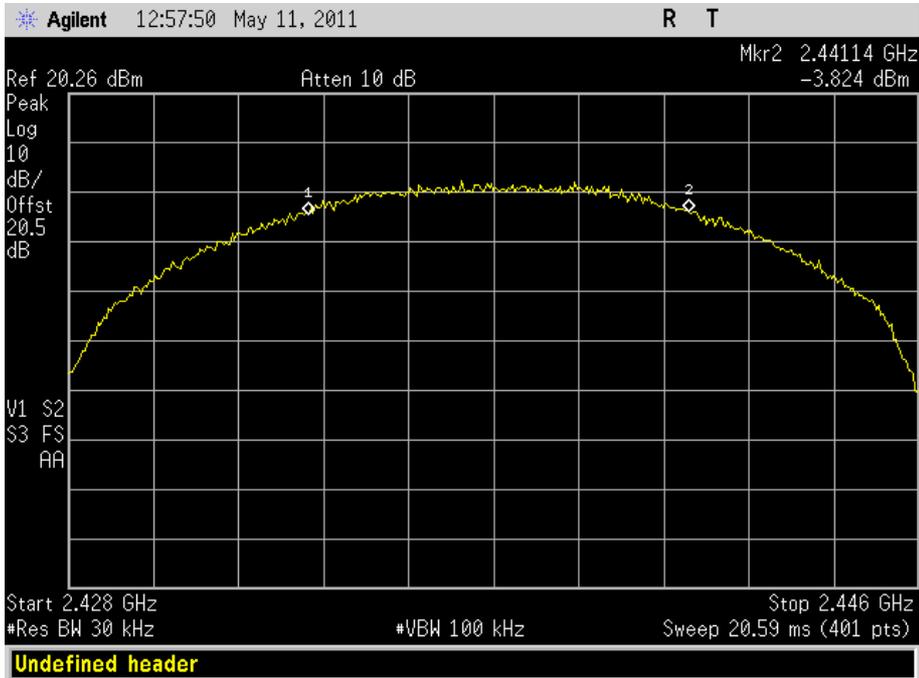

11 Mbps

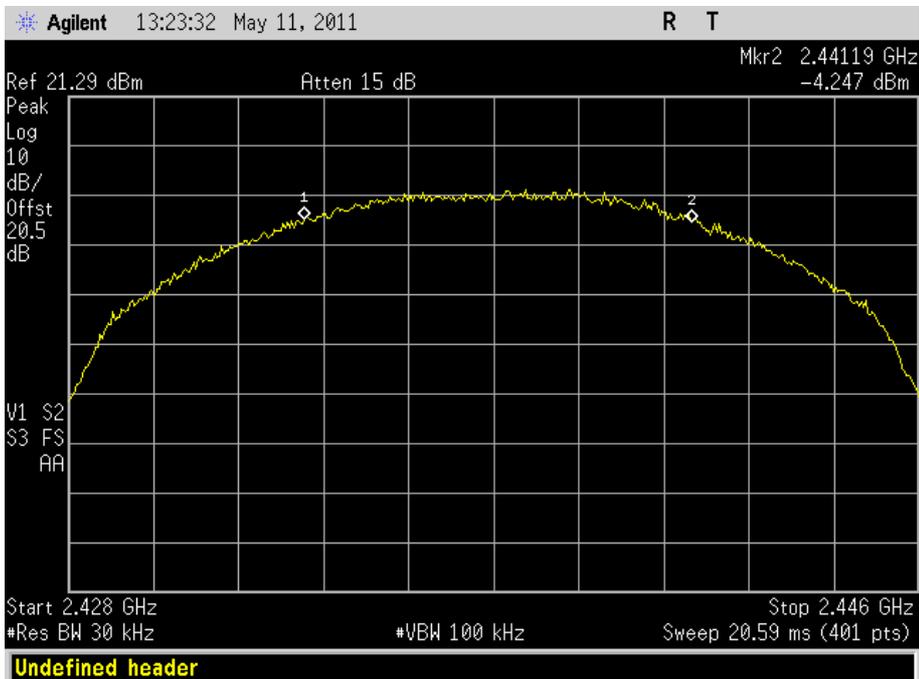





Product Service

2462 MHz

1 Mbps

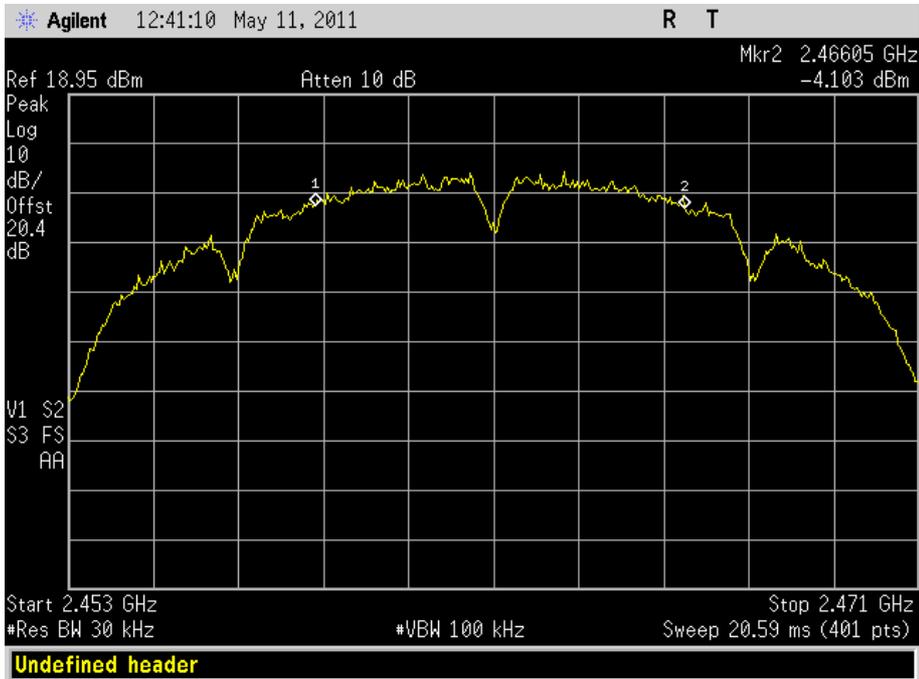


2 Mbps

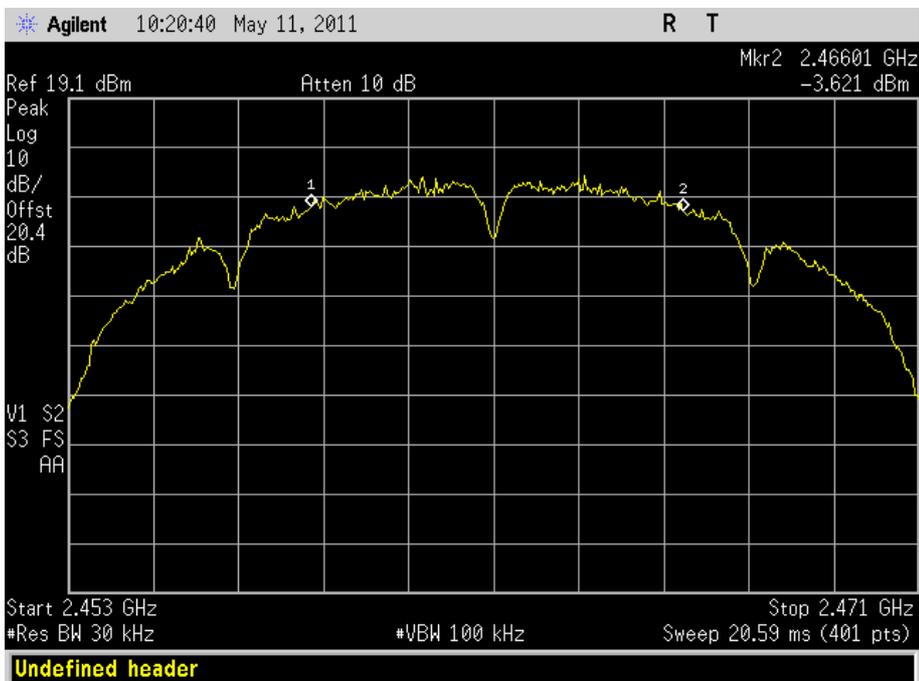




Product Service

5.5 Mbps

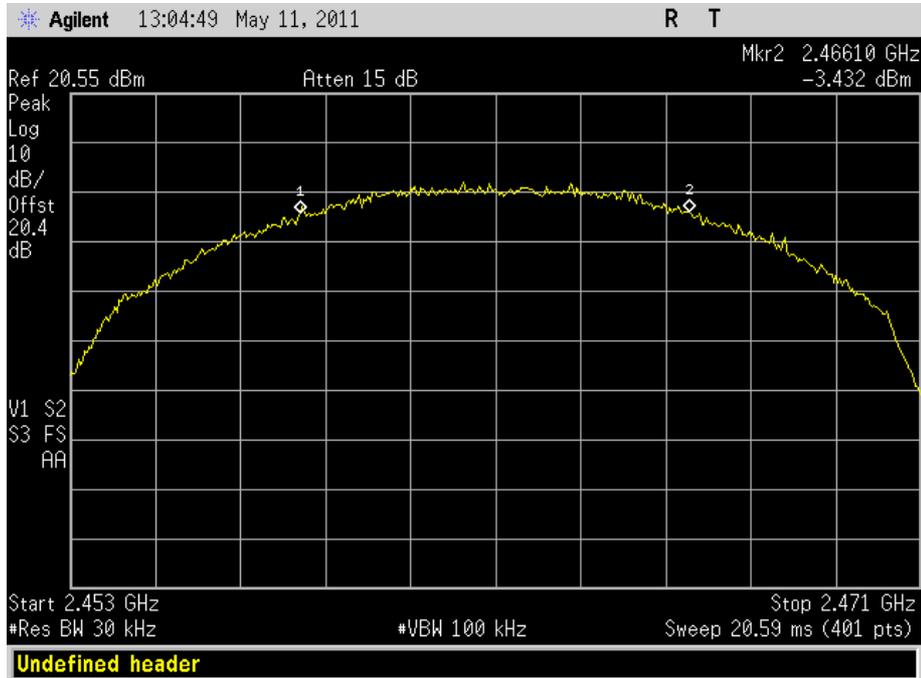

11 Mbps

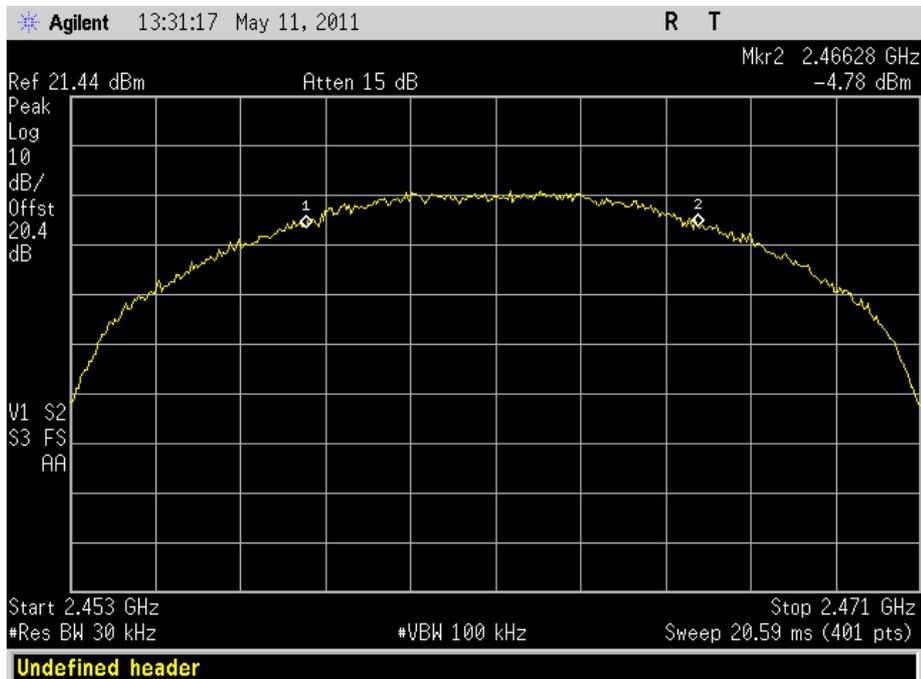



Product Service

Configuration 2 – Modes 1, 2 and 3


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412	6	16400
	9	16400
	12	16350
	18	16400
	36	15750
	48	16400
	54	16450
2437	6	16400
	9	16400
	12	16400
	18	16100
	36	16450
	48	16400
	54	16400
2462	6	16400
	9	16400
	12	16400
	18	16400
	36	16400
	48	16350
	54	16150




Product Service

2412 MHz

6 Mbps

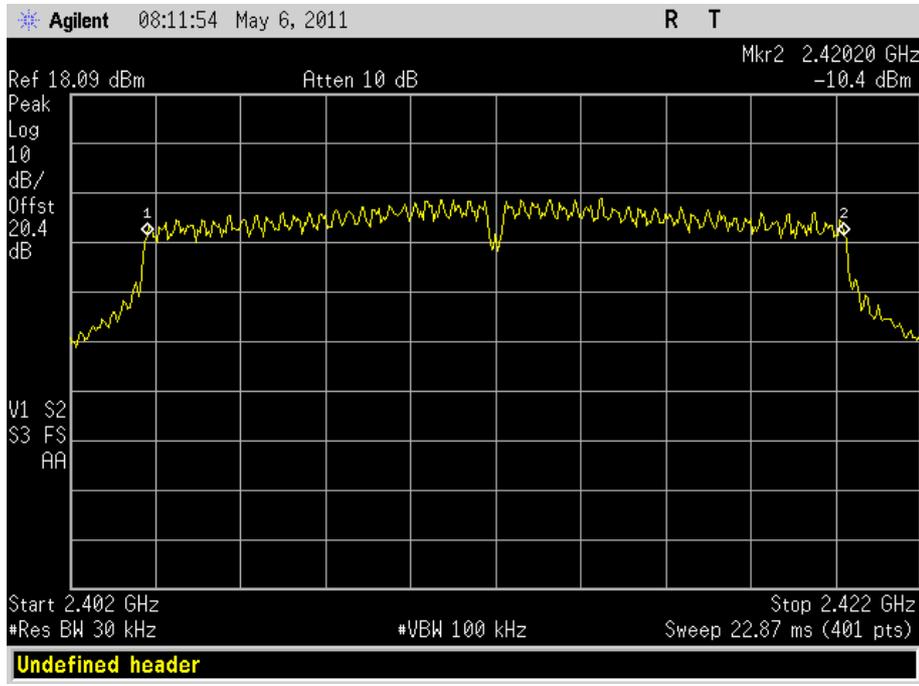


9 Mbps

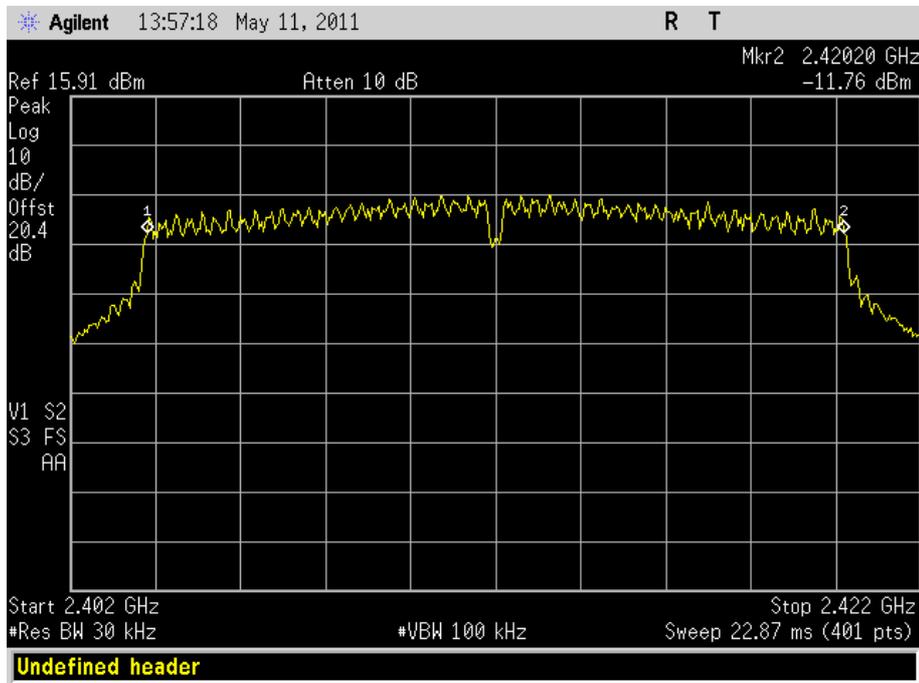




Product Service

12 Mbps

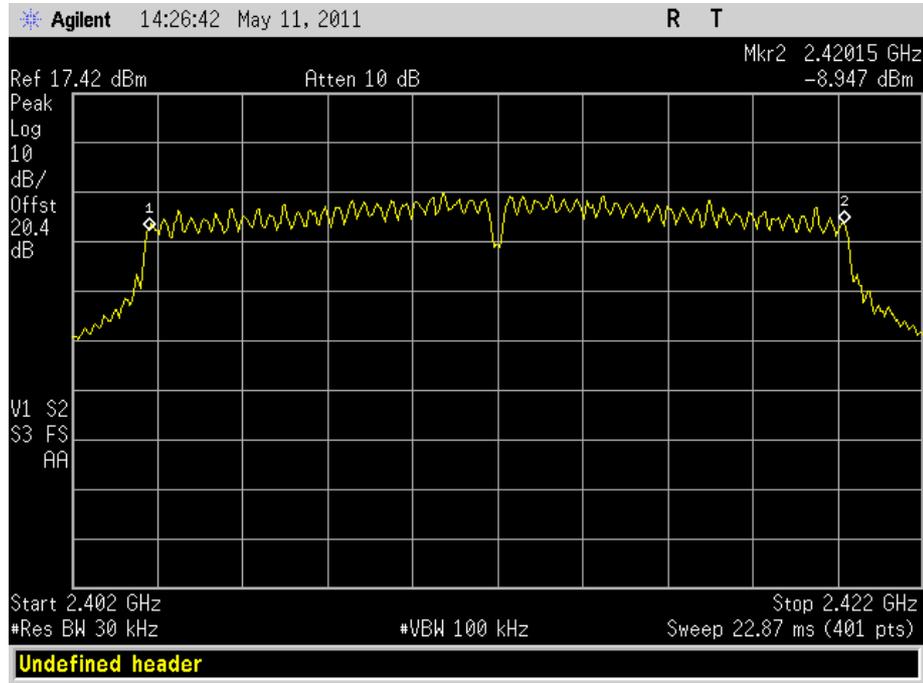


18 Mbps

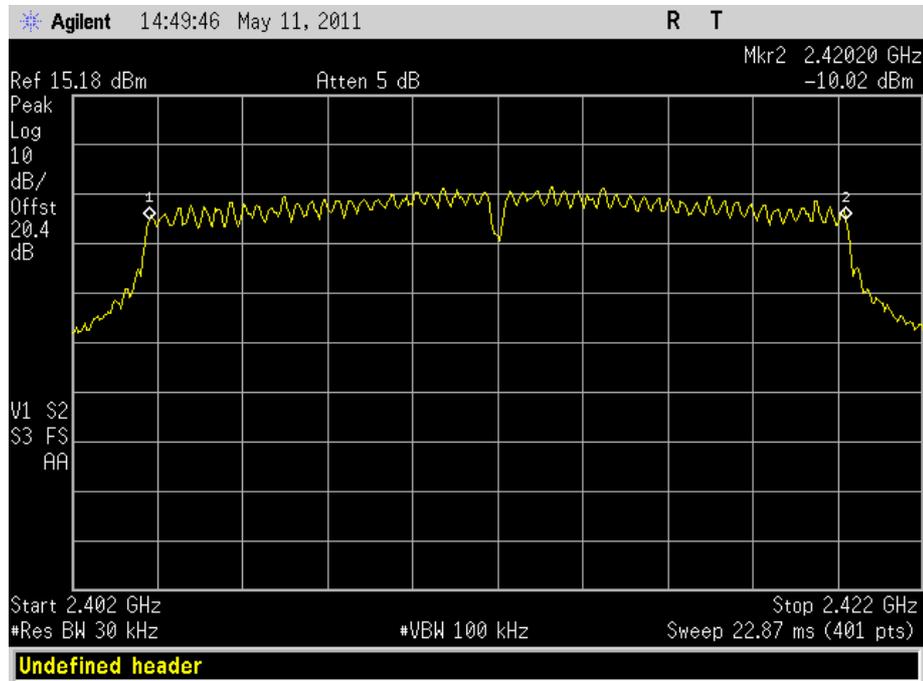



Product Service

54 Mbps

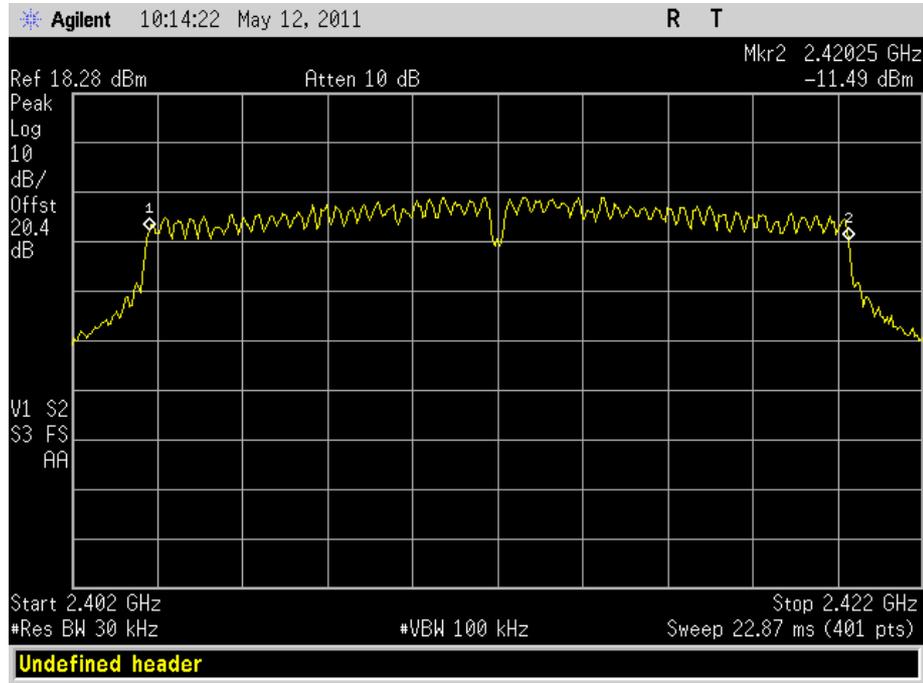





Product Service

2437 MHz

6 Mbps

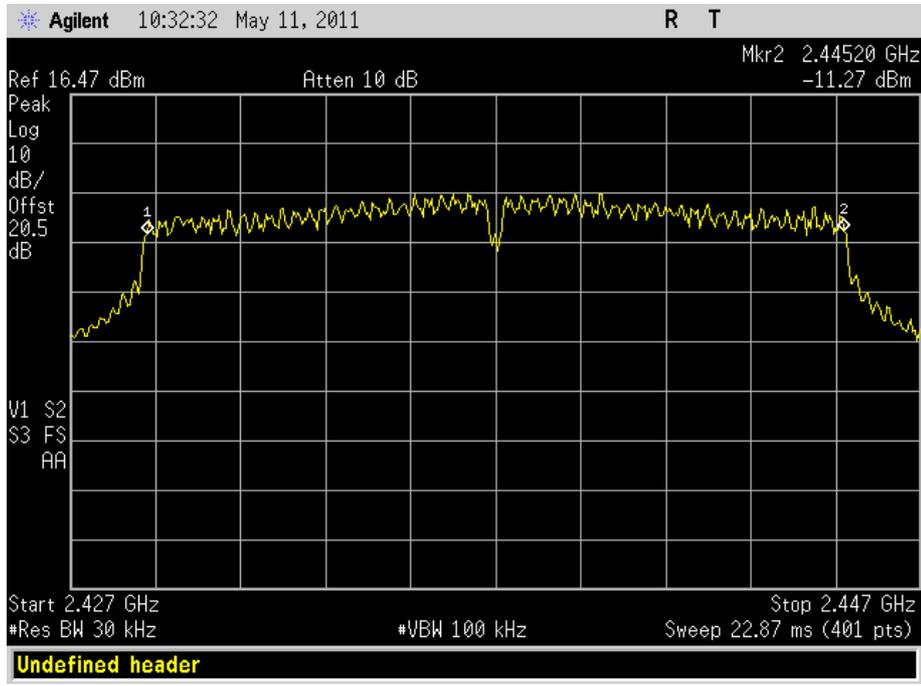


9 Mbps

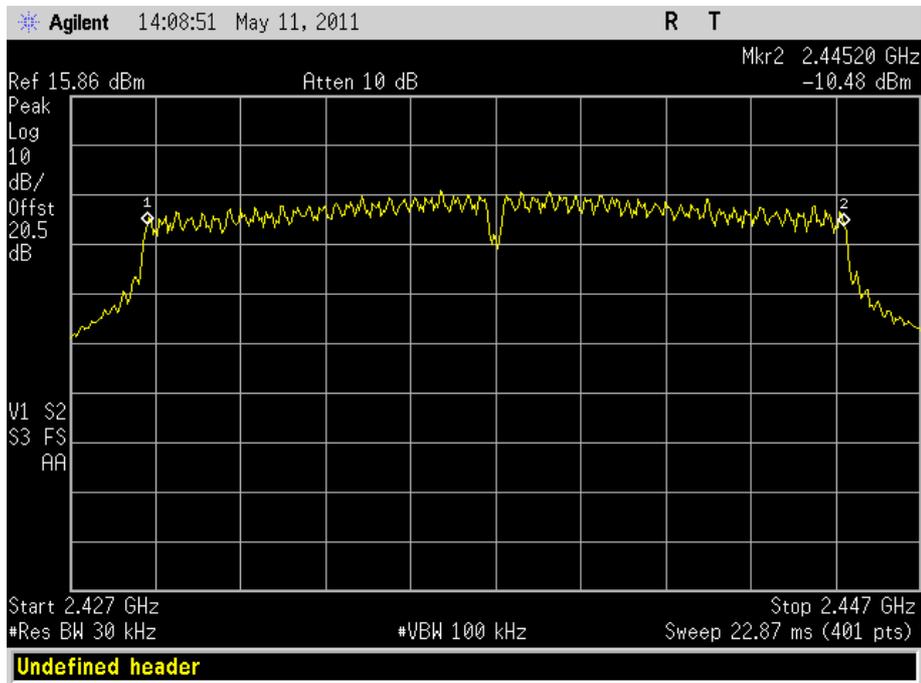




Product Service

12 Mbps

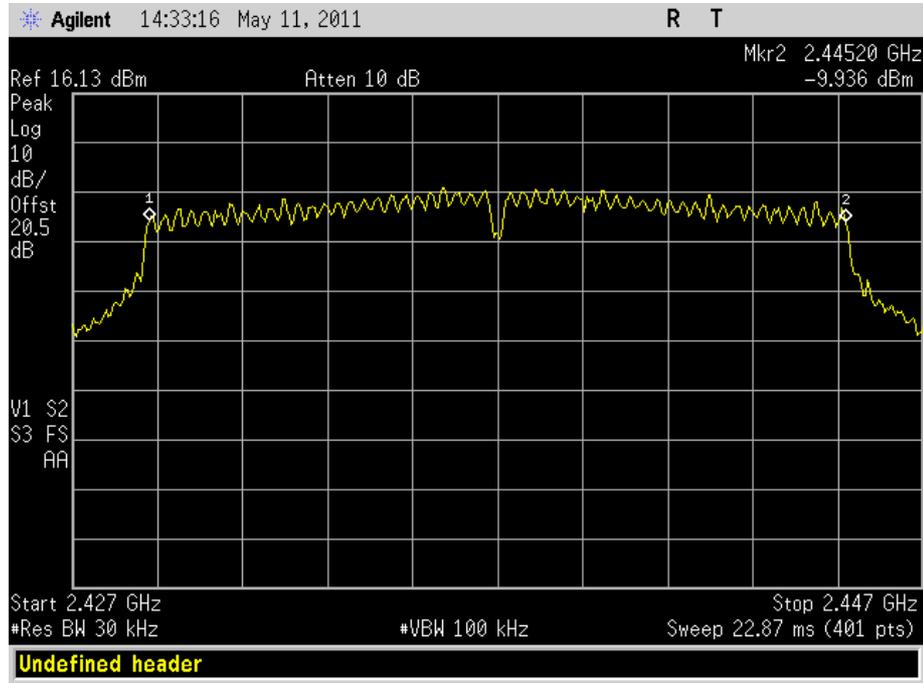


18 Mbps

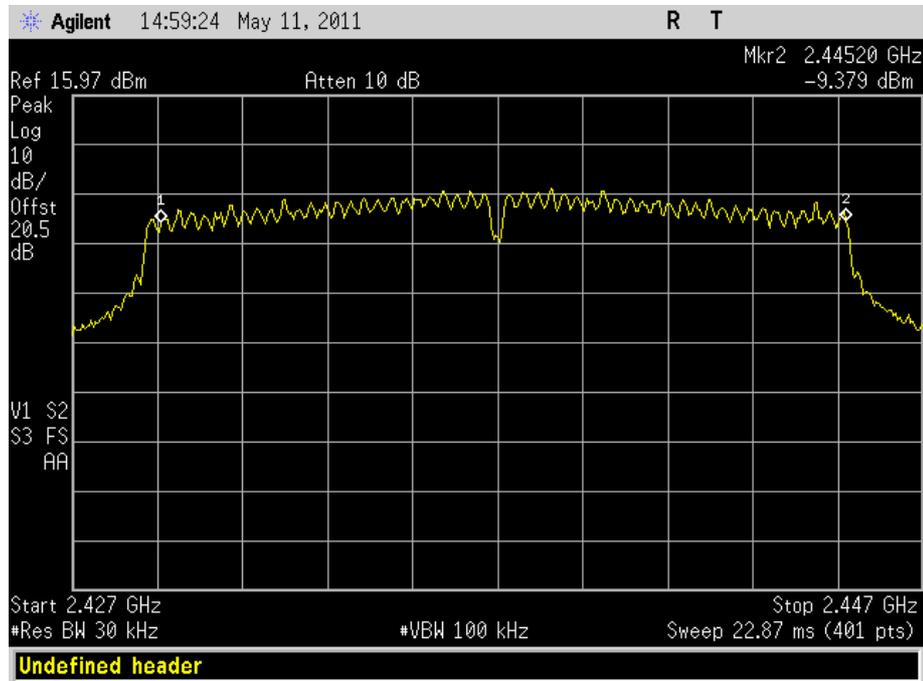




Product Service

36 Mbps

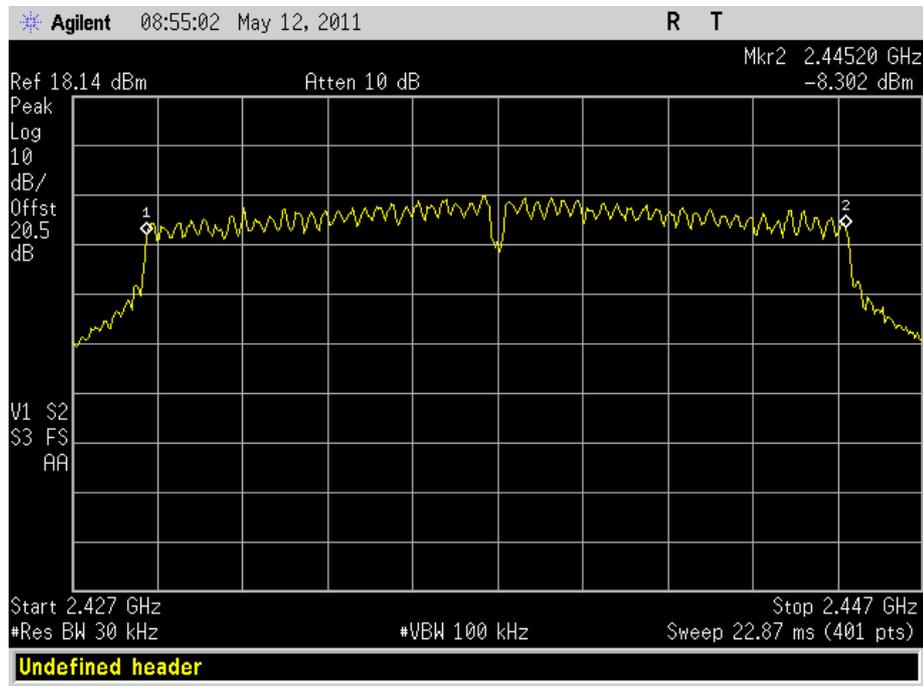


48 Mbps

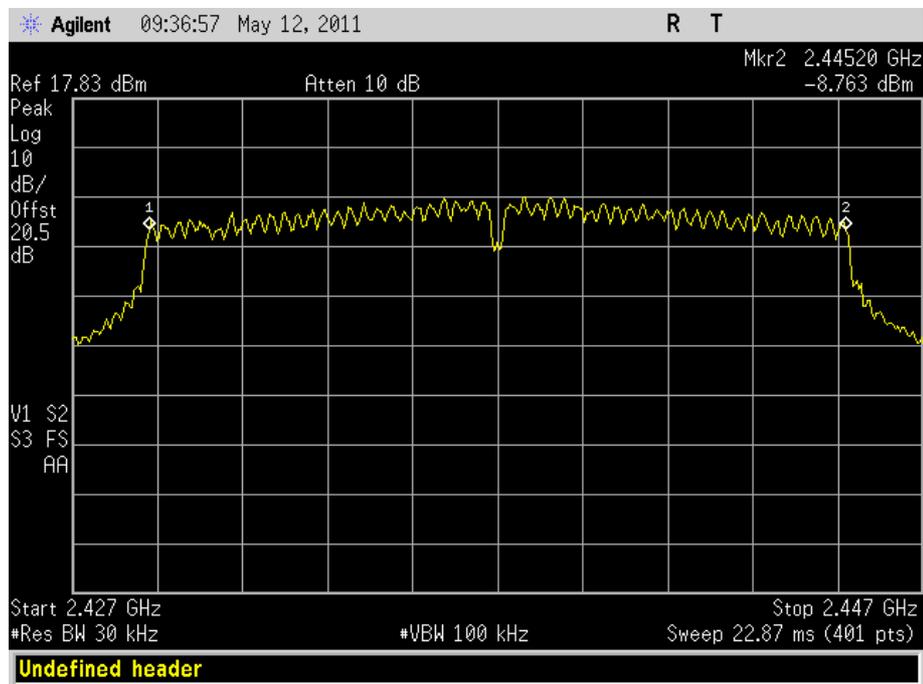



Product Service

54 Mbps

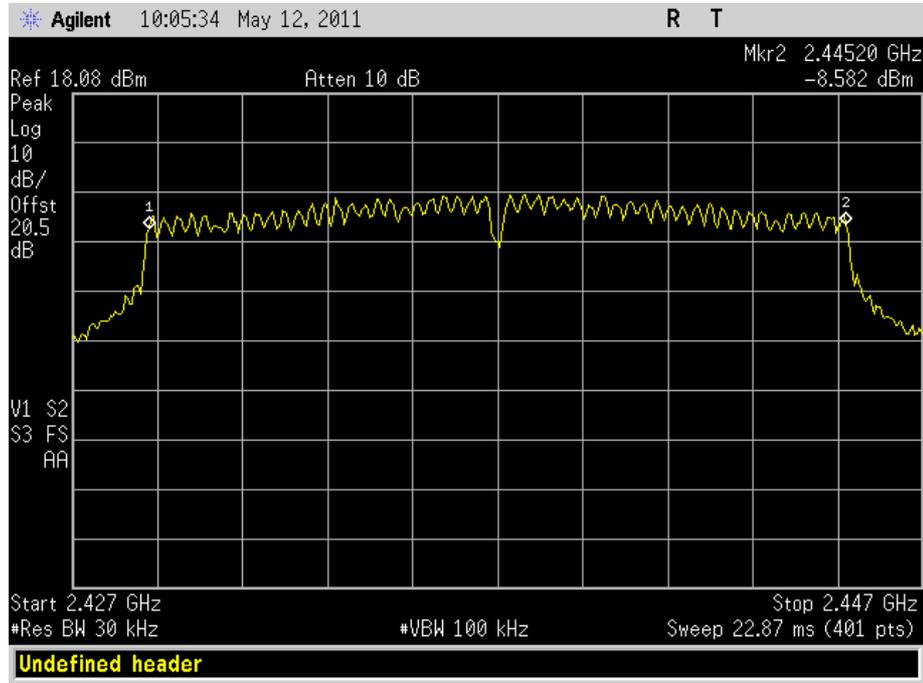





Product Service

2462 MHz

6 Mbps

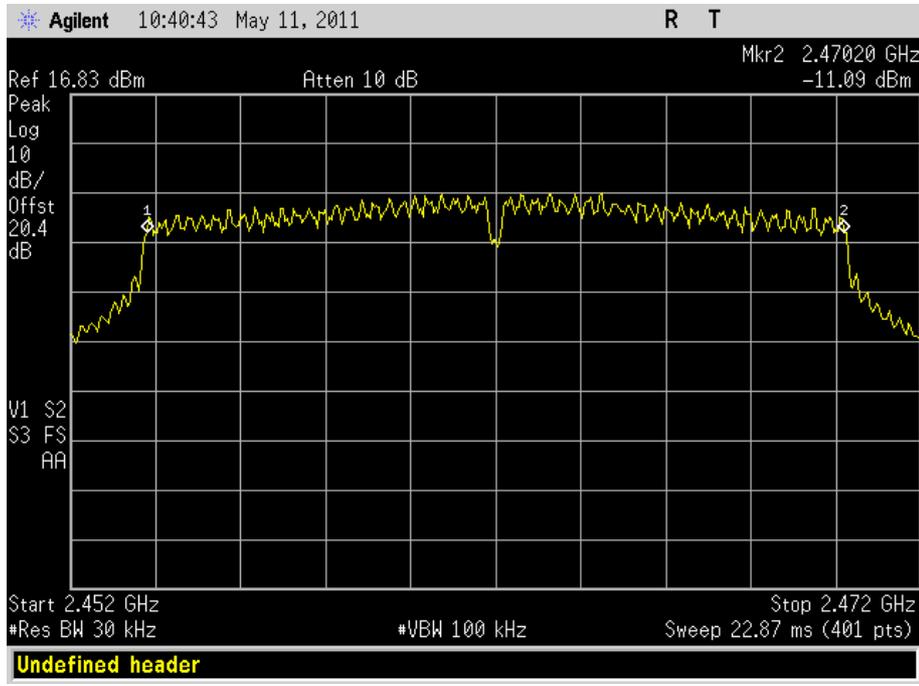


9 Mbps

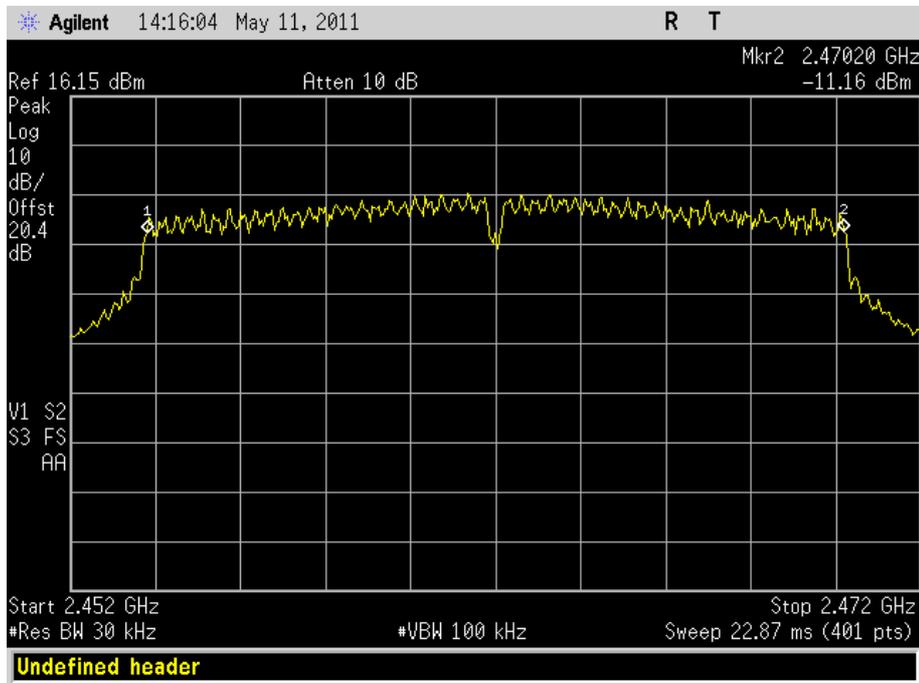




Product Service

12 Mbps

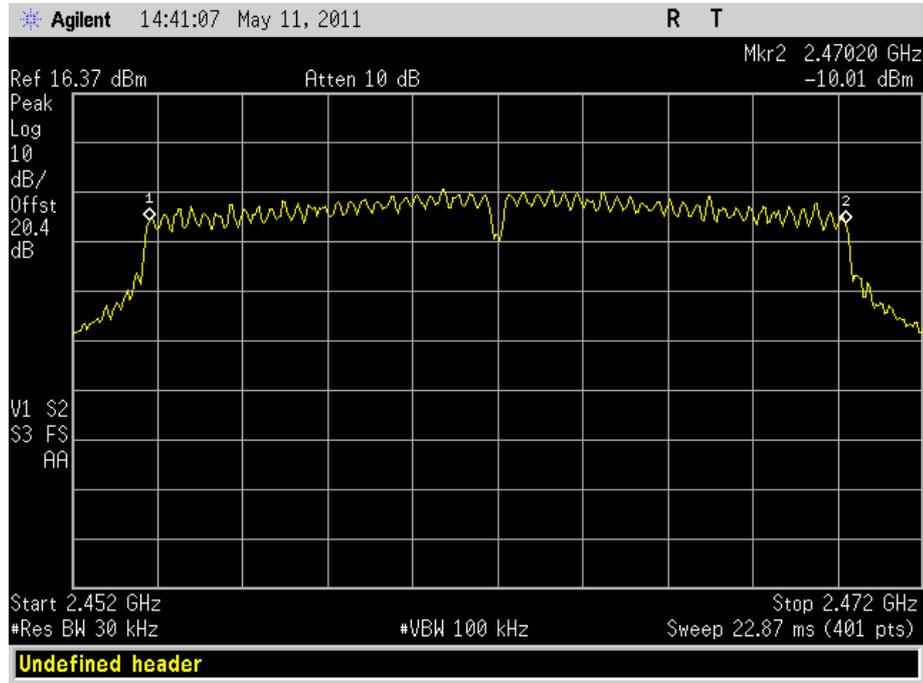


18 Mbps

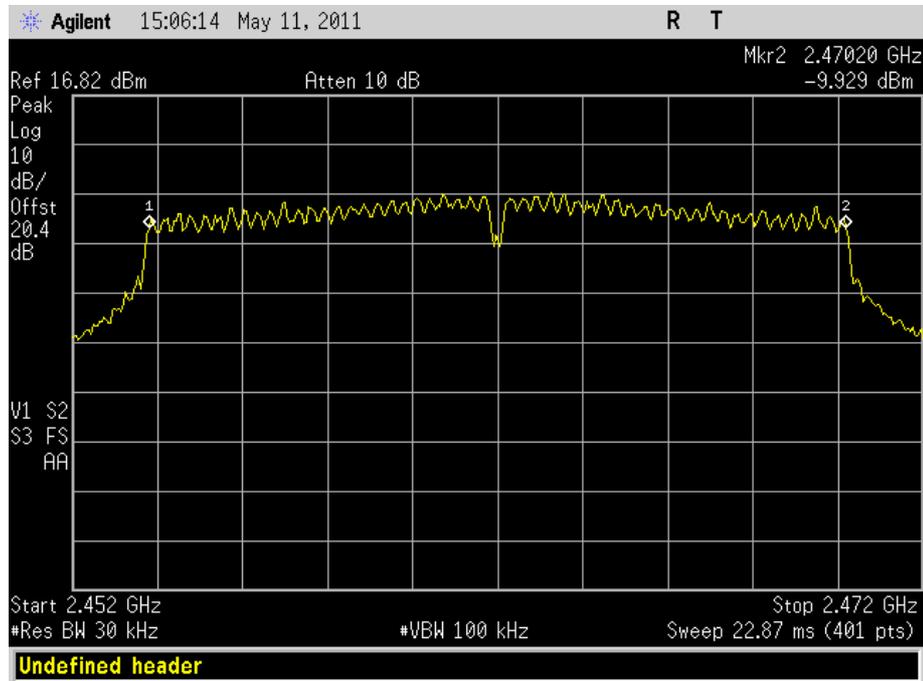




Product Service

36 Mbps

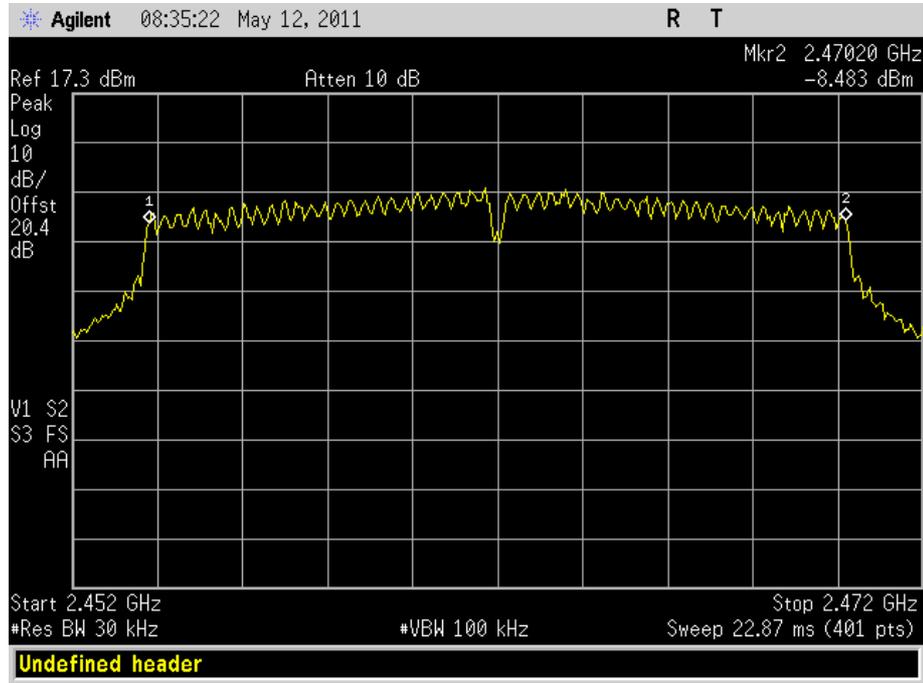


48 Mbps

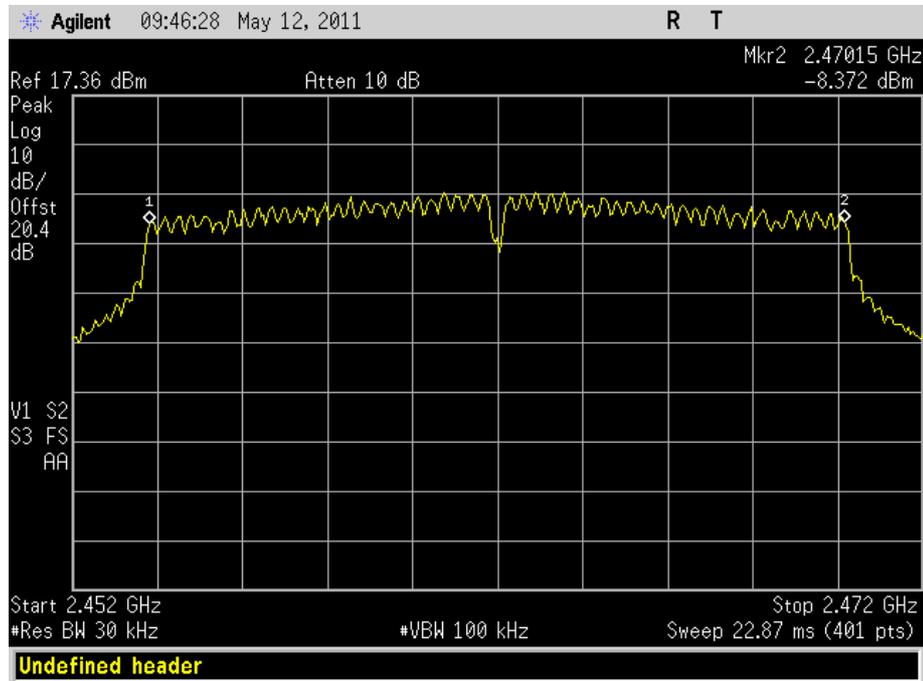



Product Service

54 Mbps

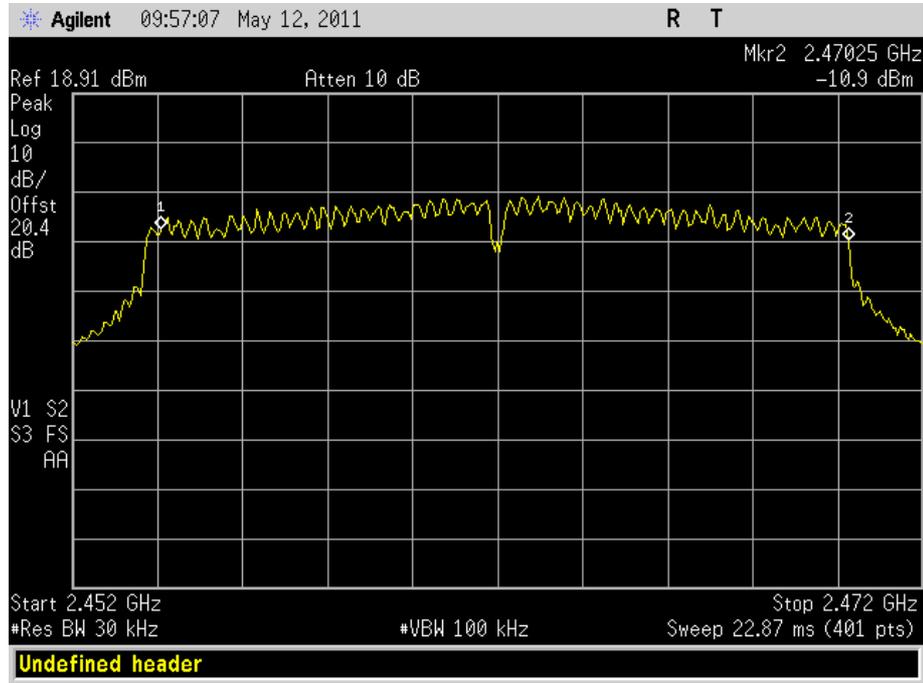



Product Service

Configuration 3 – Modes 1, 2 and 3


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412	6.5	17650
	13	17700
	19.5	17650
	26	17650
	39	17700
	52	17700
	58.5	17350
	65	17650
2437	6.5	17600
	13	17700
	19.5	17350
	26	17600
	39	17600
	52	17650
	58.5	17700
	65	17700
2462	6.5	17600
	13	17700
	19.5	17650
	26	17700
	39	17700
	52	17700
	58.5	17700
	65	17600




Product Service

2412 MHz

6.5 Mbps

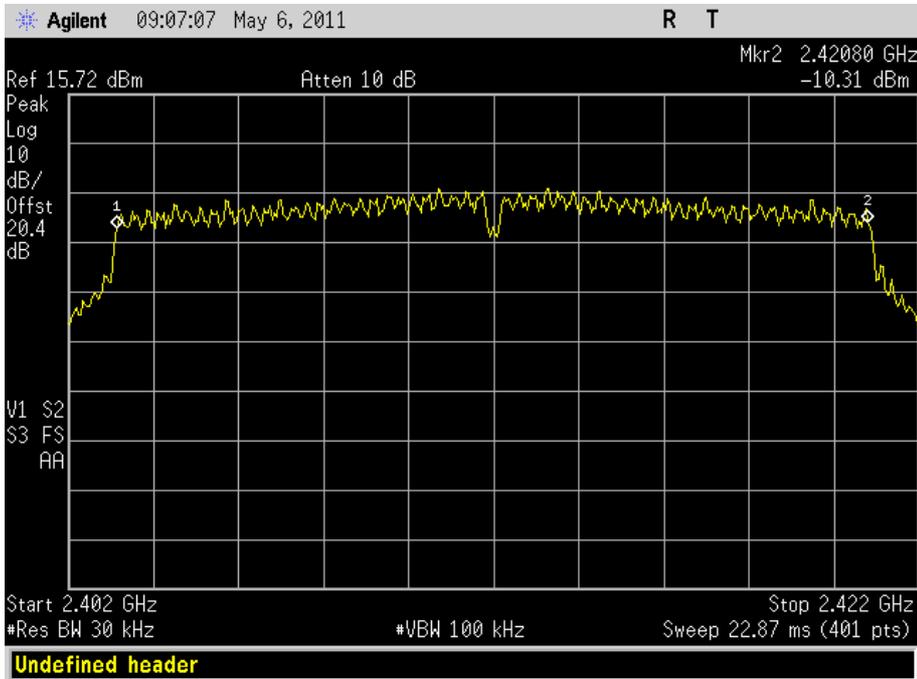


13 Mbps

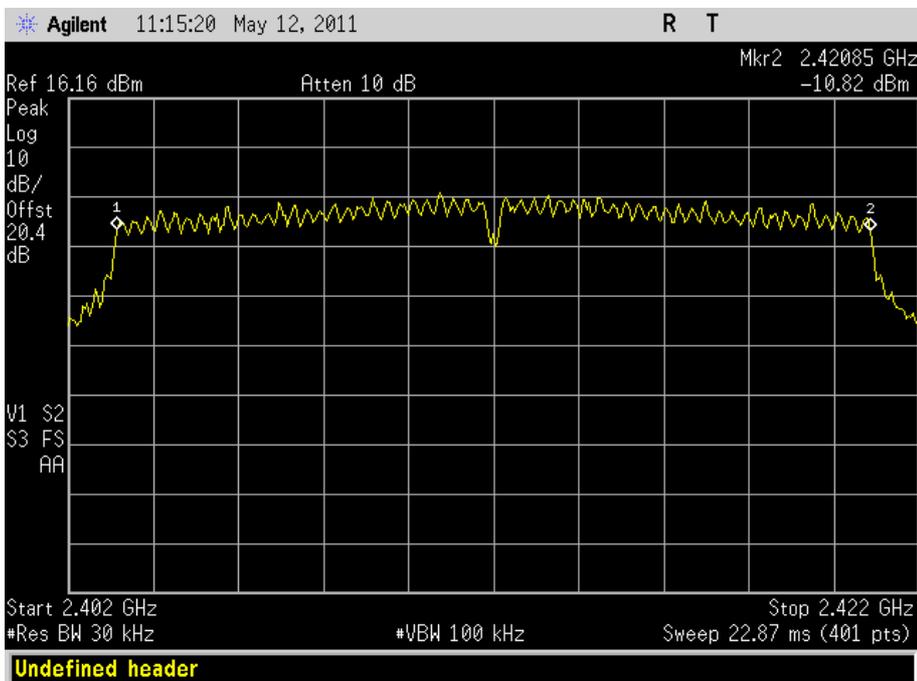




Product Service

19.5 Mbps

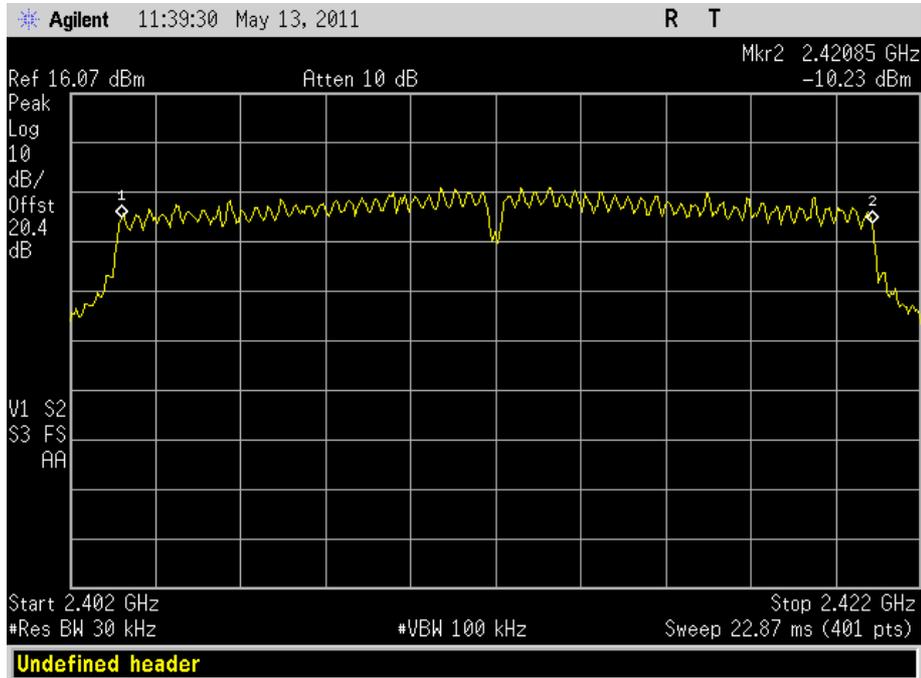


26 Mbps

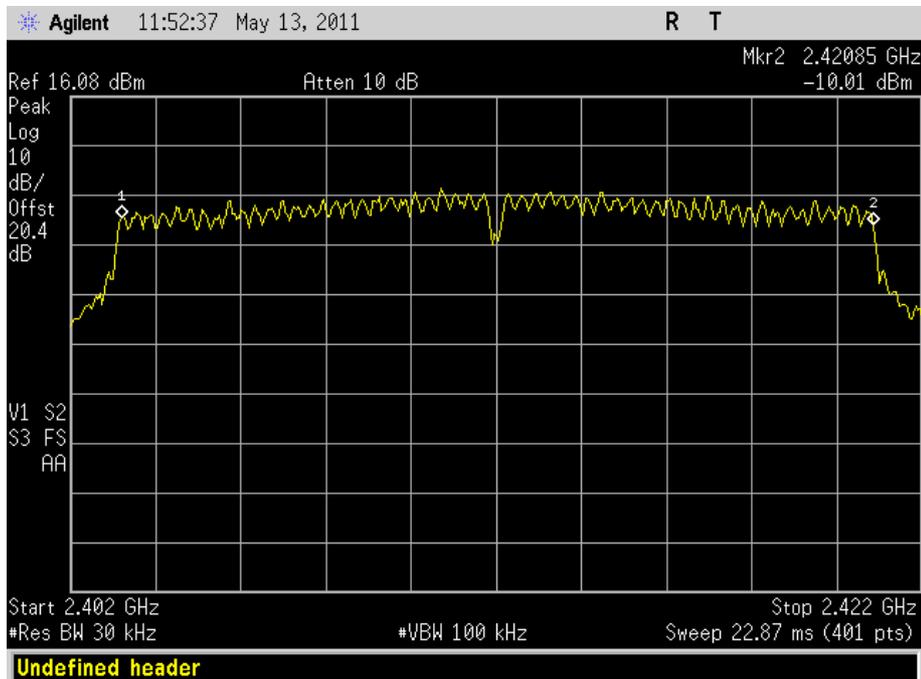




39 Mbps

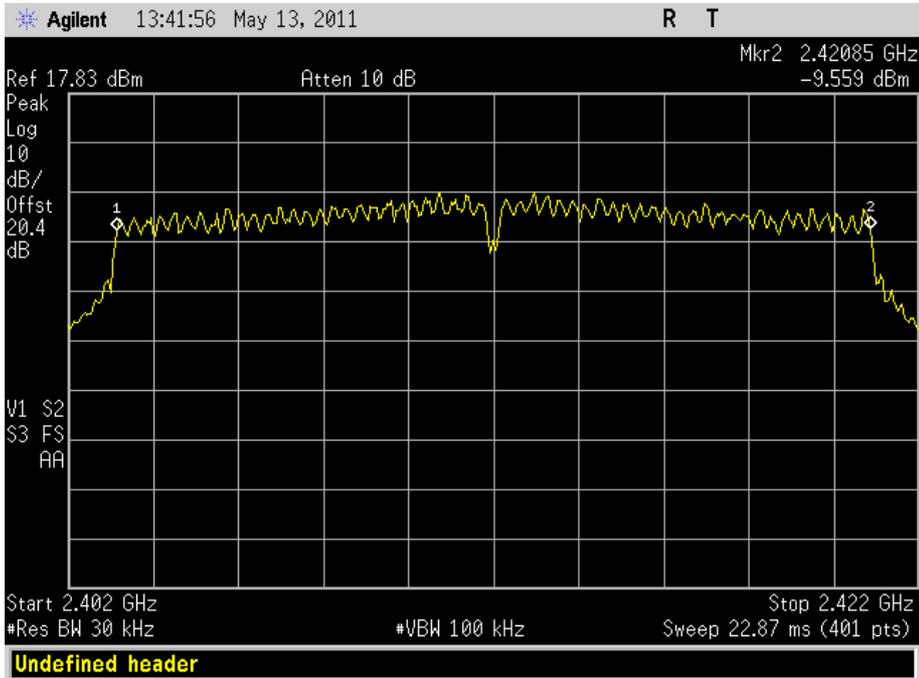


52 Mbps

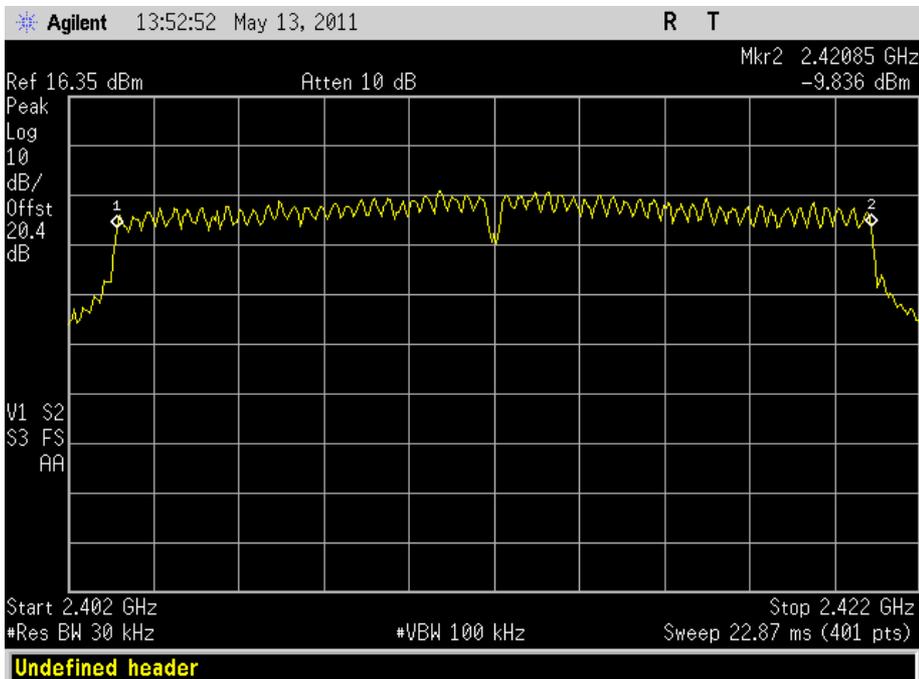




Product Service

58.5 Mbps

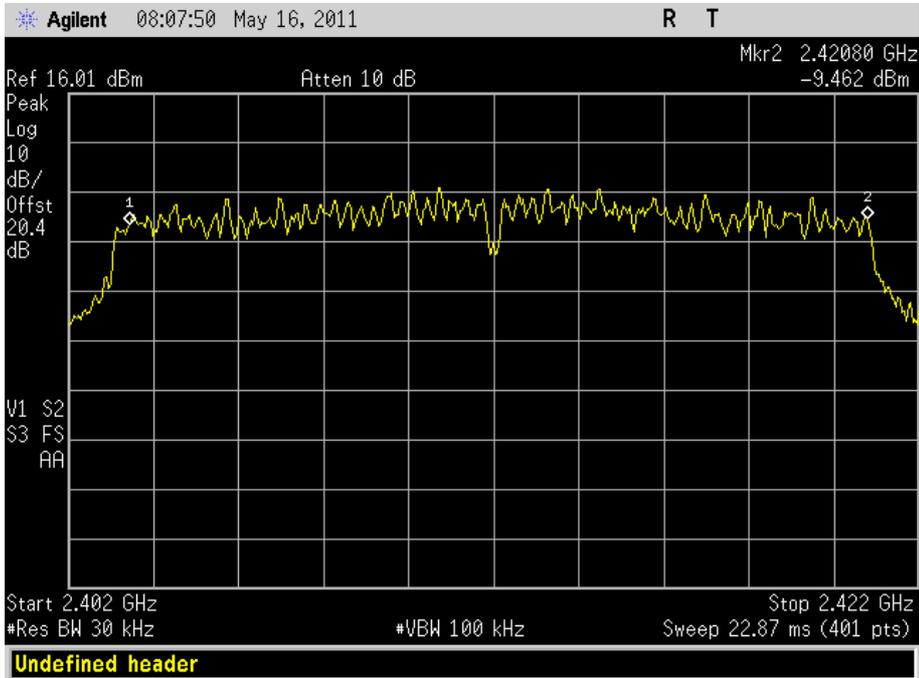

65 Mbps

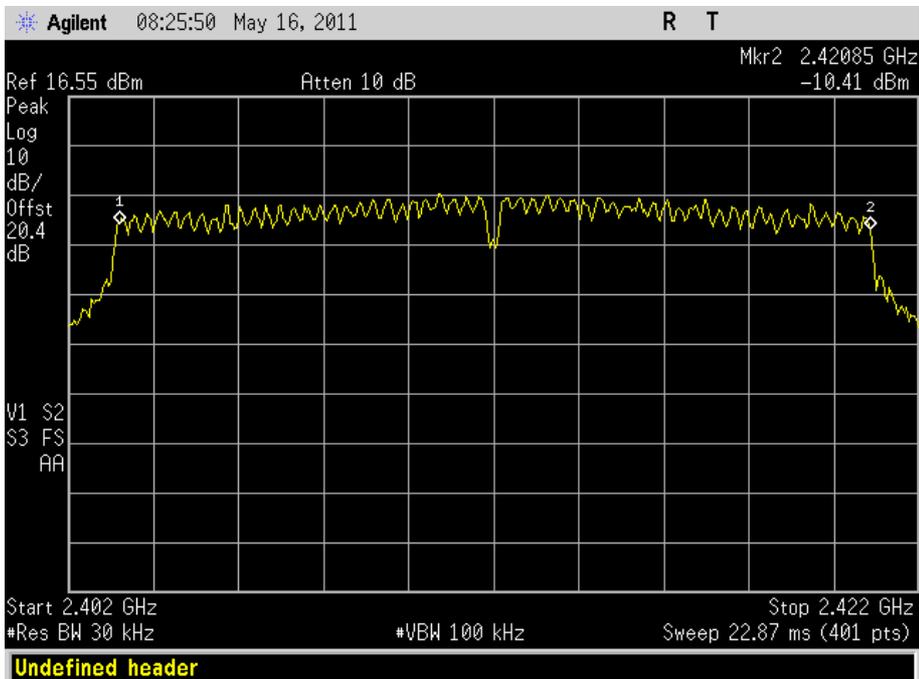





Product Service

2437 MHz

6.5 Mbps

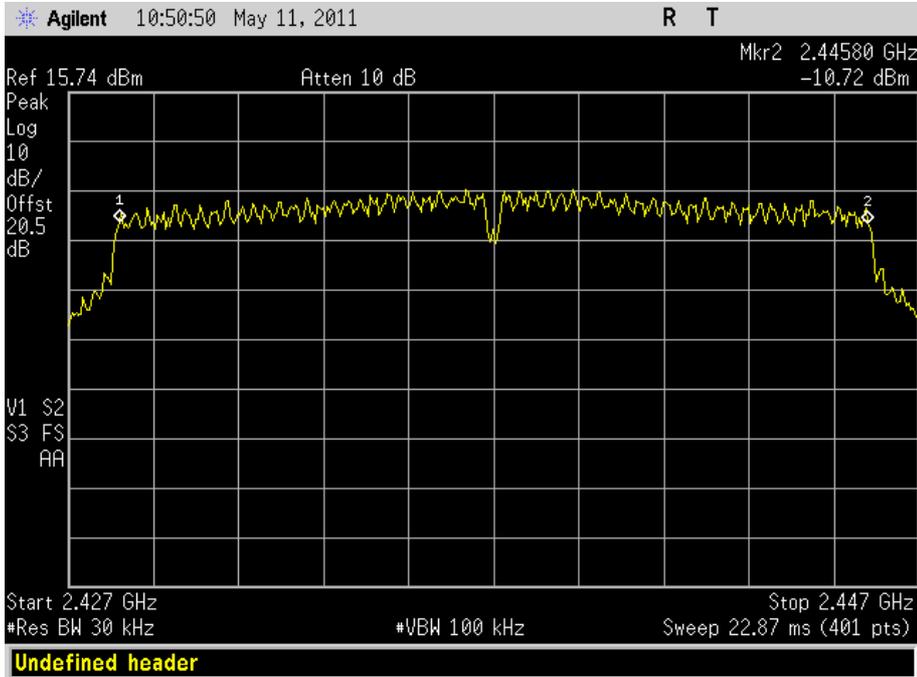


13 Mbps

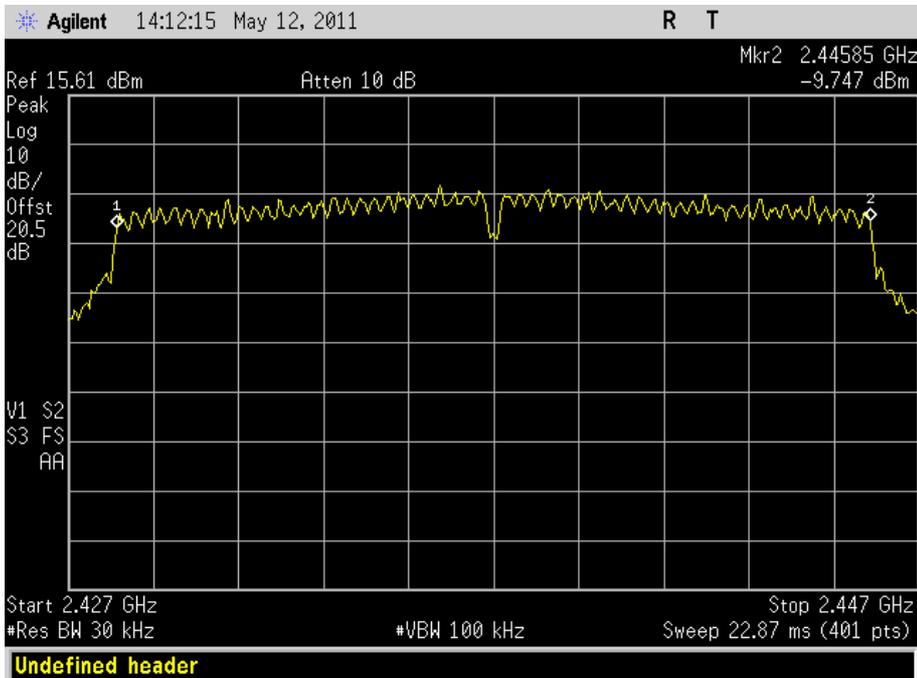




Product Service

19.5 Mbps

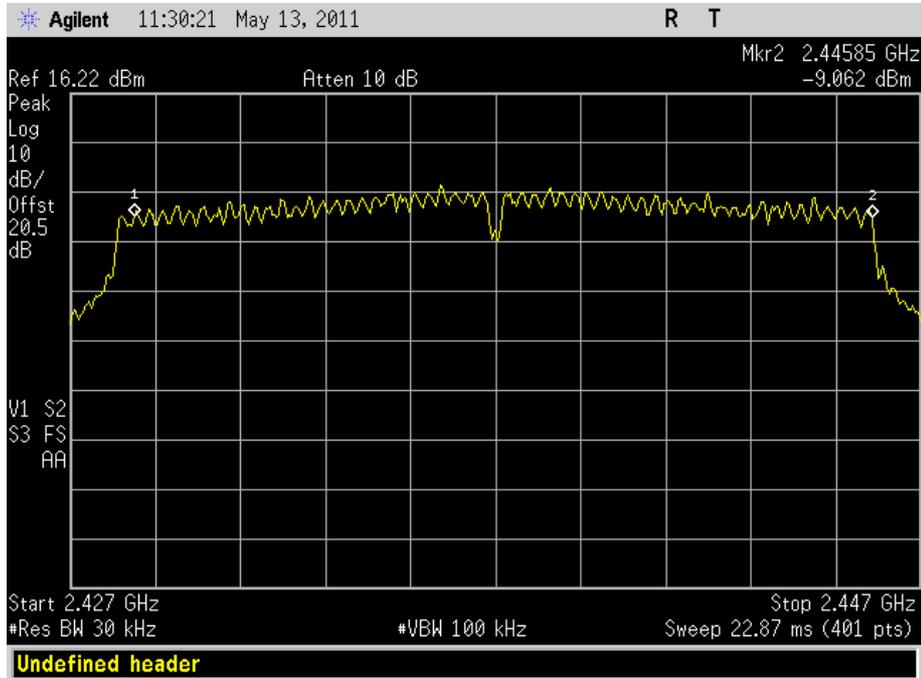


26 Mbps

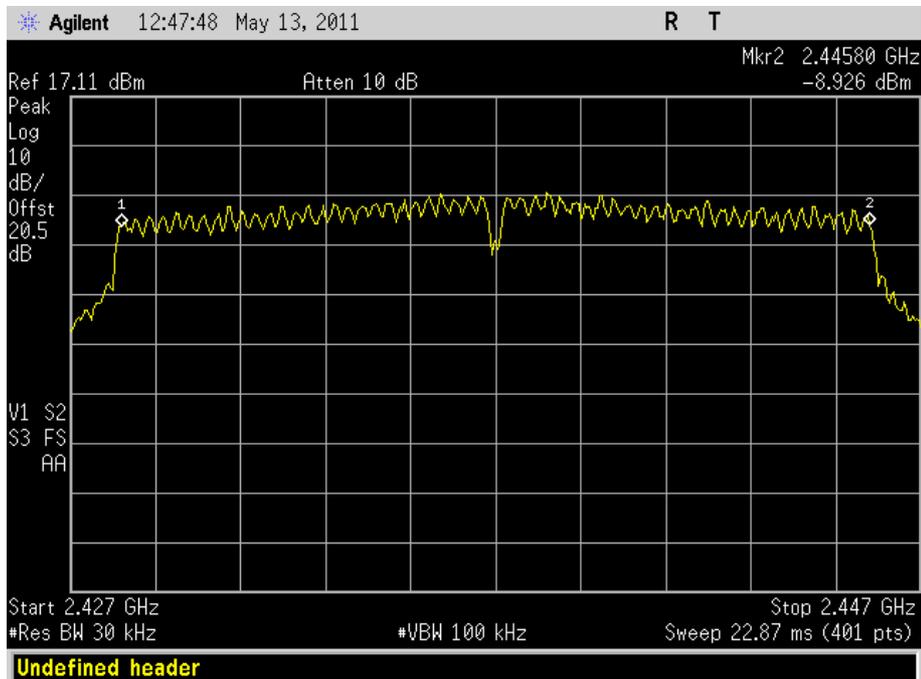




Product Service

39 Mbps

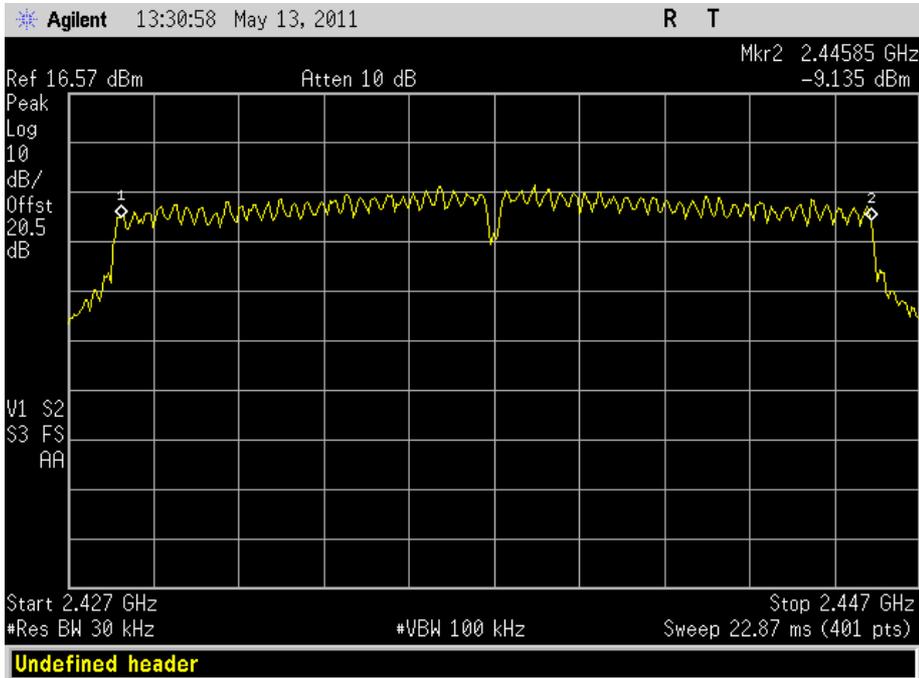


52 Mbps

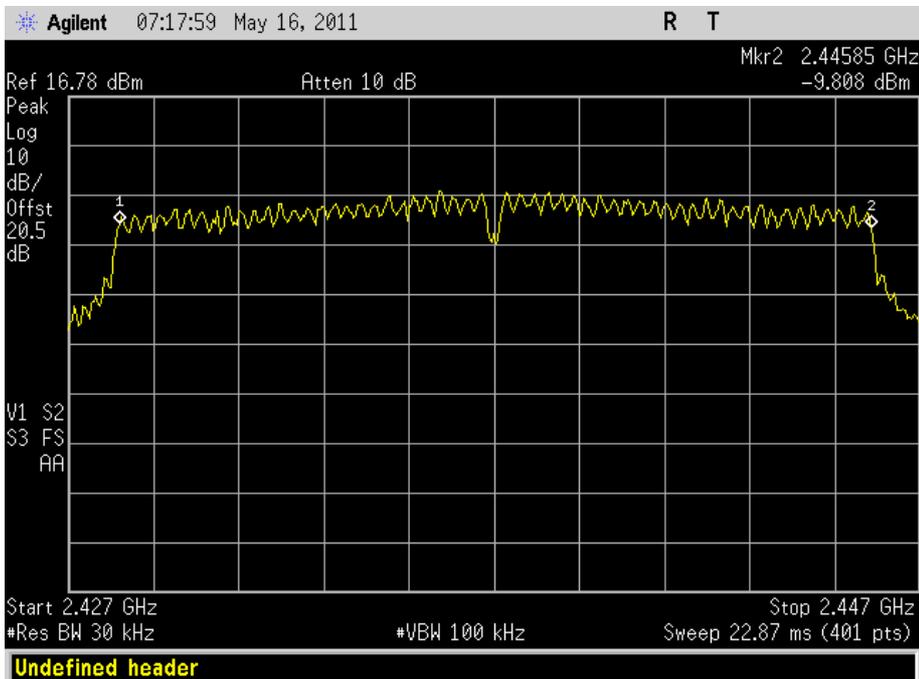




Product Service

58.5 Mbps

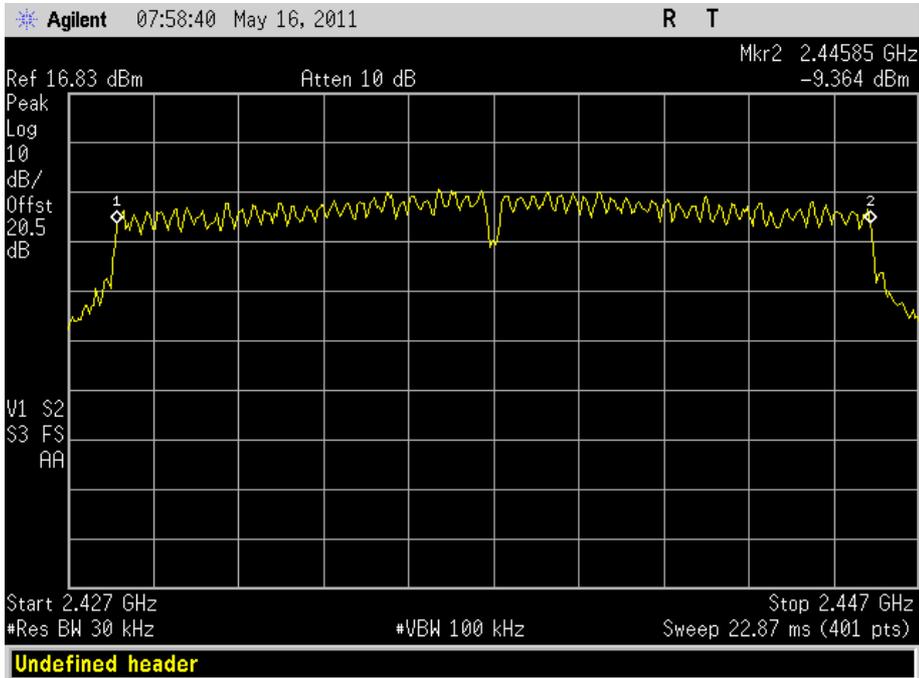

65 Mbps

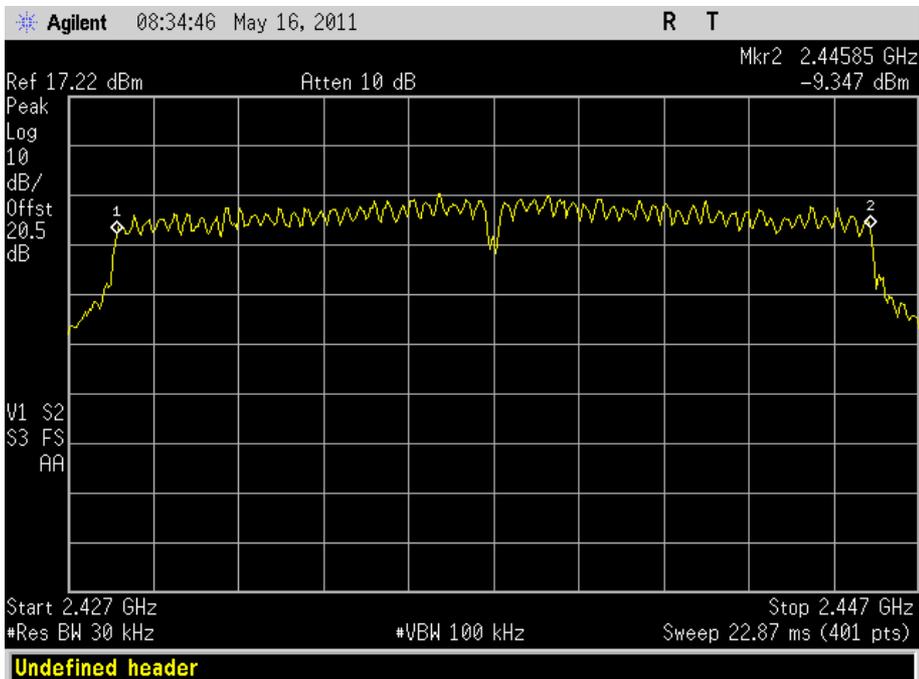





Product Service

2462 MHz

6.5 Mbps

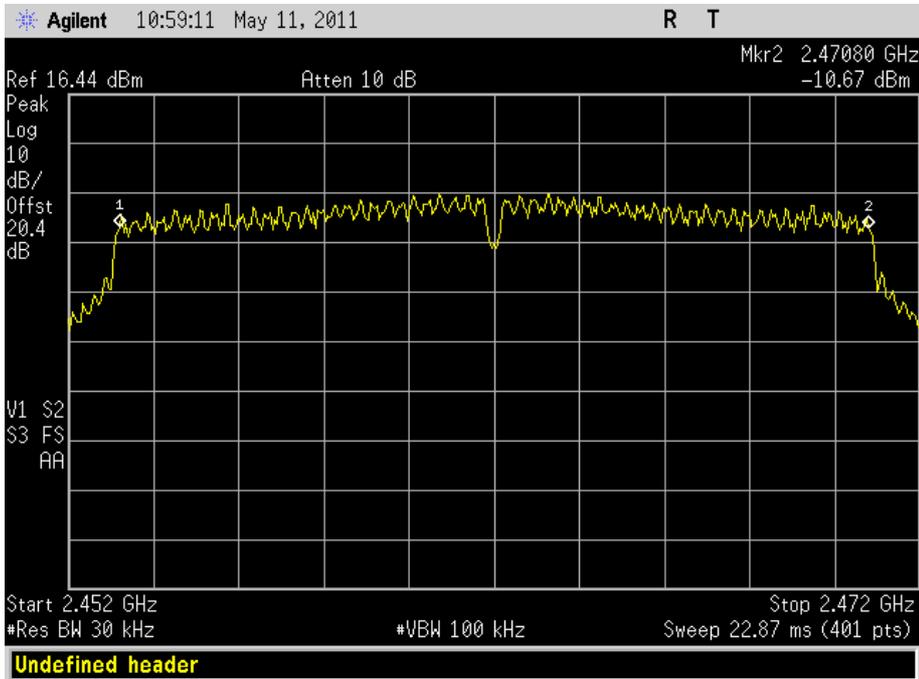


13 Mbps

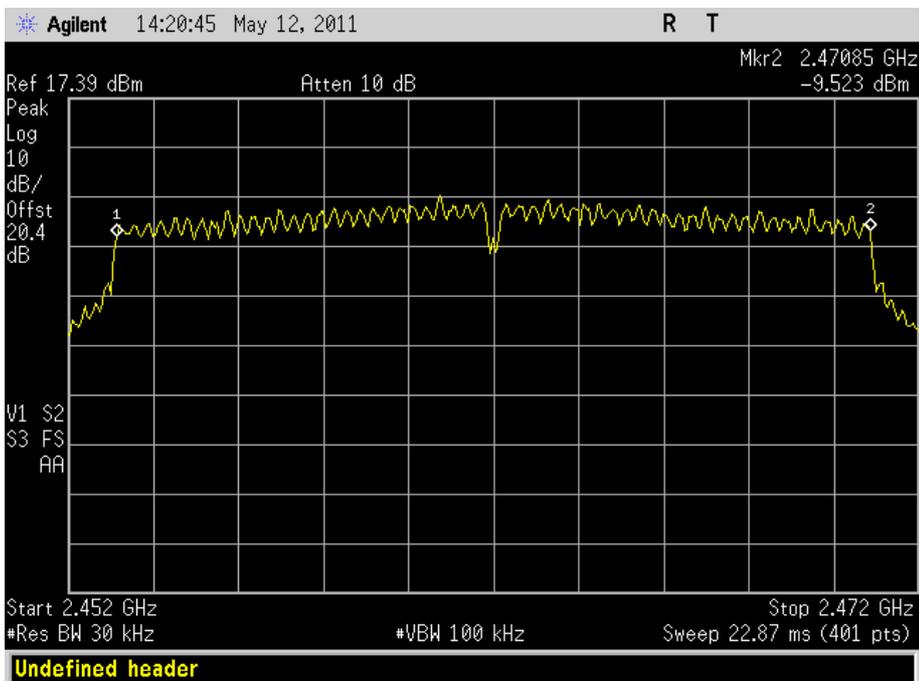




19.5 Mbps

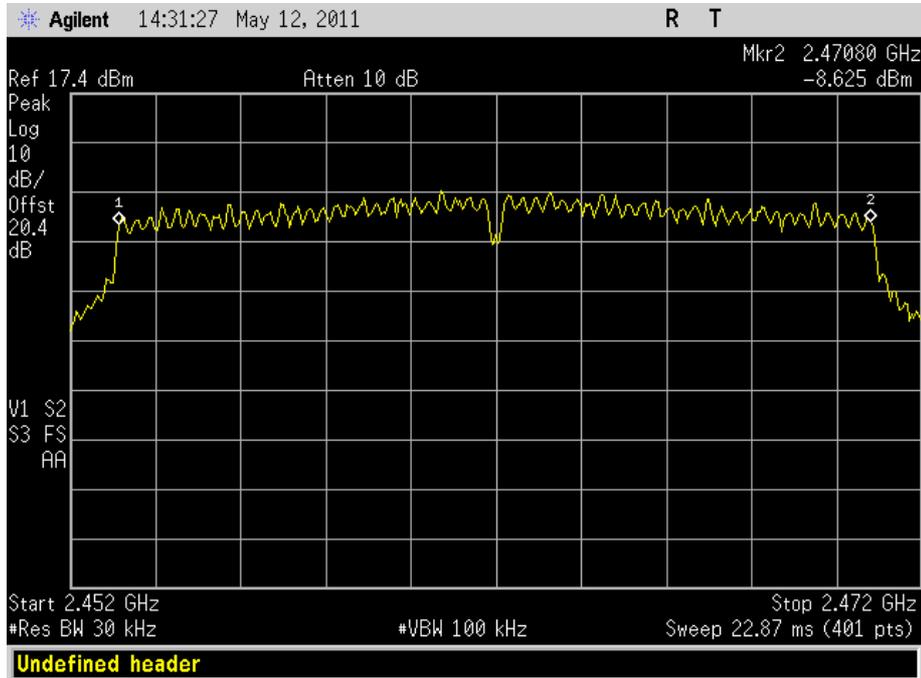


26 Mbps

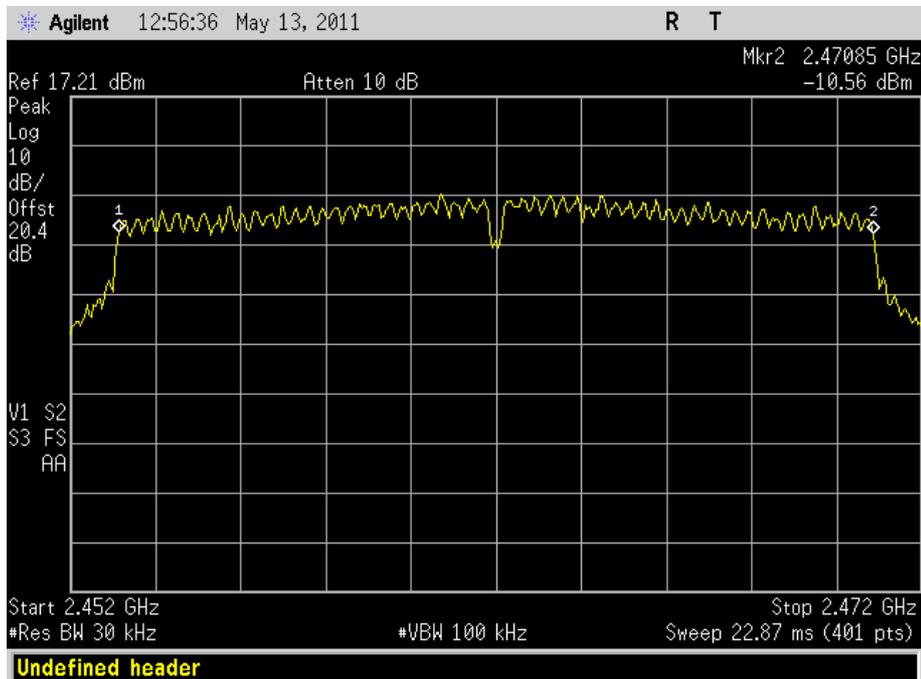




Product Service

39 Mbps

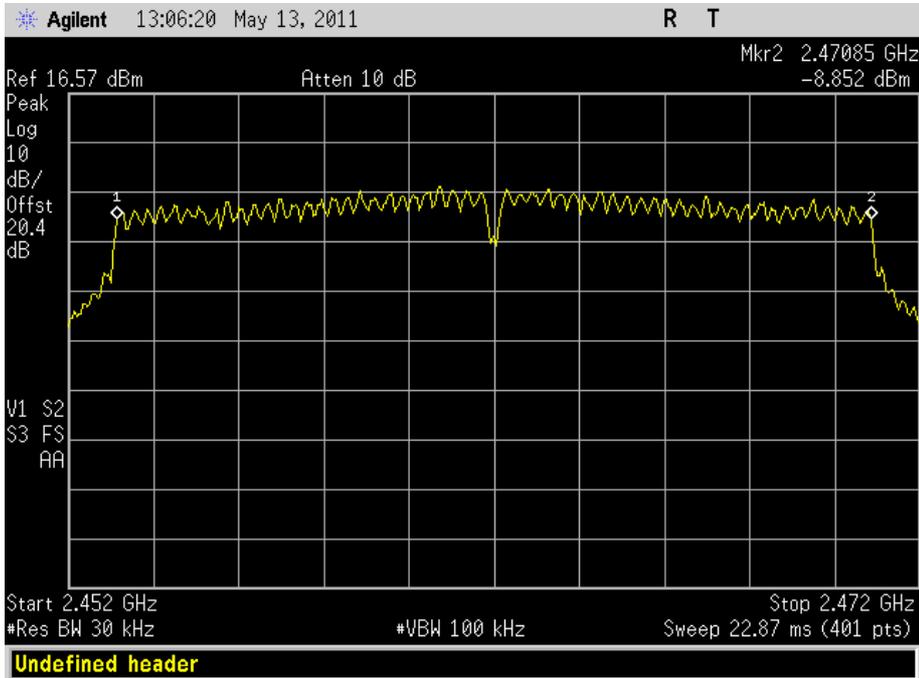


52 Mbps

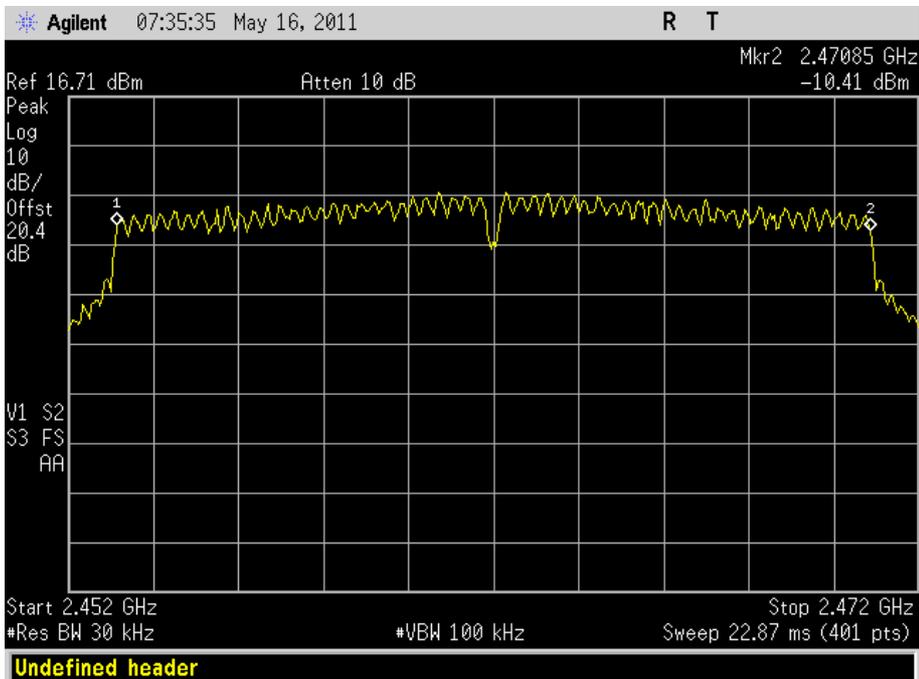




58.5 Mbps

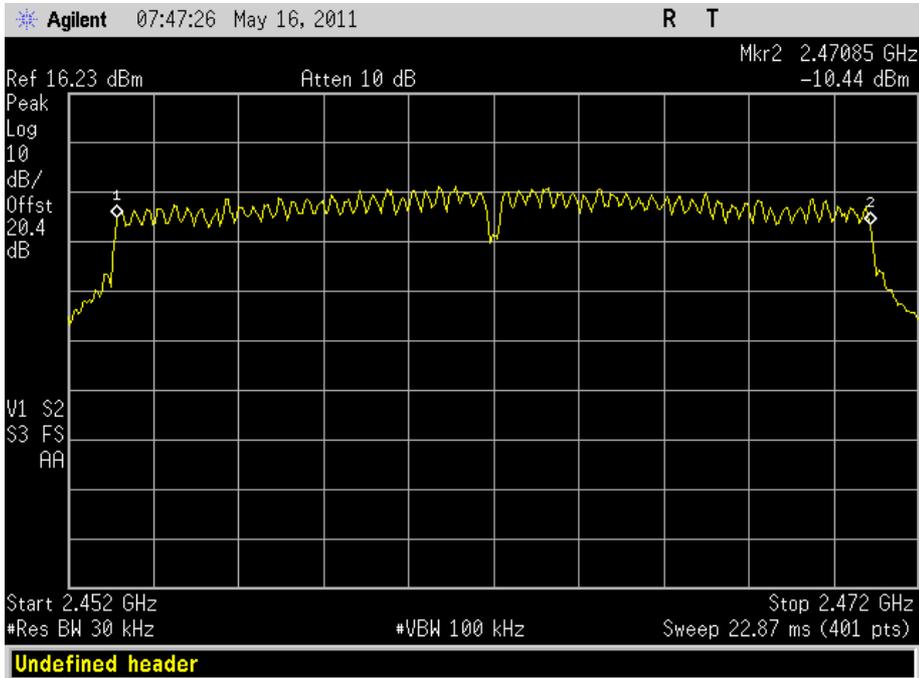

65 Mbps

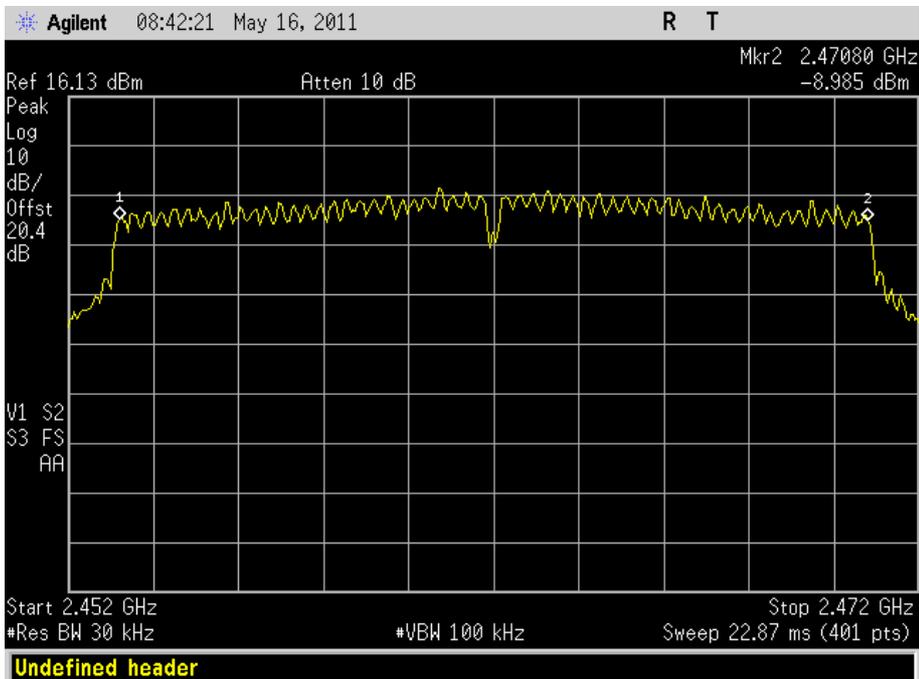

Limit Clause

The minimum 6 dB Bandwidth shall be at least 500 kHz.



Product Service

2.2 RADIATED EMISSIONS (ENCLOSURE PORT)

2.2.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (a)(2)

2.2.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113359901

2.2.3 Date of Test and Modification State

04, 09, 10 and 16 May 2011 - Modification State 0

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of ANSI C63.4.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

Emissions within the restricted bands defined in 15.205 were measured in accordance with 15.209. Emissions measured below 1GHz employed a quasi peak detector, in accordance with 15.35(a). Emissions measured above 1GHz employed an average detector as defined in 15.35(b). The peak level of the emission was also measured to ensure that a difference of 20dB from the average level was not exceeded, as defined in 15.35(b). Emissions identified within the range 30MHz – 1GHz were then formally measured using a CISPR Quasi-Peak detector. Other emissions from 30MHz to 25GHz excluding the restricted bands were measured using a peak detector.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1 - Mode 1
- Mode 2
- Mode 3
- Configuration 2 - Mode 1
- Mode 2
- Mode 3
- Configuration 3 - Mode 1
- Mode 2
- Mode 3



Product Service

2.2.6 Environmental Conditions

	04 May 2011	09 May 2011	10 May 2011	16 May 2011
Ambient Temperature	19.8°C	19.5°C	20.6°C	20.5°C
Relative Humidity	29.0%	49.0%	46.0%	42.0%


2.2.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Radiated Emissions (Enclosure Port).

The test results are shown below.

Configuration 1 - Mode 1

30 MHz to 1 GHz

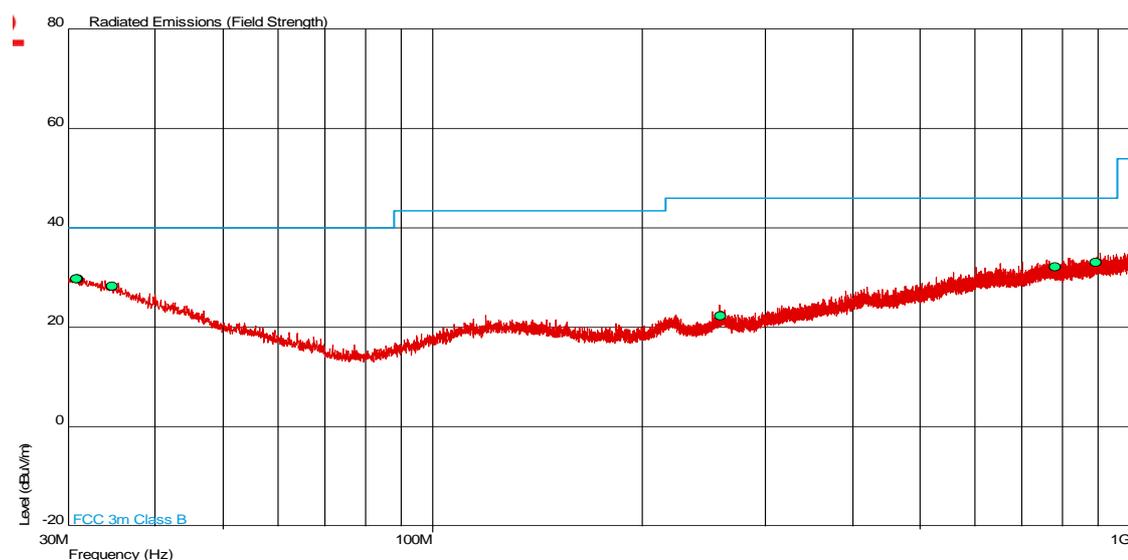


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.864	29.8	30.9	40.0	100	-10.2	69.1	317	1.00	Vertical
30.931	29.8	30.9	40.0	100	-10.2	69.1	215	1.00	Vertical
34.713	28.2	25.7	40.0	100	-11.8	74.3	1	1.67	Vertical
258.737	22.4	13.2	46.0	200	-23.6	186.8	154	1.00	Vertical
782.324	32.2	40.7	46.0	200	-13.8	159.3	360	1.55	Vertical
894.142	33.1	45.2	46.0	200	-12.9	154.8	31	1.00	Vertical




Product Service

1GHz to 3GHz

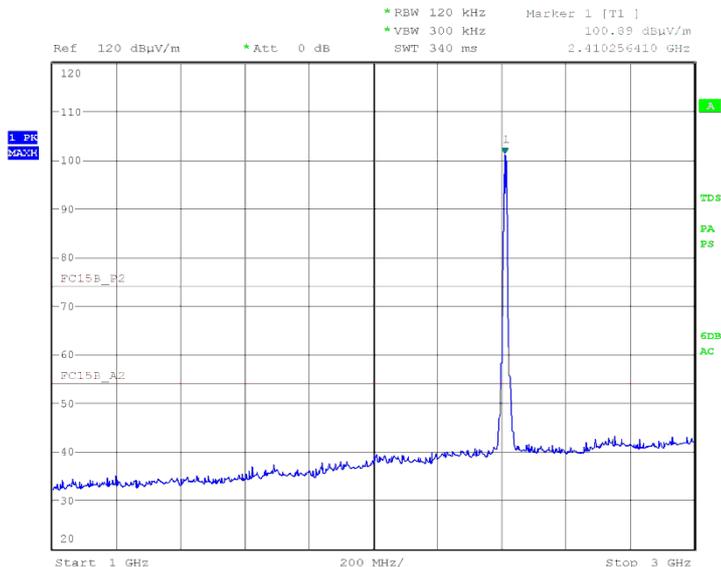

Date: 10.MAY.2011 17:48:10


3GHz to 8GHz

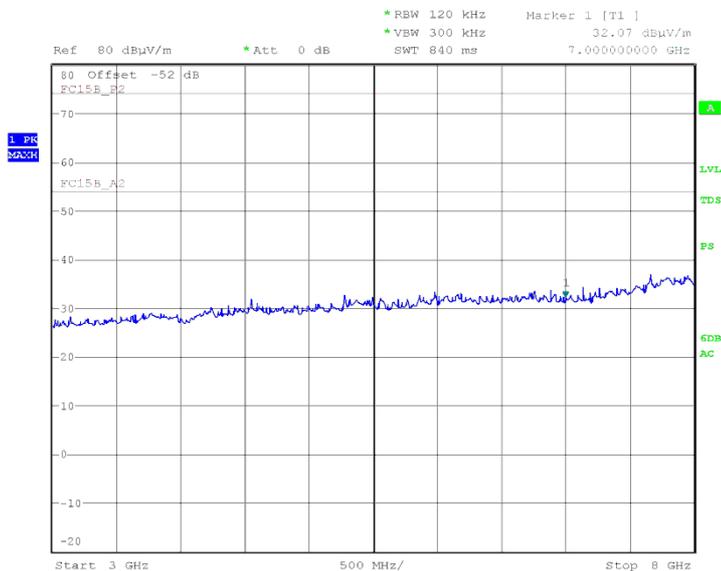

Date: 10.MAY.2011 21:48:25




8GHz to 18GHz

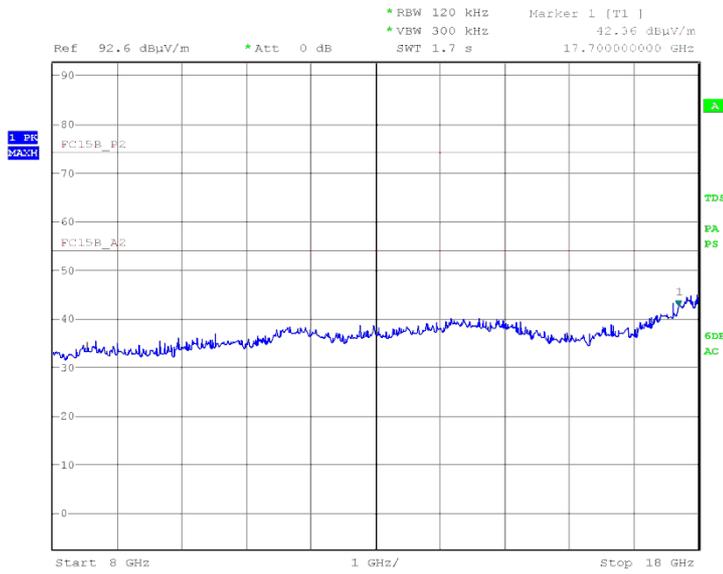

Date: 10.MAY.2011 23:20:24

18GHz to 25GHz

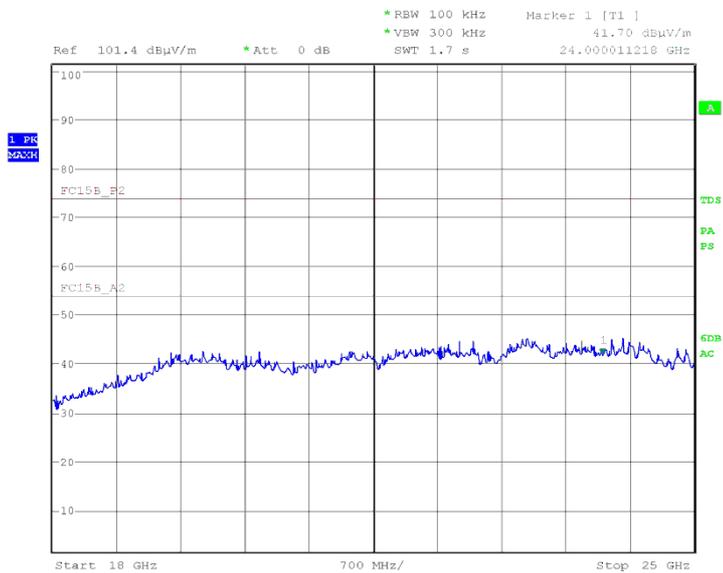


Date: 16.MAY.2011 22:12:25



Configuration 1 - Mode 2

30 MHz to 1 GHz

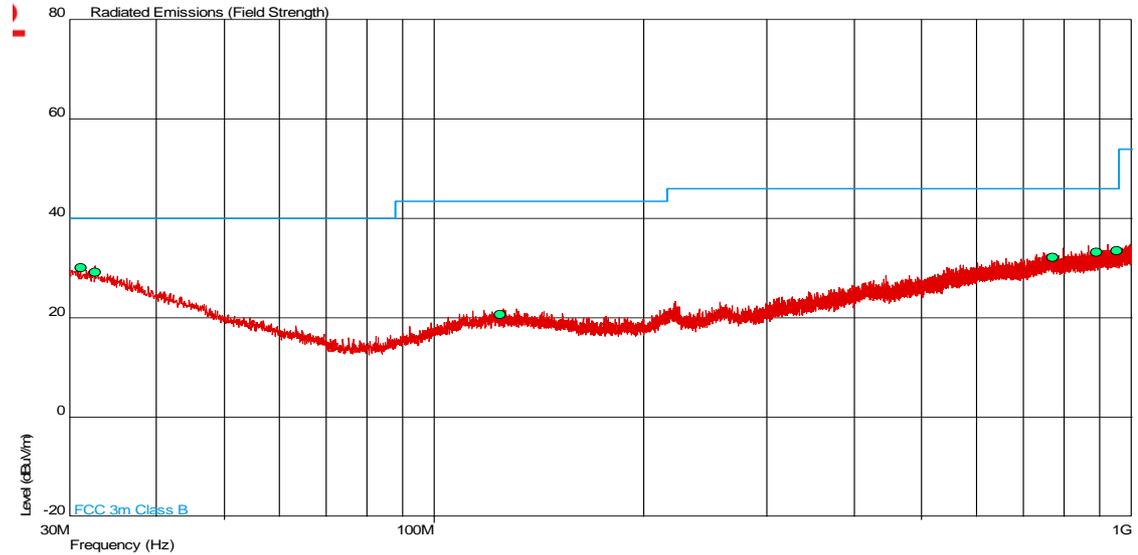


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
31.176	30.0	31.6	40.0	100	-10.0	68.4	348	1.24	Horizontal
32.720	29.2	28.8	40.0	100	-10.8	71.2	0	1.00	Vertical
124.378	20.6	10.7	43.5	100	-22.9	89.3	328	2.76	Vertical
771.431	32.2	40.7	46.0	200	-13.8	159.3	234	1.00	Horizontal
890.033	33.2	45.7	46.0	200	-12.8	154.3	0	1.00	Vertical
952.154	33.5	47.3	46.0	200	-12.5	152.7	359	1.00	Horizontal



Product Service

1GHz to 3GHz

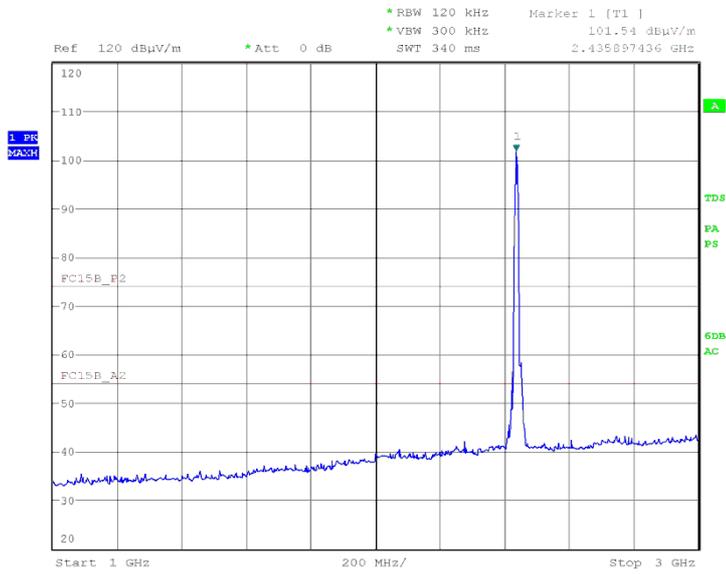


Date: 10.MAY.2011 18:21:39




Product Service

3GHz to 8GHz

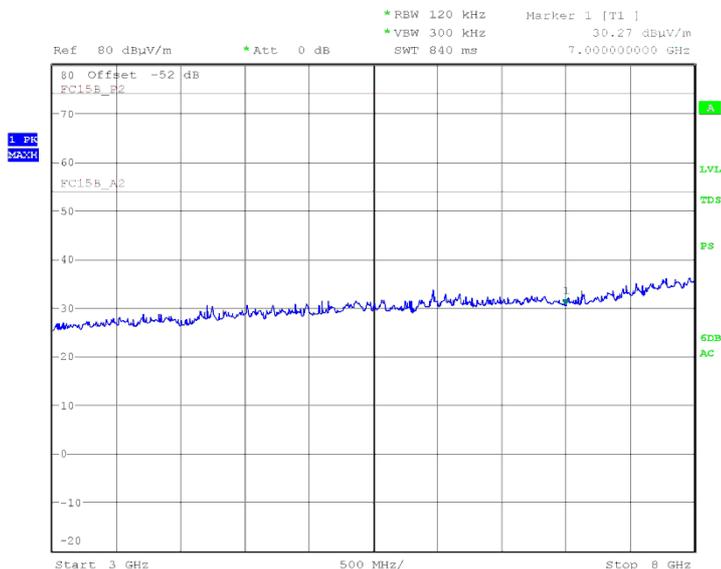

Date: 10.MAY.2011 21:59:10

8GHz to 18GHz

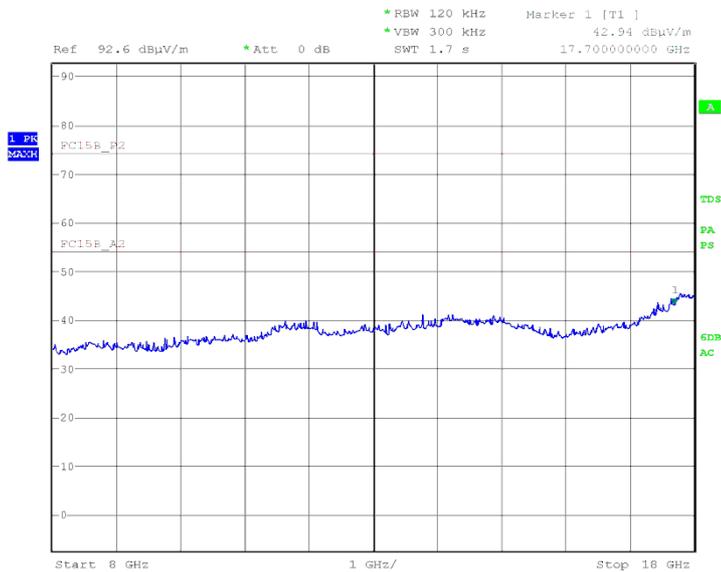


Date: 10.MAY.2011 23:07:13



Product Service

18GHz to 25GHz

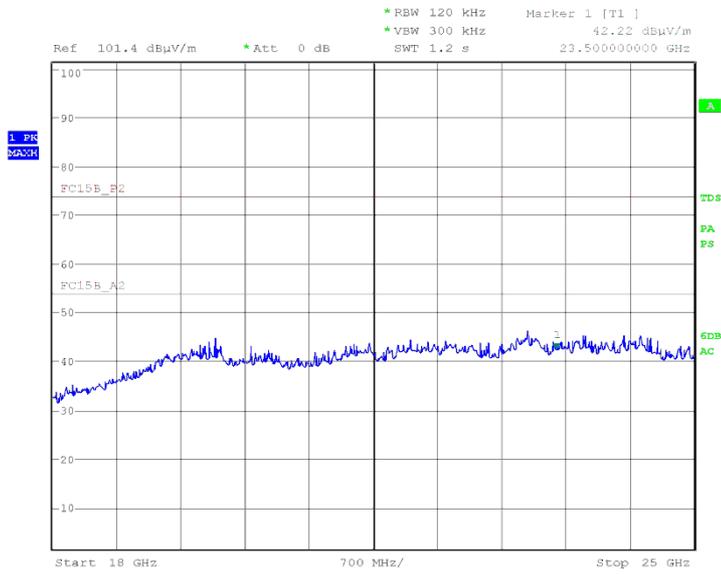


Date: 16.MAY.2011 22:27:10



Configuration 1 - Mode 3

30 MHz to 1 GHz

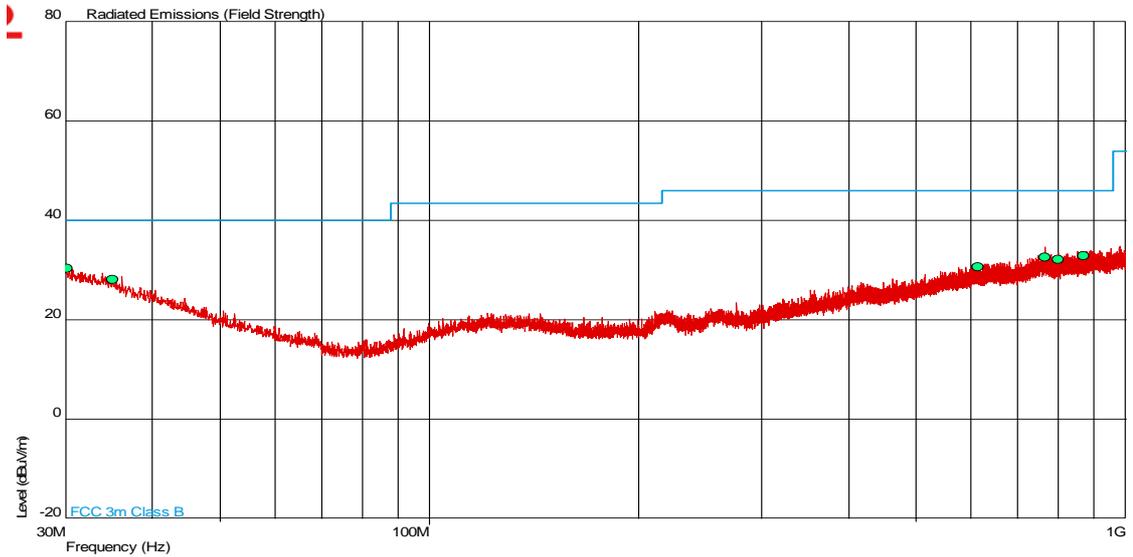


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
30.194	30.3	32.7	40.0	100	-9.7	67.3	180	1.00	Horizontal
35.044	28.1	25.4	40.0	100	-11.9	74.6	180	1.00	Horizontal
614.134	30.6	33.9	46.0	200	-15.4	166.1	360	1.00	Vertical
766.085	32.7	43.2	46.0	200	-13.3	156.8	0	1.00	Horizontal
799.598	32.1	40.3	46.0	200	-13.9	159.7	360	1.00	Horizontal
869.244	32.9	44.2	46.0	200	-13.1	155.8	180	1.00	Vertical




Product Service

1GHz to 3GHz

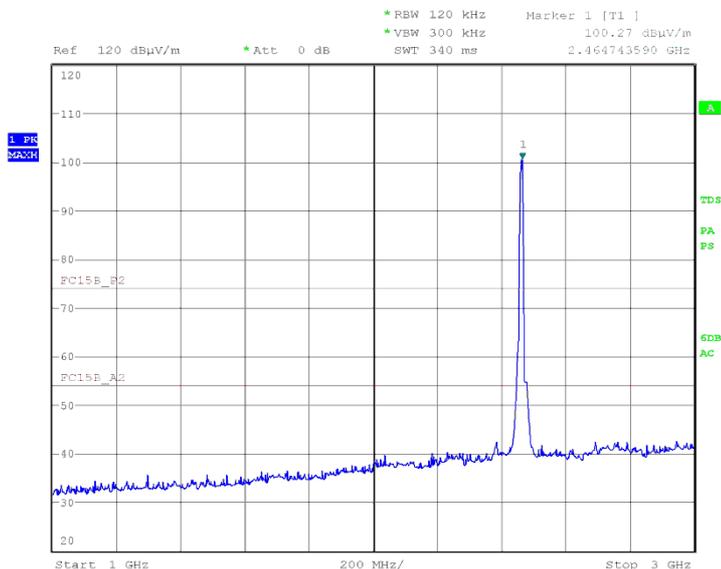

Date: 10.MAY.2011 18:32:22

3GHz to 8GHz

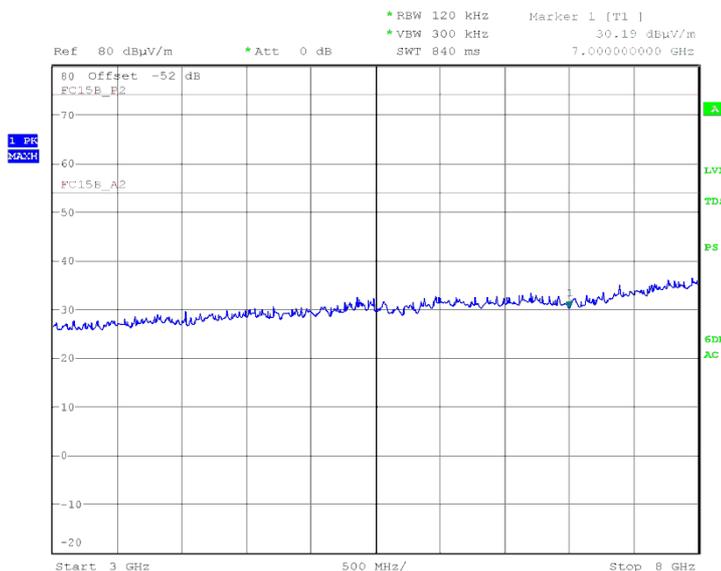


Date: 10.MAY.2011 22:08:36




Product Service

8GHz to 18GHz

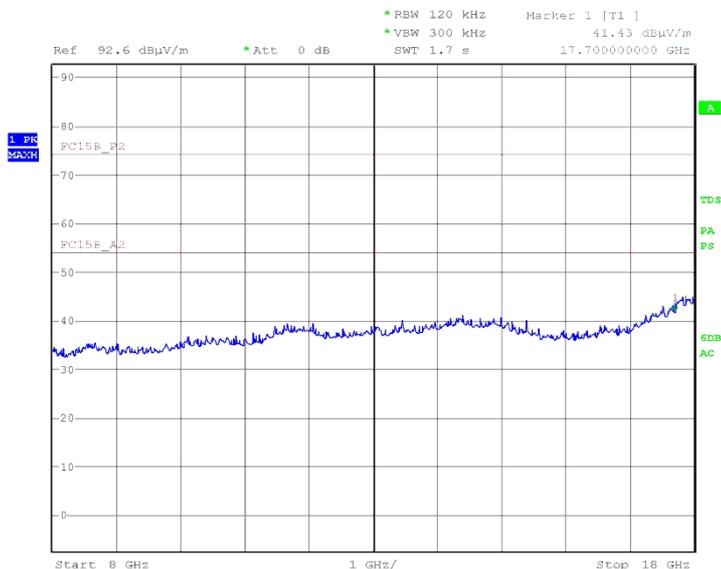

Date: 10.MAY.2011 22:46:05

18GHz to 25GHz

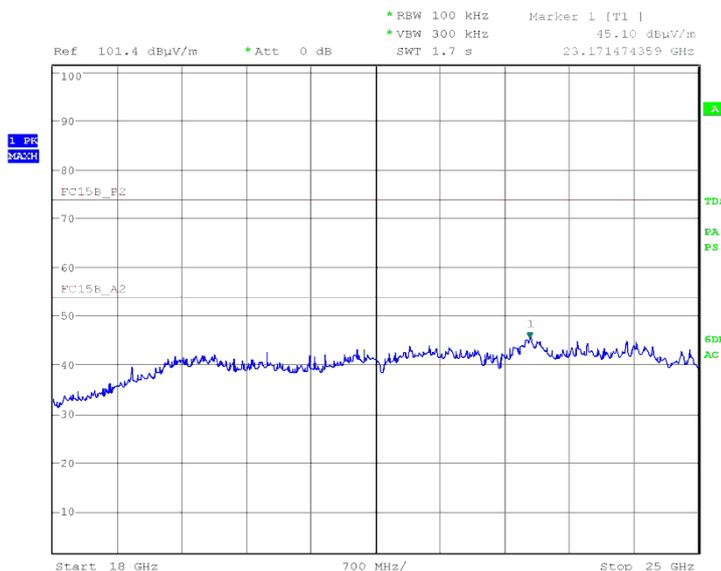


Date: 16.MAY.2011 22:35:56



Configuration 2 - Mode 1

30 MHz to 1 GHz

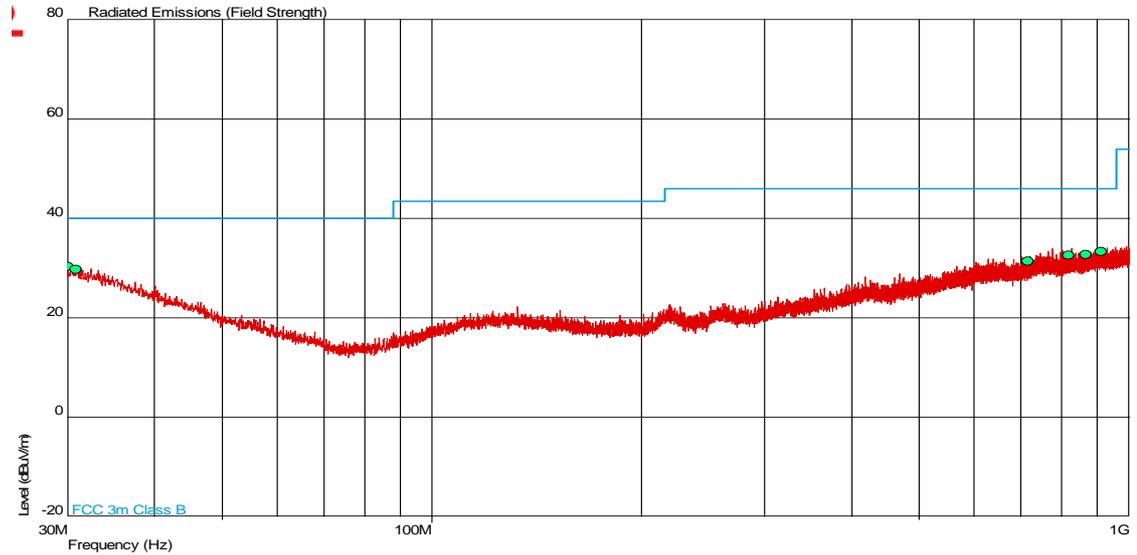


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.000	30.3	32.7	40.0	100	-9.7	67.3	0	1.00	Vertical
30.873	29.8	30.9	40.0	100	-10.2	69.1	0	1.00	Vertical
717.003	31.4	37.2	46.0	200	-14.6	162.8	180	1.00	Vertical
818.319	32.5	42.2	46.0	200	-13.5	157.8	0	1.00	Vertical
866.625	32.8	43.7	46.0	200	-13.2	156.3	360	1.00	Horizontal
912.361	33.4	46.8	46.0	200	-12.6	153.2	360	1.00	Vertical




Product Service

1GHz to 3GHz

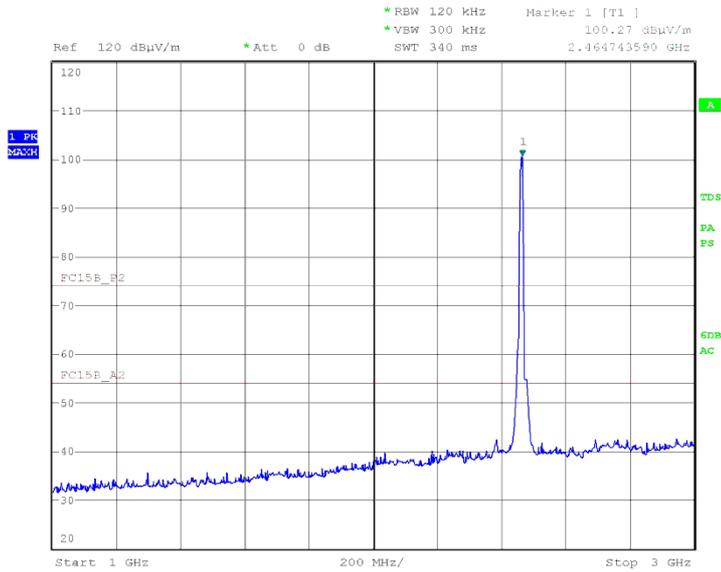

Date: 10.MAY.2011 18:32:22


3GHz to 8GHz

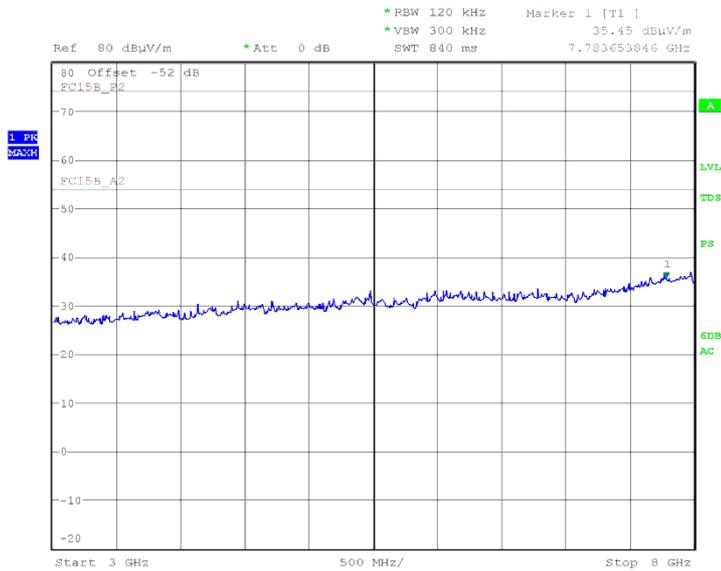

Date: 10.MAY.2011 21:21:38




8GHz to 18GHz

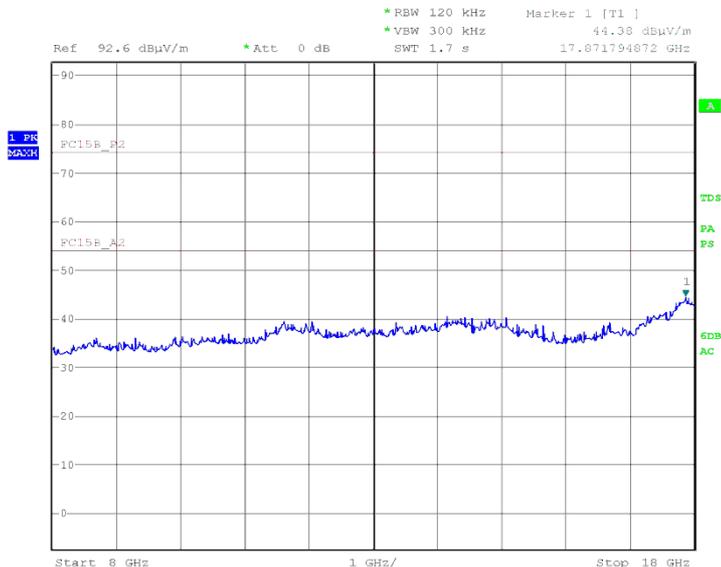

Date: 16.MAY.2011 20:08:42

18GHz to 25GHz

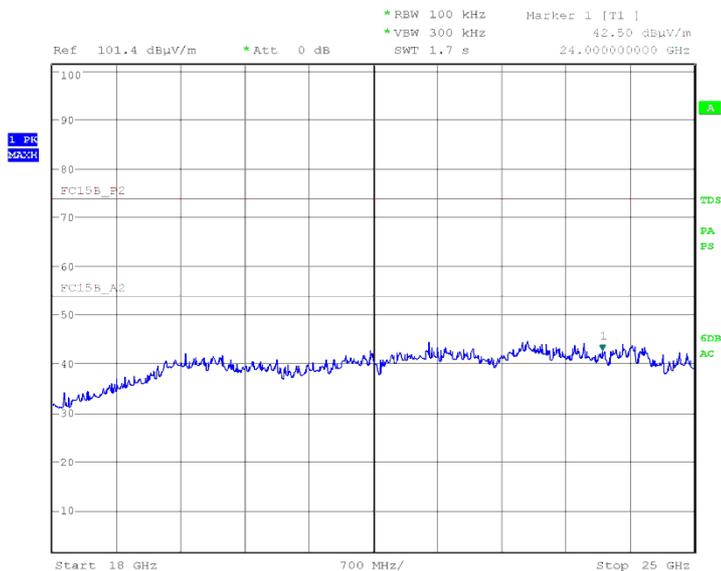


Date: 16.MAY.2011 22:48:42



Configuration 2 - Mode 2


30 MHz to 1 GHz

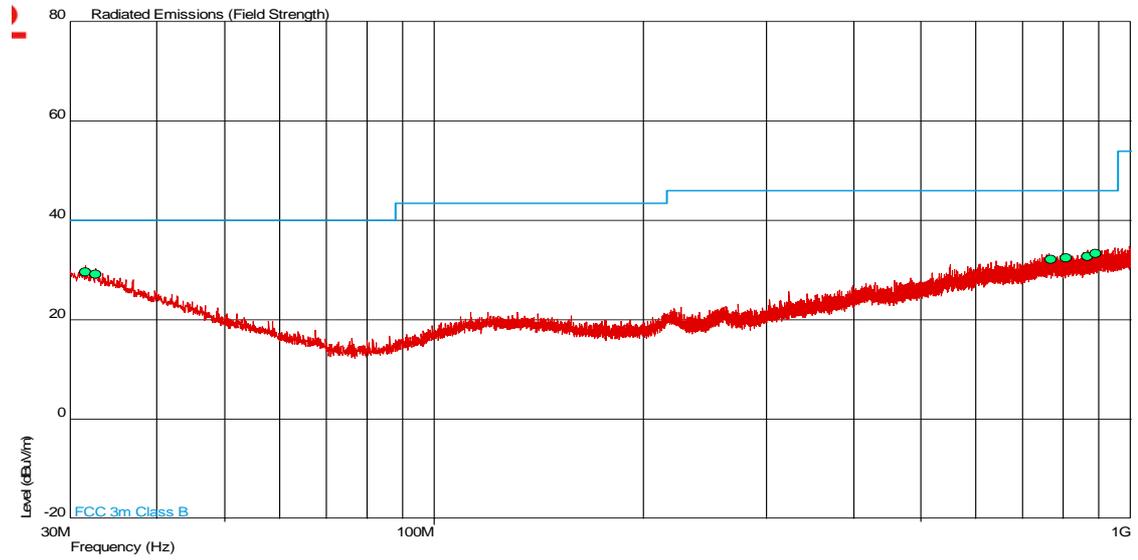

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
31.552	29.6	30.2	40.0	100	-10.4	69.8	180	1.00	Vertical
32.716	29.2	28.8	40.0	100	-10.8	71.2	0	1.00	Vertical
768.704	32.1	40.3	46.0	200	-13.9	159.7	180	1.00	Horizontal
808.813	32.5	42.2	46.0	200	-13.5	157.8	0	1.00	Horizontal
866.189	32.8	43.7	46.0	200	-13.2	156.3	180	1.00	Horizontal
889.275	33.3	46.2	46.0	200	-12.7	153.8	360	1.00	Horizontal




1GHz to 3GHz

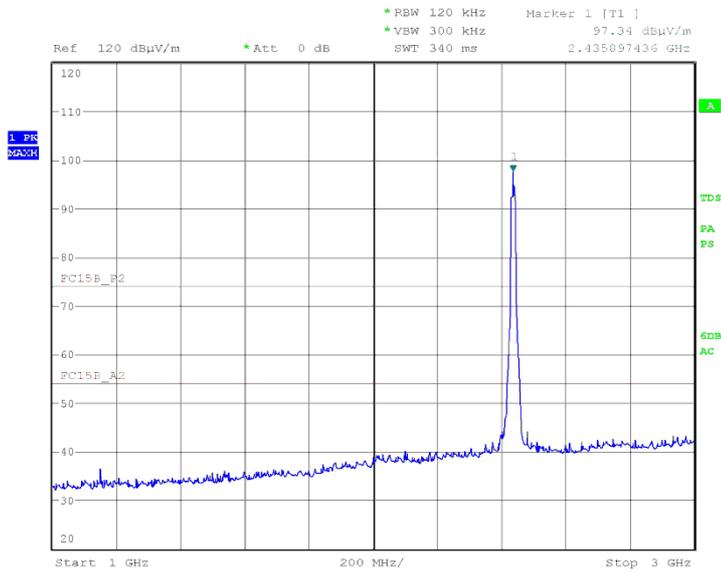

Date: 10.MAY.2011 19:11:13

3GHz to 8GHz

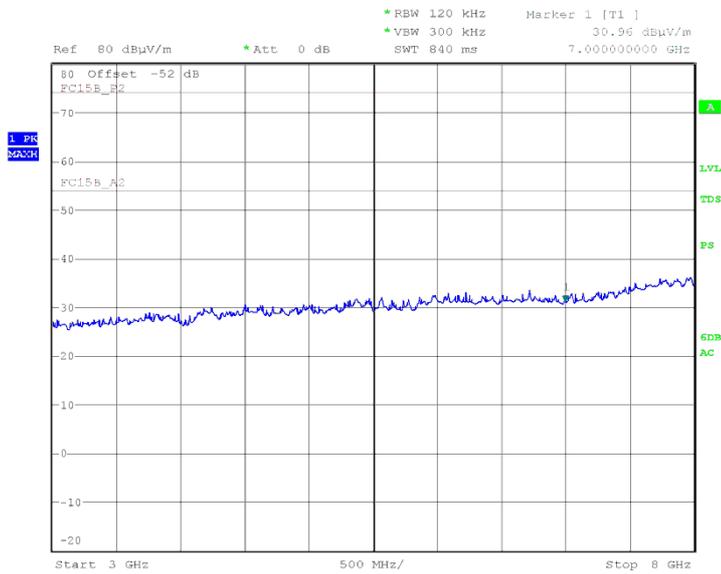


Date: 10.MAY.2011 21:28:10




Product Service

8GHz to 18GHz

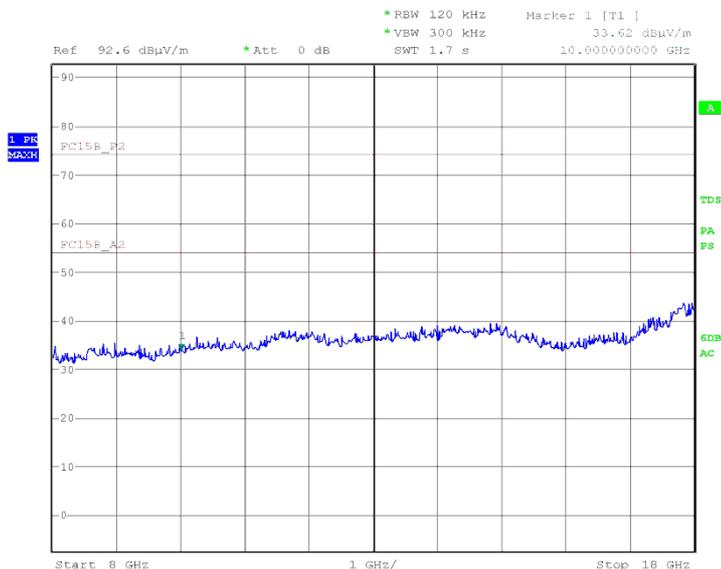

Date: 16.MAY.2011 20:31:55

18GHz to 25GHz

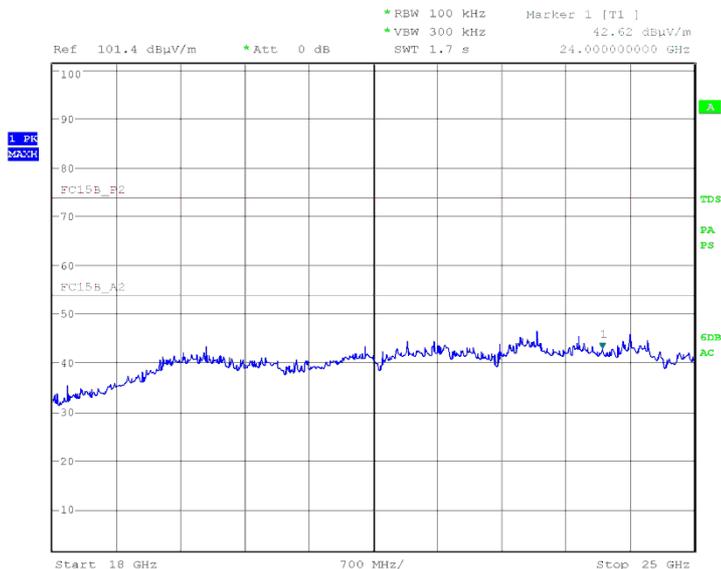


Date: 16.MAY.2011 23:00:12



Configuration 2 - Mode 3


30 MHz to 1 GHz

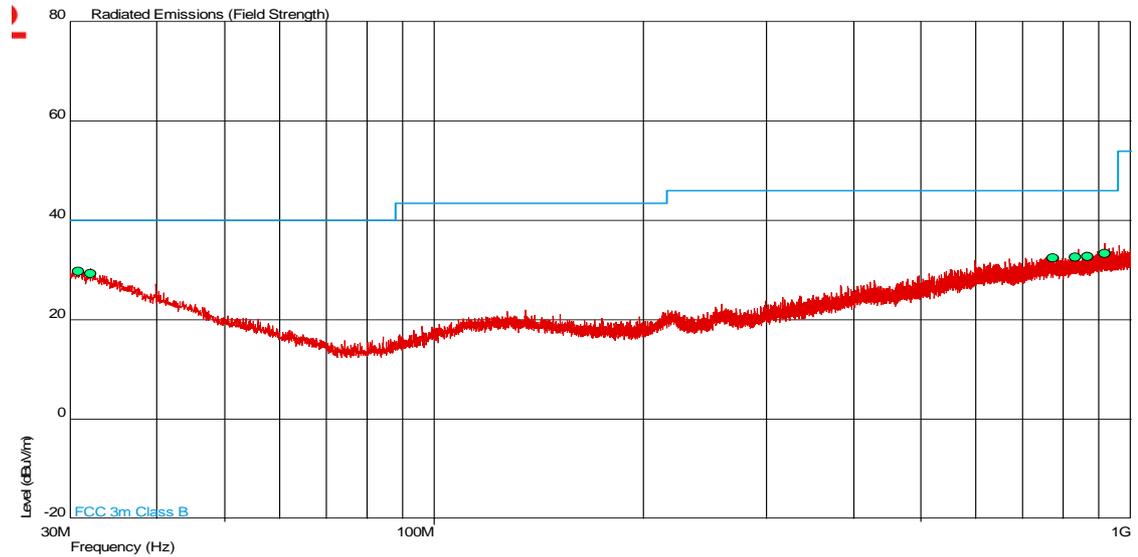

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
30.873	29.8	30.9	40.0	100	-10.2	69.1	0	1.00	Vertical
32.183	29.4	29.5	40.0	100	-10.6	70.5	360	1.00	Horizontal
772.729	32.4	41.7	46.0	200	-13.6	158.3	360	1.00	Vertical
832.578	32.6	42.7	46.0	200	-13.4	157.3	360	1.00	Vertical
867.256	32.8	43.7	46.0	200	-13.2	156.3	180	1.00	Vertical
918.278	33.4	46.8	46.0	200	-12.6	153.2	0	1.00	Vertical




1GHz to 3GHz

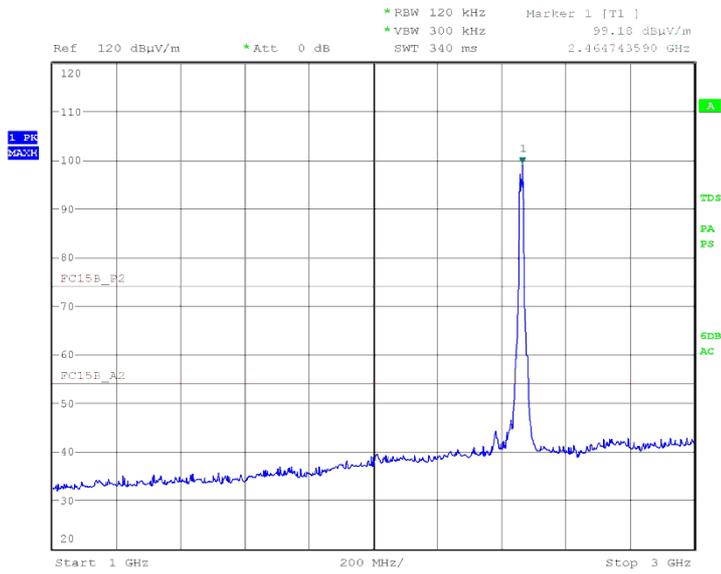

Date: 10.MAY.2011 18:44:43


3GHz to 8GHz

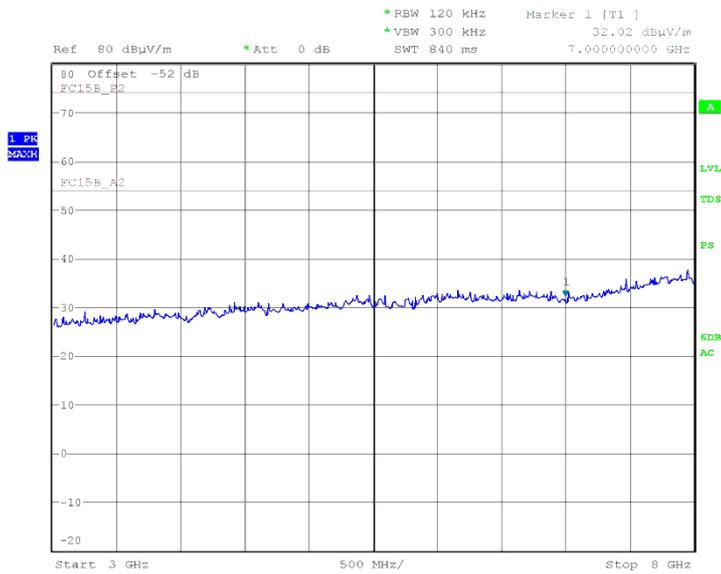

Date: 10.MAY.2011 21:38:03




8GHz to 18GHz

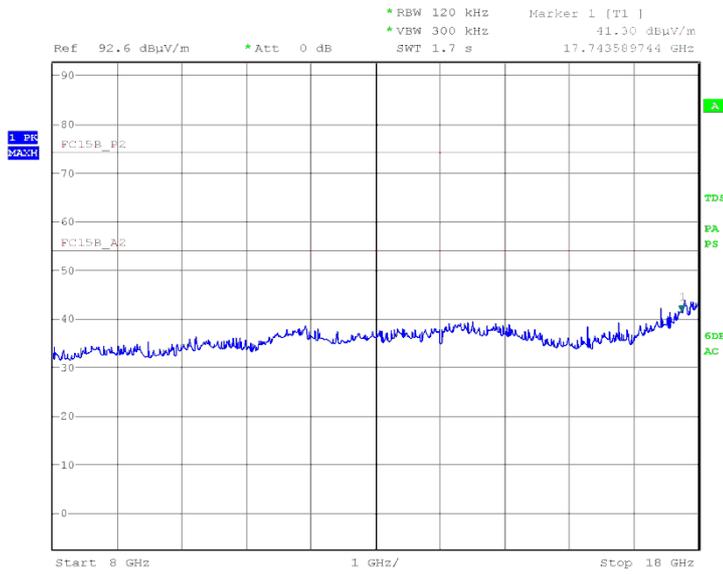

Date: 16.MAY.2011 21:16:20

18GHz to 25GHz

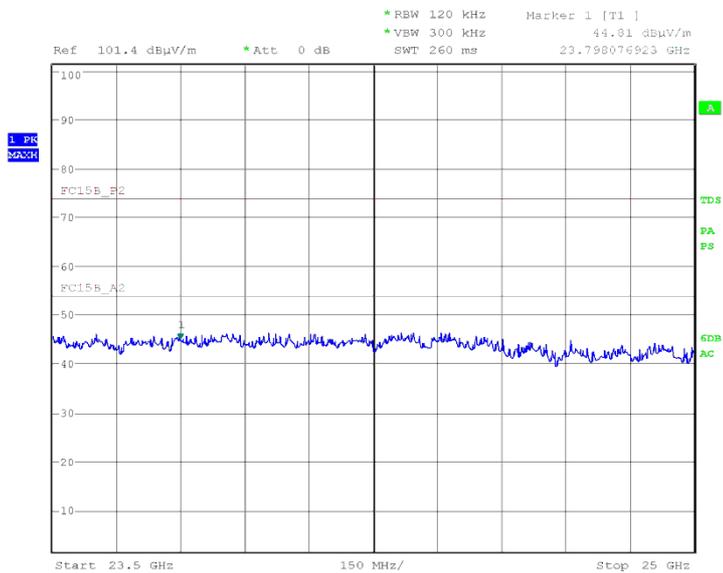


Date: 16.MAY.2011 23:21:10



Configuration 3 - Mode 1

30 MHz to 1 GHz

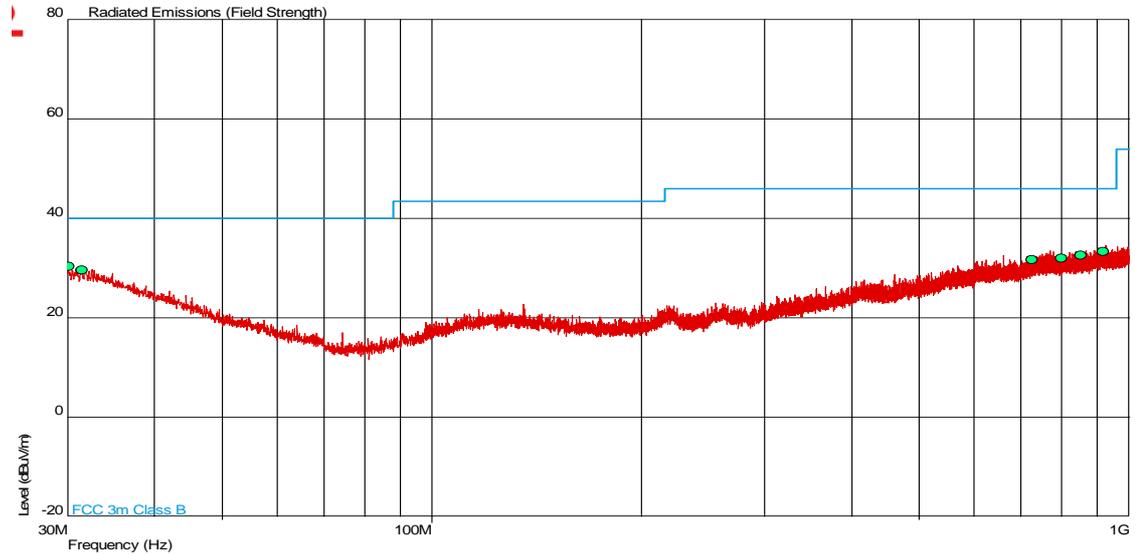


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.146	30.4	33.1	40.0	100	-9.6	66.9	0	1.00	Vertical
31.504	29.6	30.2	40.0	100	-10.4	69.8	180	1.00	Horizontal
725.151	31.7	38.5	46.0	200	-14.3	161.5	180	1.00	Vertical
799.889	32.1	40.3	46.0	200	-13.9	159.7	360	1.00	Vertical
851.687	32.6	42.7	46.0	200	-13.4	157.3	180	1.00	Horizontal
917.599	33.4	46.8	46.0	200	-12.6	153.2	360	1.00	Vertical




Product Service

1GHz to 3GHz

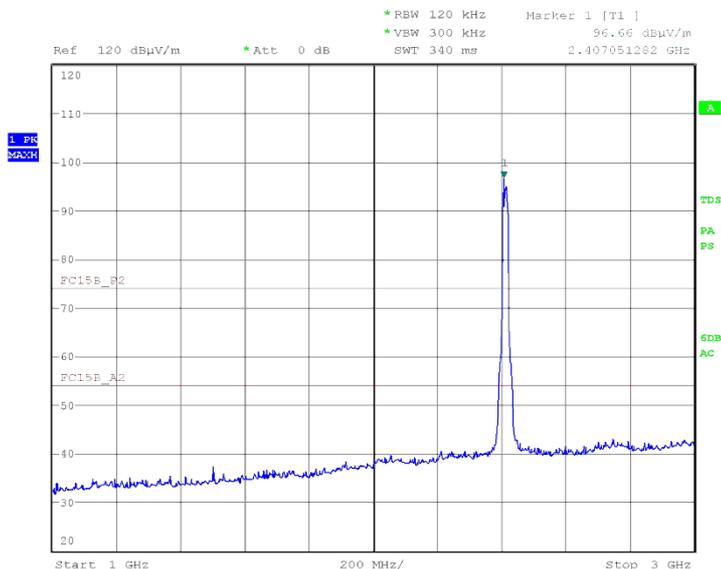

Date: 10.MAY.2011 19:58:51


3GHz to 8GHz

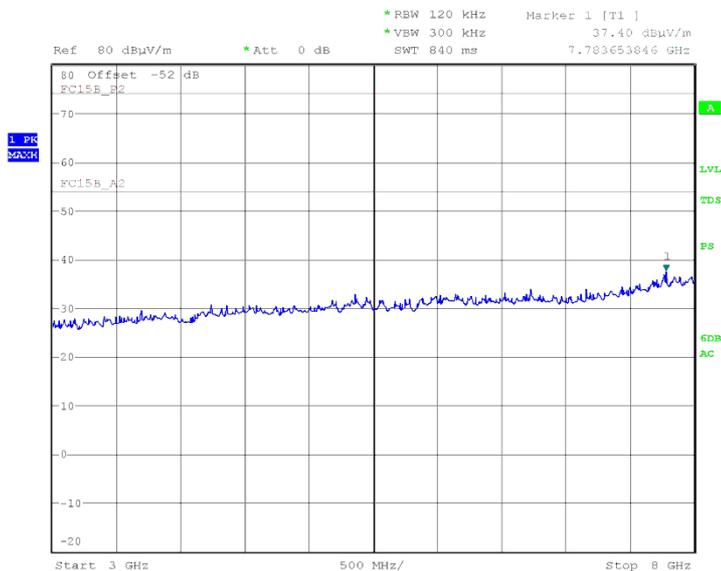

Date: 10.MAY.2011 21:12:34




8GHz to 18GHz

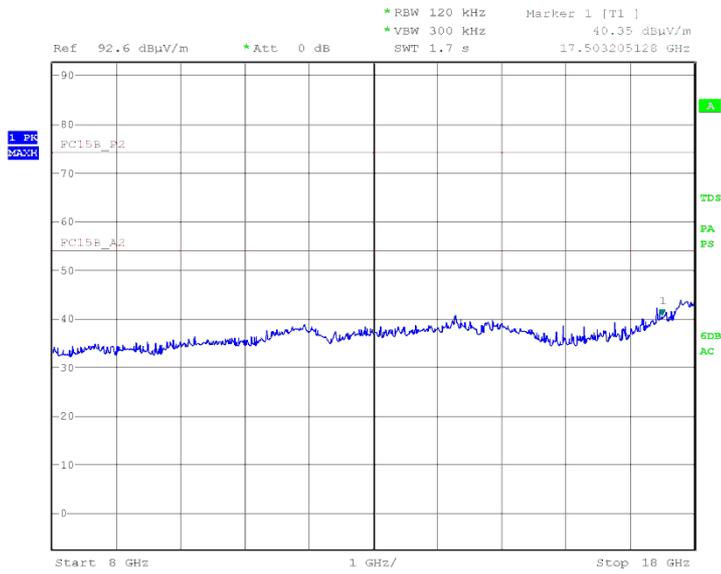

Date: 16.MAY.2011 21:16:35

18GHz to 25GHz

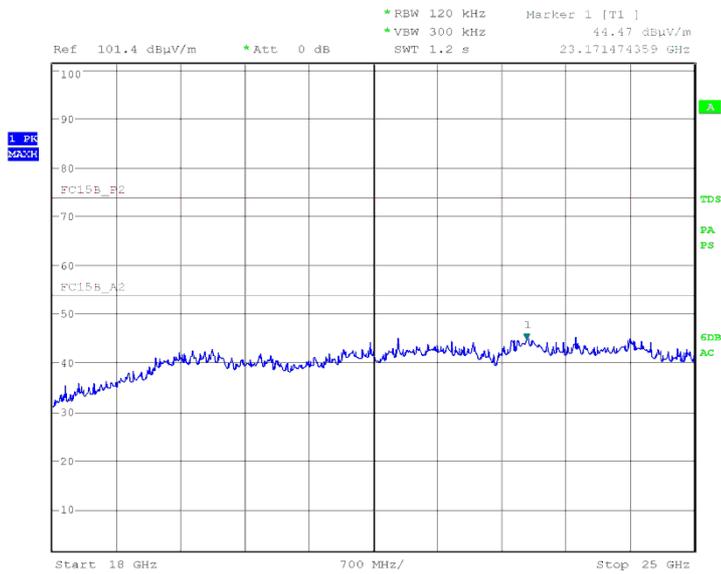


Date: 16.MAY.2011 23:27:59



Configuration 3 - Mode 2


30 MHz to 1 GHz

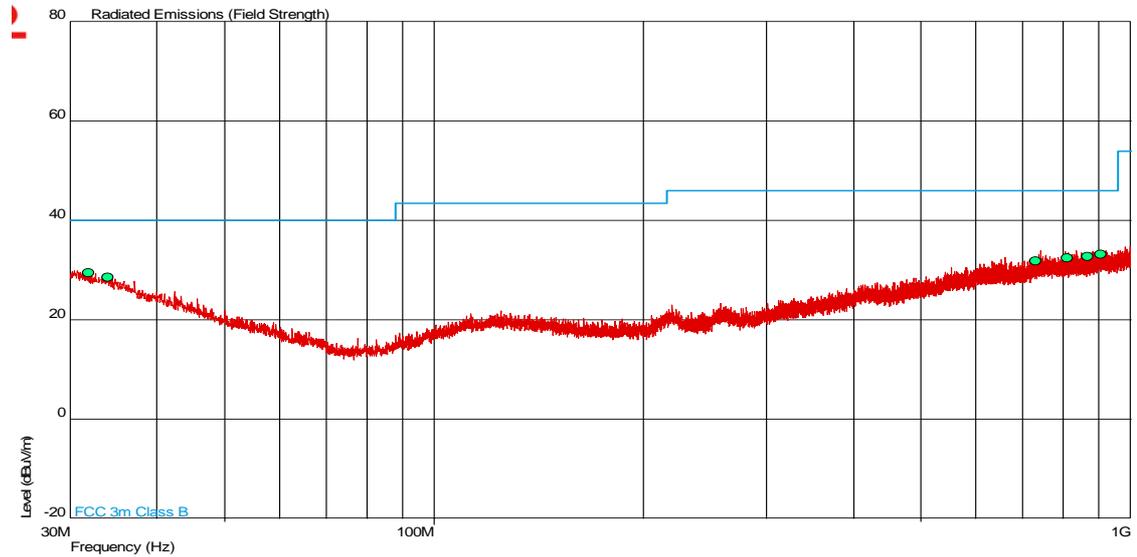

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
31.892	29.5	29.9	40.0	100	-10.5	70.1	360	1.00	Vertical
34.074	28.5	26.6	40.0	100	-11.5	73.4	360	1.00	Horizontal
730.195	31.8	38.9	46.0	100	-14.2	61.1	360	1.00	Horizontal
809.783	32.5	42.2	46.0	200	-13.5	157.8	360	1.00	Vertical
868.177	32.8	43.7	46.0	200	-13.2	156.3	360	1.00	Vertical
904.164	33.2	45.7	46.0	200	-12.8	154.3	180	1.00	Horizontal




1GHz to 3GHz

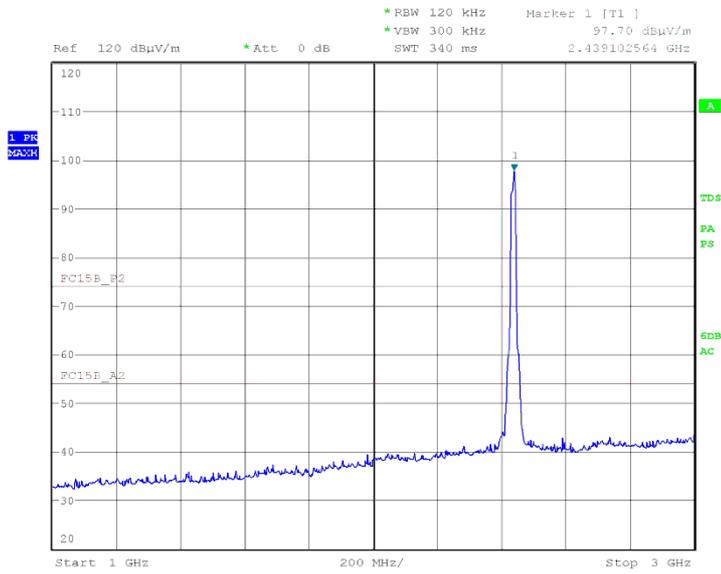

Date: 10.MAY.2011 20:04:12

3GHz to 8GHz

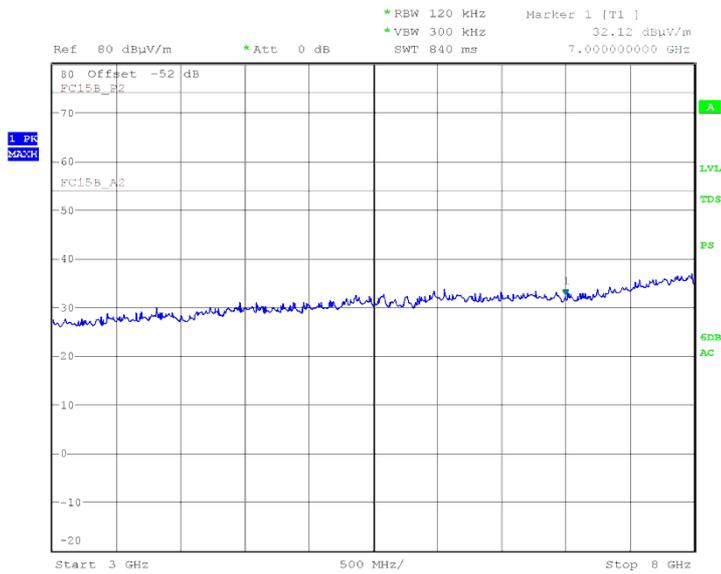


Date: 10.MAY.2011 21:04:23




Product Service

8GHz to 18GHz

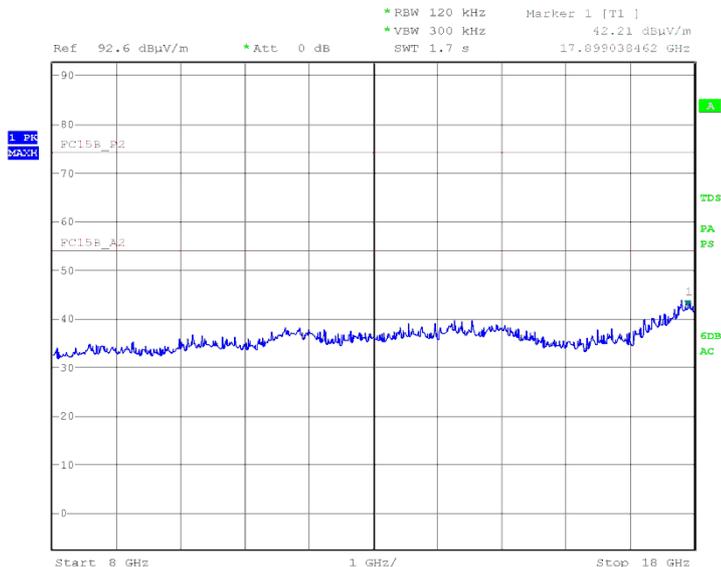

Date: 16.MAY.2011 21:30:16

18GHz to 25GHz

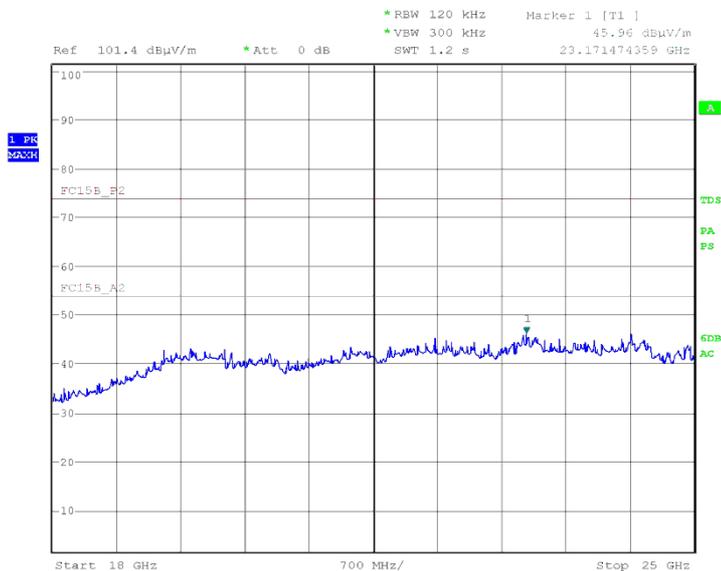


Date: 16.MAY.2011 23:37:02



Configuration 3 - Mode 3

30 MHz to 1 GHz

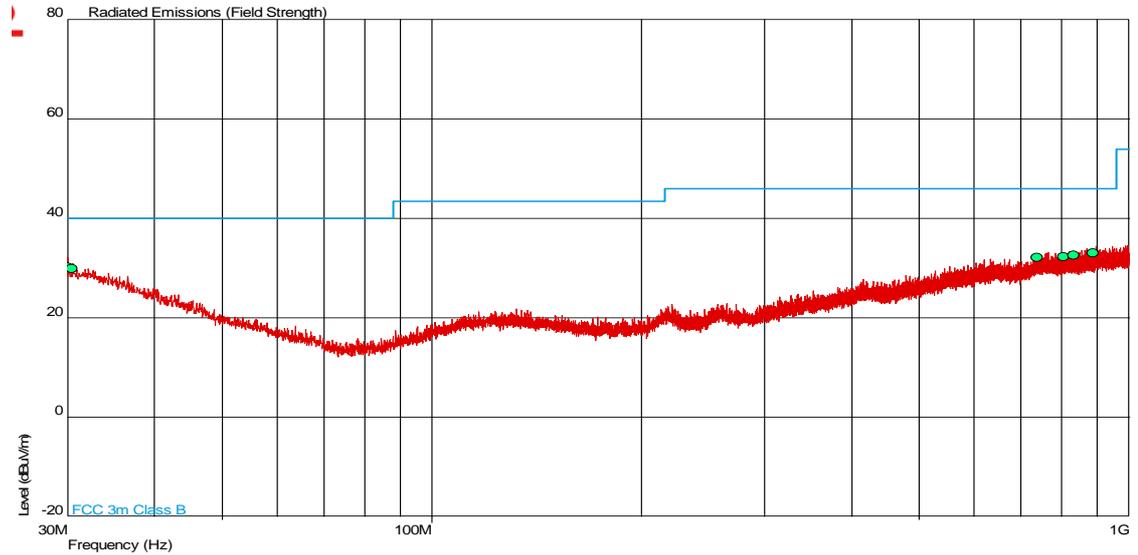


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (deg)	Height (m)	Polarity
30.049	30.2	32.4	40.0	100	-9.8	67.6	180	1.00	Horizontal
30.437	30.0	31.6	40.0	100	-10.0	68.4	180	1.00	Vertical
737.761	32.1	40.3	46.0	200	-13.9	159.7	180	1.00	Vertical
804.497	32.3	41.2	46.0	200	-13.7	158.8	360	1.00	Horizontal
832.578	32.6	42.7	46.0	200	-13.4	157.3	360	1.00	Vertical
886.898	33.1	45.2	46.0	200	-12.9	154.8	180	1.00	Horizontal




Product Service

1GHz to 3GHz

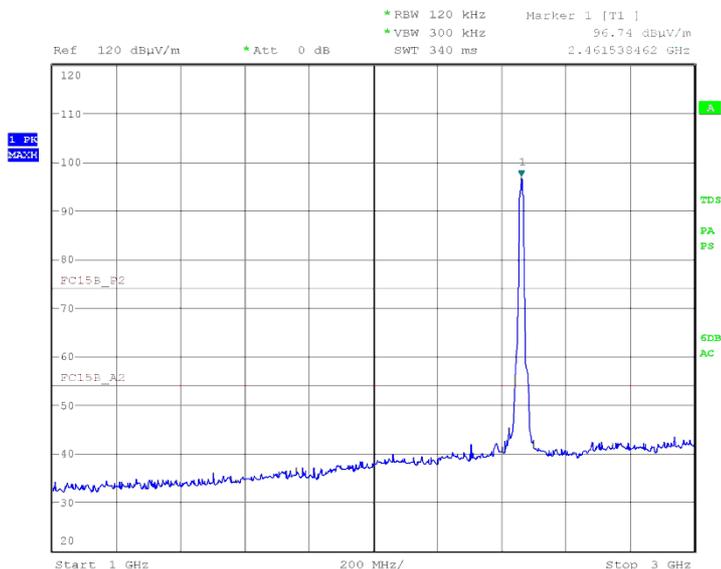

Date: 10.MAY.2011 20:08:36


3GHz to 8GHz

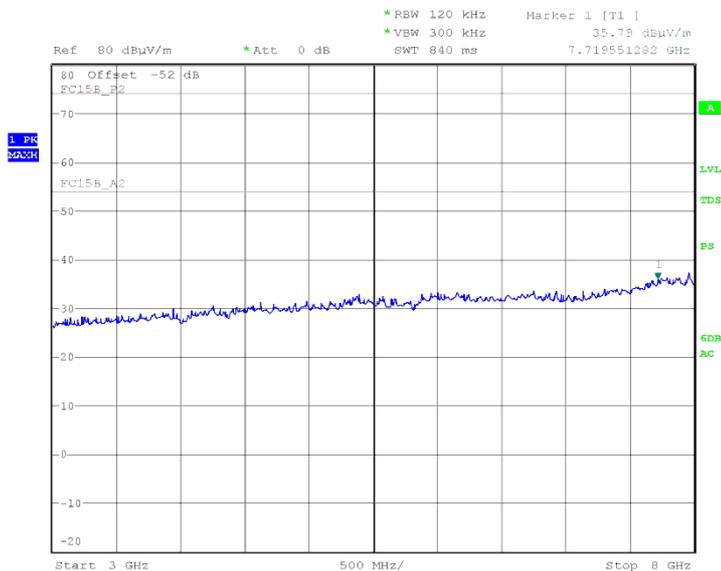

Date: 10.MAY.2011 20:53:32




8GHz to 18GHz

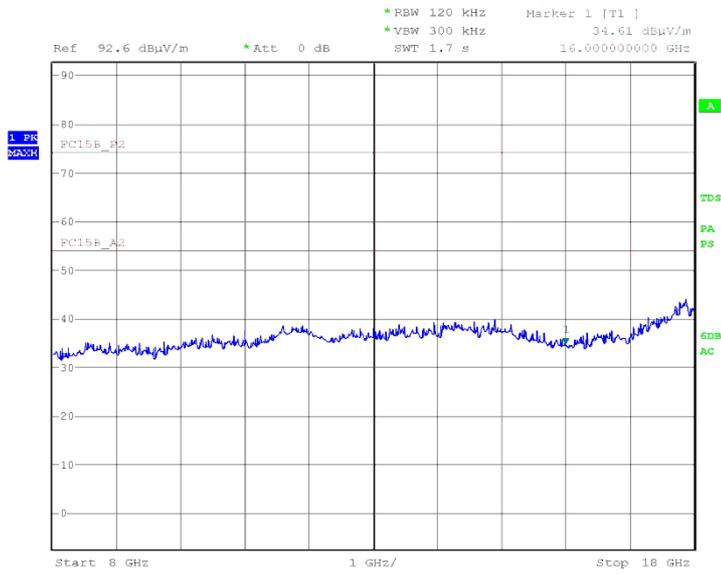

Date: 16.MAY.2011 21:49:22

18GHz to 25GHz

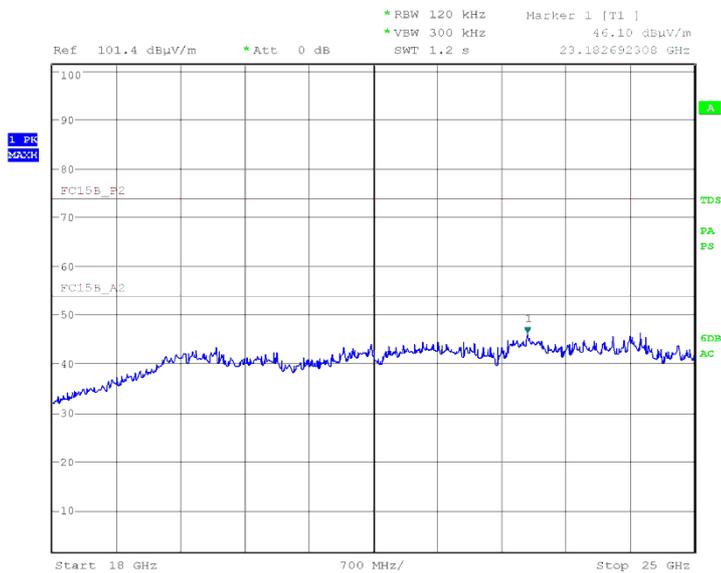

Date: 16.MAY.2011 23:42:14



Product Service

2.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER

2.3.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(3)

2.3.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113357913

2.3.3 Date of Test and Modification State

05 May 2011 - Modification State 0

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

The EUT was transmitted at maximum power via a cable to the Peak Power Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a reference level offset was entered to account for the measurement path loss. The measurement bandwidth was set according to the signal being measured and the peak and average levels were recorded.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1
 - Mode 1
 - Mode 2
 - Mode 3
- Configuration 2
 - Mode 1
 - Mode 2
 - Mode 3
- Configuration 3
 - Mode 1
 - Mode 2
 - Mode 3

2.3.6 Environmental Conditions

	05 May 2011
Ambient Temperature	24.0°C
Relative Humidity	37.0%



2.3.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Maximum Peak Conducted Output Power.

The test results are shown below.

4.0 V DC Supply

Configuration 1 - Modes 1, 2 & 3

Modulation Data Rate (Mbps)	Maximum Peak Conducted Output Power					
	mW			dBm		
	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
1	68.29	80.35	72.71	18.34	19.05	18.62
2	74.73	85.58	76.47	18.74	19.32	18.83
5.5	74.37	86.05	77.58	18.71	19.35	18.90
11	71.56	78.38	73.21	15.55	18.94	18.65

Configuration 2 - Modes 1, 2 & 3

Modulation Data Rate (Mbps)	Maximum Peak Conducted Output Power					
	mW			dBm		
	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
6	109.50	126.68	115.84	20.39	20.103	20.64
9	111.10	129.12	114.00	20.46	21.11	20.57
12	108.54	123.82	115.32	20.36	20.93	20.62
18	109.85	125.34	109.72	20.41	20.98	20.44
24	112.93	140.38	110.69	20.53	21.472	20.44
36	119.15	133.48	123.54	20.76	21.25	20.92
48	116.65	127.94	108.92	20.67	21.07	20.37
54	114.02	128.71	111.22	20.57	21.10	20.46



Product Service

Configuration 3 - Modes 1, 2 & 3

Modulation Data Rate (Mbps)	Maximum Peak Conducted Output Power					
	mW			dBm		
	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
6.5	111.71	128.35	111.07	20.48	21.08	20.46
13	112.98	131.31	112.02	20.53	21.18	20.49
19.5	110.33	122.38	112.67	20.43	20.88	20.52
26	104.69	128.56	107.42	20.20	21.09	20.31
39	104.04	125.81	106.49	20.17	21.00	20.27
52	100.97	113.84	102.92	20.04	20.56	20.13
58.5	96.82	111.66	104.50	19.86	20.48	20.19
65	99.06	123.25	105.29	19.96	203.91	20.22

Limit Clause

<1 watt.



Product Service

2.4 EIRP PEAK POWER

2.4.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(4)

2.4.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113359901

2.4.3 Date of Test and Modification State

09 May 2011 - Modification State 0

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of ANSI C63.4.

The EUT was placed on a remotely controlled turntable within a semi-anechoic chamber. Measurements of the carrier frequency from the EUT were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The measurement was performed with a peak detector and the trace set to max hold using a Resolution and Video bandwidth of 1 MHz.

A substitution was then performed by replacing the EUT with a substitution antenna and signal generator. The signal generator level was increased to achieve the same raw result as the EUT. Cable loss and antenna gain was included to obtain the result.

A wideband power metre was then used to apply a correction factor to achieve the final result.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1 - Mode 1
- Mode 2
- Mode 3
- Configuration 2 - Mode 1
- Mode 2
- Mode 3
- Configuration 3 - Mode 1
- Mode 2
- Mode 3

2.4.6 Environmental Conditions

09 May 2011

Ambient Temperature 19.5°C

Relative Humidity 49.0%




2.4.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for EIRP Peak Power.

The test results are shown below.

Configuration 1 - Mode 1

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.412	18.2	36.0	66.07	4000

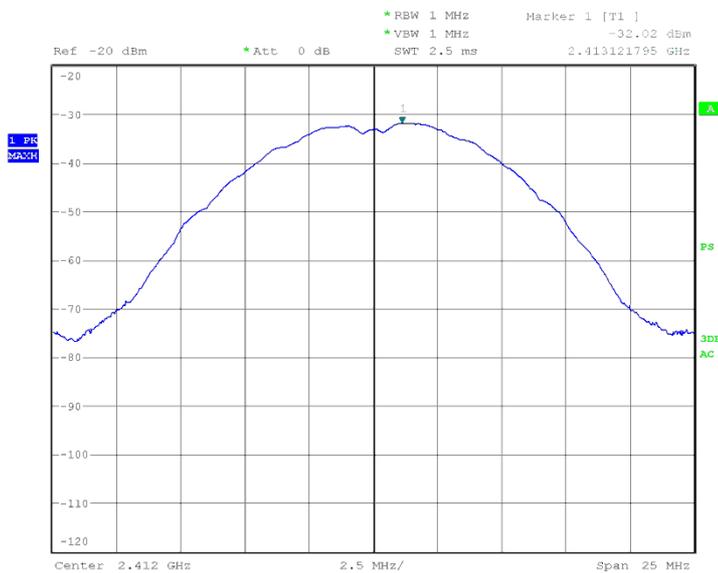


Date: 9.MAY.2011 18:09:12



Configuration 1 - Mode 2

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.437	17.5	36.0	56.23	4000

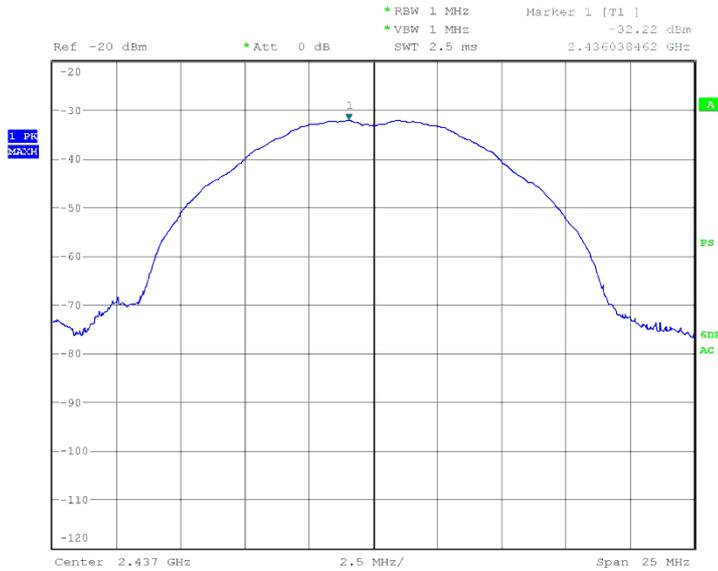


Date: 9.MAY.2011 18:41:54



Configuration 1 - Mode 3

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.462	16.6	36.0	45.72	4000

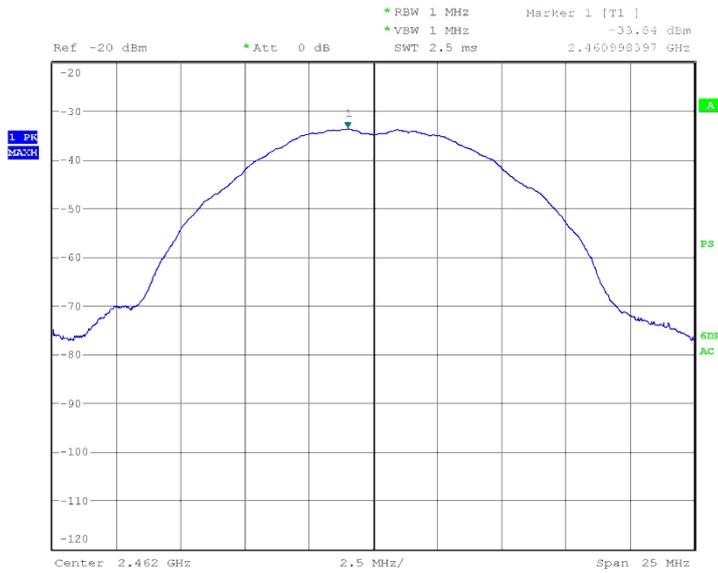


Date: 9.MAY.2011 19:13:48



Configuration 2 - Mode 1

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.412	19.2	36.0	83.18	4000

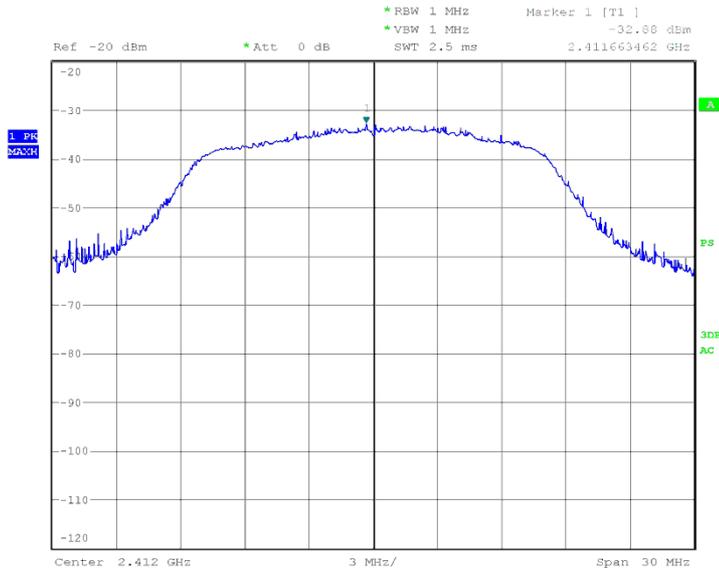


Date: 9.MAY.2011 20:14:17



Configuration 2 - Mode 2

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.437	18.6	36.0	72.44	4000

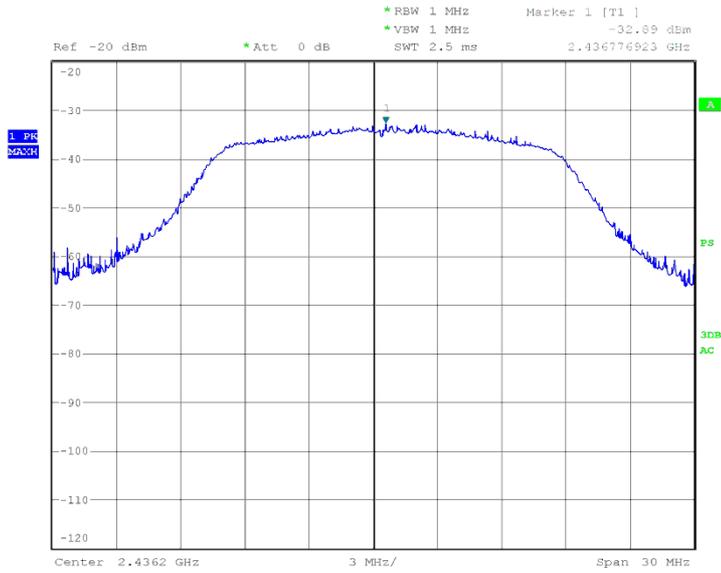


Date: 9.MAY.2011 20:59:47



Configuration 2 - Mode 3

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.462	18.2	36.0	66.07	4000

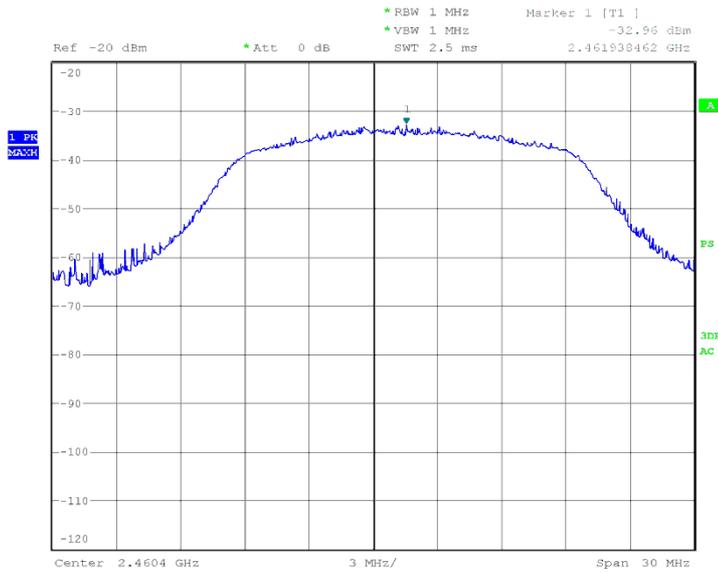


Date: 9.MAY.2011 20:46:40



Configuration 3 - Mode 1

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.412	17.5	36.0	56.23	4000

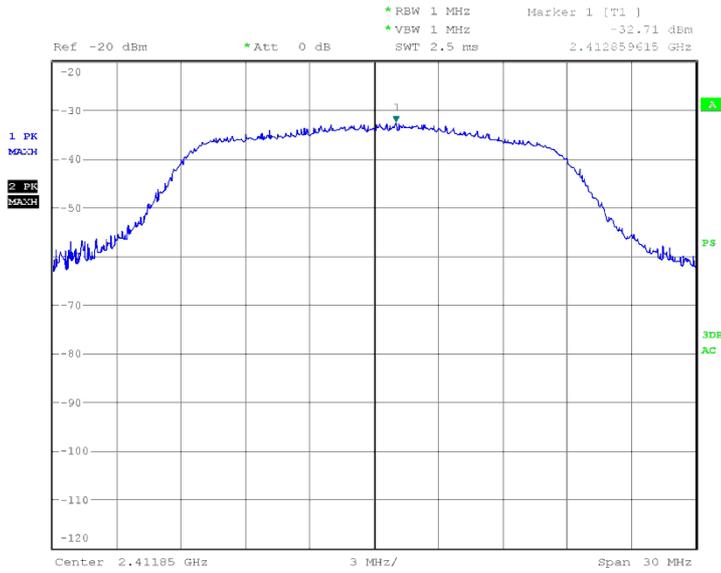


Date: 8.MAY.2011 12:24:35



Configuration 3 - Mode 2

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.437	17.0	36.0	50.12	4000

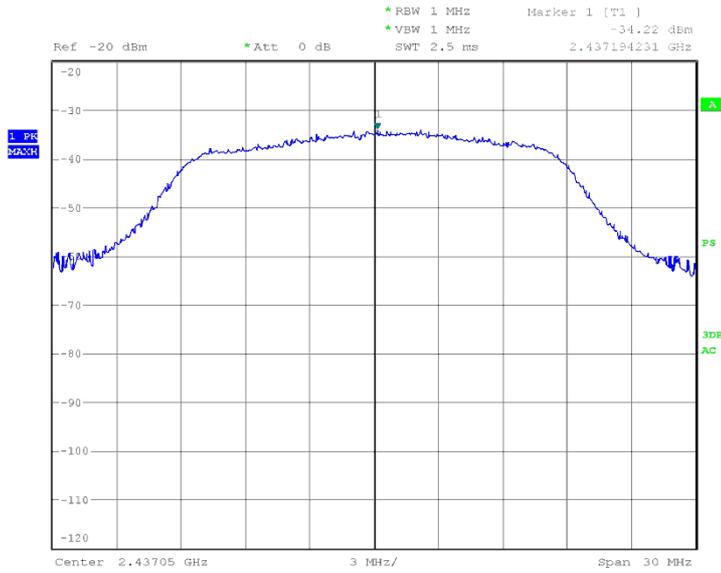


Date: 8.MAY.2011 12:44:31



Configuration 3 - Mode 3

Freq GHz	Result EIRP dBm	Limit EIRP dBm	Result EIRP mW	Limit EIRP mW
2.462	18.1	36.0	64.56	4000

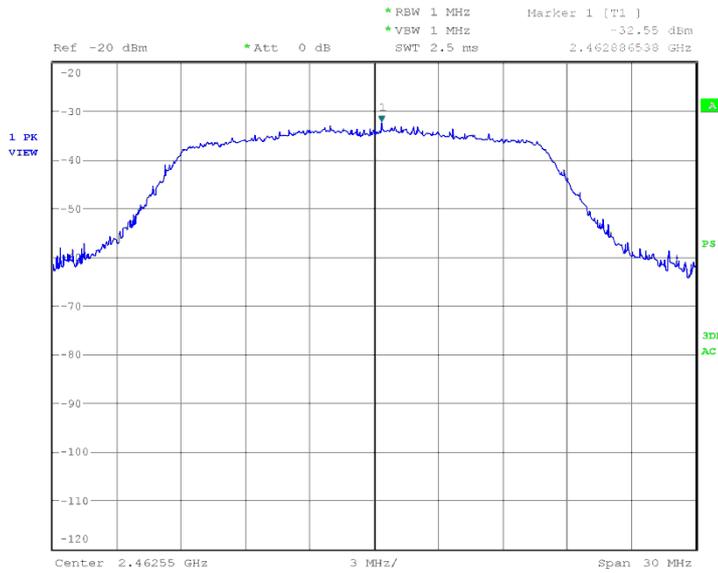

Date: 8.MAY.2011 12:54:31



Product Service

2.5 SPURIOUS EMISSIONS

2.5.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (d)

2.5.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113357913

2.5.3 Date of Test and Modification State

10 May 2011 - Modification State 0

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Method and Operating Modes

The test was applied in accordance with FCC CFR 47 Part 15.

In accordance with Part 15.247(d), the Spurious Conducted Emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9 kHz to 25 GHz. The EUT was set to transmit on full power. The resolution and video bandwidths were set to 100 kHz in accordance with Part 15.247. The spectrum analyser detector was set to Max Hold.

With the EUT transmitting at maximum power, the Spectrum Analyser was set to Max Hold and the fundamental peak measured in a RBW and VBW of 100 kHz. This level was used to determine the limit line as displayed on the plots of -20dBc.

The maximum path loss across each measurement band was used as the reference level offset to ensure worst case results.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1
 - Mode 1
 - Mode 2
 - Mode 3
- Configuration 2
 - Mode 1
 - Mode 2
 - Mode 3
- Configuration 3
 - Mode 1
 - Mode 2
 - Mode 3

2.5.6 Environmental Conditions

	10 May 2011
Ambient Temperature	23.0°C
Relative Humidity	45.0%



2.5.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Spurious Emissions.


The test results are shown below.

4.0 V DC Supply

Configuration 1 – Mode 1

2 Mbps


9 kHz to 12 GHz

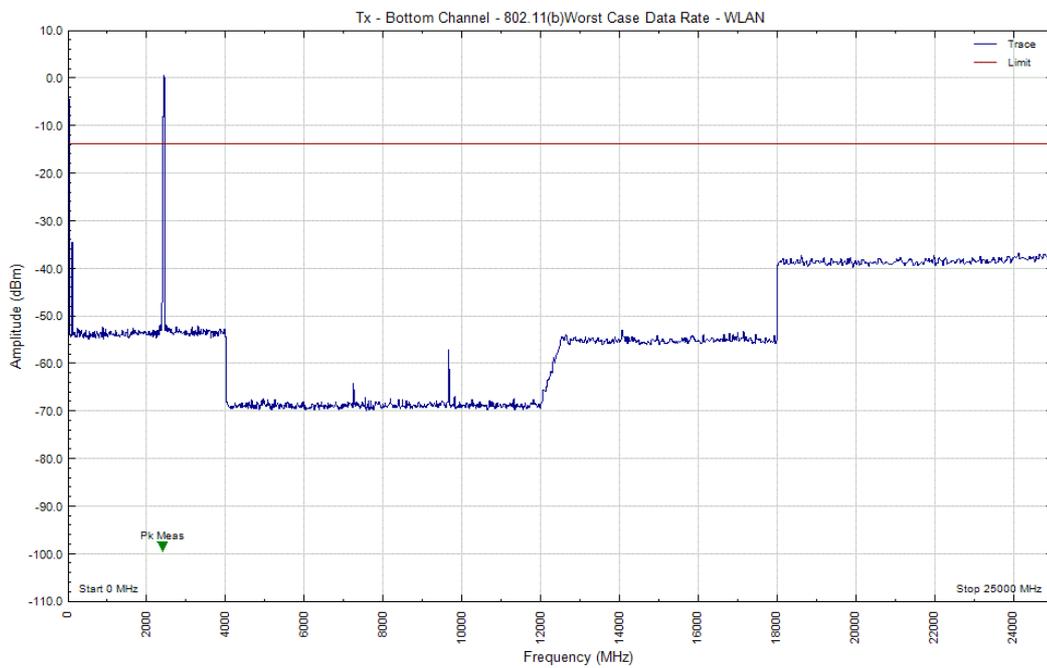




Configuration 1 – Mode 2

12 GHz to 18 GHz

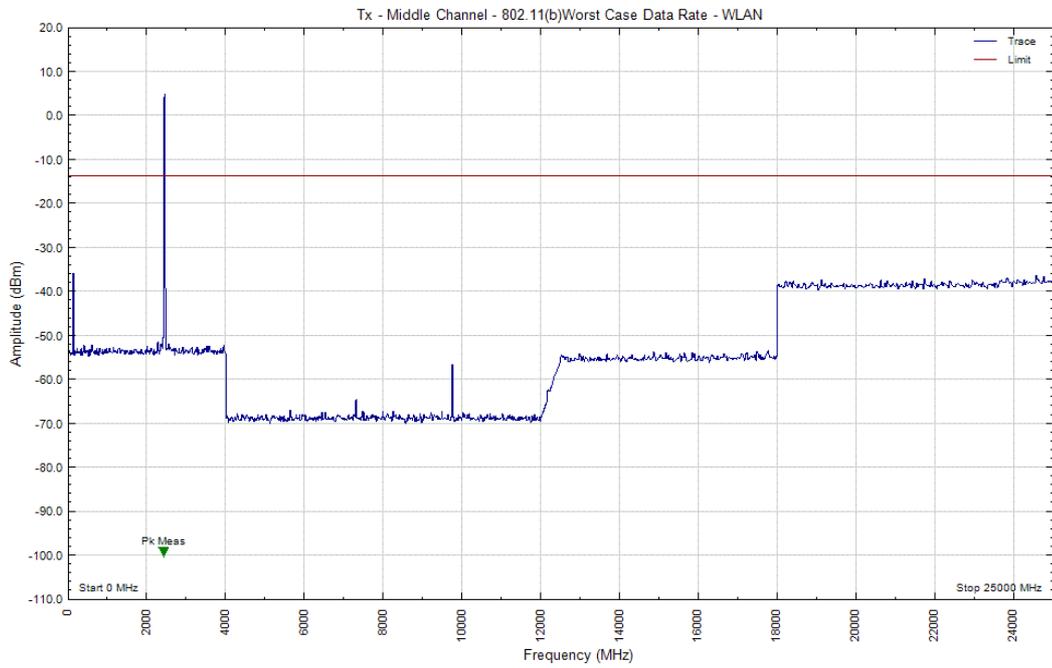

Configuration 1 – Mode 3

18 GHz to 25 GHz

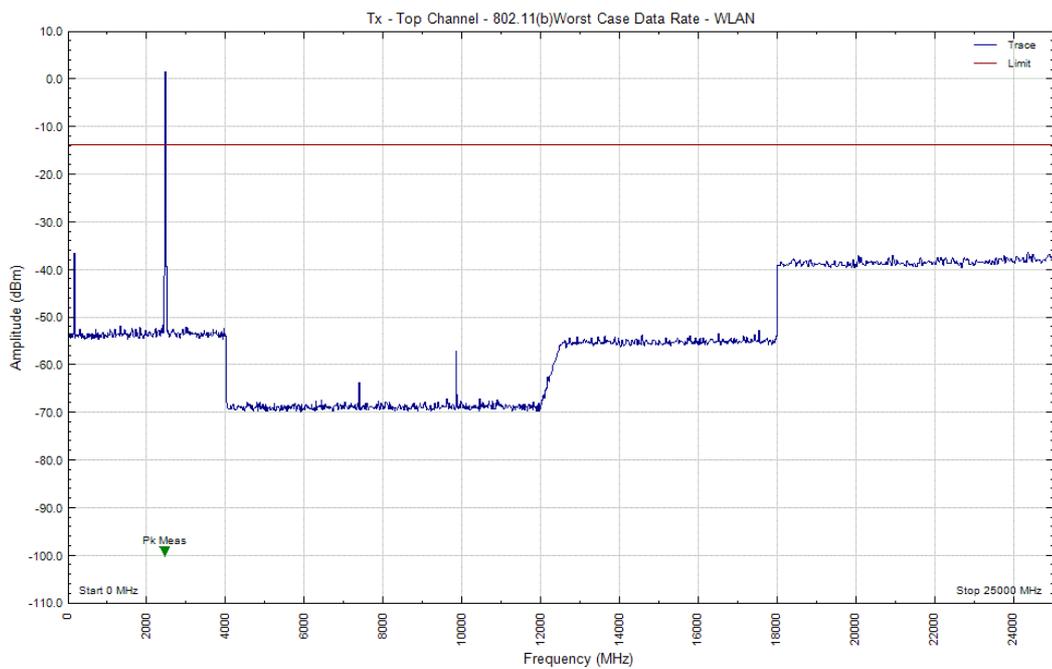




Configuration 2 – Mode 1


6 Mbps

9 kHz to 12 GHz

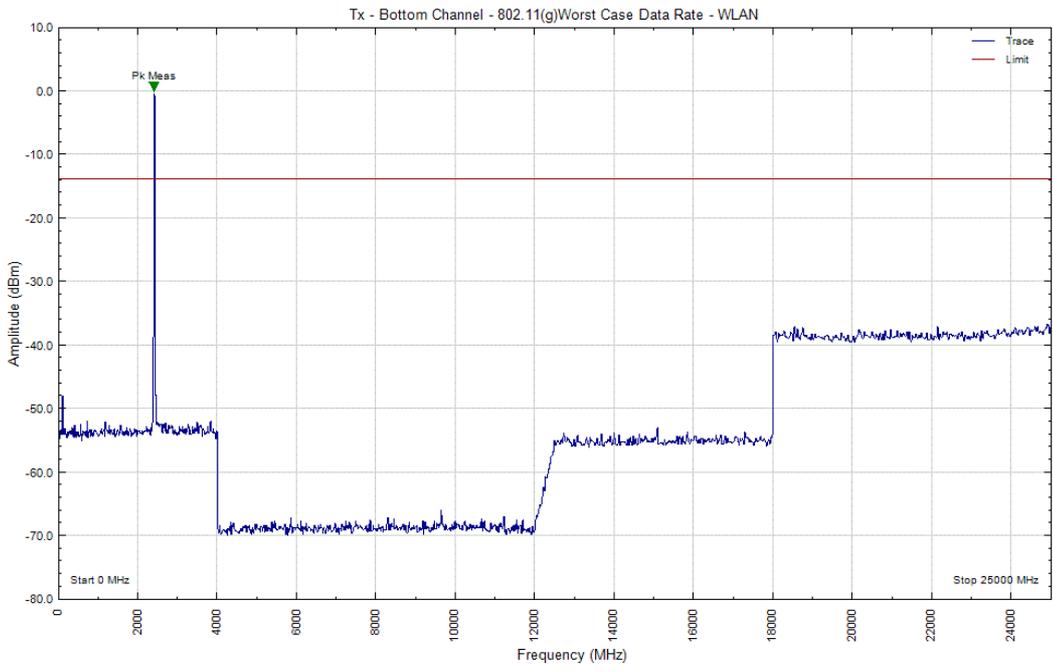

Configuration 2 – Mode 2


12 GHz to 18 GHz

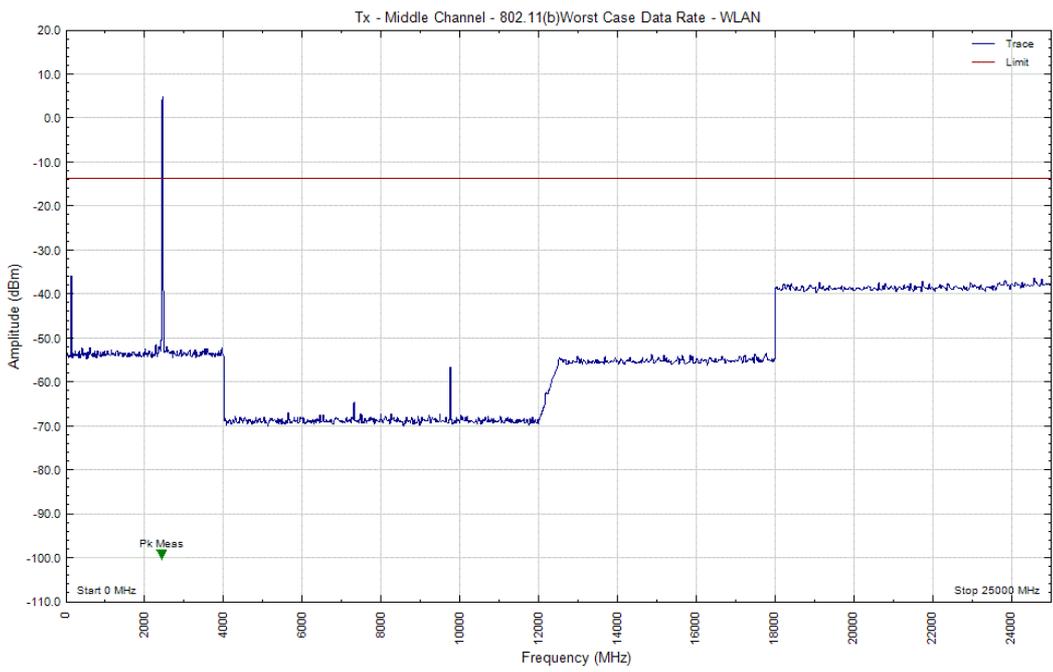



Configuration 2 – Mode 3


18 GHz to 25 GHz

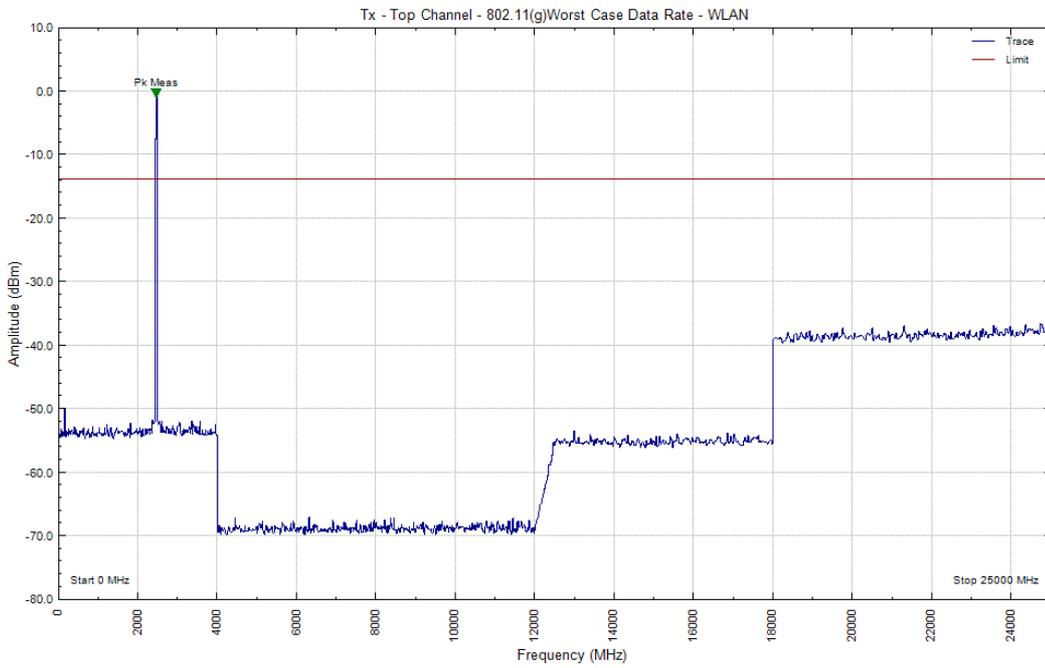

Configuration 3 – Mode 1

6.5 Mbps


9 kHz to 12 GHz

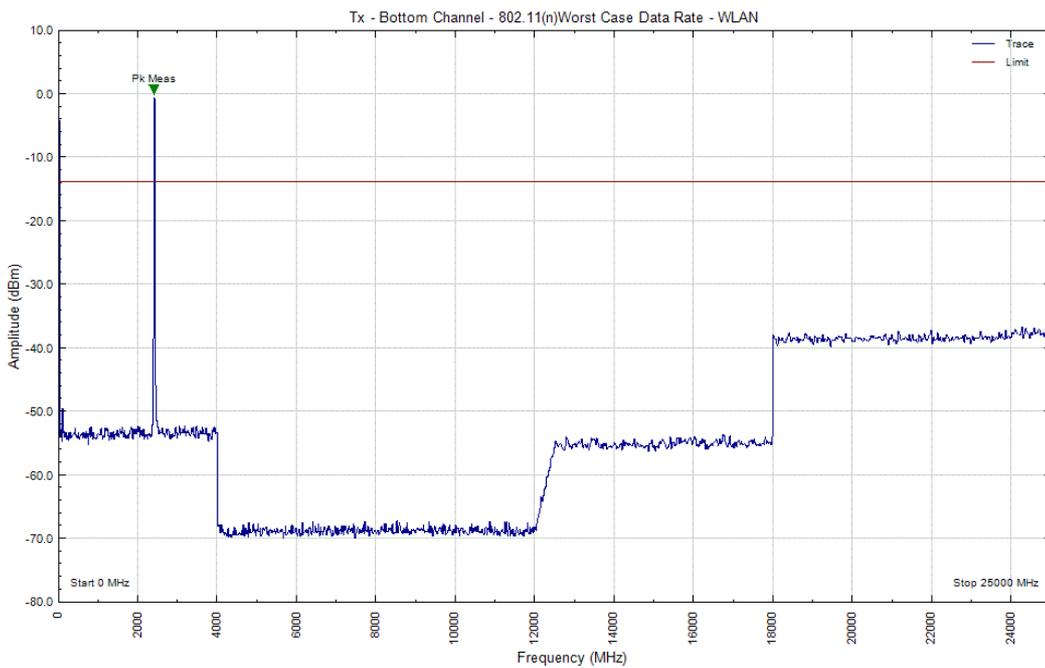




Configuration 3 – Mode 2

12 GHz to 18 GHz

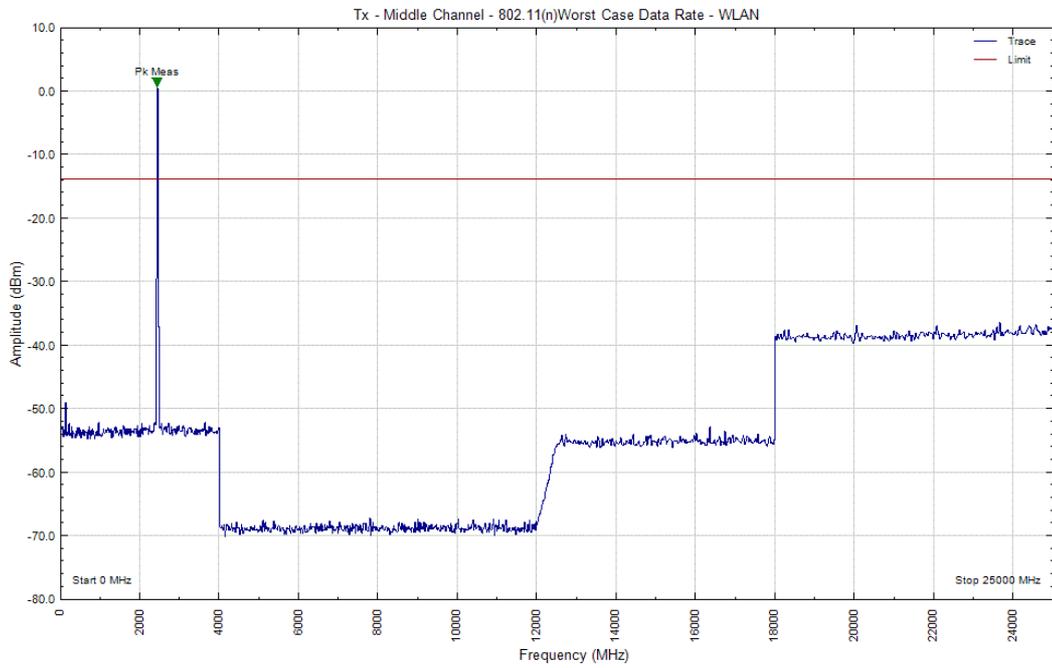

Configuration 3 – Mode 3

18 GHz to 25 GHz

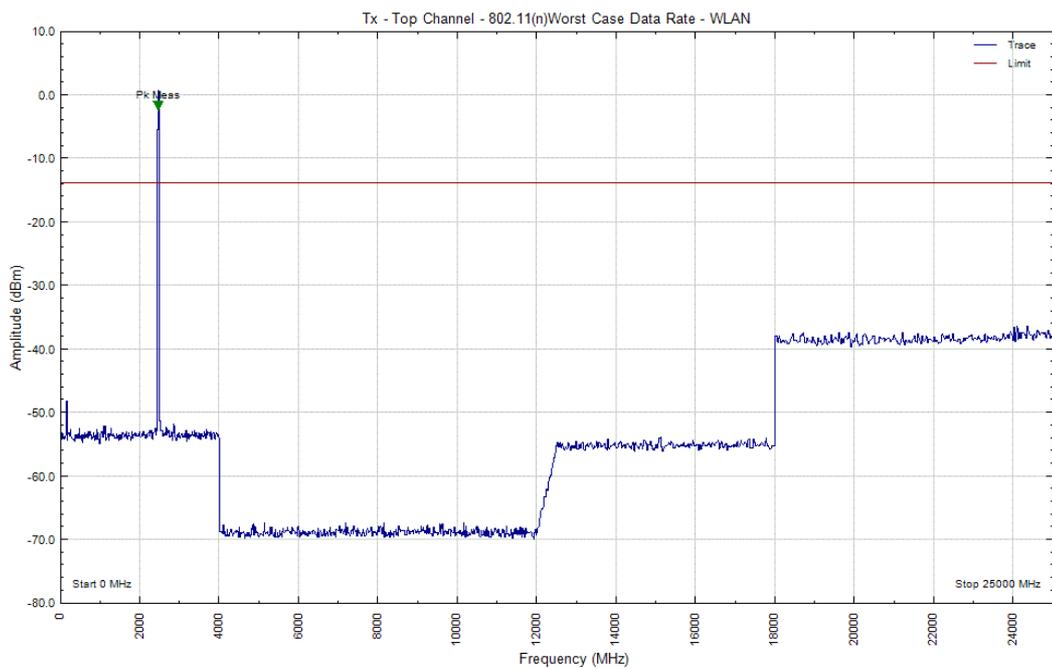



Product Service

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.



Product Service

2.6 POWER SPECTRAL DENSITY

2.6.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (e)

2.6.2 Equipment Under Test

CDMA SHX11, S/N: IMEI: 004401113357913

2.6.3 Date of Test and Modification State

06 May 2011 - Modification State 0

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Method and Operating Modes

The test was applied in accordance with FCC CFR 47 Part 15.

The EUT was connected to a spectrum analyser via a 10 dB attenuator. The path loss was measured between the EUT and the spectrum analyser and entered as a reference level offset. The trace was set to max hold and using a peak detector the maximum response was established. With the spectrum analyser RBW at 3 kHz and VBW at 10 kHz, the power spectral density in a 3 kHz bandwidth was measured.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1 - Mode 1
- Mode 2
- Mode 3
- Configuration 2 - Mode 1
- Mode 2
- Mode 3
- Configuration 3 - Mode 1
- Mode 2
- Mode 3

2.6.6 Environmental Conditions

	06 May 2011
Ambient Temperature	24.0°C
Relative Humidity	37.0%



Product Service

2.6.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Power Spectral Density.

The test results are shown below.

4.0 V DC Supply

Configuration 1 – Modes 1, 2 and 3


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412	1	-5.04
	2	-5.97
	5	-8.31
	11	-8.43
2437	1	-5.81
	2	-6.27
	5	-7.06
	11	-8.12
2462	1	-6.28
	2	-6.39
	5	-8.13
	11	-8.08




Product Service

2412 MHz

1 Mbps

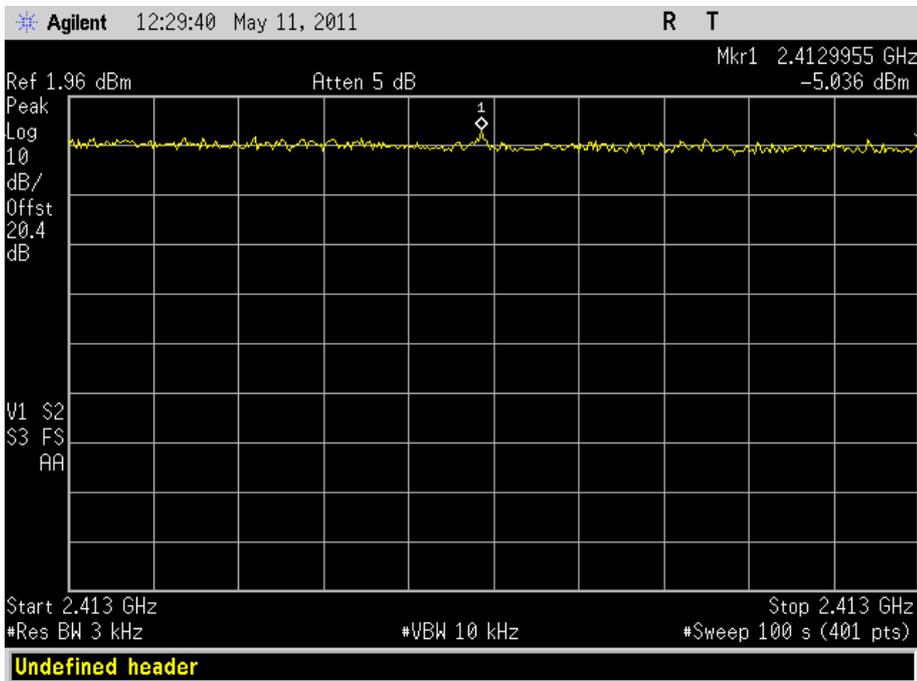


2 Mbps

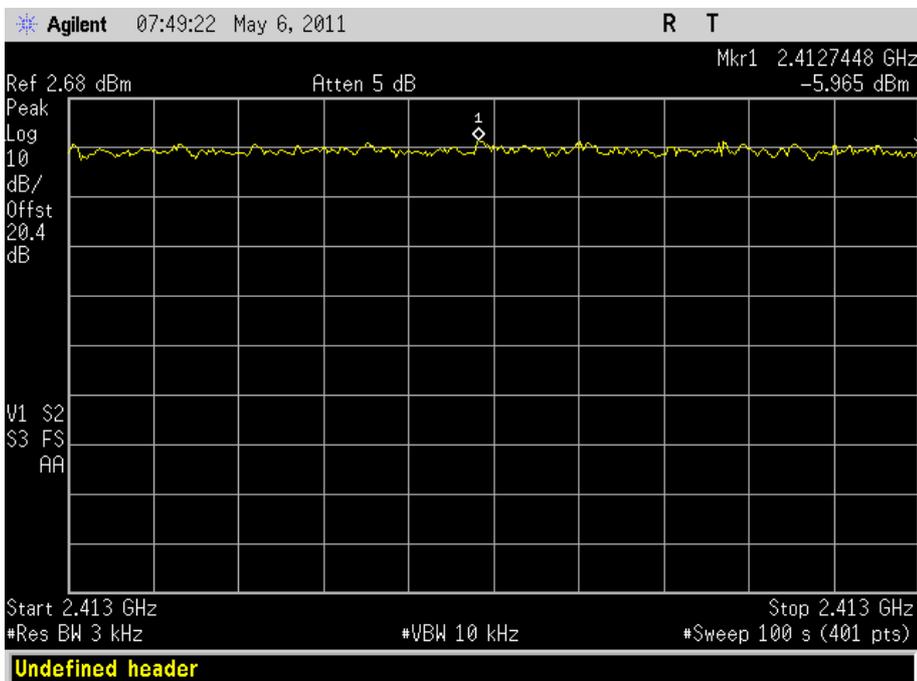




Product Service

5.5 Mbps

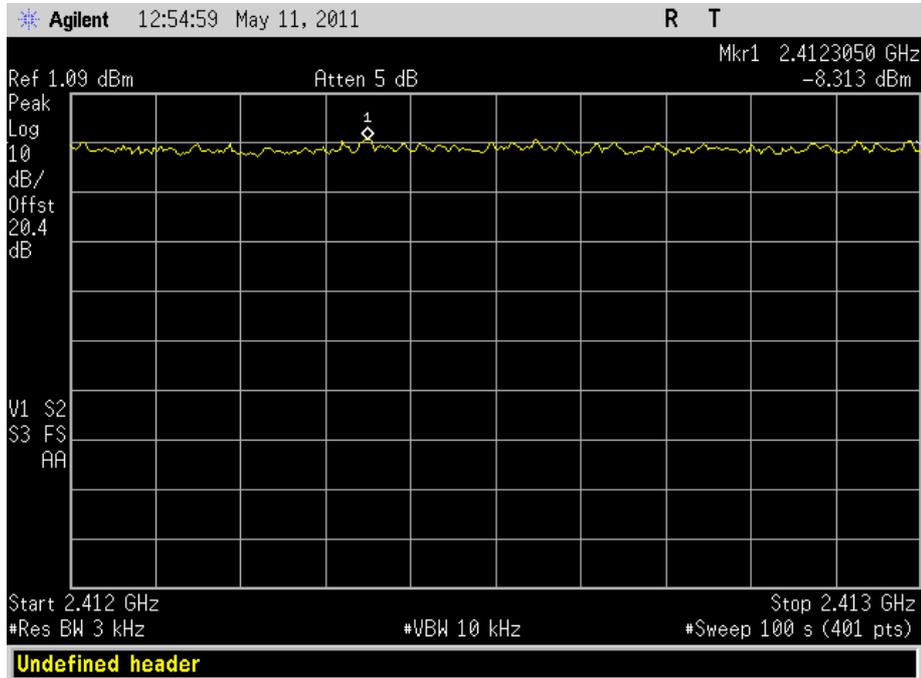

11 Mbps

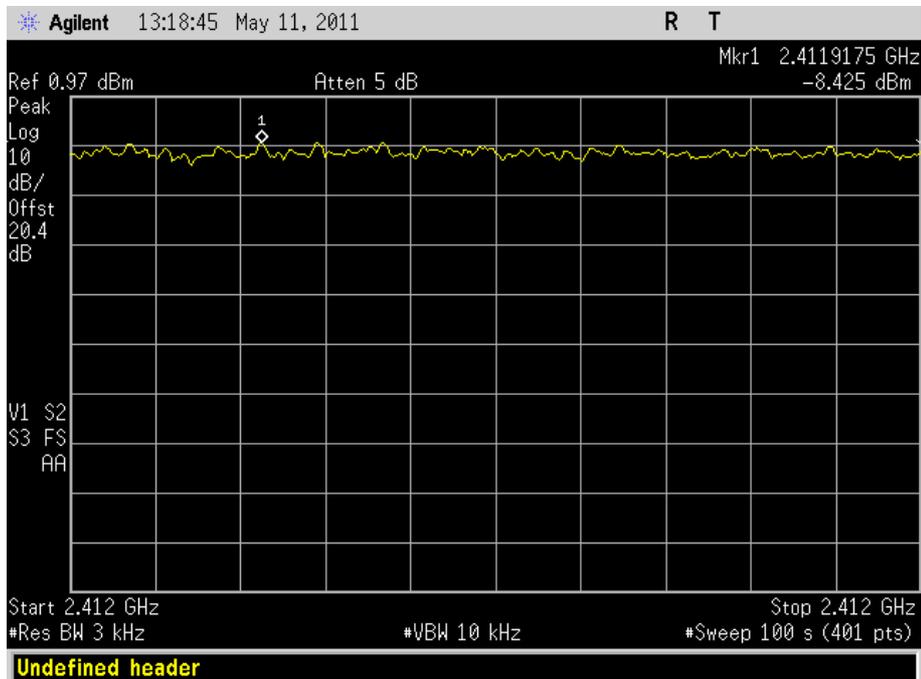





Product Service

2437 MHz

1 Mbps

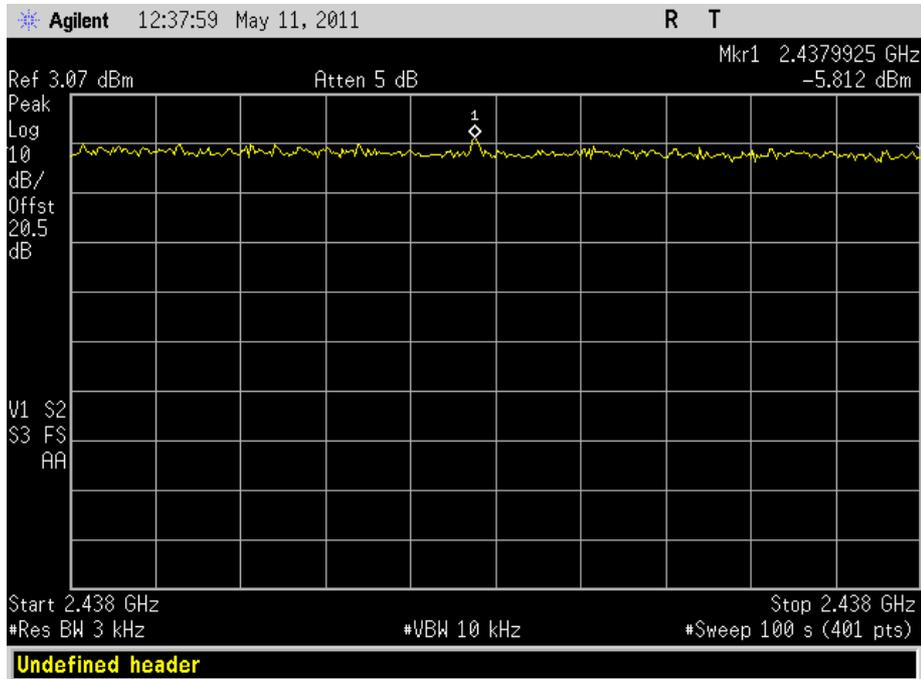


2 Mbps

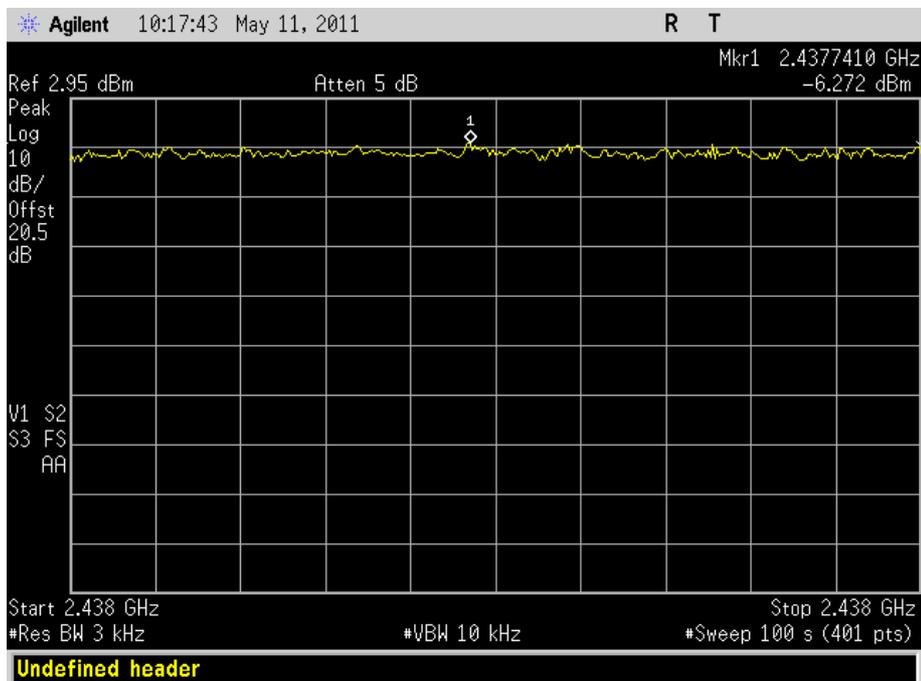




Product Service

5.5 Mbps

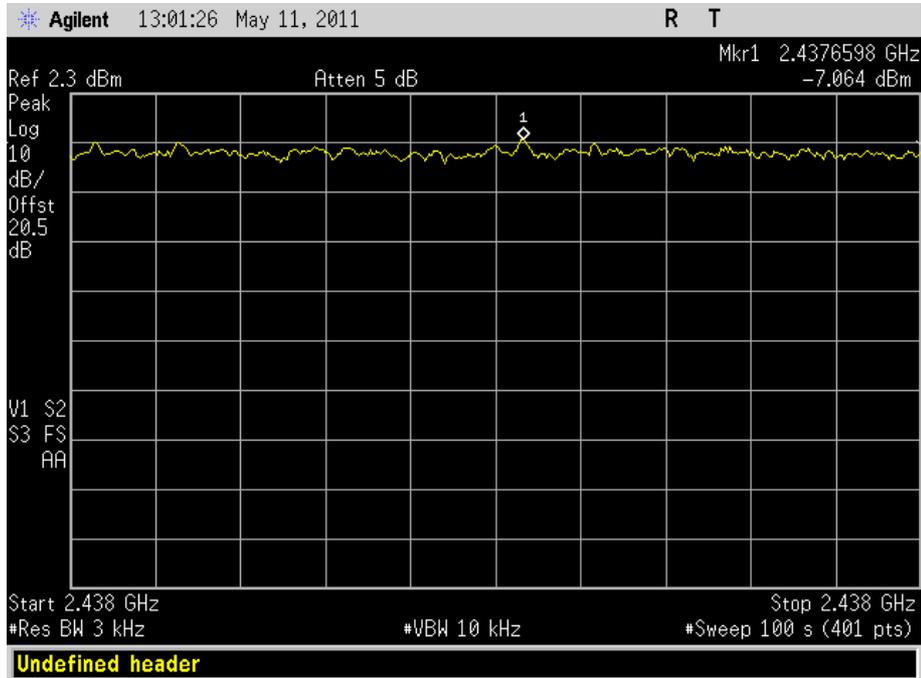

11 Mbps

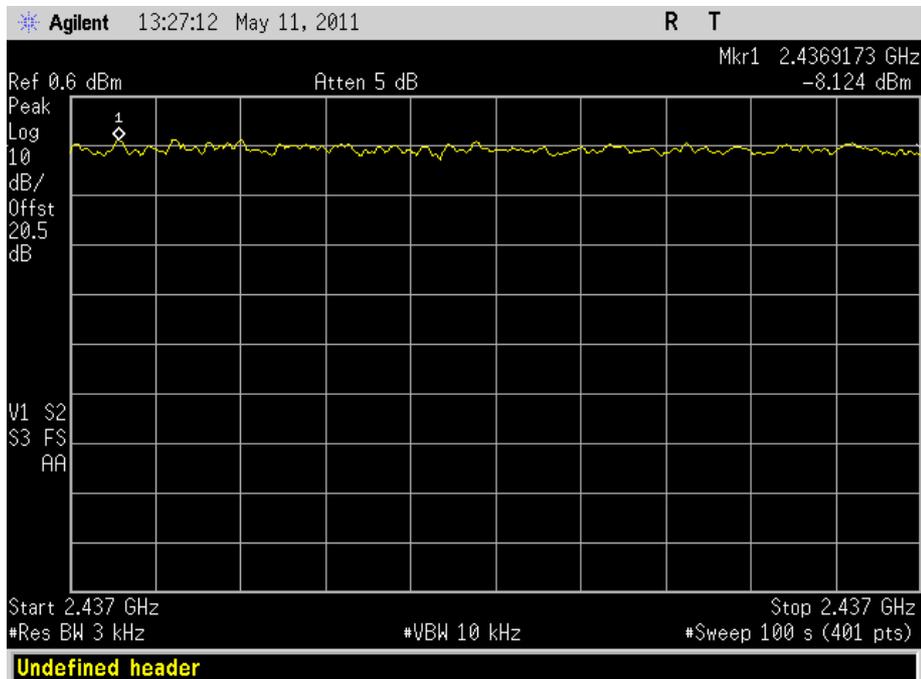





Product Service

2462 MHz

1 Mbps

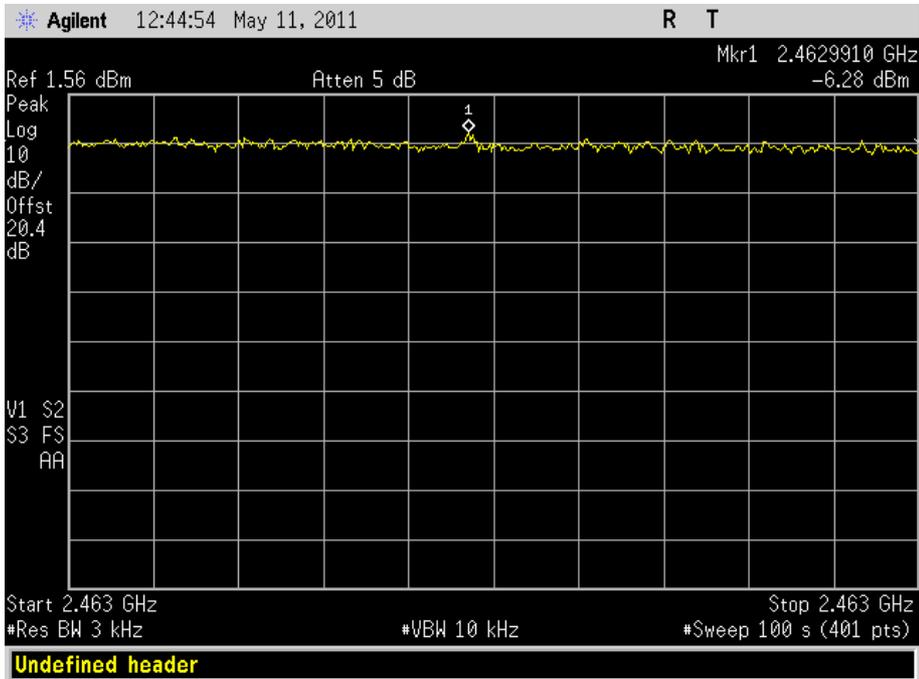


2 Mbps

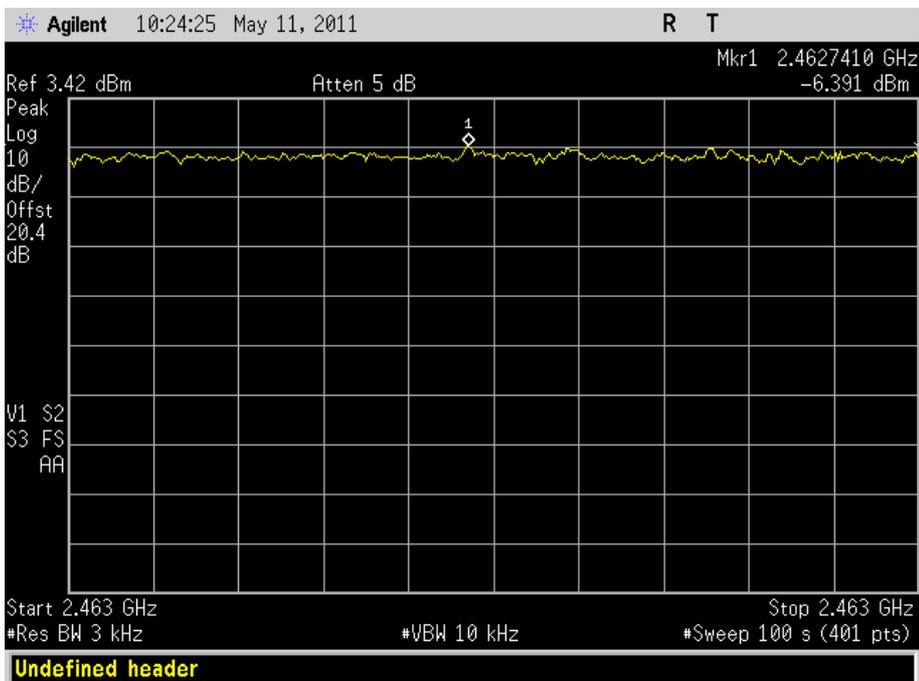




Product Service

5.5 Mbps

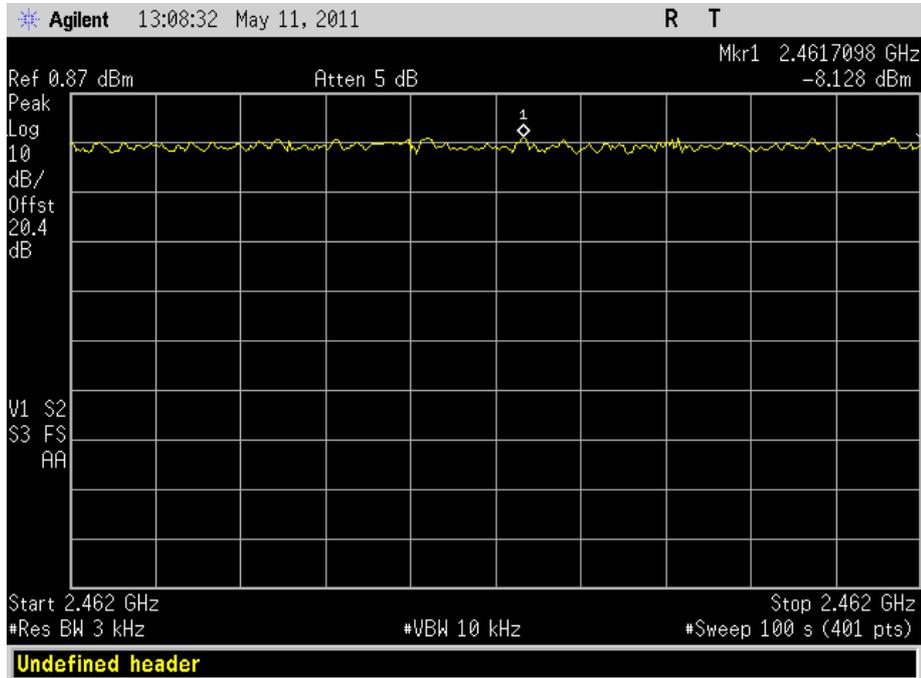

11 Mbps

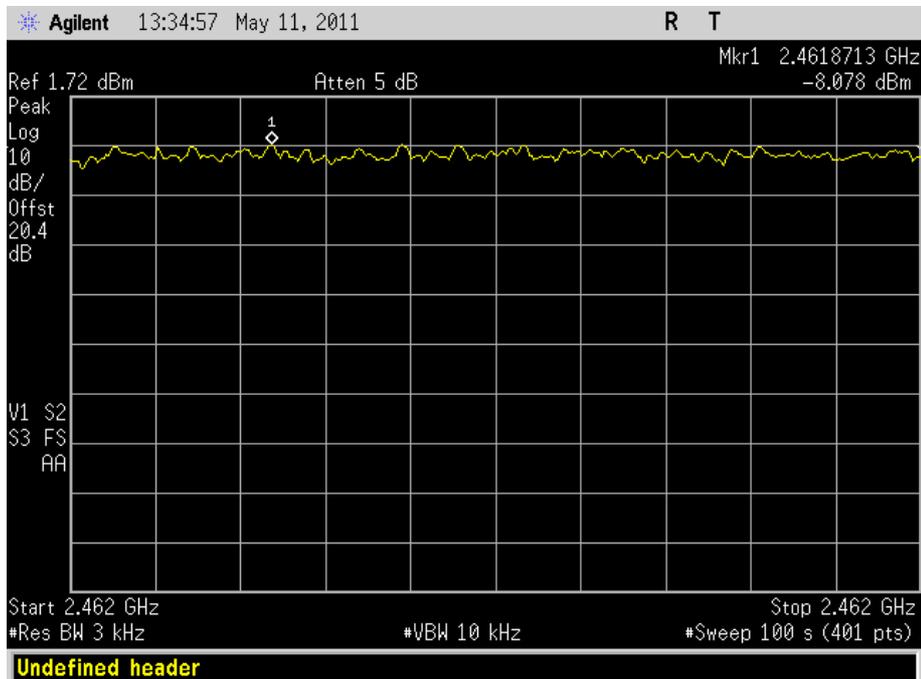



Product Service

Configuration 2 – Modes 1, 2 and 3


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412	6	-12.98
	9	-13.16
	12	-12.19
	18	-12.69
	36	-12.29
	48	-11.43
	54	-12.17
2437	6	-15.00
	9	-14.29
	12	-11.60
	18	-11.29
	36	-12.38
	48	-11.50
	54	-11.18
2462	6	-12.21
	9	-12.25
	12	-11.54
	18	-12.27
	36	-11.81
	48	-12.00
	54	-11.97




Product Service

2412 MHz

6 Mbps

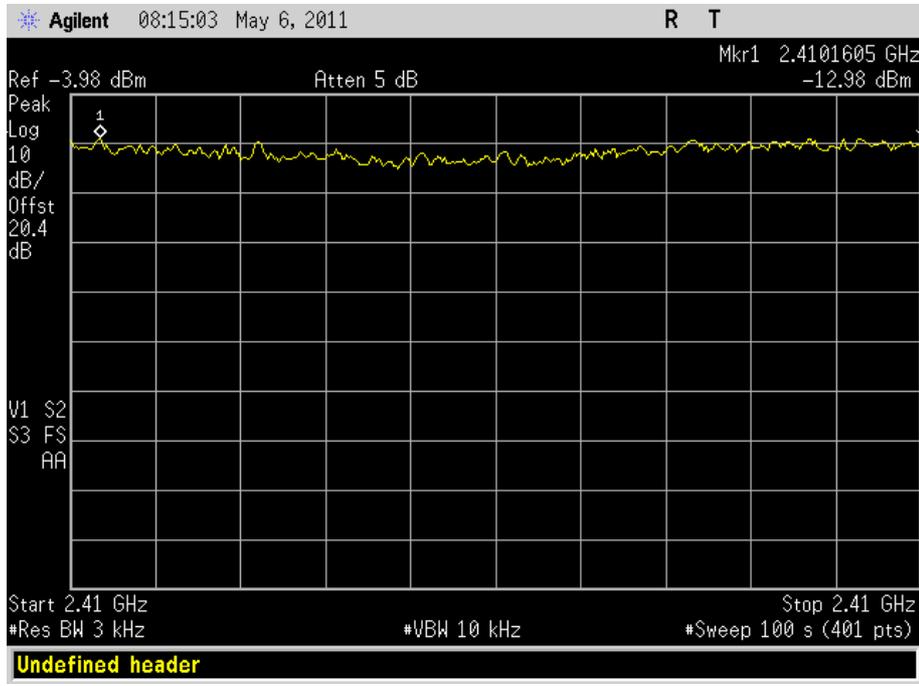


9 Mbps

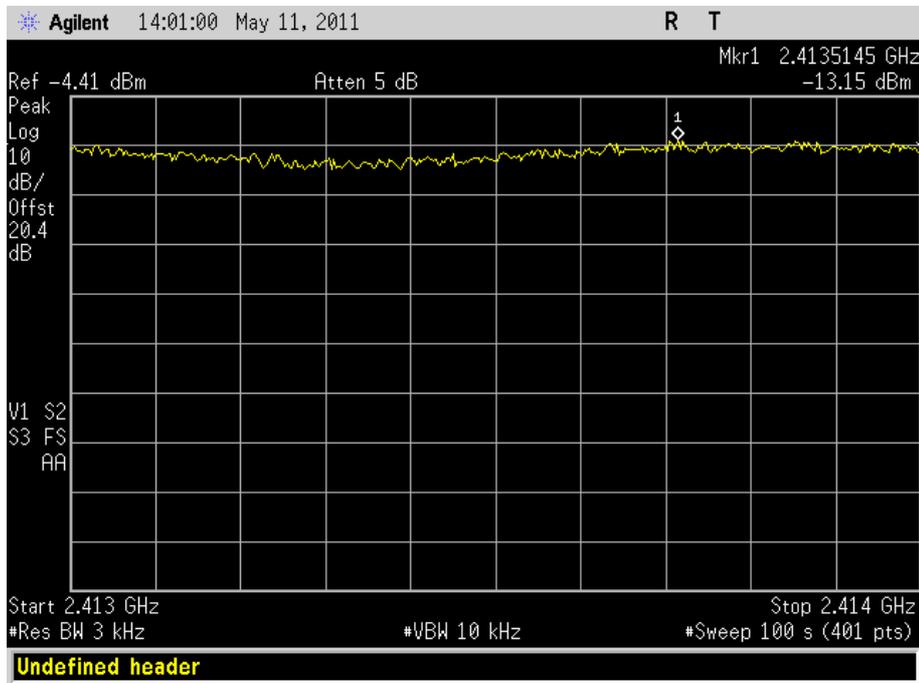




Product Service

12 Mbps

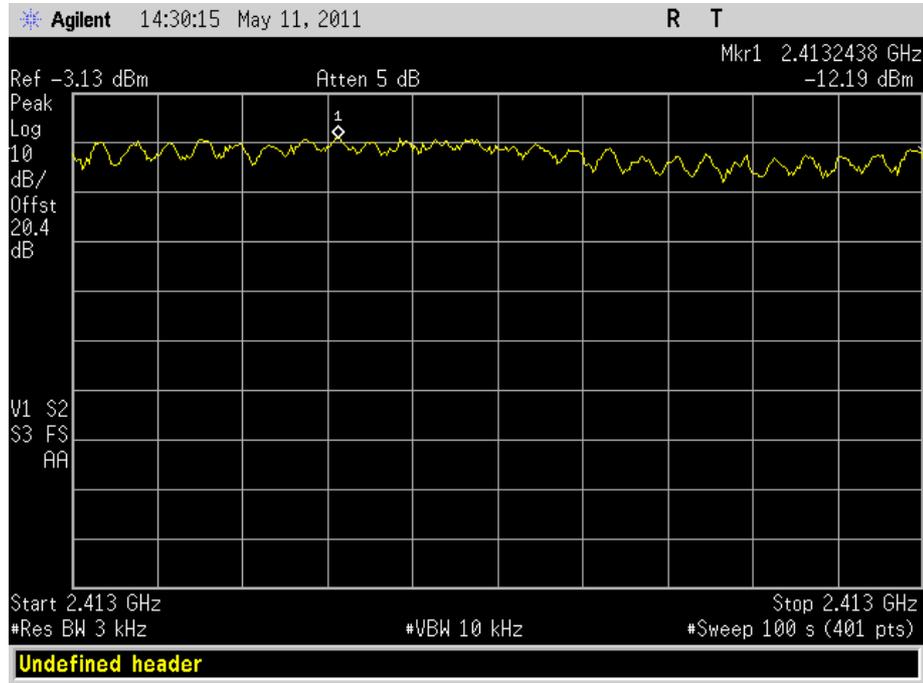


18 Mbps

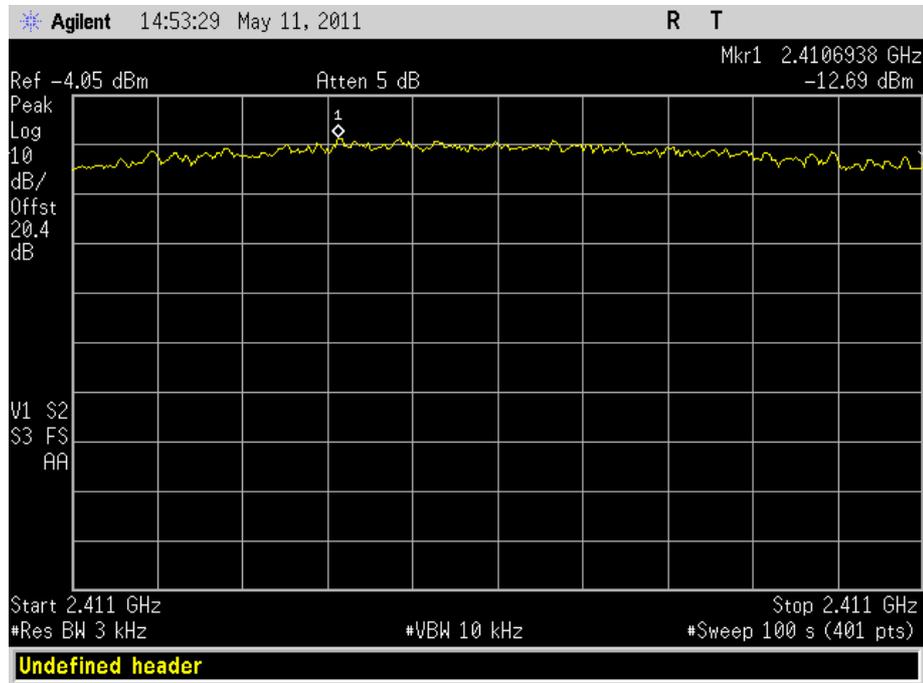




Product Service

36 Mbps

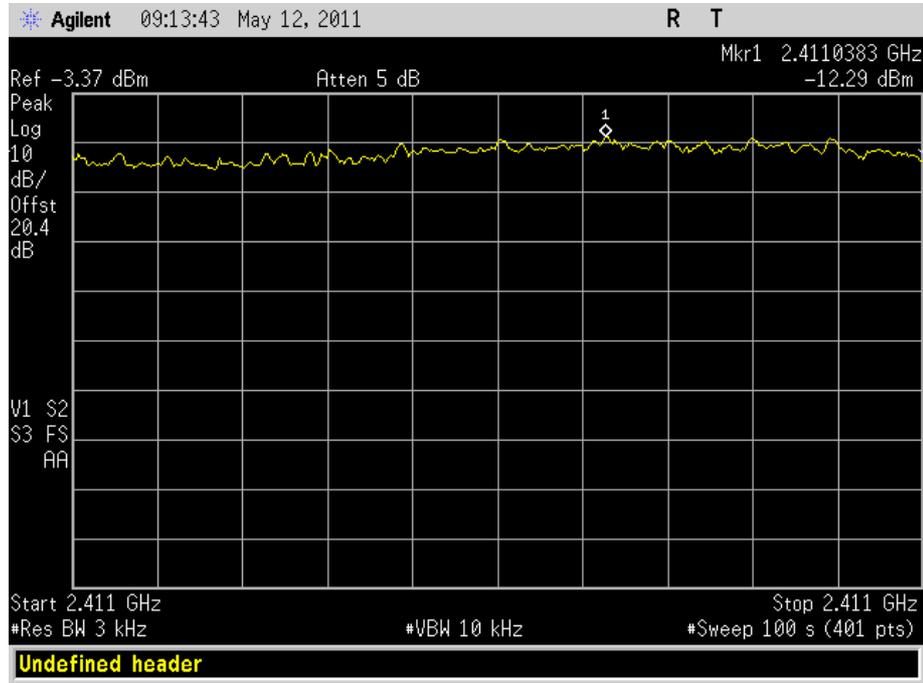


48 Mbps

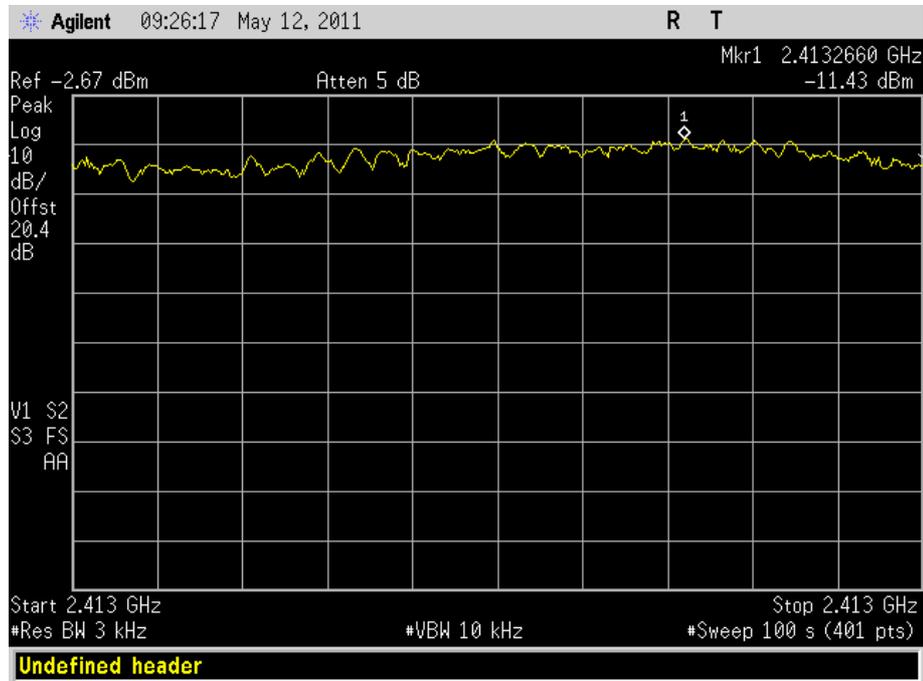



Product Service

54 Mbps

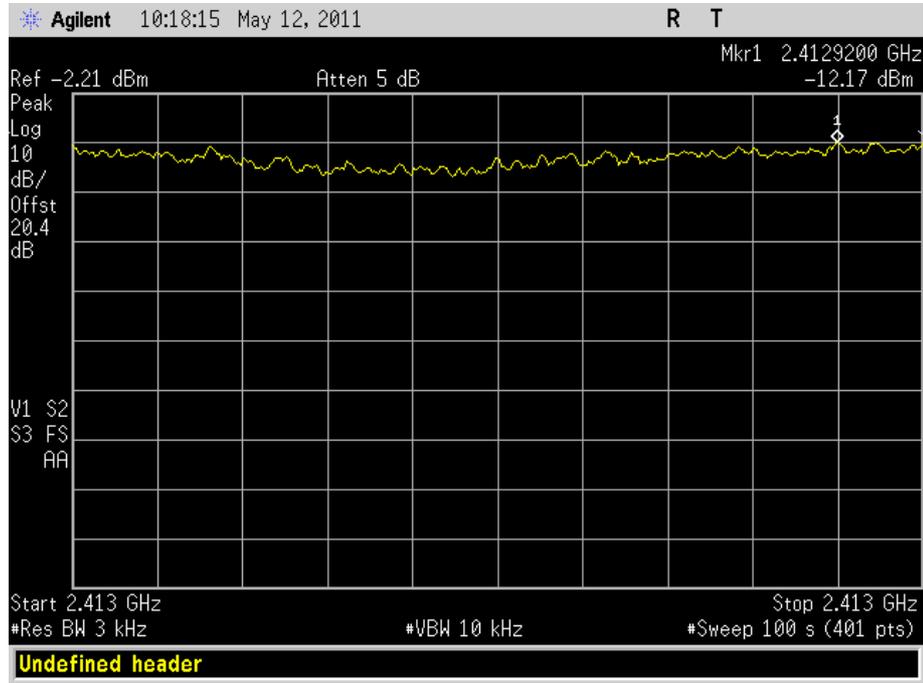





Product Service

2437 MHz

6 Mbps

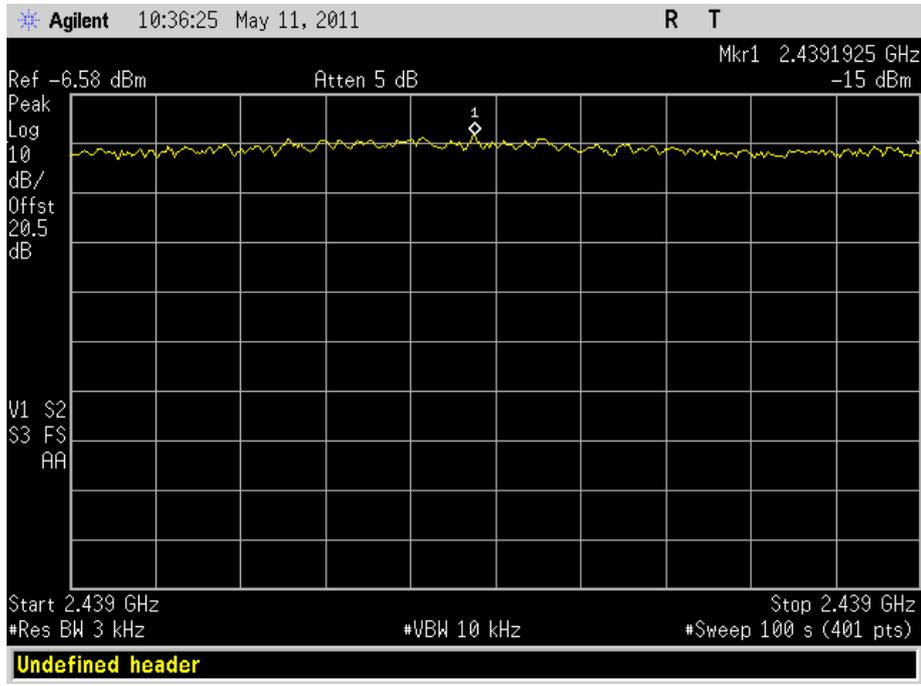


9 Mbps

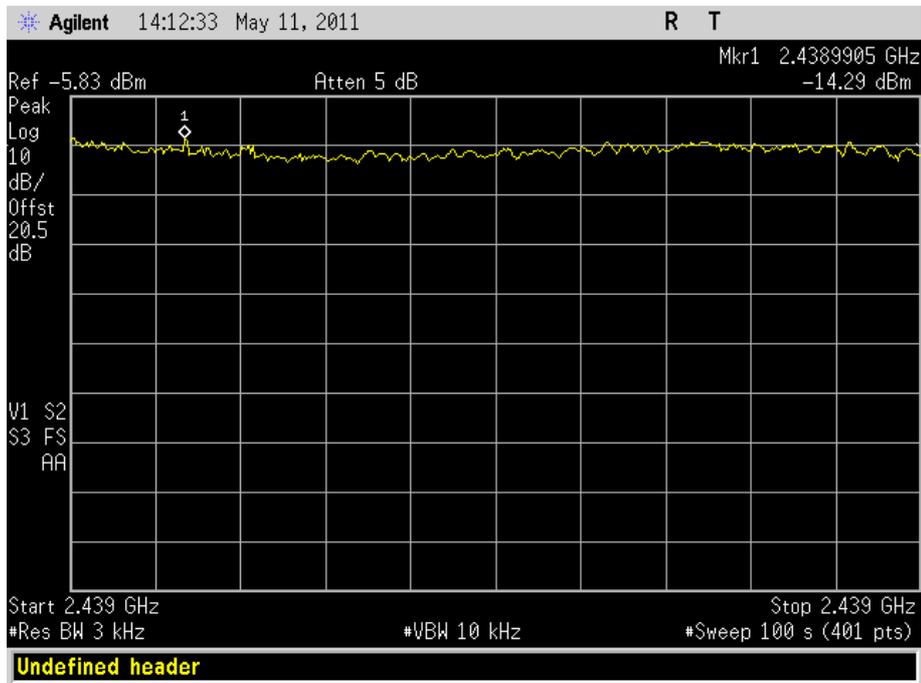




Product Service

12 Mbps

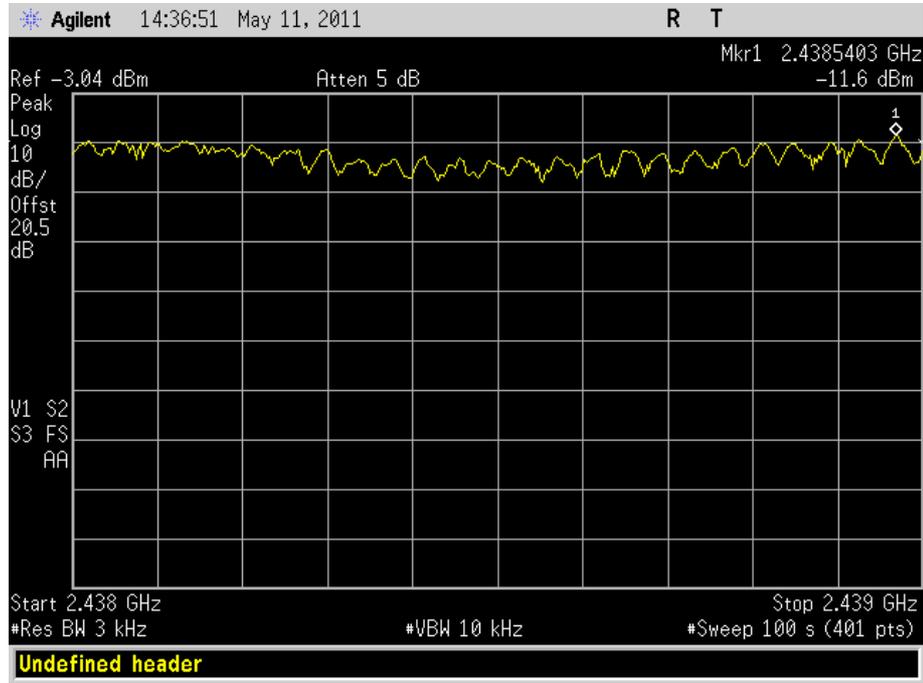


18 Mbps

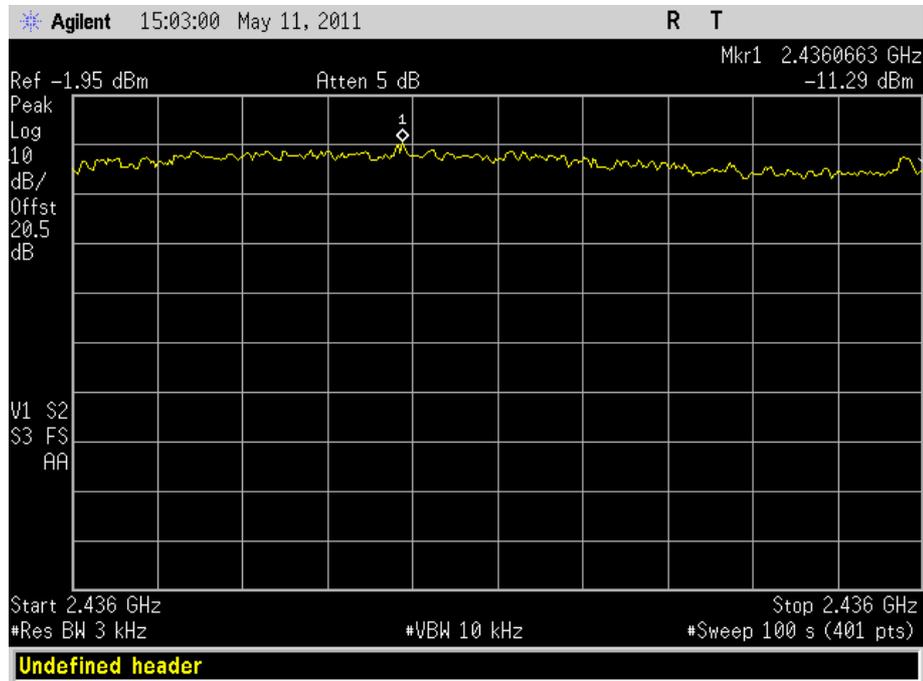




Product Service

36 Mbps

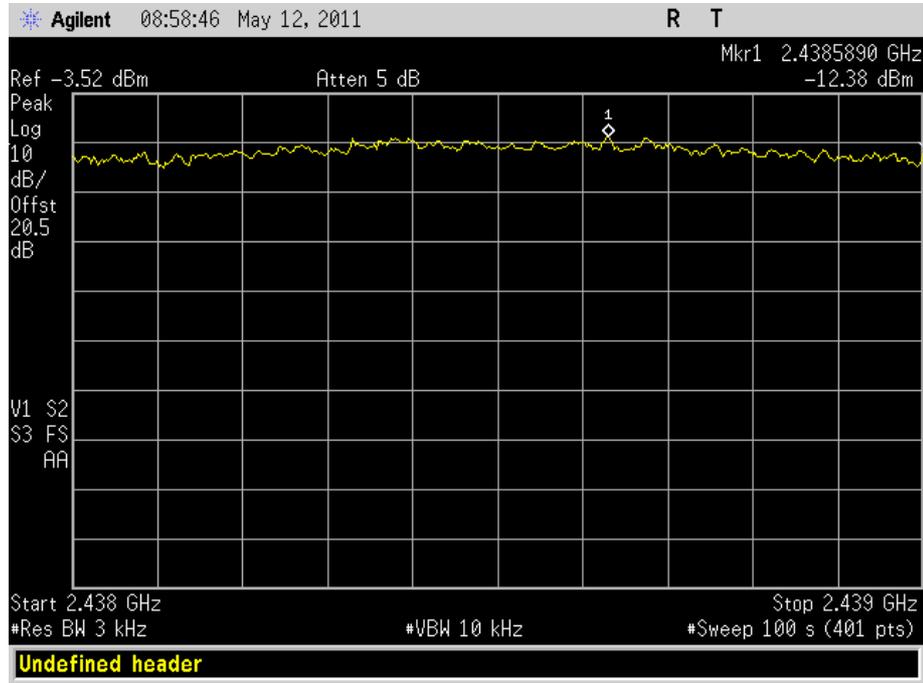


48 Mbps

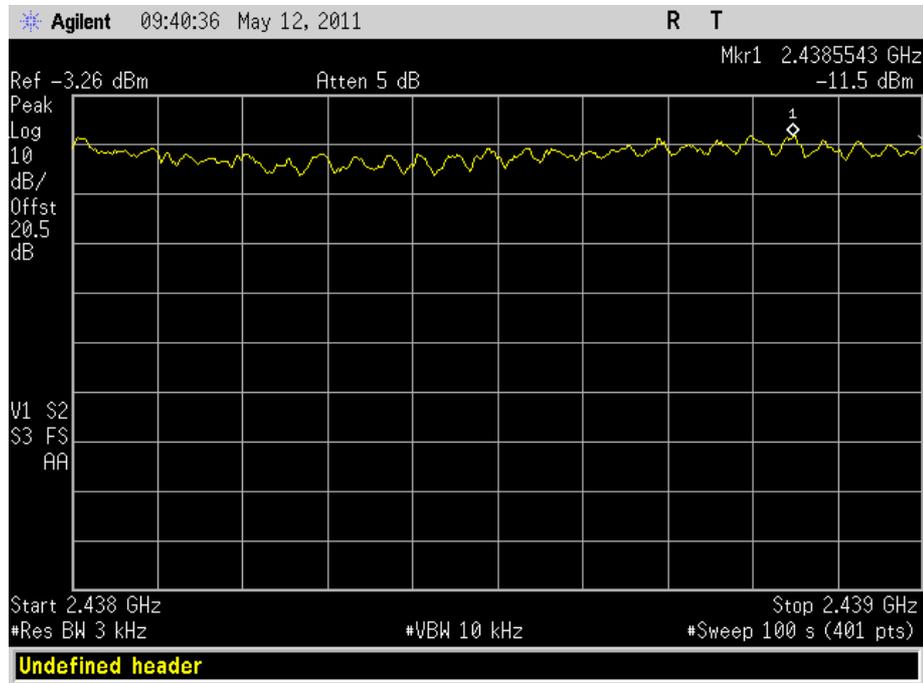



Product Service

54 Mbps

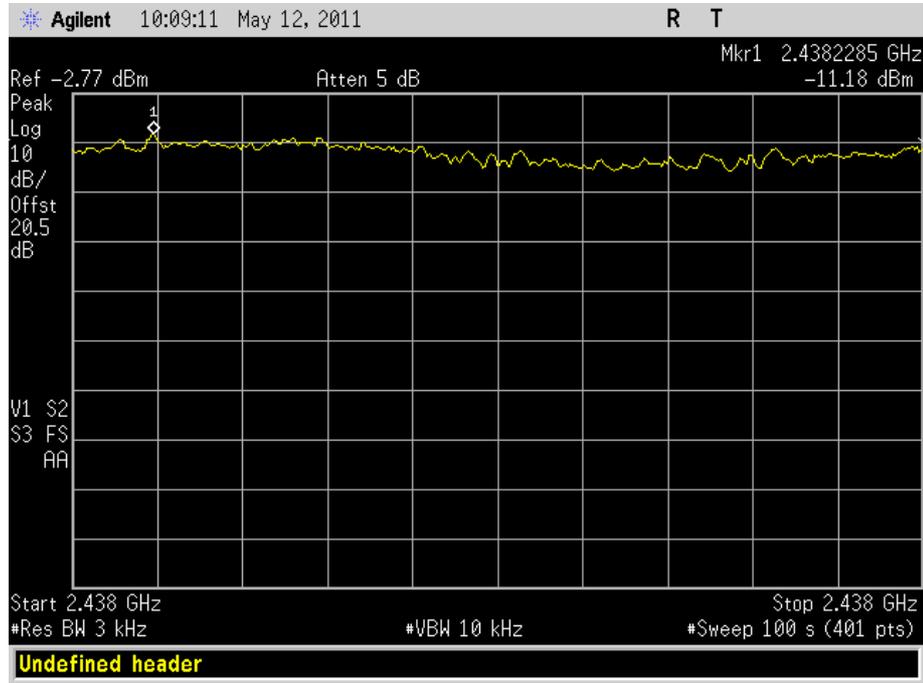





Product Service

2462 MHz

6 Mbps

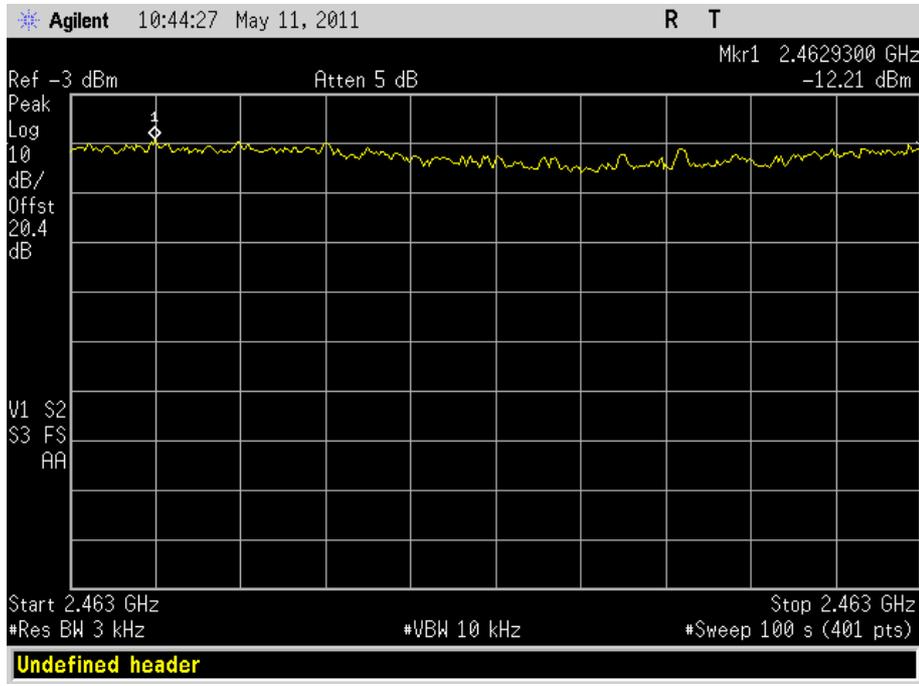


9 Mbps

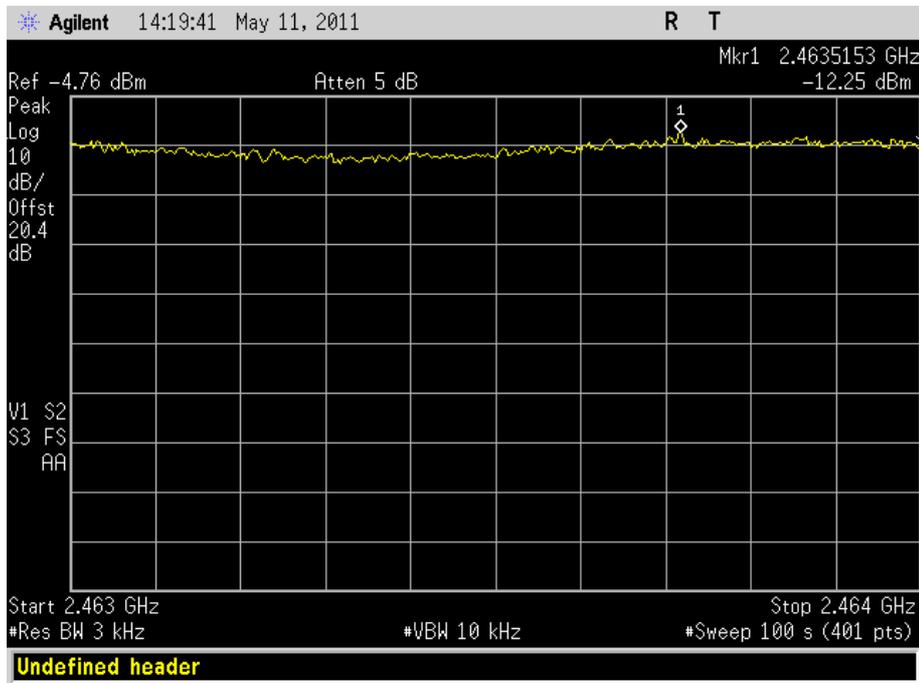




Product Service

12 Mbps

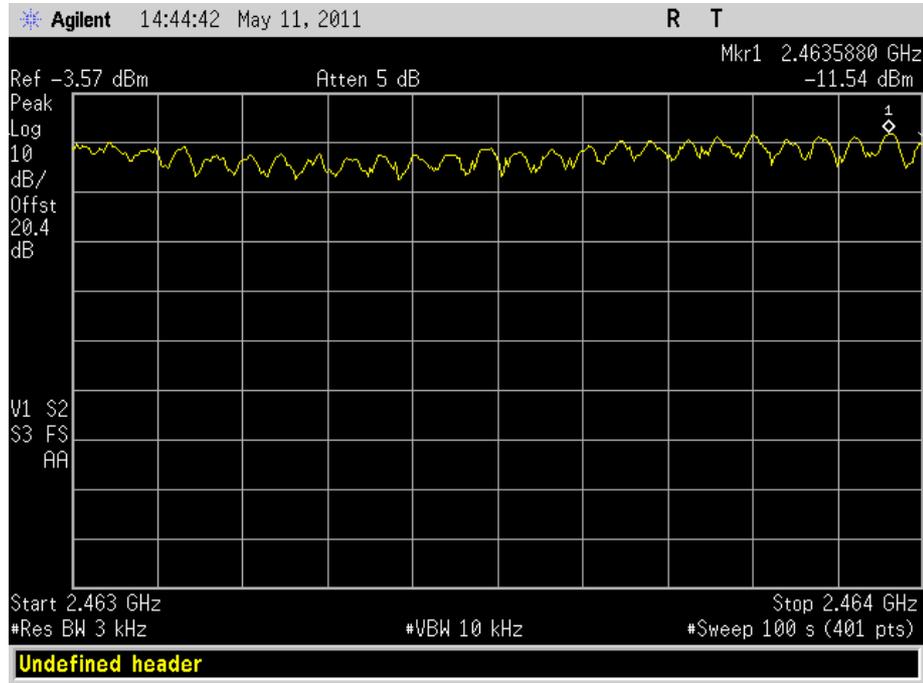


18 Mbps

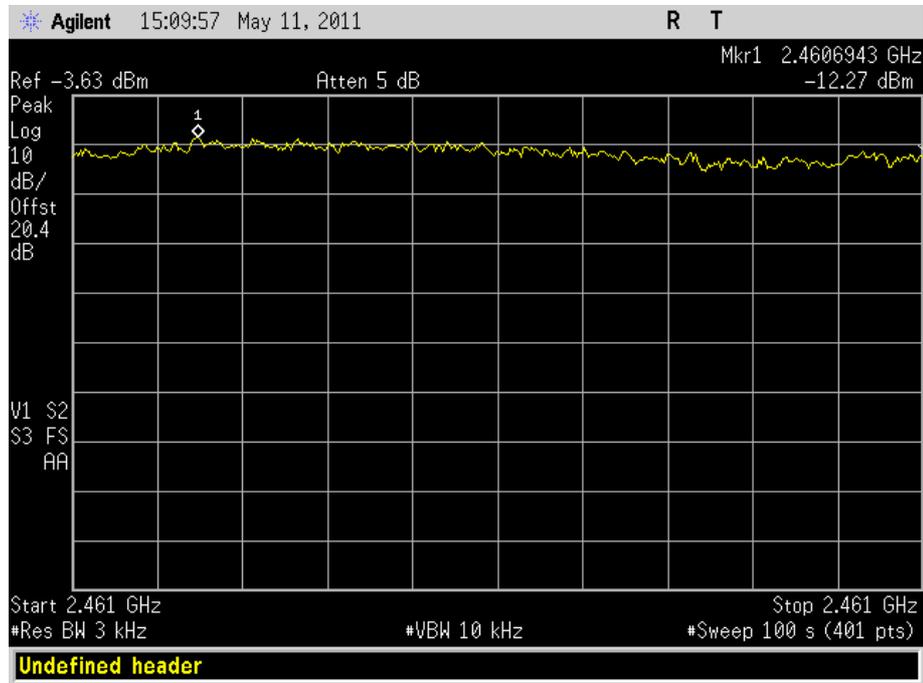




Product Service

36 Mbps

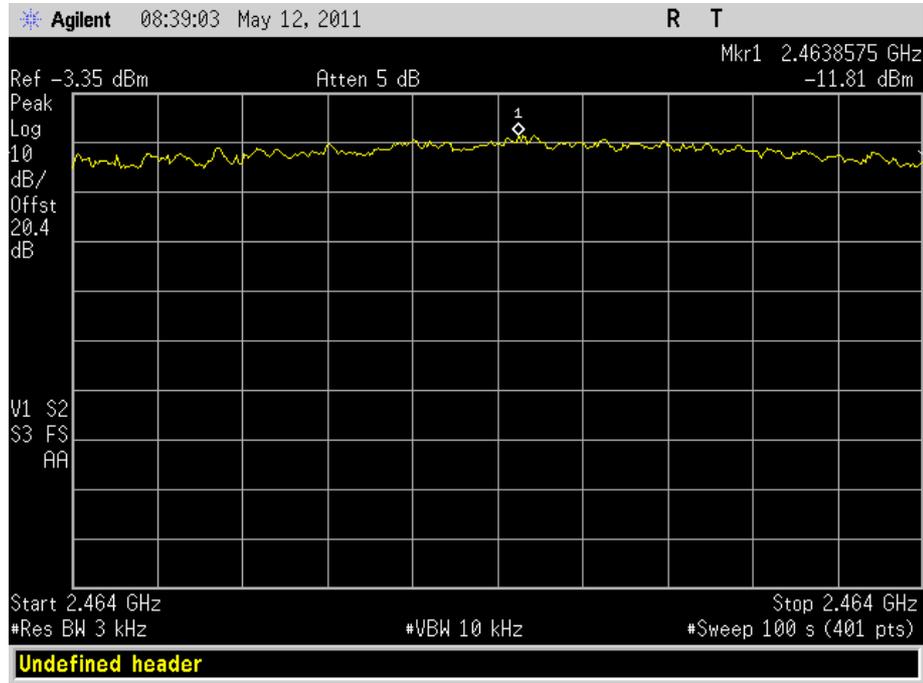


48 Mbps

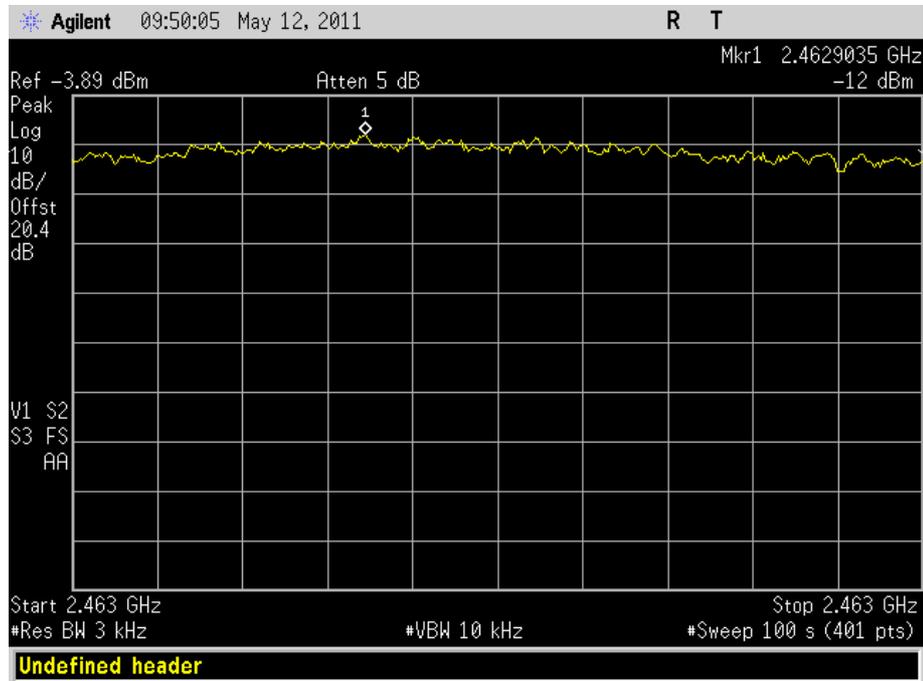



Product Service

54 Mbps

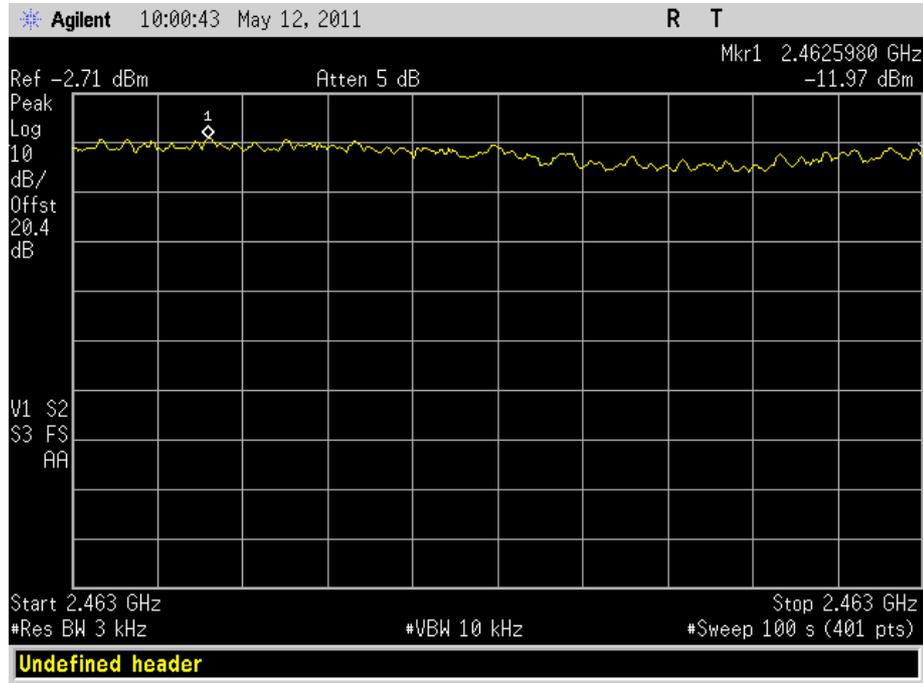



Product Service

Configuration 3 – Modes 1, 2 and 3


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412	6.5	-12.38
	13	-11.84
	19.5	-11.45
	26	-12.77
	39	-11.23
	52	-12.60
	58.5	-14.71
	65	-13.88
2437	6.5	-13.21
	13	-11.52
	19.5	-12.35
	26	-12.69
	39	-12.48
	52	-12.79
	58.5	-12.70
	65	-12.49
2462	6.5	-13.56
	13	-11.38
	19.5	-12.58
	26	-11.99
	39	-12.55
	52	-11.76
	58.5	-12.01
	65	-11.38




Product Service

2412 MHz

6.5 Mbps

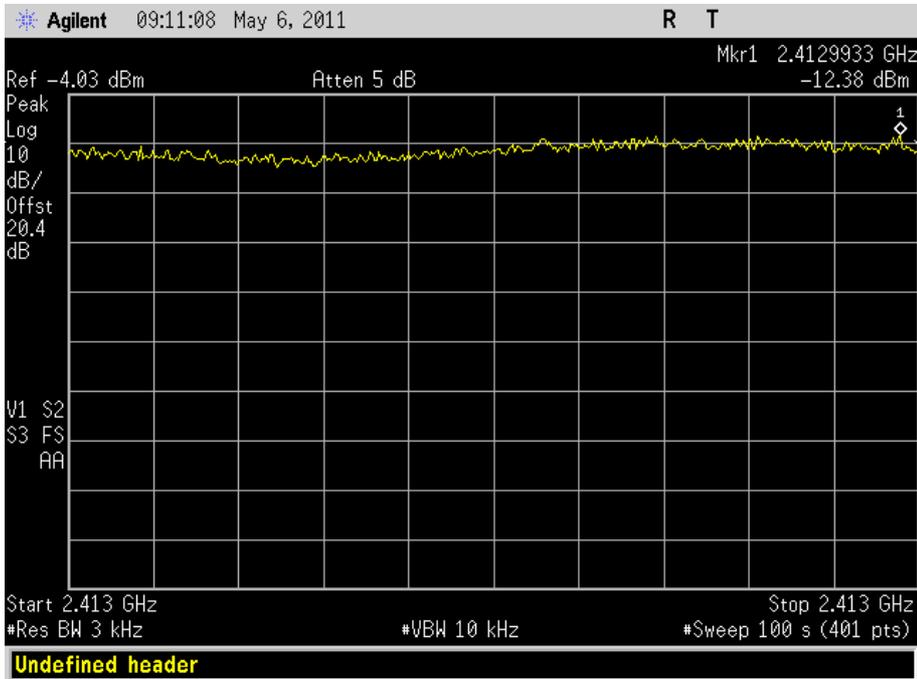


13 Mbps

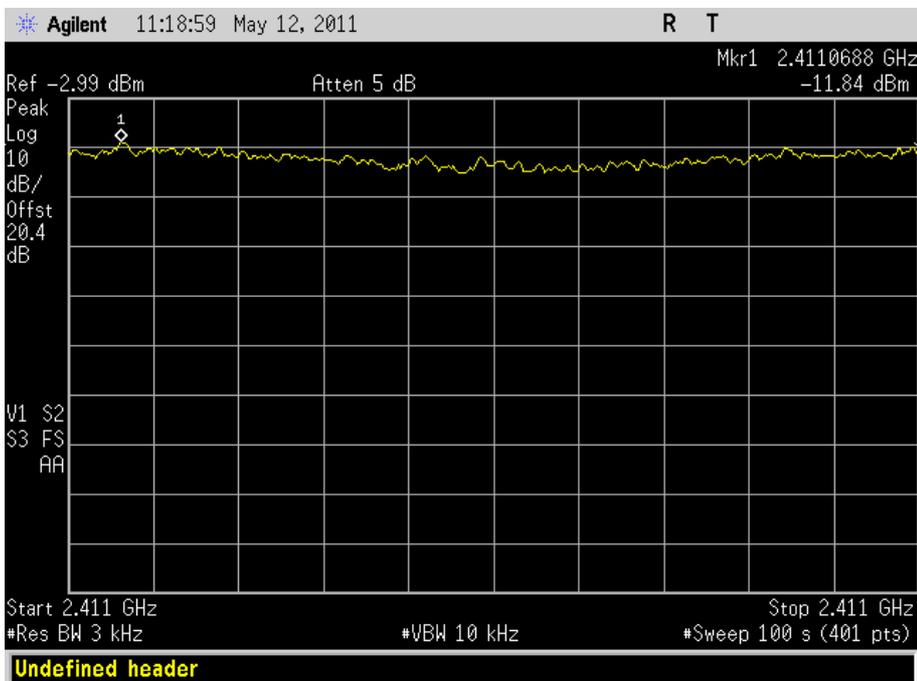




Product Service

19.5 Mbps

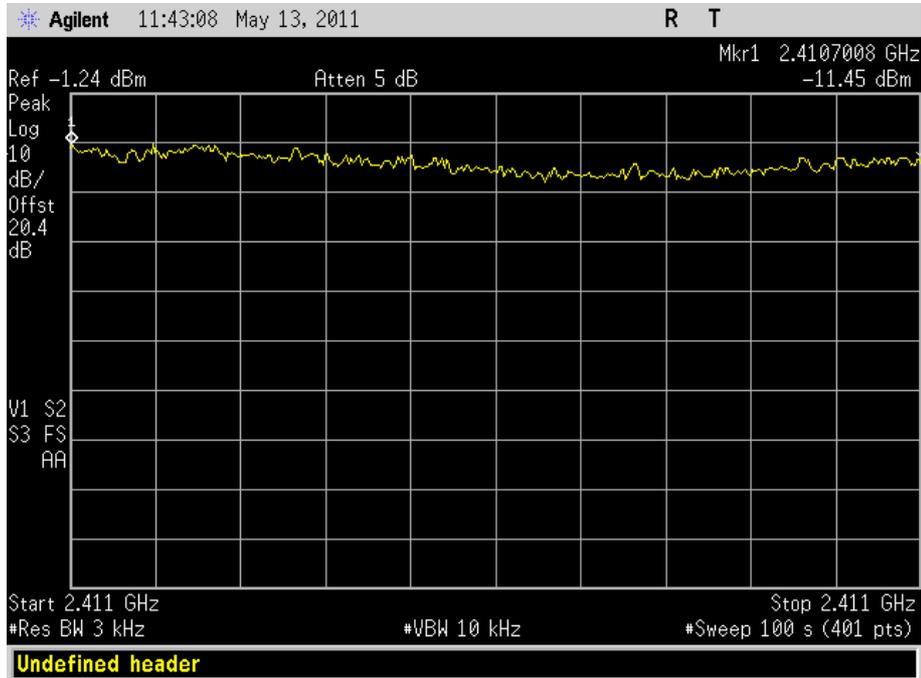


26 Mbps

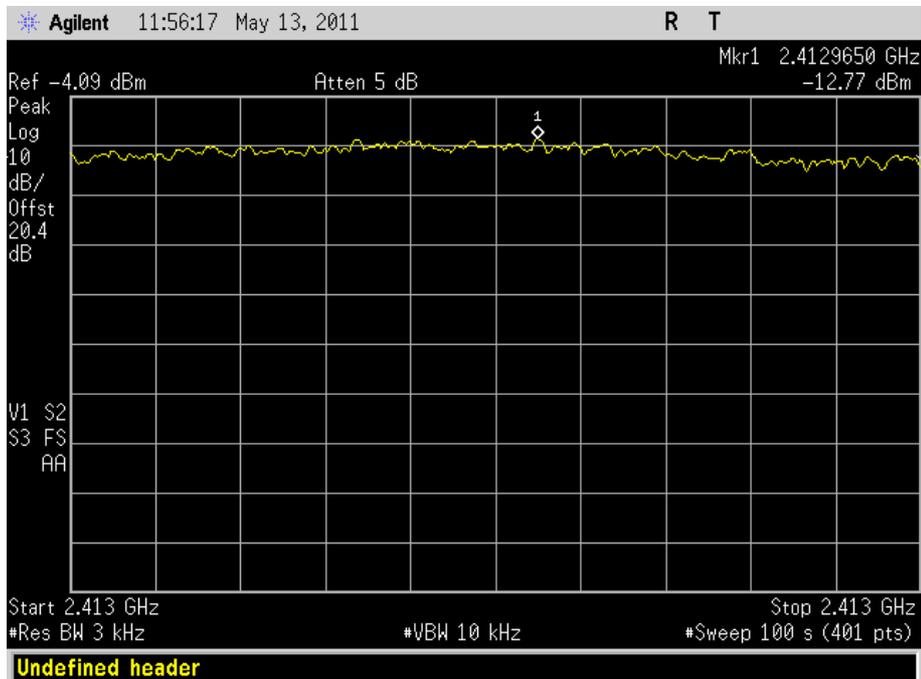




Product Service

39 Mbps

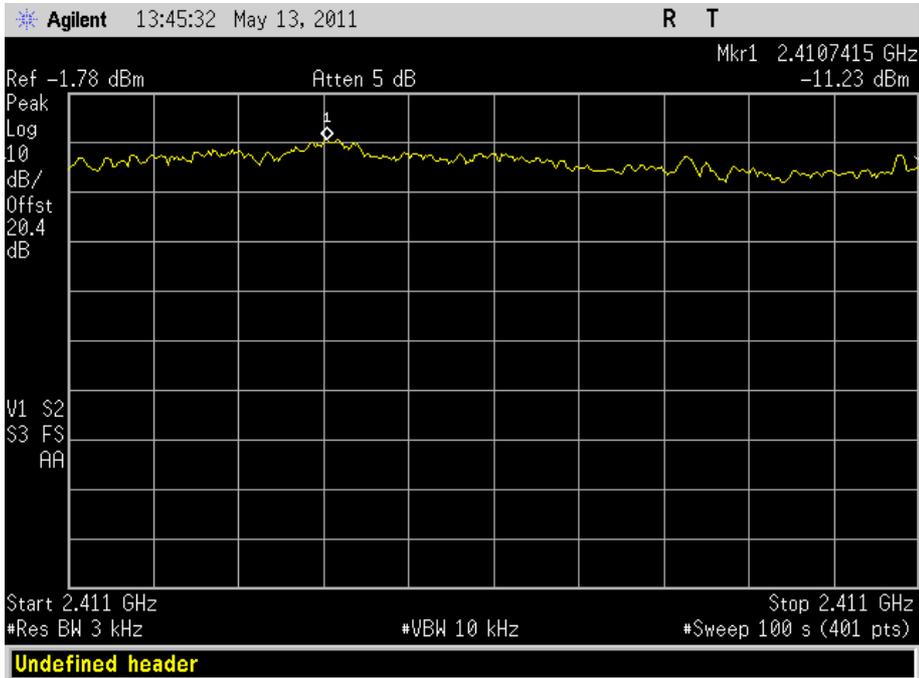


52 Mbps

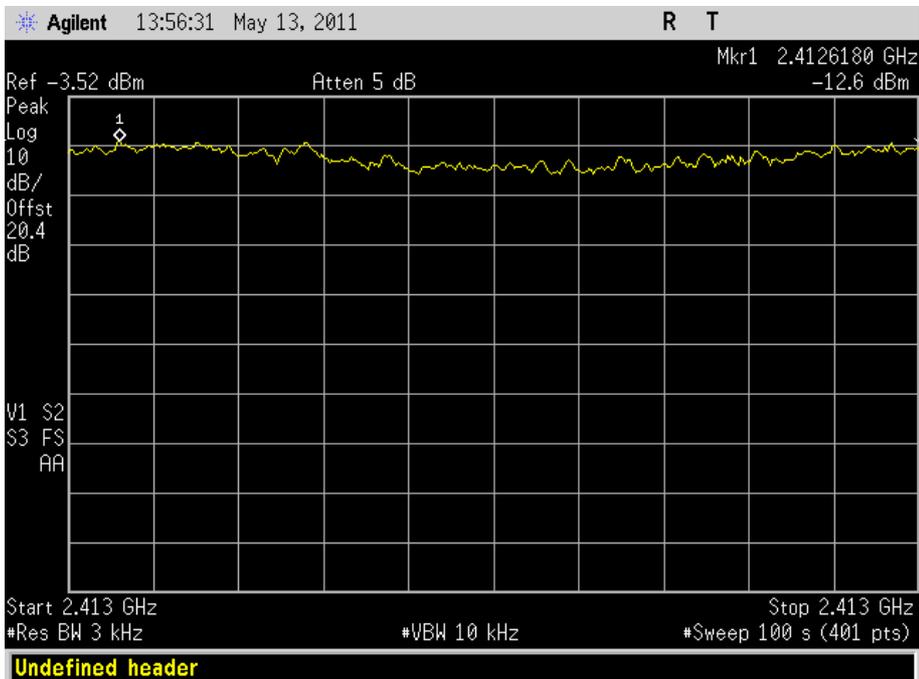




Product Service

58.5 Mbps

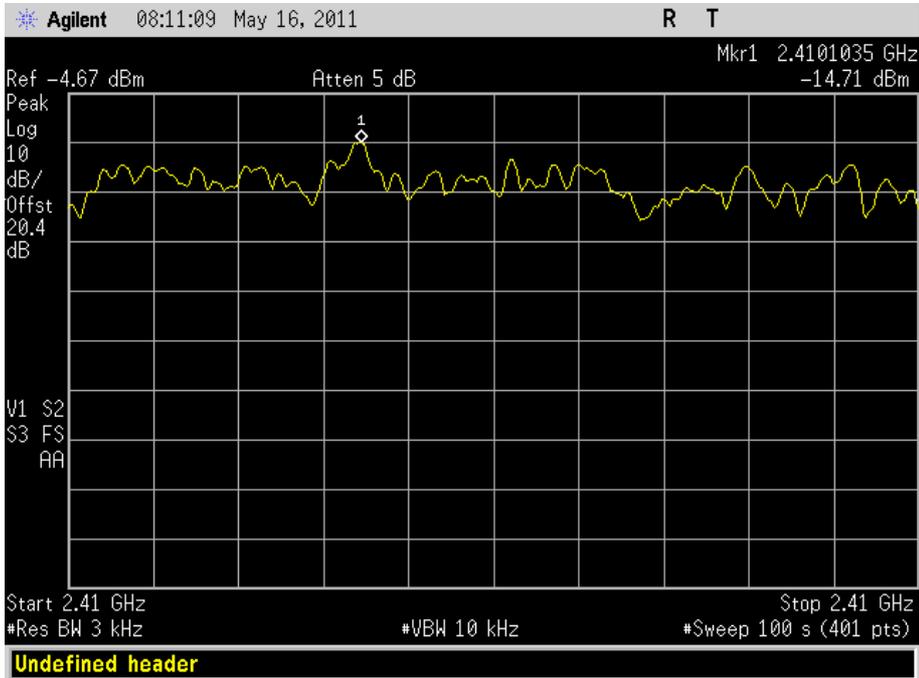

65 Mbps

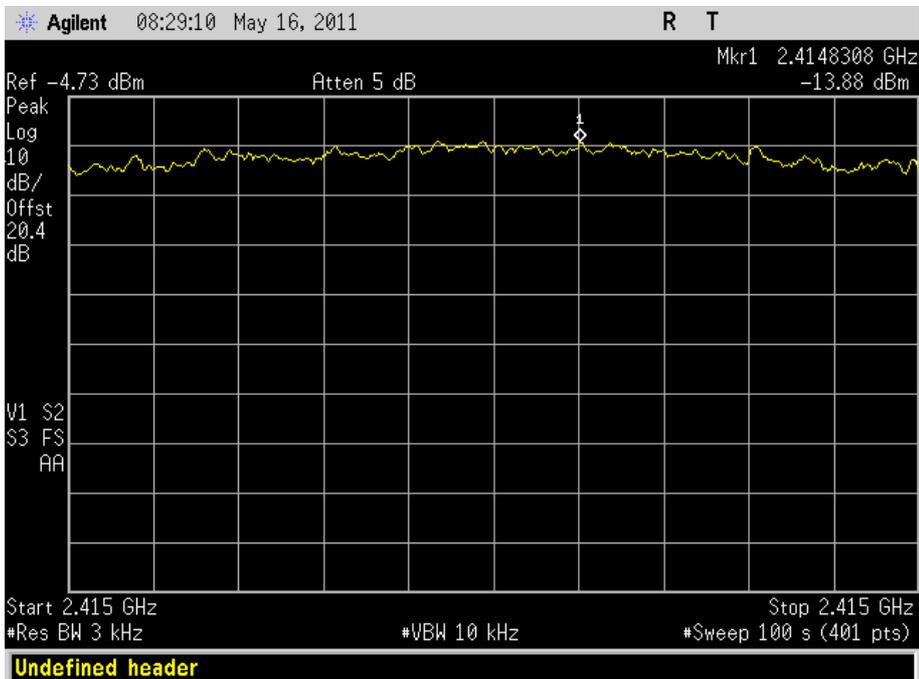





Product Service

2437 MHz

6.5 Mbps

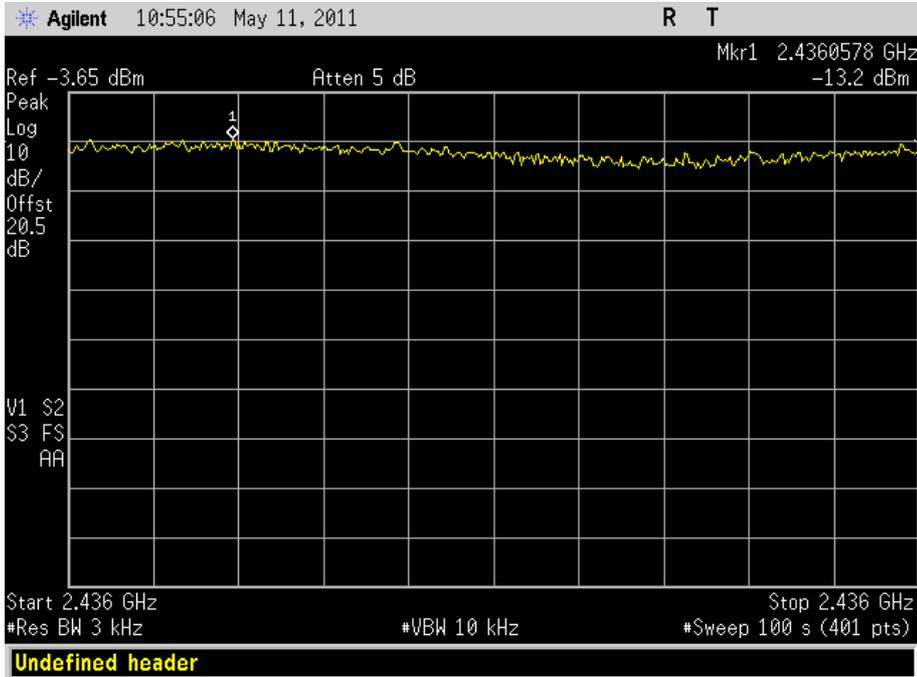


13 Mbps

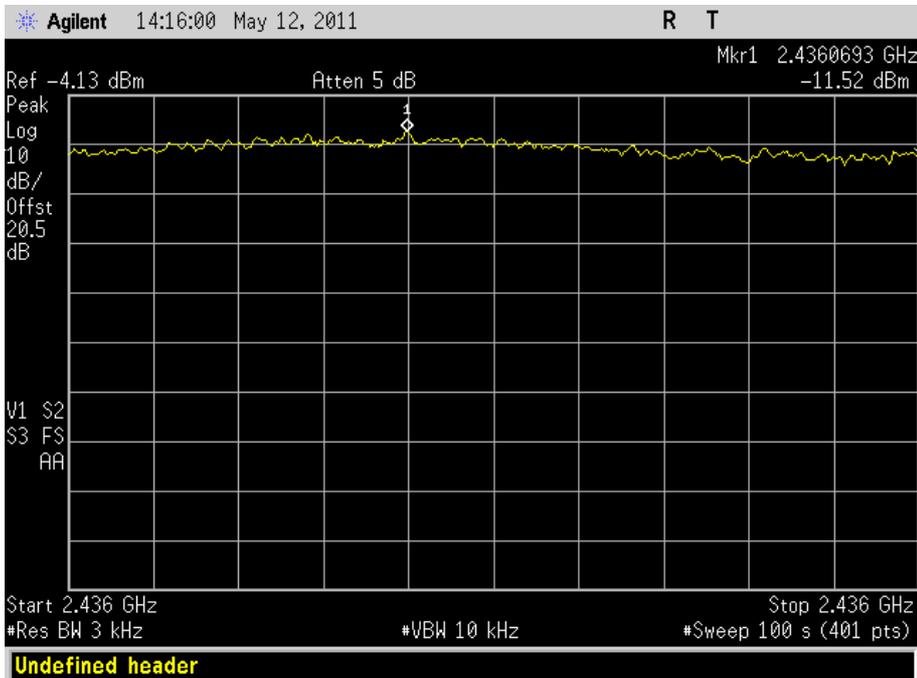




Product Service

19.5 Mbps

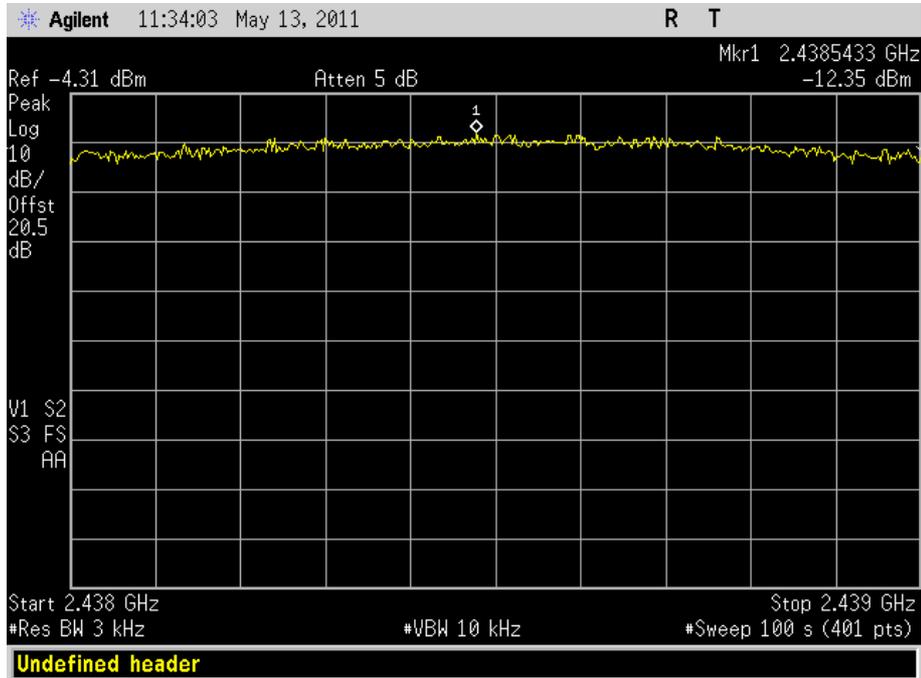


26 Mbps

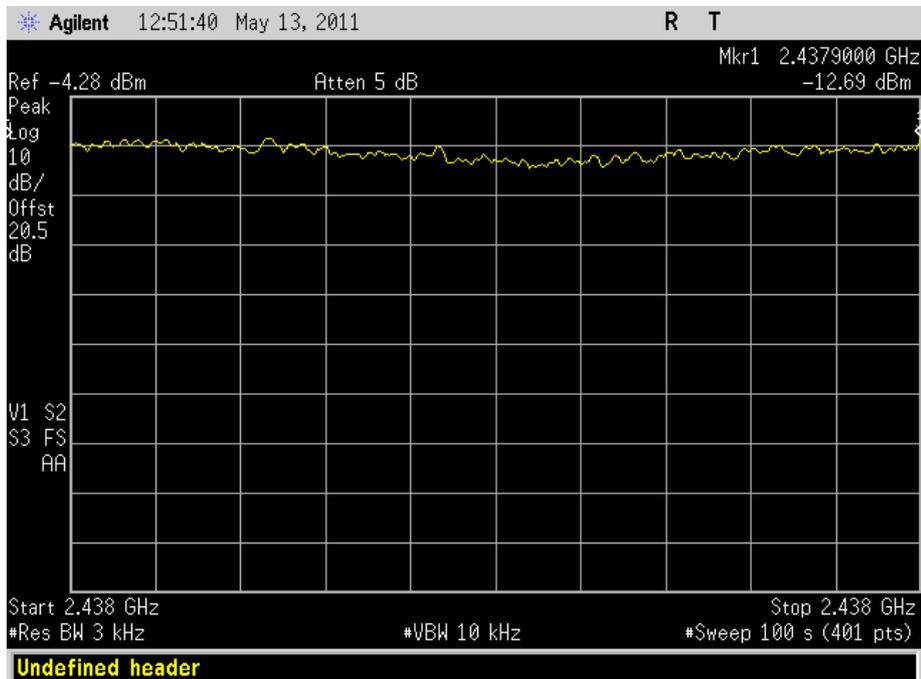




Product Service

39 Mbps

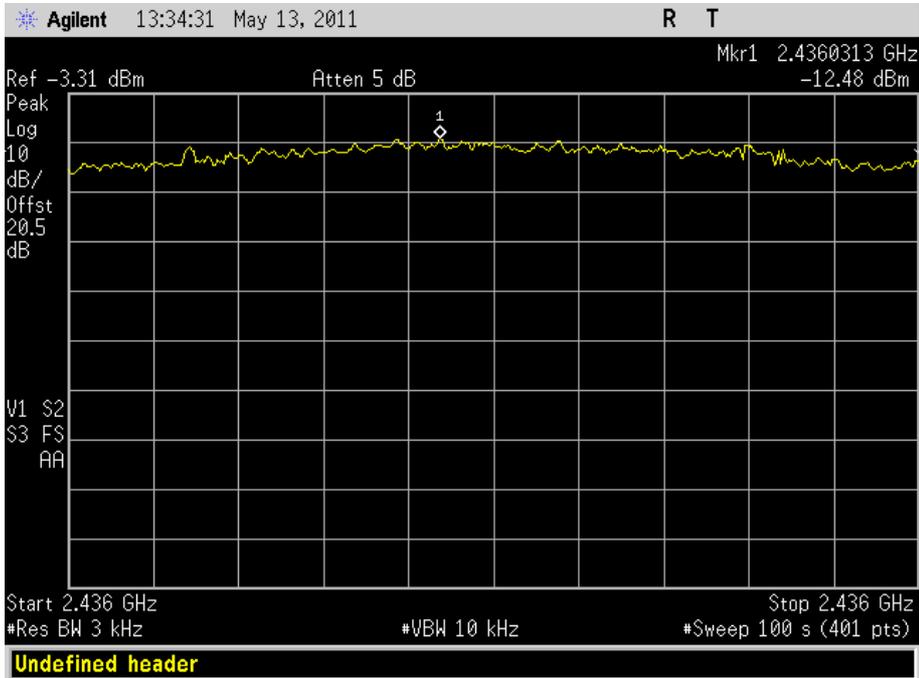


52 Mbps

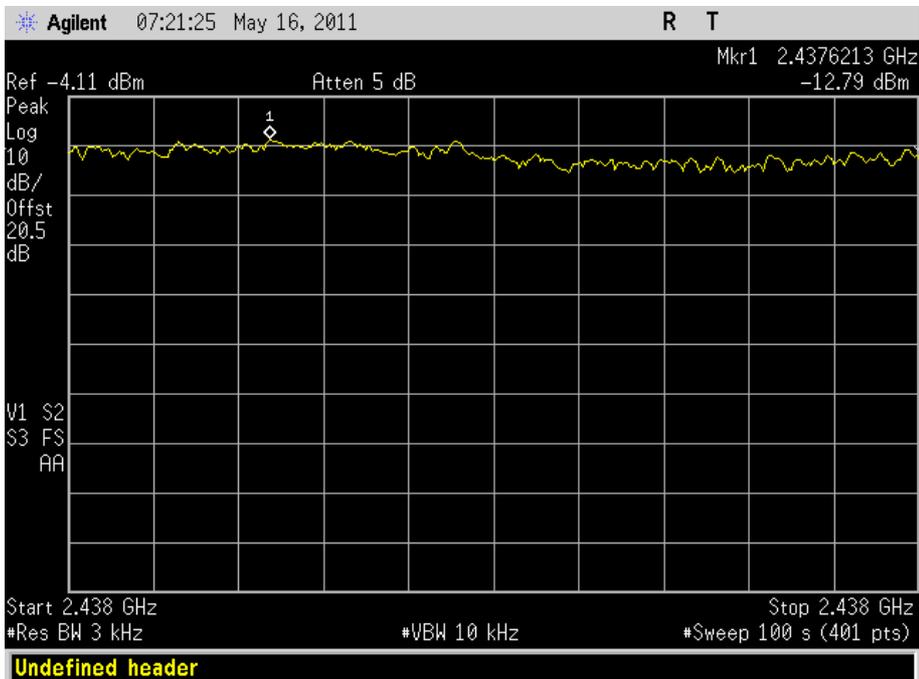




Product Service

58.5 Mbps

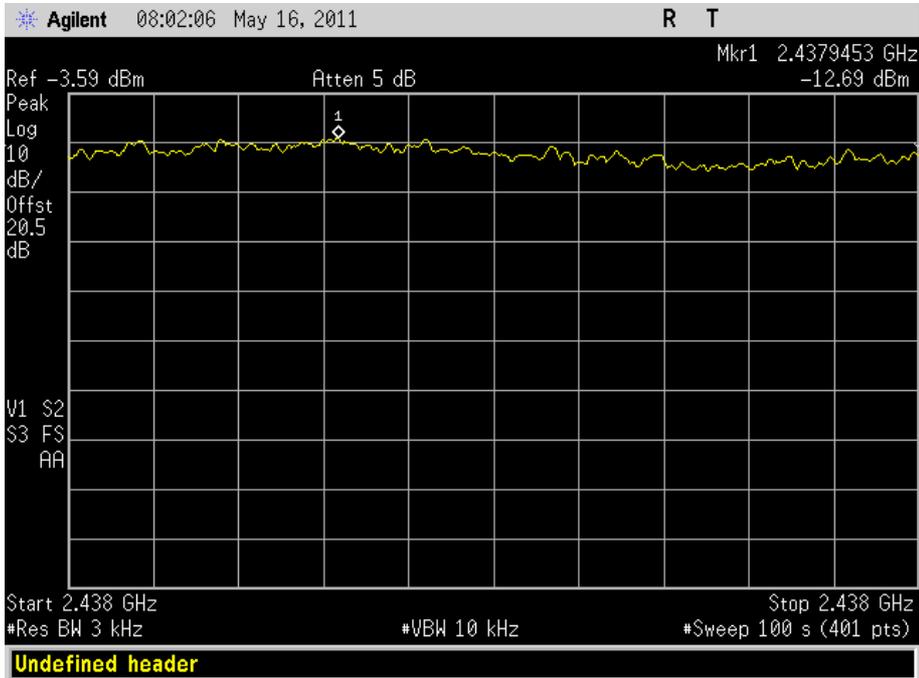

65 Mbps

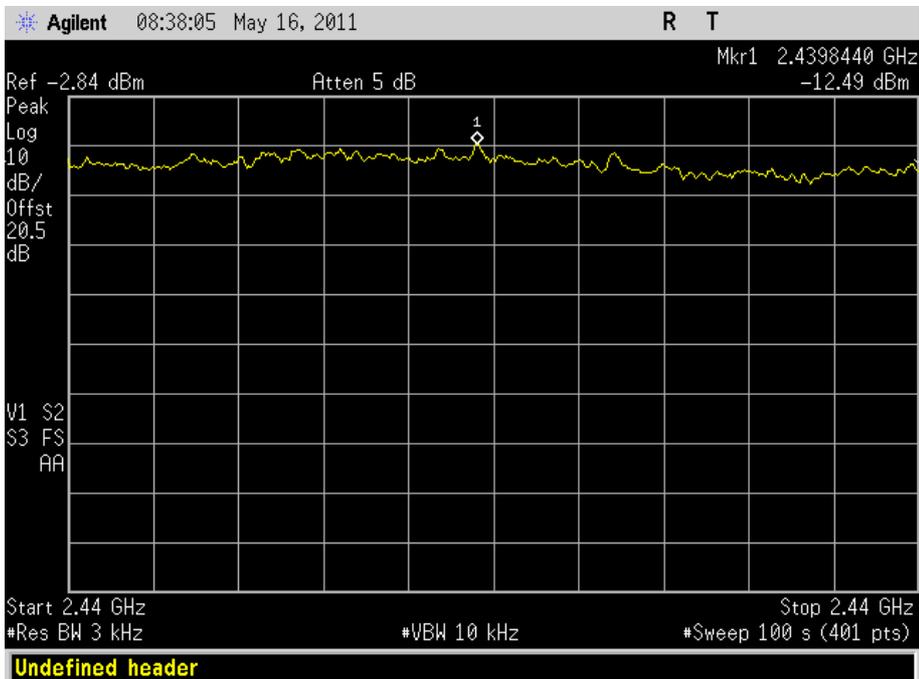





Product Service

2462 MHz

6.5 Mbps

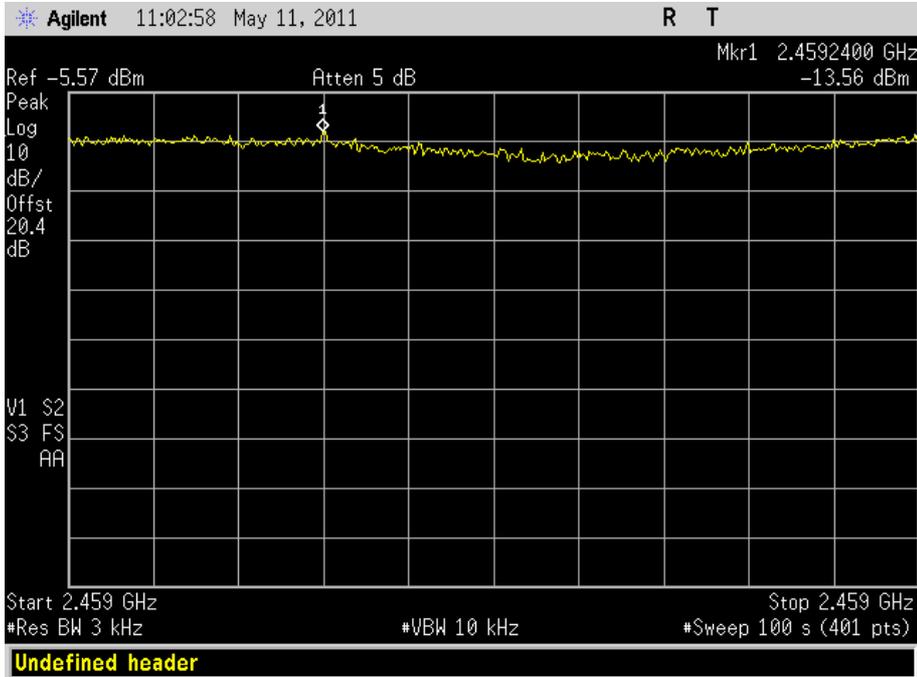


13 Mbps

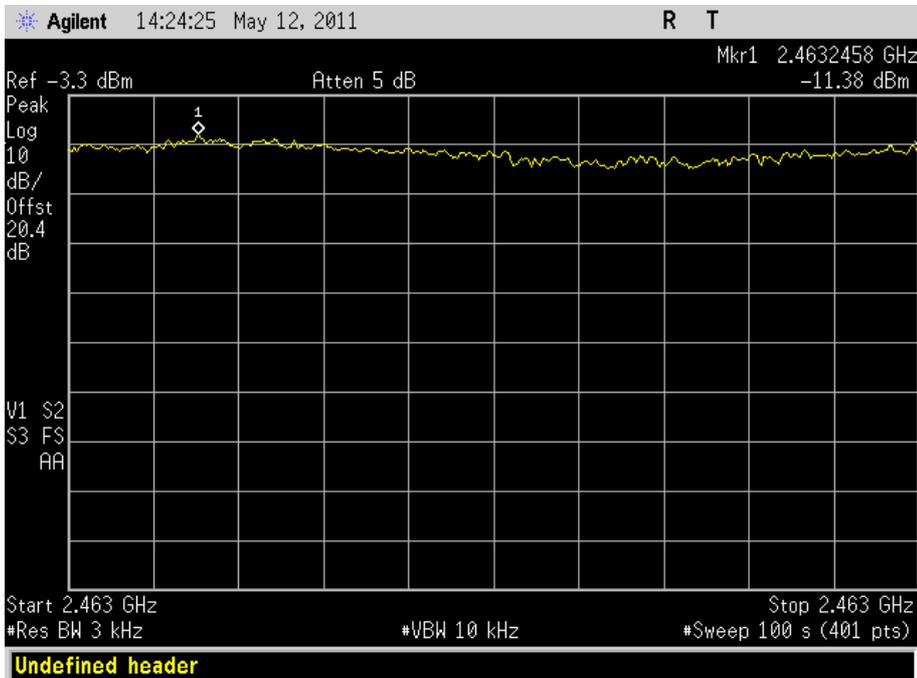




Product Service

19.5 Mbps

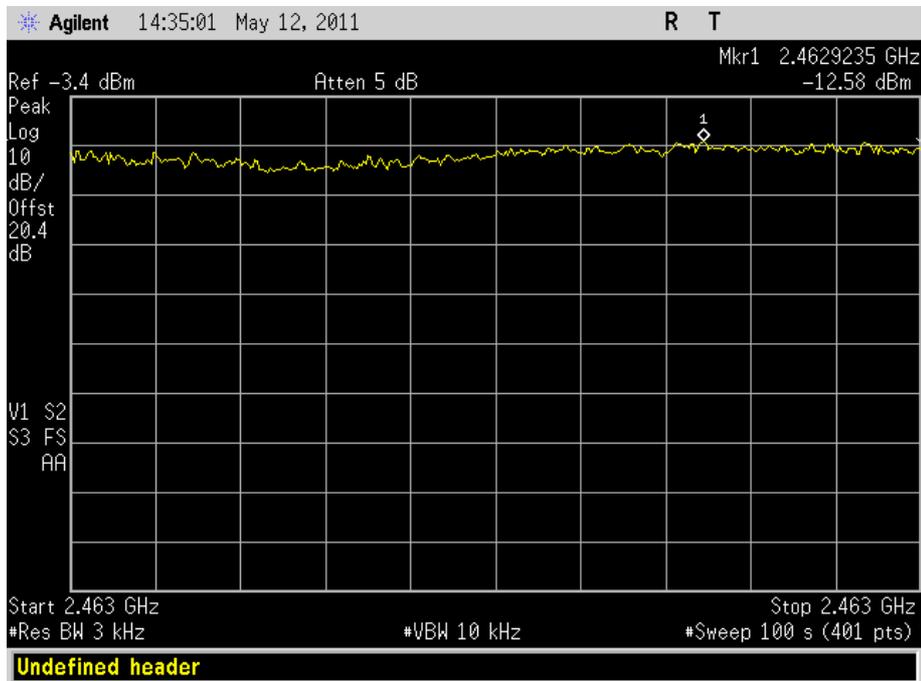


26 Mbps

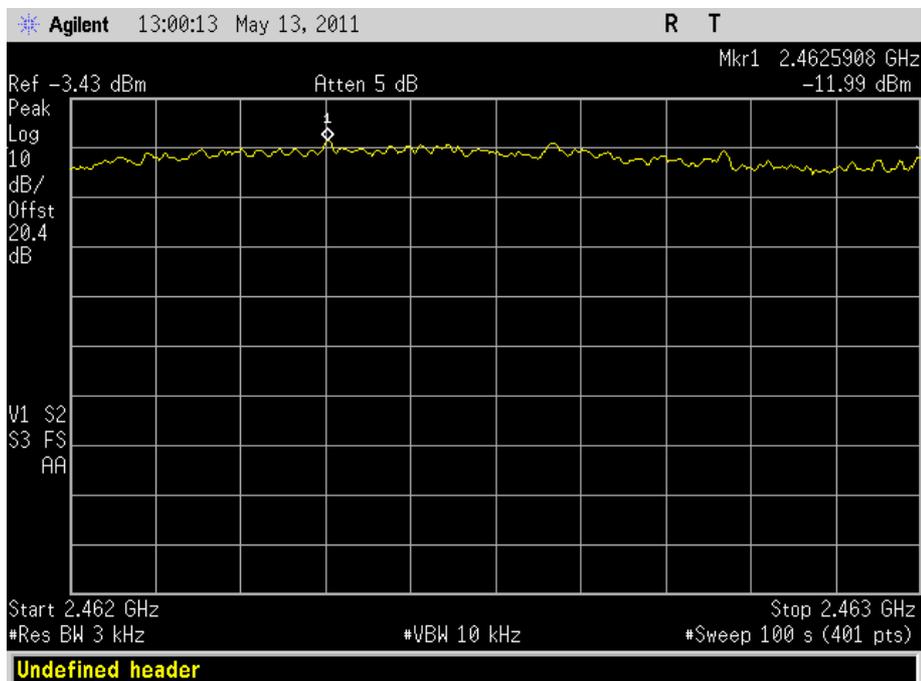




Product Service

39 Mbps

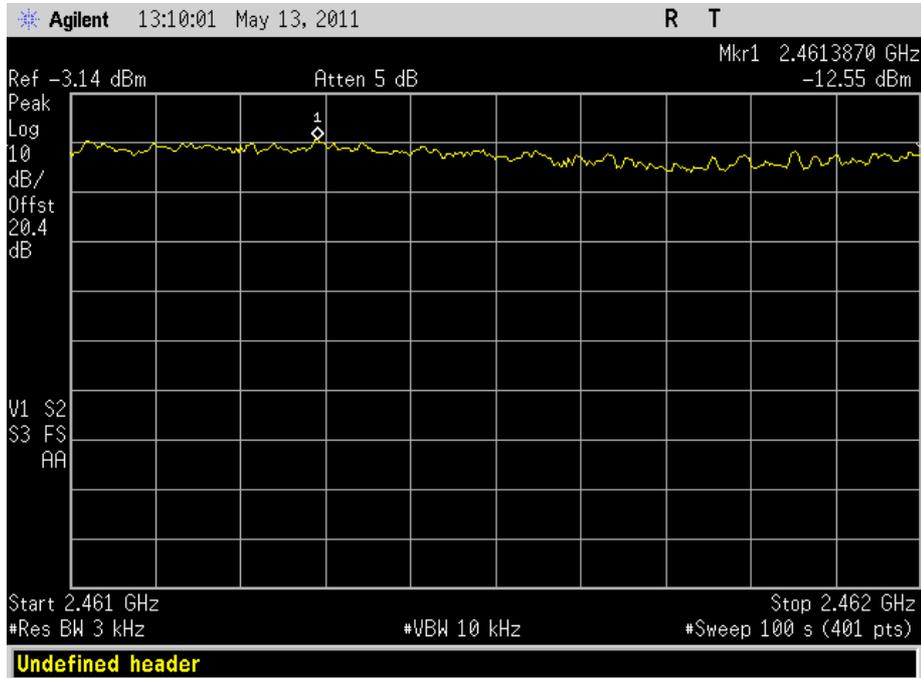


52 Mbps

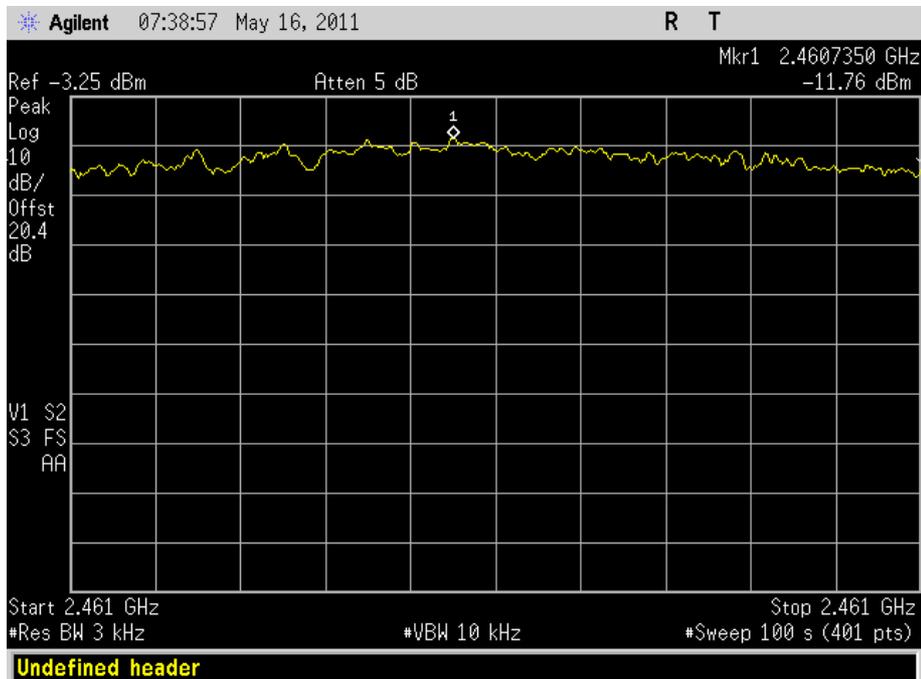




Product Service

58.5 Mbps

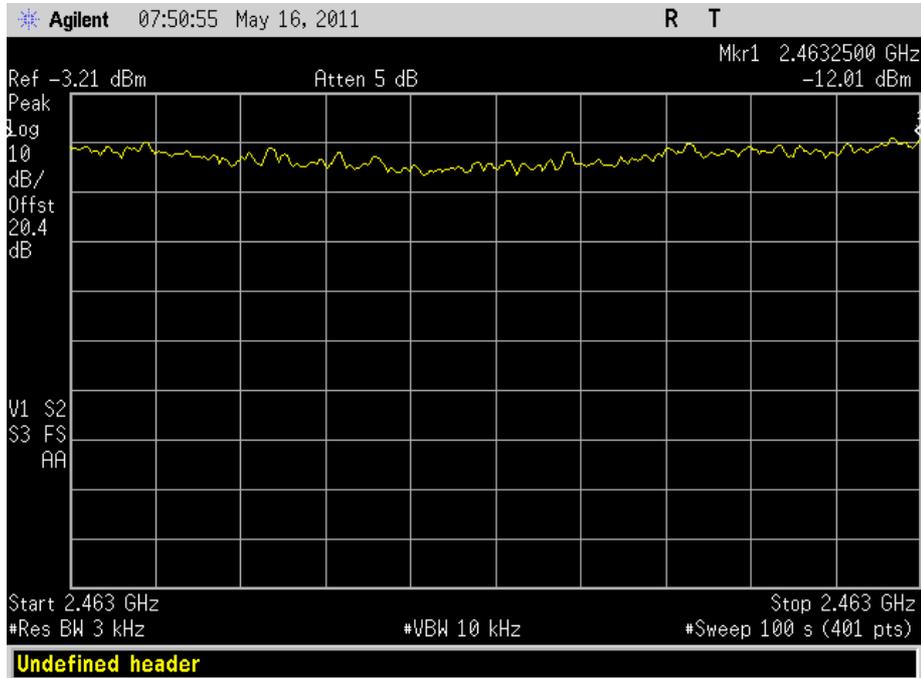

65 Mbps

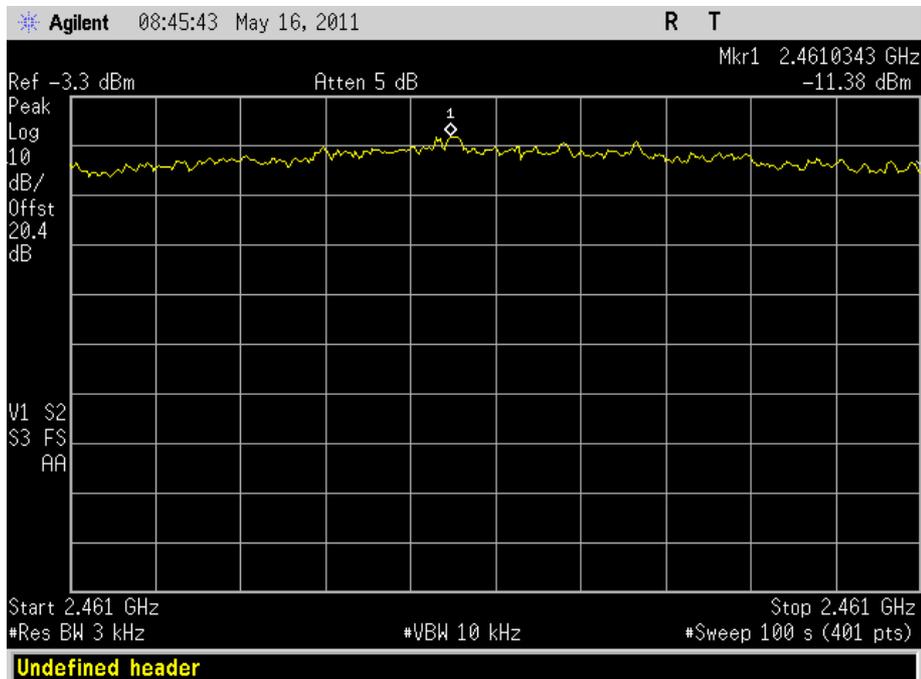

Limit Clause

The minimum 6 dB Bandwidth shall be at least 500 kHz.



Product Service

2.7 BAND EDGE EMISSIONS

2.7.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (d)

2.7.2 Equipment Under Test

CDMA SHX11, S/N: IMEI 004401113359901

2.7.3 Date of Test and Modification State

09 May 2011 - Modification State 0

2.7.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of ANSI C63.4.

The band edge measurements were performed in accordance with ANSI C63.10, Clause 6.9.3. The results were analysed to ensure compliance with restricted bands. The EUT was set to the lowest and highest operating frequencies.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 1
 - Mode 3
Configuration 2 - Mode 1
 - Mode 3
Configuration 2 - Mode 1
 - Mode 3

2.7.6 Environmental Conditions

09 May 2011
Ambient Temperature 19.5°C
Relative Humidity 49.0%




2.7.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15C for Band Edge Emissions.

The test results are shown below.

Configuration 1 - Mode 1

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.412	Horizontal	51.7	74.0	47.2	54.0

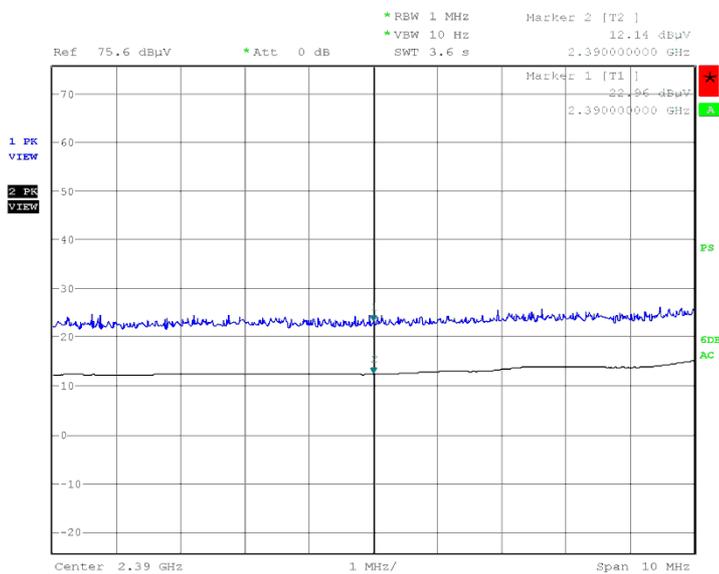


Date: 10.MAY.2011 16:01:11



Configuration 1 - Mode 3

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.462	Horizontal	51.9	74.0	47.2	54.0

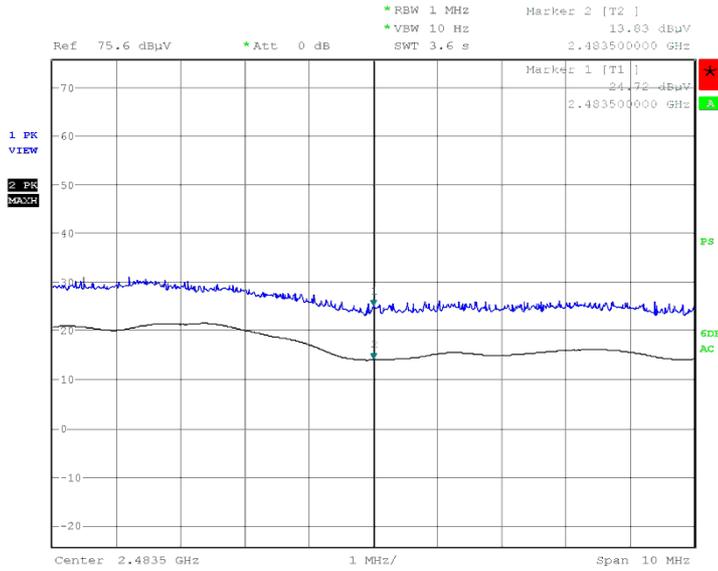


Date: 10.MAY.2011 18:35:39



Configuration 2 - Mode 1

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.412	Horizontal	65.1	74.0	53.9	54.0

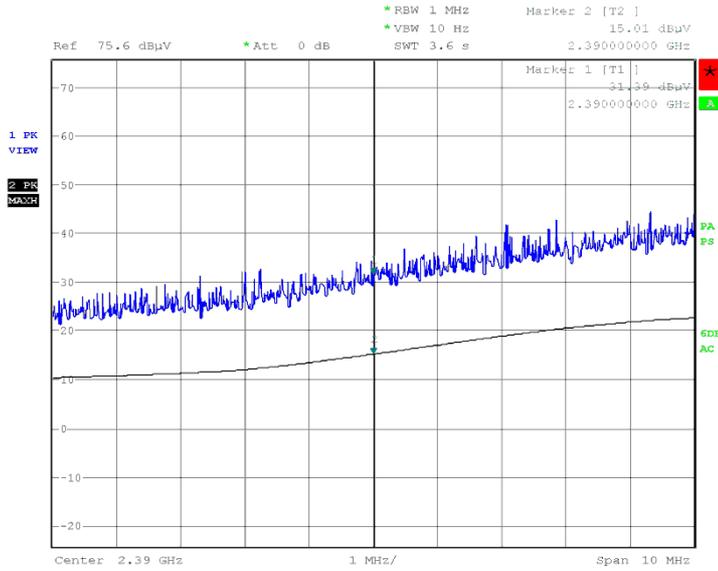


Date: 10.MAY.2011 19:44:38



Configuration 2 - Mode 3

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.462	Horizontal	62.8	74.0	51.1	54.0

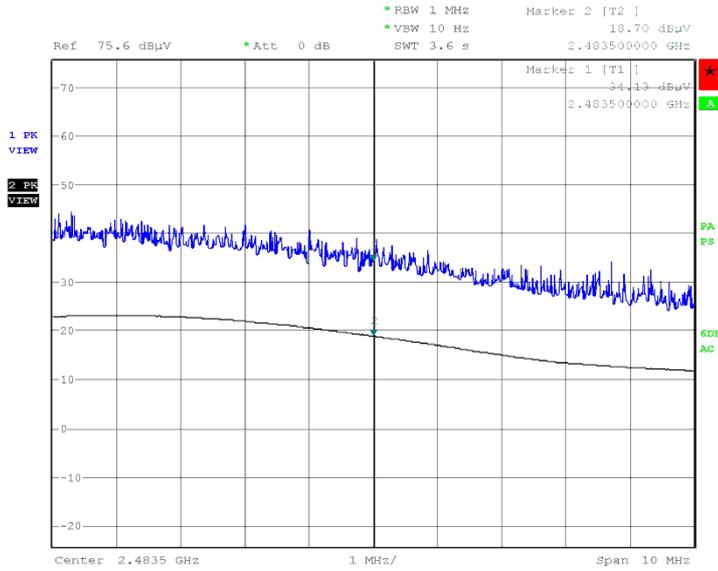


Date: 10.MAY.2011 18:48:04



Configuration 3 - Mode 1

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.412	Horizontal	63.4	74.0	52.5	54.0

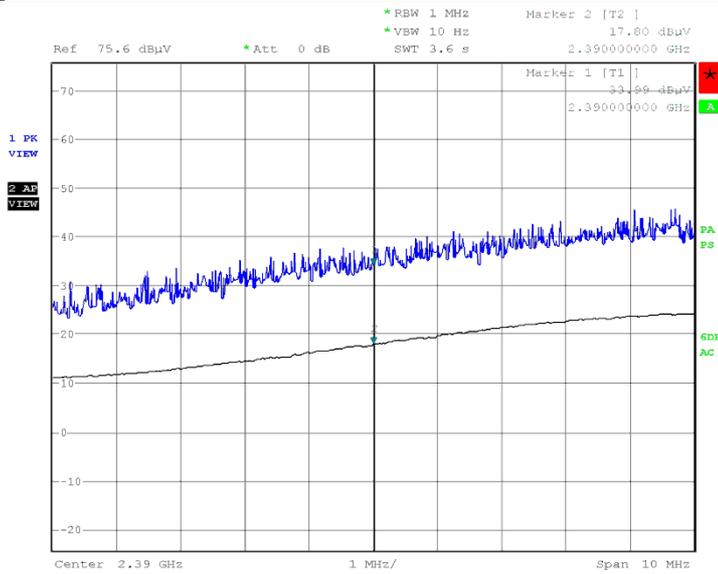


Date: 10.MAY.2011 19:55:55



Configuration 3 - Mode 3

Freq in GHz	Polarisation	Final Peak dBµV/m	Peak Limit dBµV/m	Final Average dBµV/m	Average Limit dBµV/m
2.462	Horizontal	71.1	74.0	52.9	54.0

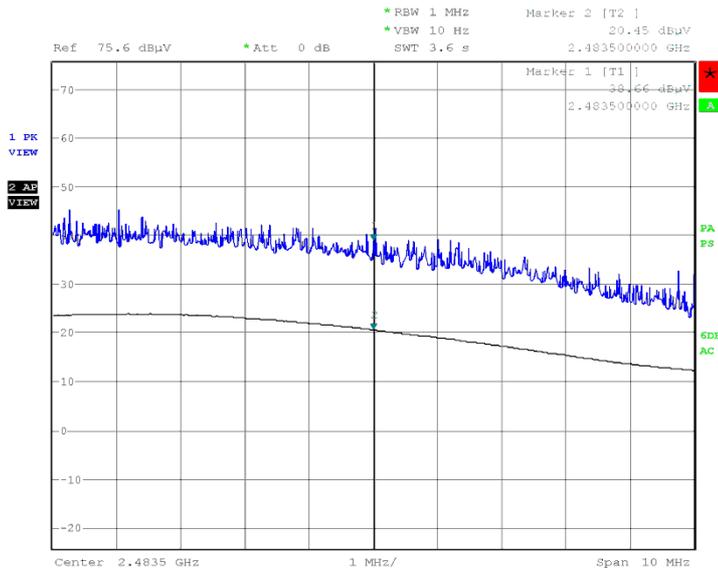

Date: 10.MAY.2011 20:12:49



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1– 6dB Bandwidth					
Termination 50ohm/50W	Bird	8085	389	12	3-Sep-2011
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Spectrum Analyser	Agilent	E7405A	1410	12	29-Mar-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	3-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygrometer	Rotronic	A1	2677	12	20-Jan-2012
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Signal Generator, 9kHz to 3GHz	Rohde & Schwarz	SMA 100A	3494	12	25-Jan-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Jan-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012
Section 2.2, 2.4 and 2.7- Radiated Emissions (Enclosure Port), EIRP Peak Power and Band Edge Emissions					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	12-Nov-2011
Antenna (Bilog)	Schaffner	CBL6143	287	24	19-Jan-2012
Antenna (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	2-Aug-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	15-Sep-2011
Pre-Amplifier	Phase One	PSO4-0087	1534	12	22-Sep-2011
Screened Room (5)	Rainford	Rainford	1545	24	3-Feb-2014
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Turntable/Mast Controller	EMCO	2090	1607	-	TU
Comb Generator	Schaffner	RSG1000	3034	-	TU
Amplifier (1 - 8GHz)	Phase One	PS06-0060	3175	12	2-Jul-2011
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	9-Sep-2011
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	14-Apr-2012
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	10-Aug-2011
Tilt Antenna Mast	mature GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	mature GmbH	NCD	3917	-	TU



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.3 - Maximum Peak Conducted Output Power					
Antenna (Double Ridge Guide)	EMCO	3115	34	12	17-Jul-2011
Spectrum Analyser	Rohde & Schwarz	FSEM	37	12	18-Apr-2012
Radiocommunications Tester	Rohde & Schwarz	CMU 200	39	12	18-Nov-2011
Power Meter	Hewlett Packard	436A	94	12	11-Oct-2011
Peak Power Analyser	Hewlett Packard	8990A	107	12	11-Feb-2012
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	12-Nov-2011
Power Sensor	Hewlett Packard	8484A	420	12	6-Sep-2011
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Spectrum Analyser	Agilent	E7405A	1410	12	29-Mar-2012
Attenuator	Hewlett Packard	11708A	1507	12	17-Dec-2011
Screened Room (5)	Rainford	Rainford	1545	24	3-Feb-2014
Screened Room (8)	Rainford	Rainford	1548	-	TU
Turntable/Mast Controller	EMCO	2090	1609	-	TU
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	3-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygrometer	Rotronic	A1	2677	12	20-Jan-2012
Power Sensor	Hewlett Packard	84812A	2743	-	TU
Hygrometer	Rotronic	I-1000	2882	12	10-Jul-2011
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	27-Apr-2012
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	12-Aug-2011
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	2-Jun-2011
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2011
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	9-Sep-2011
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Jan-2012
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	10-Aug-2011
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012
Mast Controller	maturo Gmbh	NCD	3917	-	TU



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.5 - Spurious Emissions					
Radiocommunications Tester	Rohde & Schwarz	CMU 200	39	12	18-Nov-2011
Termination 50ohm/50W	Bird	8085	389	12	3-Sep-2011
Multimeter	Iso-tech	IDM-101	466	12	2-Mar-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	22-Sep-2011
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jun-2011
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	11-Sep-2011
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	3-Sep-2011
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
High Pass Filter (4GHz)	RLC Electronics	F-100-4000-5-R	2773	12	6-Sep-2011
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	22-Dec-2011
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	8-Feb-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	28-Jan-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012
Section 2.6 - Peak Power Spectral Density					
Termination 50ohm/50W	Bird	8085	389	12	3-Sep-2011
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Spectrum Analyser	Agilent	E7405A	1410	12	29-Mar-2012
Programmable Power Supply	Iso-tech	IPS 2010	2437	-	O/P Mon
Hygrometer	Rotronic	A1	2677	12	20-Jan-2012
Attenuator (3dB)	Suhner	6803.17.B	3026	12	24-Mar-2012
Signal Generator, 9kHz to 3GHz	Rohde & Schwarz	SMA 100A	3494	12	25-Jan-2012
Combiner/Splitter	Weinschel	1506A	3879	12	22-Feb-2012

TU – Traceability Unscheduled

O/P Mon – Output monitored using calibrated equipment.



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Conducted Emissions, LISN	150kHz to 30MHz Amplitude	3.2dB*
Conducted Emissions, ISN	150kHz to 30MHz Amplitude	2.1dB
Substitution Antenna, Radiated Field	30MHz to 18GHz Amplitude	2.6dB
Discontinuous Interference	150kHz to 30MHz Amplitude	3.0dB*
Interference Power	30MHz to 300MHz Amplitude	3.0dB*
Radiated E-Field Susceptibility	10MHz to 6GHz Test Amplitude	2.0dB†
Conducted Susceptibility RF	50kHz to 1000MHz Amplitude	3.1dB•
	EM Clamp Method of Test	1.2dB•
	CDN Method of Test	1.1dB•
	BCI Clamp Method of Test	1.2dB•
Conducted Susceptibility LF	DC to 150kHz	1.0%†
Power Frequency Magnetic Field	50Hz/60Hz Amplitude	0.45%
Magnetic Emissions	9kHz to 30MHz Amplitude	3.4dB*
Magnetic Field/Flux iaw EN 50366	10Hz to 400kHz	2.64%
Harmonics and Flicker	The test was applied using proprietary equipment that meets the requirements of EN 61000-3-2 and EN 61000-3-3	—
Mains Voltage Variations and Interrupts	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-11	—
Fast Transient Burst	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-4	—
Electrostatic Discharge	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-2	—
Surge	The test was applied using proprietary equipment that meets the requirements of EN 61000-4-5	—
Vehicle Transients	The test was applied using proprietary equipment that meets the requirements of ISO 7637-1 and 2	—
Compass Safe Distance	Azimuth Accuracy	0.10°
Channel Occupancy/Separation	19.1kHz	N/A
Maximum Output Power	Not Applicable	±0.5dB
Number of Channels	Not Applicable	N/A
20dB Bandwidth	19.1kHz	±0.5dB

Worst case error for both Time and Frequency measurement 12 parts in 10⁶.

- * In accordance with CISPR 16-4-2
- † In accordance with UKAS Lab 34
- In accordance with EN61000-4-6



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service Limited

© 2011 TÜV SÜD Product Service Limited