



EMI TEST REPORT

Test Report No. : 31JE0237-HO-B

Applicant : SHARP CORPORATION
Type of Equipment : Cellular Phone
Model No. : SH80F
FCC ID : APYHRO00156
Test standard : FCC Part 15 Subpart B 2010 Class B
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test:

July 25, 2011

Representative test engineer:

Takeshi Choda
Engineer of WiSE Japan,
UL Verification Service

Approved by:

Masanori Nishiyama
Leader of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	7
SECTION 5: Conducted Emission	9
SECTION 6: Radiated Emission	10
APPENDIX 1: Photographs of test setup.....	11
Conducted Emission	11
Radiated Emission	12
Worst Case Position (Horizontal: X-axis/ Vertical:X-axis)	13
APPENDIX 2: Data of EMI test	14
Conducted Emission	14
Radiated Emission	16
APPENDIX 3: Test instruments	20

SECTION 1: Customer information

Company Name : SHARP CORPORATION
Address : 2-13-1 Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192 Japan
Telephone Number : +81-82-420-1825
Facsimile Number : +81-82-420-1829
Contact Person : Kazuo Sugimoto

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Cellular Phone
Model No. : SH80F
Serial No. : Refer to Section 4, Clause 4.2
Receipt Date of Sample : July 25, 2011
Country of Mass-production : China
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product description

Feature of EUT : Dual-band (900/2000)WCDMA & Tri-band GSM(900/1800/1900) Dual
mode Cellular Phone / Bluetooth/W-LAN & 1.5GHz Band Satellite
Receiver (GPS) enable
- GSM (EU:900/1800M, 1900M)
- WCDMA (EU:2000M, 900M)
Clock frequencies in the system : CPU: 1.4GHZ
Source oscillation: 48MHz

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test Specification : FCC Part 15 Subpart B: 2010, final revised on December 6, 2010 and effective January 5, 2011

Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Class B	N/A	[QP] 14.3dB 0.15474MHz, N [AV] 16.6dB 0.15474MHz, N	Complied
Radiated emission	ANSI C63.4: 2003 8. Radiated emission measurements	Class B	N/A	5.8dB 798.001MHz, Vertical, QP	Complied

*Note: UL Japan, Inc's EMI Work Procedure 13-EM-W0420.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Conducted emission (+dB)
	150kHz-30MHz
No.1	3.1dB
No.2	3.3dB
No.3	3.7dB
No.4	3.2dB

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	3.5dB	5.1dB	5.2dB	4.8dB	5.1dB	4.4dB	4.3dB
No.2	4.0dB	5.1dB	5.2dB	4.8dB	5.0dB	4.3dB	4.2dB
No.3	4.2dB	4.7dB	5.2dB	4.8dB	5.0dB	4.5dB	4.2dB
No.4	4.0dB	5.0dB	5.1dB	4.8dB	5.0dB	5.1dB	4.2dB

*3m/1m/0.5m = Measurement distance

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating modes

The mode(s) : 1) USB Data Com Mode
The USB data is communicated between EUT and Personal computer (Pair of EUT).
2) Standby Mode
Standby state for EUT.

4.2 Configuration and peripherals

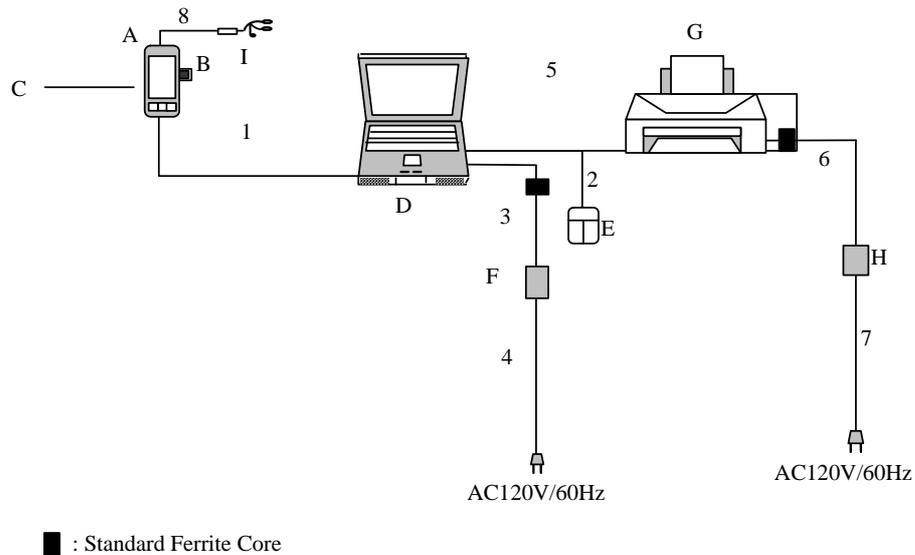

*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Cellular Phone	SH80F	IMEI00441113528638	Sharp Corporation	EUT
B	Micro SD Memory Card	Samsung 4GB	-	Samsung	-
C	Lithium-Ion Battery	Battery Pack SH30	-	Sharp Corporation	EUT
D	Personal Computer	PP11L	CN-0D4571-48643-58P-1053	DELL	-
E	Mouse	M-UAG120	G83C0007F310	Toshiba	-
F	AC Adapter (PC)	PA-1650-05D2	CN-0F7970-71615-77H-0D63	DELL	-
G	Printer	C6410A	SG8BA1W18J	Hewlett Packard	-
H	AC Adapter (Printer)	AT3018A-0101	C4557-60004	Hewlett Packard	-
I	Stereo Headset	542943	-	Sharp Corporation	EUT

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Data Cable	0.80	Shielded	Shielded	-
2	Mouse Cable	0.71	Shielded	Shielded	-
3	DC Power Cable (PC)	1.80	Unshielded	Unshielded	-
4	AC Power Cable (PC)	0.90	Unshielded	Unshielded	-
5	Printer Cable	1.80	Shielded	Shielded	-
6	DC Power Cable (printer)	2.00	Unshielded	Unshielded	-
7	AC Power Cable (printer)	1.80	Unshielded	Unshielded	-
8	Headset Cable	1.45	Unshielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

5.1 Operating environment

Test place : No.1 semi anechoic chamber.
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from the LISN/AMN and excess AC cable was bundled in center. I/O cables that were connected to the other peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/AMN to the input power source. All unused 50 ohm connectors of the LISN/AMN were resistivity terminated in 50 ohm when not connected to the measuring equipment. Photographs of the set up are shown in Appendix 1.

Frequency range : 0.15 MHz-30MHz
EUT position : Table top
EUT operation mode : See Clause 4.1

5.3 Test procedure

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT within a semi anechoic chamber. The EUT was connected to a Line Impedance Stabilization Network (LISN)/ Artificial Mains network (AMN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector.

The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : Quasi-Peak and Average
IF Bandwidth : 9 kHz

5.4 Test result

Summary of the test results: Pass

Date: July 25, 2011

Test engineer: Takeshi Choda

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Radiated Emission

6.1 Operating environment

Test place : No.1 semi anechoic chamber
Temperature : See data
Humidity : See data

6.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The EUT was set on the edge of the tabletop.
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

6.3 Test conditions

Frequency range : 30MHz-300MHz (Biconical antenna) / 300MHz-1000MHz (Logperiodic antenna)
1000MHz - 7000MHz (Horn antenna)
Test distance : 3m
EUT position : Table top
EUT operation mode : See Clause 4.1

6.4 Test procedure

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.
The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
IF Bandwidth	QP: BW 120kHz	PK: RBW:1MHz/VBW: 3MHz AV *1): RBW:1MHz/VBW:10Hz

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

- The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at representative X-axis since no difference was found among each position.

6.5 Test result

Summary of the test results: Pass

Date: July 25, 2011

Test engineer: Takeshi Choda

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

APPENDIX 1: Photographs of test setup

Conducted Emission

This page has been submitted for a separate exhibit.

Radiated Emission

This page has been submitted for a separate exhibit.

Worst Case Position (Horizontal: X-axis/ Vertical:X-axis)

This page has been submitted for a separate exhibit.

APPENDIX 2: Data of EMI test

Conducted Emission

DATA OF CONDUCTED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/07/25

Report No. : 31JE0237-HO

Temp./Humi. : 24deg. C / 68% RH
Engineer : Takeshi Choda

Mode / Remarks : USB Data Com Mode

LIMIT : FCC15.107(a) QP ClassB
FCC15.107(a) AV ClassB

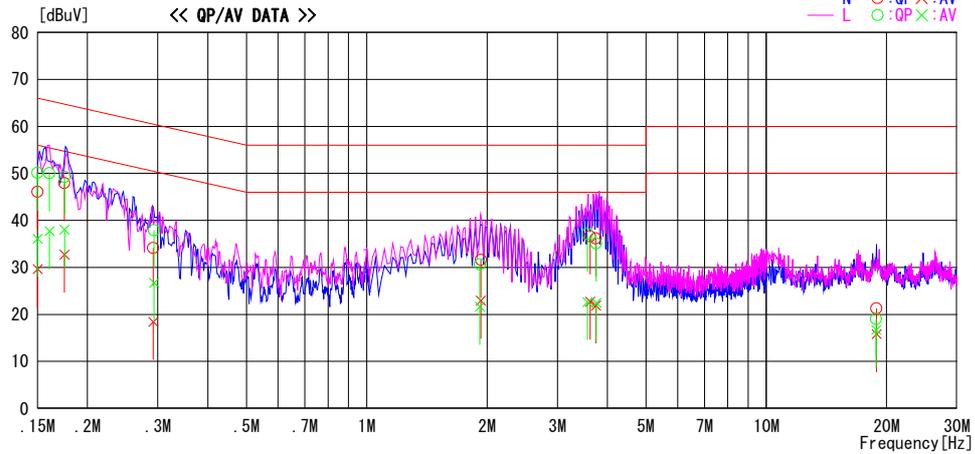

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.15000	36.9	22.9	13.2	50.1	36.1	66.0	56.0	15.9	19.9	L
0.15000	32.9	16.4	13.2	46.1	29.6	66.0	56.0	19.9	26.4	N
0.17501	34.7	19.5	13.2	47.9	32.7	64.7	54.7	16.8	22.0	N
0.16060	36.8	24.5	13.2	50.0	37.7	65.4	55.4	15.4	17.7	L
0.17529	36.0	24.8	13.2	49.2	38.0	64.7	54.7	15.5	16.7	L
0.29347	24.6	13.4	13.3	37.9	26.7	60.4	50.4	22.5	23.7	L
0.29231	20.8	5.1	13.3	34.1	18.4	60.5	50.5	26.4	32.1	N
1.93018	18.1	9.4	13.5	31.6	22.9	56.0	46.0	24.4	23.1	N
1.91965	17.1	8.1	13.5	30.6	21.6	56.0	46.0	25.4	24.4	L
3.56919	23.3	8.8	13.8	37.1	22.6	56.0	46.0	18.9	23.4	L
3.62363	22.8	8.9	13.8	36.6	22.7	56.0	46.0	19.4	23.3	N
3.74487	22.3	8.1	13.8	36.1	21.9	56.0	46.0	19.9	24.1	N
3.75539	21.3	8.6	13.8	35.1	22.4	56.0	46.0	20.9	23.6	L
18.82983	3.7	1.4	15.3	19.0	16.7	60.0	50.0	41.0	33.3	L
18.87001	6.0	0.5	15.3	21.3	15.8	60.0	50.0	38.7	34.2	N

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C. F [dB] (LISN LOSS + CABLE LOSS + ATTENATOR LOSS)
Except for the above table : adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/07/25

Report No. : 31JE0237-HO
Temp./Humi. : 24deg. C / 68% RH
Engineer : Takeshi Choda

Mode / Remarks : Standby Mode

LIMIT : FCC15.107(a) QP ClassB
FCC15.107(a) AV ClassB

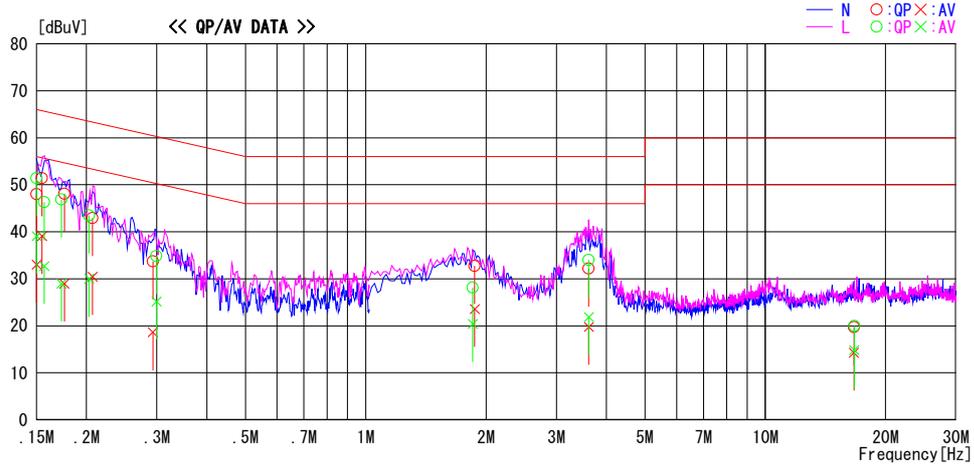

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]	
0.15000	34.8	19.8	13.2	48.0	33.0	66.0	56.0	18.0	23.0	N
0.15474	38.2	25.9	13.2	51.4	39.1	65.7	55.7	14.3	16.6	N
0.17607	34.9	15.8	13.2	48.1	29.0	64.7	54.7	16.6	25.7	N
0.20708	29.7	17.2	13.2	42.9	30.4	63.3	53.3	20.4	22.9	N
0.29319	20.4	5.3	13.3	33.7	18.6	60.4	50.4	26.7	31.8	N
1.87364	19.2	10.1	13.5	32.7	23.6	56.0	46.0	23.3	22.4	N
3.61557	18.4	6.0	13.8	32.2	19.8	56.0	46.0	23.8	26.2	N
16.66010	4.5	-0.9	15.2	19.7	14.3	60.0	50.0	40.3	35.7	N
0.15000	38.2	25.9	13.2	51.4	39.1	66.0	56.0	14.6	16.9	L
0.15681	33.1	19.5	13.2	46.3	32.7	65.6	55.6	19.3	22.9	L
0.17309	33.7	15.8	13.2	46.9	29.0	64.8	54.8	17.9	25.8	L
0.20303	30.3	16.8	13.2	43.5	30.0	63.5	53.5	20.0	23.5	L
0.29939	21.5	11.9	13.3	34.8	25.2	60.3	50.3	25.5	25.1	L
1.85175	14.6	6.9	13.5	28.1	20.4	56.0	46.0	27.9	25.6	L
3.61558	20.2	8.1	13.8	34.0	21.9	56.0	46.0	22.0	24.1	L
16.70028	4.8	-0.4	15.2	20.0	14.8	60.0	50.0	40.0	35.2	L

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT [dBuV] = READING [dBuV] + C.F [dB] (LISN LOSS + CABLE LOSS + ATTENUATOR LOSS)
Except for the above table : adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission

DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/07/25

Report No. : 31JE0237-HO

Temp./Humi. : 24deg. C / 68% RH
Engineer : Takeshi Choda

Mode / Remarks : USB Data Com Mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

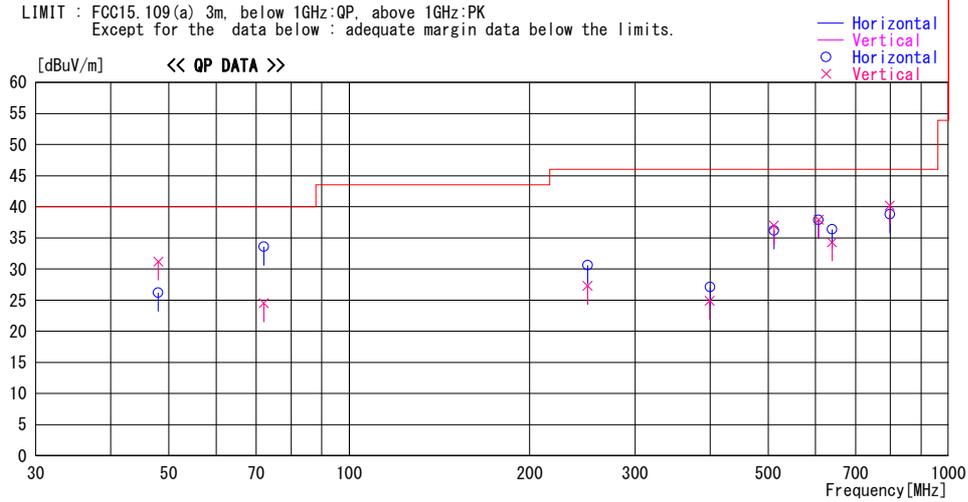

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
48.016	45.3	QP	11.5	-30.6	26.2	70	279	Hori.	40.0	13.8	
48.020	50.3	QP	11.5	-30.6	31.2	86	100	Vert.	40.0	8.8	
72.024	48.6	QP	6.4	-30.5	24.5	206	100	Vert.	40.0	15.5	
72.030	57.7	QP	6.4	-30.5	33.6	100	238	Hori.	40.0	6.4	
249.997	41.8	QP	17.1	-28.3	30.6	266	132	Hori.	46.0	15.4	
249.997	38.5	QP	17.1	-28.3	27.3	20	100	Vert.	46.0	18.7	
399.309	33.8	QP	17.9	-26.8	24.9	136	137	Vert.	46.0	21.1	
399.920	36.0	QP	17.9	-26.8	27.1	355	100	Hori.	46.0	18.9	
511.273	43.3	QP	18.8	-25.9	36.2	155	161	Hori.	46.0	9.8	
511.274	44.1	QP	18.8	-25.9	37.0	35	125	Vert.	46.0	9.0	
607.134	42.6	QP	20.3	-25.0	37.9	157	128	Hori.	46.0	8.1	
607.136	42.6	QP	20.3	-25.0	37.9	334	100	Vert.	46.0	8.1	
639.089	40.7	QP	20.5	-24.8	36.4	150	124	Hori.	46.0	9.6	
639.095	38.6	QP	20.5	-24.8	34.3	339	100	Vert.	46.0	11.7	
798.001	41.7	QP	22.1	-23.6	40.2	64	100	Vert.	46.0	5.8	
798.001	40.3	QP	22.1	-23.6	38.8	155	104	Hori.	46.0	7.2	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/07/25

Report No. : 31JE0237-HO
Temp./Humi. : 24deg. C / 68% RH
Engineer : Takeshi Choda

Mode / Remarks : Standby Mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

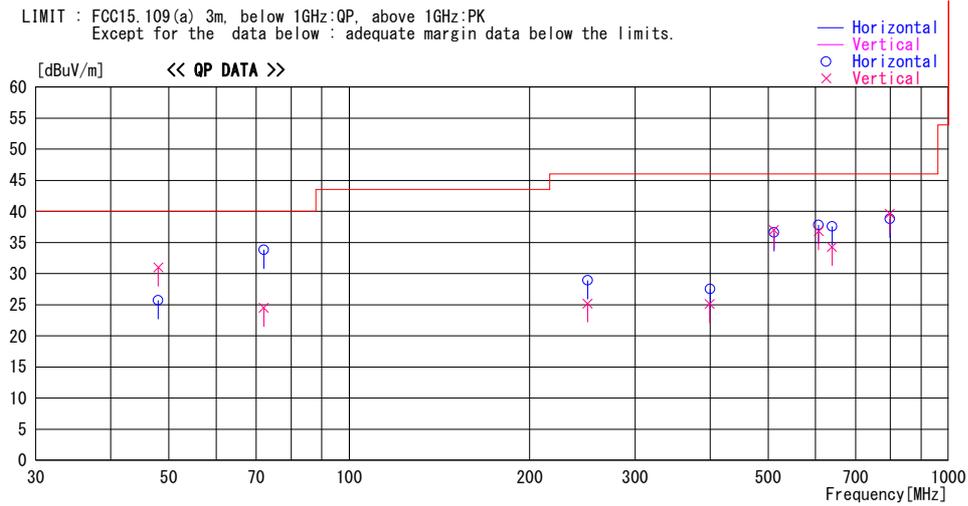

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]							
48.016	44.8	QP	11.5	-30.6	25.7	70	348	Hori.	40.0	14.3	
48.020	50.1	QP	11.5	-30.6	31.0	97	100	Vert.	40.0	9.0	
72.024	48.6	QP	6.4	-30.5	24.5	211	100	Vert.	40.0	15.5	
72.030	57.9	QP	6.4	-30.5	33.8	93	241	Hori.	40.0	6.2	
249.997	40.1	QP	17.1	-28.3	28.9	252	142	Hori.	46.0	17.1	
249.997	36.4	QP	17.1	-28.3	25.2	21	100	Vert.	46.0	20.8	
399.309	34.0	QP	17.9	-26.8	25.1	151	138	Vert.	46.0	20.9	
399.920	36.4	QP	17.9	-26.8	27.5	343	100	Hori.	46.0	18.5	
511.273	43.7	QP	18.8	-25.9	36.6	149	158	Hori.	46.0	9.4	
511.274	44.1	QP	18.8	-25.9	37.0	35	122	Vert.	46.0	9.0	
607.134	42.5	QP	20.3	-25.0	37.8	153	125	Hori.	46.0	8.2	
607.136	41.5	QP	20.3	-25.0	36.8	333	103	Vert.	46.0	9.2	
639.089	41.9	QP	20.5	-24.8	37.6	150	124	Hori.	46.0	8.4	
639.095	38.6	QP	20.5	-24.8	34.3	25	100	Vert.	46.0	11.7	
798.001	41.1	QP	22.1	-23.6	39.6	62	100	Vert.	46.0	6.4	
798.001	40.3	QP	22.1	-23.6	38.8	155	100	Hori.	46.0	7.2	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/07/25

Report No. : 31JE0237-HO
Temp./Humi. : 24deg. C / 68% RH
Engineer : Takeshi Choda

Mode / Remarks : USB Data Com Mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

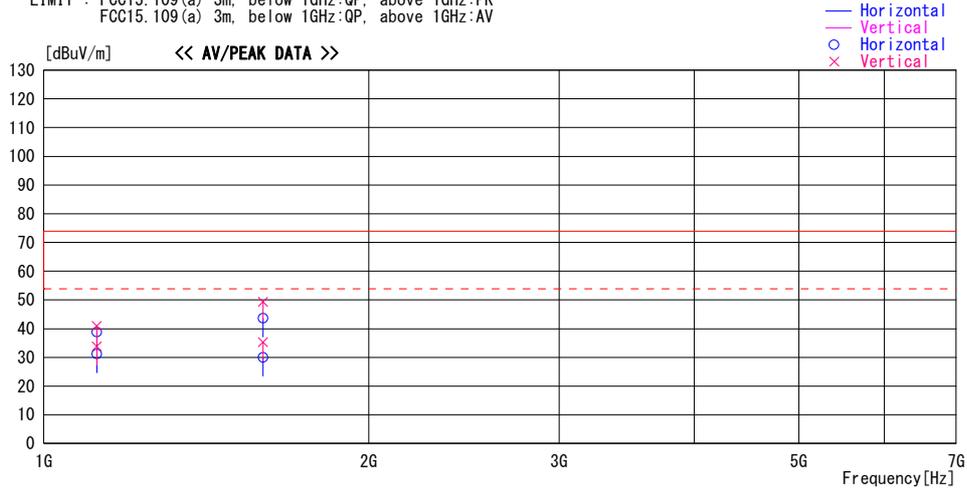

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
1119.997	45.2	AV	24.1	-35.5	33.8	19	106	Vert.	53.9	20.1	
1119.997	42.6	AV	24.1	-35.5	31.2	181	100	Hori.	53.9	22.7	
1119.997	52.3	PK	24.1	-35.5	40.9	19	106	Vert.	73.9	33.0	
1119.997	50.2	PK	24.1	-35.5	38.8	181	100	Hori.	73.9	35.1	
1595.879	43.6	AV	26.2	-34.5	35.3	86	102	Vert.	53.9	18.6	
1595.879	57.6	PK	26.2	-34.5	49.3	86	102	Vert.	73.9	24.6	
1595.879	51.9	PK	26.2	-34.5	43.6	49	100	Hori.	73.9	30.3	
1595.879	38.2	AV	26.2	-34.5	29.9	49	100	Hori.	53.9	24.0	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/07/25

Report No. : 31JE0237-H0
Temp./Humi. : 24deg. C / 68% RH
Engineer : Takeshi Choda

Mode / Remarks : Standby Mode

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

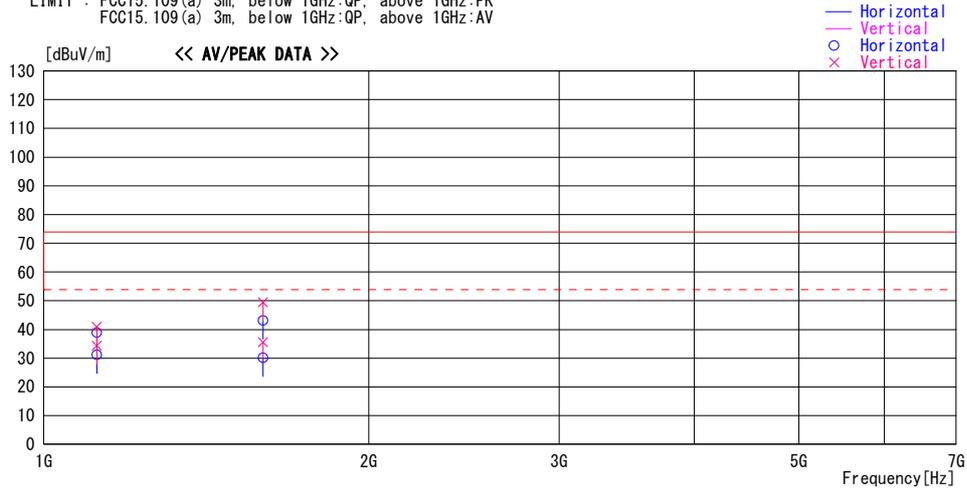

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1119.997	45.7	AV	24.1	-35.5	34.3	17	100	Vert.	53.9	19.6	
1119.997	52.3	PK	24.1	-35.5	40.9	17	100	Vert.	73.9	33.0	
1119.997	42.6	AV	24.1	-35.5	31.2	179	100	Hori.	53.9	22.7	
1119.997	50.3	PK	24.1	-35.5	38.9	179	100	Hori.	73.9	35.0	
1595.879	57.8	PK	26.2	-34.5	49.5	84	109	Vert.	73.9	24.4	
1595.879	43.8	AV	26.2	-34.5	35.5	84	109	Vert.	53.9	18.4	
1595.879	38.4	AV	26.2	-34.5	30.1	53	100	Hori.	53.9	23.8	
1595.879	51.4	PK	26.2	-34.5	43.1	53	100	Hori.	73.9	30.8	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz:-HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

APPENDIX 3: Test instruments

EMI Test Instruments

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-01	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	RE/CE	2011/07/10 * 12
MOS-01	Digital Humidity Indicator	N.T	NT-1800	MOS01	RE/CE	2011/02/23 * 12
MJM-01	Measure	KDS	ES19-55	-	RE/CE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE/CE	-
MTR-01	Test Receiver	Rohde & Schwarz	ESI40	100084	RE/CE	2010/12/07 * 12
KBA-05	Biconical Antenna	Schwarzbeck	BBA9106	2513	RE	2010/10/15 * 12
KLA-04	Logperiodic Antenna	Schwarzbeck	USLP9143	361	RE	2010/10/16 * 12
MAT-08	Attenuator(6dB)	Weinschel Corp	2	BK7971	RE	2010/11/05 * 12
MCC-01	Coaxial Cable 0.1-3000MHz	Suhner/storm/Agilent/TSJ	-	-	RE	2010/10/14 * 12
MPA-19	Pre Amplifier	MITEQ	MLA-10K01-B01-35	1237616	RE	2011/02/28 * 12
MHA-05	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	253	RE	2011/06/19 * 12
MHA-01	Horn Antenna 18-26.5GHz	EMCO	3160-09	1266	RE	2011/06/20 * 12
MCC-18	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX 104	148048-143(1m) / 292410(5m)	RE	2010/09/30 * 12
MPA-01	Pre Amplifier	Agilent	8449B	3008A01671	RE	2011/02/24 * 12
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	RE	2011/04/08 * 12
MLS-02	LISN(AMN)	Schwarzbeck	NSLK8127	8127383	CE(EUT)	2011/07/11 * 12
MLS-03	LISN(AMN)	Schwarzbeck	NSLK8127	8127384	CE(AE)	2011/07/11 * 12
MTA-30	Terminator	TME	CT-01	-	CE	2011/01/05 * 12
MCC-03	Coaxial Cable	Fujikura/Suhner/TSJ	5D-2W(20m)/3D-2W(7.5m)/RG400u(1.5m)/RFM-E421(Switcher)	- /01068(Switcher)	CE	2011/01/16 * 12
MAT-64	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2011/02/22 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

CE: Conducted Emissions

RE: Radiated Emissions

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124