



Product Service

---

**Choose certainty.  
Add value.**

# Report On

FCC Testing of the  
Sharp CDMA SHI17 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone  
with GPS, Bluetooth, WLAN and FeliCa  
In accordance with FCC CFR 47 Part 15B

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00158

Document 75918486 Report 01 Issue 1

June 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuvps.co.uk](http://www.tuvps.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC Testing of the  
Sharp CDMA SH117 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone  
with GPS, Bluetooth, WLAN and FeliCa  
In accordance with FCC CFR 47 Part 15B

Document 75918486 Report 01 Issue 1

June 2012

**PREPARED FOR**

Sharp Communication Compliance Ltd  
Azure House  
Bagshot Road  
Bracknell  
Berkshire  
RG12 7QY

**PREPARED BY**

  
\_\_\_\_\_  
**Maggie Whiting**  
Project Manager

**APPROVED BY**

  
\_\_\_\_\_  
**Tony Pither**  
Authorised Signatory

**DATED**

29 June 2012

---

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

  
\_\_\_\_\_

G Lawler





Product Service

**CONTENTS**

<b>Section</b>		<b>Page No</b>
<b>1</b>	<b>REPORT SUMMARY .....</b>	<b>3</b>
1.1	Introduction .....	4
1.2	Brief Summary of Results .....	5
1.3	Application Form .....	6
1.4	Product Information .....	7
1.5	Test Conditions .....	7
1.6	Deviations from the Standard .....	7
1.7	Modification Record .....	7
<b>2</b>	<b>TEST DETAILS .....</b>	<b>8</b>
2.1	AC Line Conducted Emissions .....	9
2.2	Radiated Emissions .....	12
<b>3</b>	<b>TEST EQUIPMENT USED .....</b>	<b>15</b>
3.1	Test Equipment Used .....	16
3.2	Measurement Uncertainty .....	17
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....</b>	<b>18</b>
4.1	Accreditation, Disclaimers and Copyright.....	19



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC Testing of the  
Sharp CDMA SH117 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth,  
WLAN and FeliCa  
In accordance with FCC CFR 47 Part 15B



Product Service

## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp CDMA SHI17 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth, WLAN and FeliCa to the requirements of FCC CFR 47 Part 15B.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	CDMA SHI17 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth, WLAN and FeliCa
Serial Number(s)	SSHGD000395
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 15B (2011)
Incoming Release Date	Application Form 26 June 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9233 28 June 2012
Start of Test	23 June 2012
Finish of Test	23 June 2012
Name of Engineer(s)	G Lawler



Product Service

**1.2 BRIEF SUMMARY OF RESULTS**

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15B is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
AC Powered/USB				
2.1	15.107	AC Line Conducted Emissions	Pass	
2.2	15.109	Radiated Emissions	Pass	



## 1.3 APPLICATION FORM

## DECLARATION OF BUILD STATUS

MAIN EUT			
<b>MANUFACTURING DESCRIPTION</b>	CDMA SHI17 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth, WLAN and FeliCa		
<b>MANUFACTURER</b>	Sharp Corporation		
<b>TYPE</b>	Cellular Phone		
<b>PART NUMBER</b>	N/A		
<b>SERIAL NUMBER</b>	See individual handset		
<b>HARDWARE VERSION</b>	PP		
<b>SOFTWARE VERSION</b>	V4.0 (IceCreamSandwich)		
<b>TRANSMITTER OPERATING RANGE</b>	BT & WLAN : 2400 MHz to 2483.5 MHz FeliCa : 13.553MHz to 13.567 MHz		
<b>RECEIVER OPERATING RANGE</b>	BT & WLAN : 2400 MHz to 2483.5 MHz GPS : 1574MHz to 1576 MHz FeliCa : 13.553MHz to 13.567 MHz		
<b>OUTPUT POWER (W or dBm)</b>	BT : 6dBm max WLAN : 17.3dBm max		
<b>TECHNICAL DESCRIPTION (a brief description of the intended use and operation)</b>	Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth, WLAN and FeliCa.		
BATTERY/POWER SUPPLY			
<b>MANUFACTURING DESCRIPTION</b>	SHI13UAA		
<b>MANUFACTURER</b>	Sanyo		
<b>TYPE</b>	Lithium-Ion		
<b>PART NUMBER</b>	N/A		
<b>VOLTAGE</b>	3.7V		
<b>SERIAL NUMBER</b>	N/A		
ANCILLARIES (if applicable)			
<b>MANUFACTURING DESCRIPTION</b>	USB data cable	Charger	Stereo Headset
<b>MANUFACTURER</b>	Hoshiden	Hoshiden	Sony
<b>TYPE</b>	SHI01HUA	0203PQA	MDR-E921LP/BC+0301QVA
<b>PART NUMBER</b>	N/A	N/A	N/A
<b>SERIAL NUMBER</b>	N/A	N/A	N/A

Signature

Date

 Yasuhiro Kawauchi  
 26<sup>th</sup> June, 2012

Note: This document has been prepared to enable manufacturers with no mechanism for producing their own Declaration of Build Status, to declare the build state of the equipment submitted for test.

No responsibility will be accepted by TÜV Product Service as to the accuracy of the information declared in this document by the manufacturer.



Product Service

## **1.4 PRODUCT INFORMATION**

### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Sharp CDMA SHI17 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth, WLAN and FeliCa. A full technical description can be found in the manufacturer's documentation.

## **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 3.7 V DC supply.

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

## **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard or test plan were made during testing.

## **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC Testing of the  
Sharp CDMA SH117 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth,  
WLAN and FeliCa  
In accordance with FCC CFR 47 Part 15B



## **2.1 AC LINE CONDUCTED EMISSIONS**

### **2.1.1 Specification Reference**

FCC CFR 47 Part 15B, Clause 15.107

### **2.1.2 Equipment Under Test and Modification State**

CDMA SHI17 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth, WLAN and FeliCa S/N: SSHGD000395 - Modification State 0

### **2.1.3 Date of Test**

23 June 2012

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Test Procedure**

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.


### **2.1.6 Environmental Conditions**

Ambient Temperature	20.8°C
Relative Humidity	43.0%



2.1.7 Test Results


Live Line

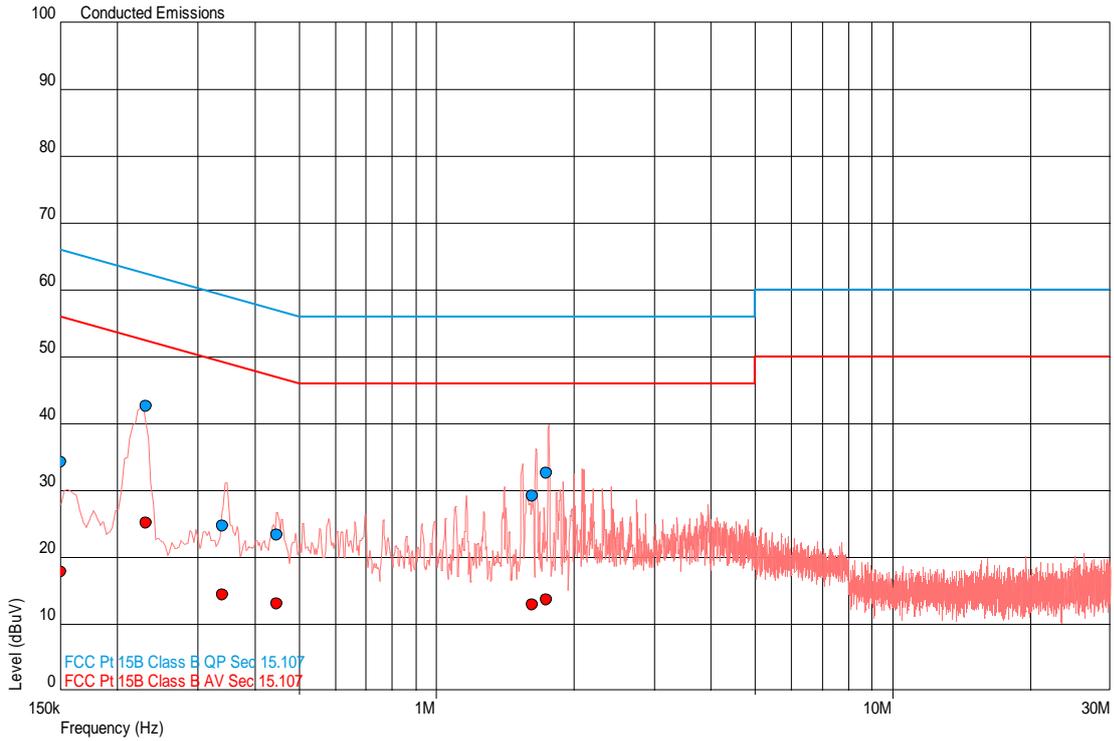

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	34.3	66.0	-31.7	17.9	56.0	0.150
0.232	42.7	62.4	-19.7	25.2	52.4	0.232
0.341	24.7	59.2	-34.5	14.4	49.2	0.341
0.447	23.3	56.9	-33.6	13.1	46.9	0.447
1.626	29.1	56.0	-26.9	13.0	46.0	1.626
1.745	32.6	56.0	-23.4	13.7	46.0	1.745



Neutral Line

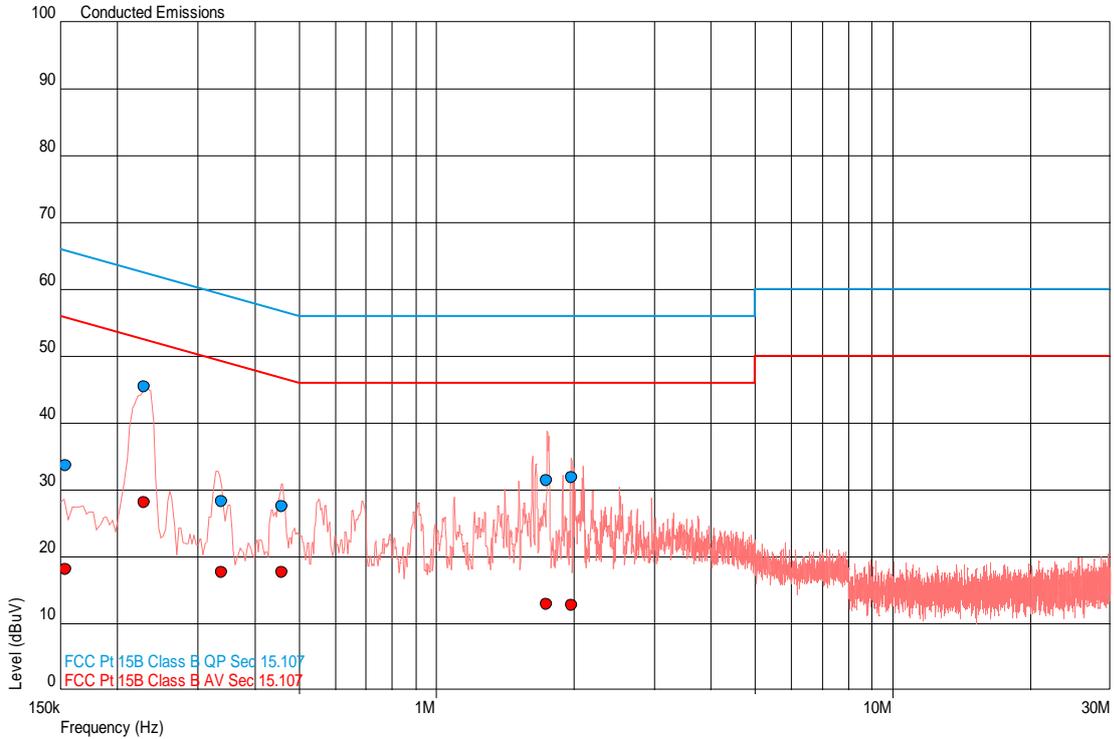

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.154	33.7	65.8	-32.1	18.2	55.8	0.154
0.230	45.4	62.5	-17.1	28.1	52.5	0.230
0.339	28.3	59.2	-30.9	17.6	49.2	0.339
0.459	27.5	56.7	-29.2	17.7	46.7	0.459
1.747	31.5	56.0	-24.5	13.0	46.0	1.747



## 2.2 RADIATED EMISSIONS

### 2.2.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.109

### 2.2.2 Equipment Under Test and Modification State

CDMA SHI17 Tri-band CDMA (BC0, BC3, BC6) Cellular Phone with GPS, Bluetooth, WLAN and FeliCa S/N: SSHGD000395 - Modification State 0

### 2.2.3 Date of Test

23 June 2012

### 2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.2.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions is obtained up to the 5th harmonic of the EUT's highest internally generated fundamental frequency. For frequencies from 30MHz to 18GHz the EUT is placed on a test table 800mm above the ground plane. For frequencies above 18GHz, the EUT height is increased by 200mm to a height of 1000mm. This is to ensure the beam width of the measuring antenna gives sufficient vertical coverage of the EUT.

During characterisation the turntable azimuth is adjusted from 0 to 360 degrees with the measuring antenna in one polarity. It is then repeated for the other polarity. Any frequencies of interest are noted for formal measuring later. The distance from the measuring antenna to the boundary of the EUT is 3m. Above 18GHz this distance may be reduced to 1m.

During formal measurement the spectrum analyser is tuned to the frequency of the emission. The turntable azimuth is adjusted from 0 to 360 degrees to determine the point at which the maximum emission level occurs. Then the height of the measuring antenna is adjusted from a height of 1m to 4m to determine the height at which the maximum emission level occurs. Once the point of maximum emission has been determined the emission is measured. Emissions in the 30MHz to 1GHz range are measured using a CISPR Quasi – Peak detector function in a 120kHz bandwidth. Emissions in the range 1GHz to 40GHz require Peak and Average measurements. The Peak measurements are made using a peak detector with 1MHz Resolution and Video bandwidths. The average measurements employ a peak detector with a Resolution bandwidth of 1MHz and a Video bandwidth of 10Hz. If measurements are made at a 1m measuring distance, then 10dB is added to the specification limit.


### 2.2.6 Environmental Conditions

Ambient Temperature	20.8°C
Relative Humidity	43.0%



**2.2.7 Test Results**

30 MHz to 1 GHz

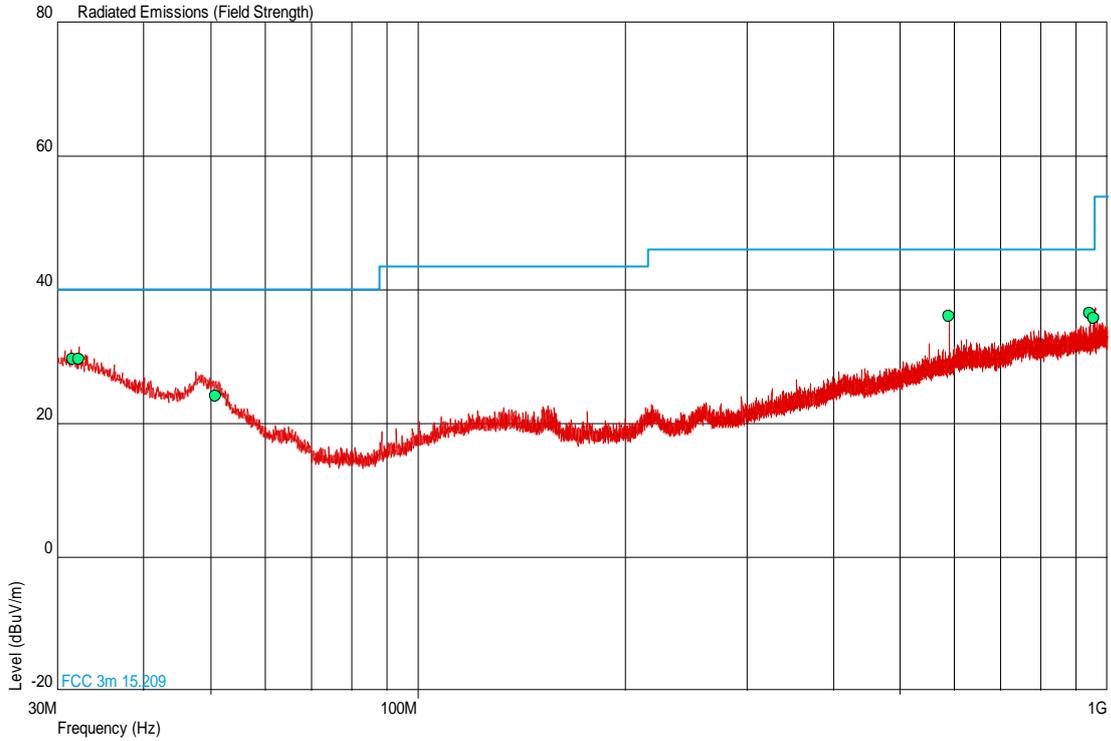

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
31.609	29.7	30.5	40.0	100	-10.3	69.5	102	2.84	Horizontal
32.240	29.0	28.2	40.0	100	-10.4	71.8	96	1.00	Horizontal
50.858	26.0	20.0	40.0	100	-15.9	80.0	194	1.00	Vertical
588.790	21.2	11.5	46.0	200	-9.9	188.5	323	1.00	Vertical
943.964	24.7	17.2	46.0	200	-9.5	182.8	172	2.99	Vertical
956.592	33.4	46.8	46.0	200	-10.3	153.2	8	1.00	Horizontal




Product Service

1 GHz to 13 GHz


Frequency (GHz)	Antenna Polarisation	Antenna Height (cm)	EUT Arc (degrees)	Final Peak (dBµV/m)	Final Average (dBµV/m)
-----------------	----------------------	---------------------	-------------------	---------------------	------------------------

1 GHz to 8 GHz

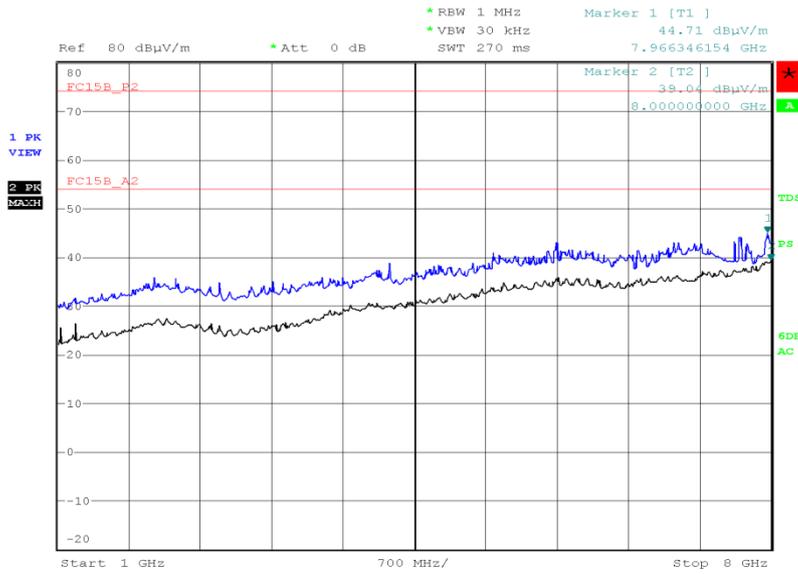

Date: 23.JUN.2012 19:36:33

8 GHz to 13 GHz

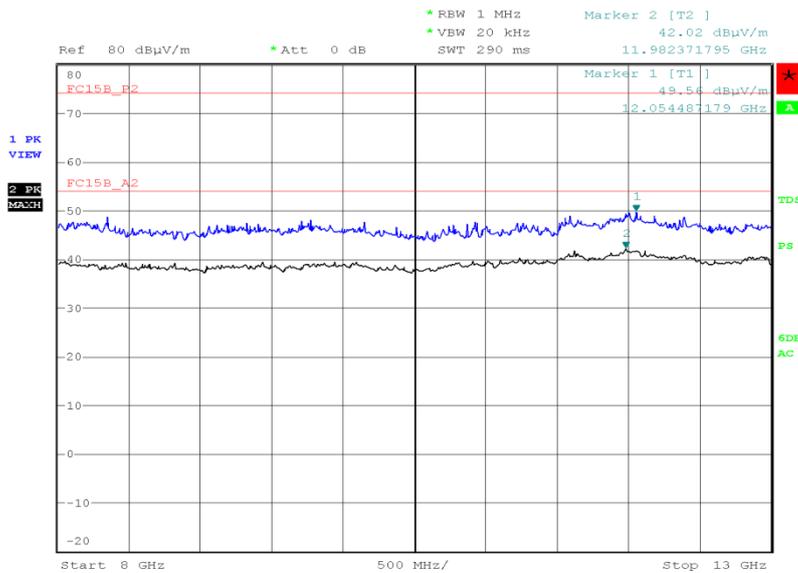

Date: 23.JUN.2012 19:28:06



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 – AC Line Conducted Emissions</b>					
LISN (1 Phase)	Chase	MN 2050	336	12	23-Mar-2013
Transient Limiter	Hewlett Packard	11947A	1032	12	29-Jun-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
<b>Section 2.2 - Radiated Emissions</b>					
Radiocommunications Tester	Rohde & Schwarz	CMU 200	39	12	9-Dec-2012
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	13-Sep-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	20-Sep-2012
Pre-Amplifier	Phase One	PS04-0087	1534	12	26-Sep-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	22-Aug-2012
3 GHz High Pass Filter	K&L Microwave	11SH10- 3000/X18000-O/O	3552	12	16-Apr-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000- 3PS	3703	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000- NPS	3791	12	26-Aug-2012
Tilt Antenna Mast	mature GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	mature GmbH	NCD	3917	-	TU
Low Noise Amplifier	Wright Technologies	APS04-0085	3969	12	8-Jul-2012

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



Product Service

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Radiated Emissions	30MHz to 1GHz: $\pm 5.1$ dB 1GHz to 40GHz: $\pm 6.3$ dB
AC Line Conducted Emissions	$\pm 3.2$ dB



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited