



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the
Sharp CDMA SHX12 Dual Band CDMA (BC0 and BC6) and Tri Band
GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with
Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00162

Document 75915934 Report 13 Issue 1

December 2011



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp CDMA SHX12 Dual Band CDMA (BC0 and BC6) and Tri Band
GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with
Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24

Document 75915934 Report 13 Issue 1

December 2011

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY

Natalie Bennett
Senior Administrator

APPROVED BY

Mark Jenkins
Authorised Signatory

DATED

15 December 2011

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s):

S Bennett

G Lawler





Product Service

CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 6
1.4	Product Information 7
1.5	Test Conditions 7
1.6	Deviations from the Standard 7
1.7	Modification Record 7
2	TEST DETAILS 8
2.1	Frequency Stability 9
2.2	Spurious Emissions at Band Edge 11
2.3	Effective Isotropic Radiated Power 14
2.4	Maximum Peak Output Power - Conducted 18
2.5	Modulation Characteristics 20
2.6	Emission for Broadband PCS Equipment 23
2.7	Conducted Spurious Emissions 32
2.8	Occupied Bandwidth 38
3	TEST EQUIPMENT USED 42
3.1	Test Equipment Used 43
3.2	Measurement Uncertainty 48
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 49
4.1	Accreditation, Disclaimers and Copyright 50



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp CDMA SHX12 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and
1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp CDMA SHX12 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS to the requirements of FCC CFR 47 Part 2 and FCC CFR 47 Part 24.

Objective	To perform Limited FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	CDMA SHX12
Serial Number(s)	IMEI 004401113640953 IMEI 004401113634311
Number of Samples Tested	2
Test Specification/Issue/Date	FCC CFR 47 Part 2 and FCC CFR 47 Part 24 (2010 and 2010)
Incoming Release Date	Application Form 09 November 2011
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	8873 11 November 2011
Start of Test	29 November 2011
Finish of Test	3 December 2011
Name of Engineer(s)	S Bennett G Lawler
Related Document(s)	ANSI C63.4: 2003



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24 is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
PCS 1900				
2.1	2.1055 and 24.135(a)	Frequency Stability	Pass	
2.2	2.1051 and 24.229	Spurious Emissions at Band Edge	Pass	
2.3	24.232(c)	Effective Isotropic Radiated Power	Pass	
2.4	2.1046 and 24.232	Maximum Peak Output Power - Conducted	Pass	
2.5	2.1047(d)	Modulation Characteristics	-	Customer Declaration
2.6	2.1051 and 24.238	Emission for Broadband PCS Equipment	Pass	
2.7	2.1051 and 24.238(a)	Conducted Spurious Emissions	Pass	
2.8	2.1049(h) and 24.238(b)	Occupied Bandwidth	Pass	



1.3 APPLICATION FORM

APPLICANT'S DETAILS			
COMPANY NAME :	Sharp Telecommunications of Europe Ltd		
ADDRESS :	Azure House, Bagshot Road Bracknell, Berkshire RG12 7QY		
NAME FOR CONTACT PURPOSES :	Ken Newman		
TELEPHONE NO: 01344 301 883	FAX NO:	01344 300 293	
	E-MAIL:	ken.newman@sharp.eu	

EQUIPMENT INFORMATION			
<u>Equipment designator:</u>			
Model name/number	CDMA SHX12	Identification number	APYHRO00162
<u>Supply Voltage:</u>			
<input type="checkbox"/>	AC mains	State AC voltage V	and AC frequency Hz
<input type="checkbox"/>	DC (external)	State DC voltage V	and DC current A
<input checked="" type="checkbox"/>	DC (internal)	State DC voltage ...3.7 V	and Battery type...Li-Ion.
<u>Frequency characteristics:</u>			
Frequency range	1850.2MHz to 1909.8 MHz	Channel spacing	(if channelized)
Designated test frequencies:			
Bottom: 1850.2 MHz	Middle: 1880.0MHz	Top: 1909.8MHz	
<u>Power characteristics:</u>			
Maximum transmitter power	1.0W(30dBm)	Minimum transmitter power W
<input checked="" type="checkbox"/>	Continuous transmission	(if variable)	
<input type="checkbox"/>	Intermittent transmission	State duty cycle	
	If intermittent, can transmitter be set to continuous transmit test mode? Y/N		
<u>Antenna characteristics:</u>			
<input checked="" type="checkbox"/>	Antenna connector	State impedance	50 ohm
<input type="checkbox"/>	Temporary antenna connector	State impedance ohm
<input type="checkbox"/>	Integral antenna	State gain dBi
<u>Modulation characteristics:</u>			
<input type="checkbox"/>	Amplitude	<input type="checkbox"/>	Other
<input type="checkbox"/>	Frequency	Details:	
<input checked="" type="checkbox"/>	Phase		
Can the transmitter operate un-modulated?		≠/N	
ITU Class of emission:			
<u>Extreme conditions:</u>			
Maximum temperature	60 °C	Minimum temperature	-20 °C
Maximum supply voltage	4.0 V	Minimum supply voltage	3.7 V

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature : T. Taki

Name : Tetsuya Taki

Position held : Manager

Date : 9th November, 2011



1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp CDMA SHX12 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp CDMA SHX12 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and
1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24



Product Service

2.1 FREQUENCY STABILITY

2.1.1 Specification Reference

FCC CFR 47 Part 2 and FCC CFR 47 Part 24, Clause 2.1055 and 24.135(a)

2.1.2 Equipment Under Test and Modification State

CDMA SHX12 S/N: IMEI 004401113640953 - Modification State 0

2.1.3 Date of Test

29 November 2011

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT was set to transmit on maximum power with GMSK modulation. A CMU200 Communications Analyser, was used to measure the frequency error. The maximum result was taken over 200 bursts. The temperature was adjusted between -30°C and +50°C in 10° steps as per 2.1055.

2.1.6 Environmental Conditions

Ambient Temperature	25.9°C
Relative Humidity	36.0%



2.1.7 Test Results

4.0 V DC Supply

Under Temperature Variations

1880.0 MHz

Temperature Interval (°C)	Mode	Deviation (ppm)
-30	GMSK	0.005
-20	GMSK	0.005
-10	GMSK	0.005
0	GMSK	0.005
+10	GMSK	0.005
+20	GMSK	0.005
+30	GMSK	0.004
+40	GMSK	0.004
+50	GMSK	0.004

Limit Clause

The frequency stability of the transmitter shall be maintained within $\pm 0.0001\%$ (± 1 ppm).

Under Voltage Variations

1880.0 MHz

DC Voltage (V)	Mode	Deviation (ppm)
4.0	GMSK	0.006
3.7	GMSK	0.006
3.7	GMSK	0.006

Limit Clause

The frequency stability of the transmitter shall be maintained within $\pm 0.0001\%$ (± 1 ppm).



2.2 SPURIOUS EMISSIONS AT BAND EDGE

2.2.1 Specification Reference

FCC CFR 47 Part 2 and FCC CFR 47 Part 24, Clause 2.1051 and 24.229

2.2.2 Equipment Under Test and Modification State

CDMA SHX12 S/N: IMEI 004401113640953 - Modification State 0

2.2.3 Date of Test

29 November 2011

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

In accordance with 24.238, any emissions outside of the block edges shall be attenuated by at least $43 + 10 \log (P)$. The measurements are shown to ± 1 MHz from the block edges. The plots shown under the Spurious Emissions sections covers the required range of 9 kHz to 20 GHz.

The reference power and path losses of all channels used for testing in each frequency block were measured. Having entered the reference level offset, a limit line was displayed, showing the $-13 \text{ dBm} (43 + 10 \log (P))$, limit.

2.2.6 Environmental Conditions

Ambient Temperature	25.9°C
Relative Humidity	36.0%




Product Service

2.2.7 Test Results

4.0 V DC Supply


Frequency Block (MHz)	Mode	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A :(1930.0 – 1945.0)	GMSK	Channel : 513 Frequency : 1850.4 MHz	N/A
B :(1975.0 – 1990.0)	GMSK	N/A	Channel : 809 Frequency : 1909.6 MHz

Frequency Block A

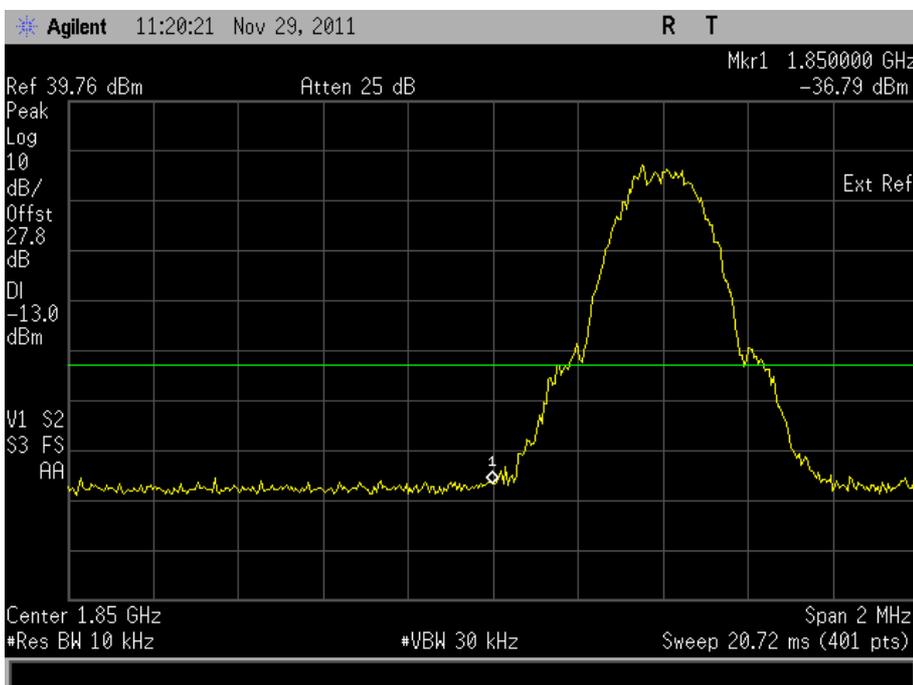



Frequency Block B

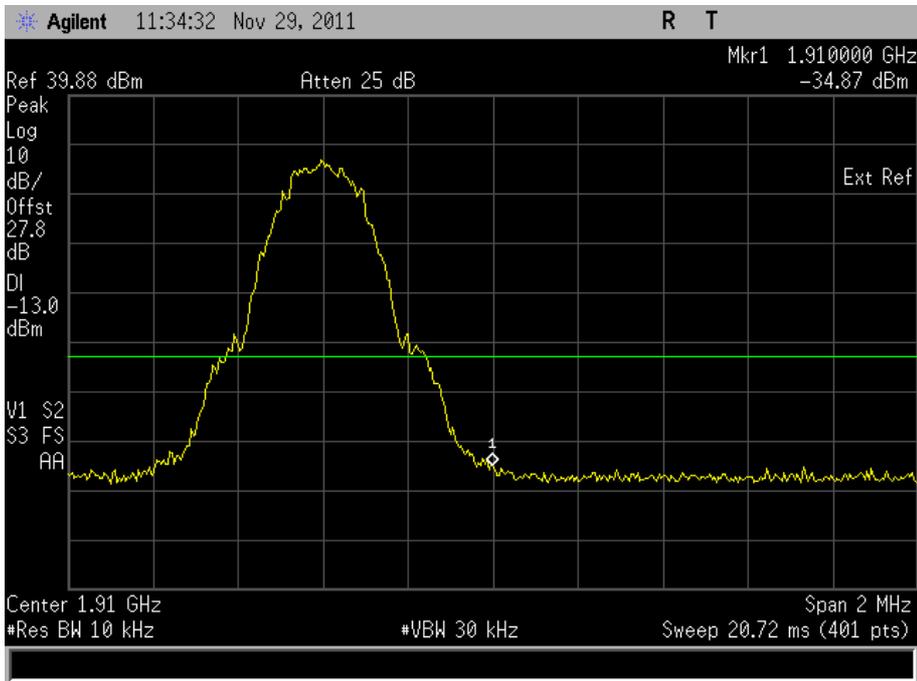

Limit Clause

-13 dBm at block edge.



2.3 EFFECTIVE ISOTROPIC RADIATED POWER

2.3.1 Specification Reference

FCC CFR 47 Part 2 and FCC CFR 47 Part 24, Clause 24.232(c)

2.3.2 Equipment Under Test and Modification State

CDMA SHX12 S/N: IMEI 004401113634311 - Modification State 0

2.3.3 Date of Test

3 December 2011

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

Measurements of the fundamental from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The fundamental frequency was maximised by adjusting the antenna height, antenna polarisation and turntable azimuth. A peak detector was used with the trace set to max hold. The maximum result was recorded.

The EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result (ERP) was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

2.3.6 Environmental Conditions

Ambient Temperature	20.9°C
Relative Humidity	35.0%




Product Service

2.3.7 Test Results

1850.2 MHz

Result (dBm)	Result (W)
30.41	1.099

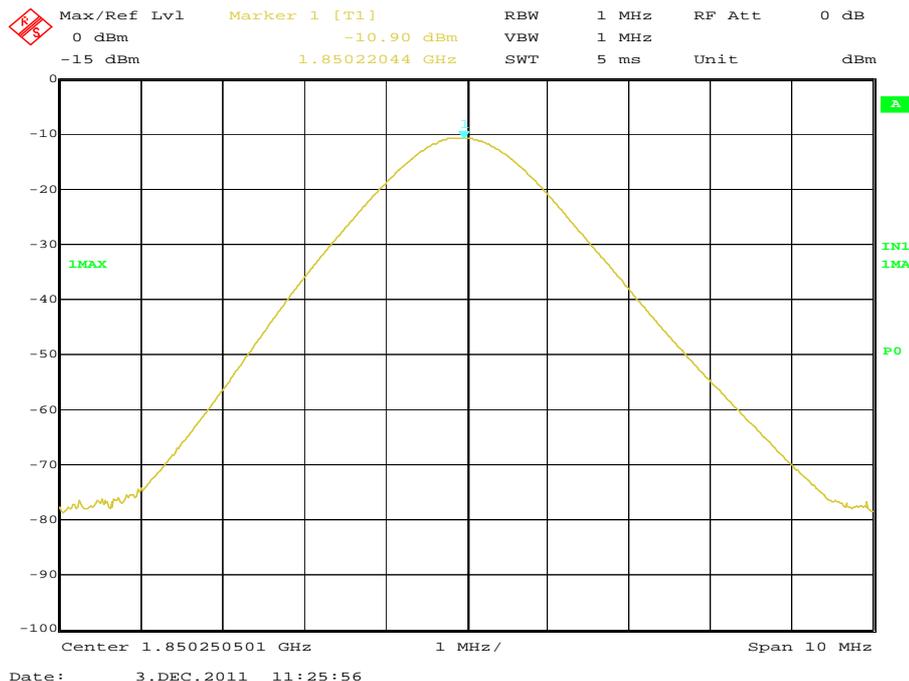




Product Service

1880.0 MHz

Result (dBm)	Result (W)
30.63	1.156

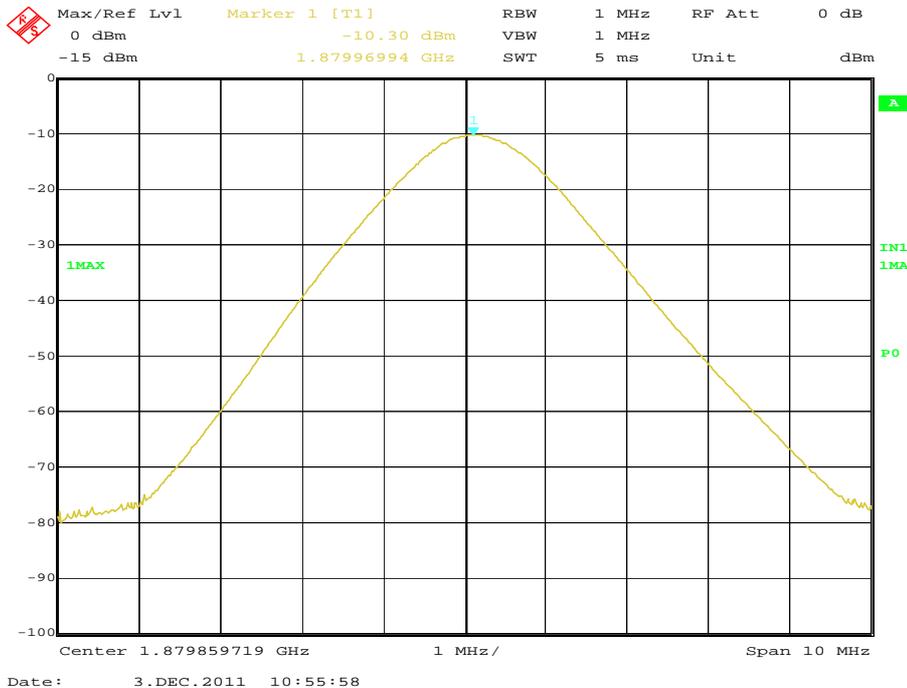




Product Service

1909.8 MHz

Result (dBm)	Result (W)
29.84	0.964

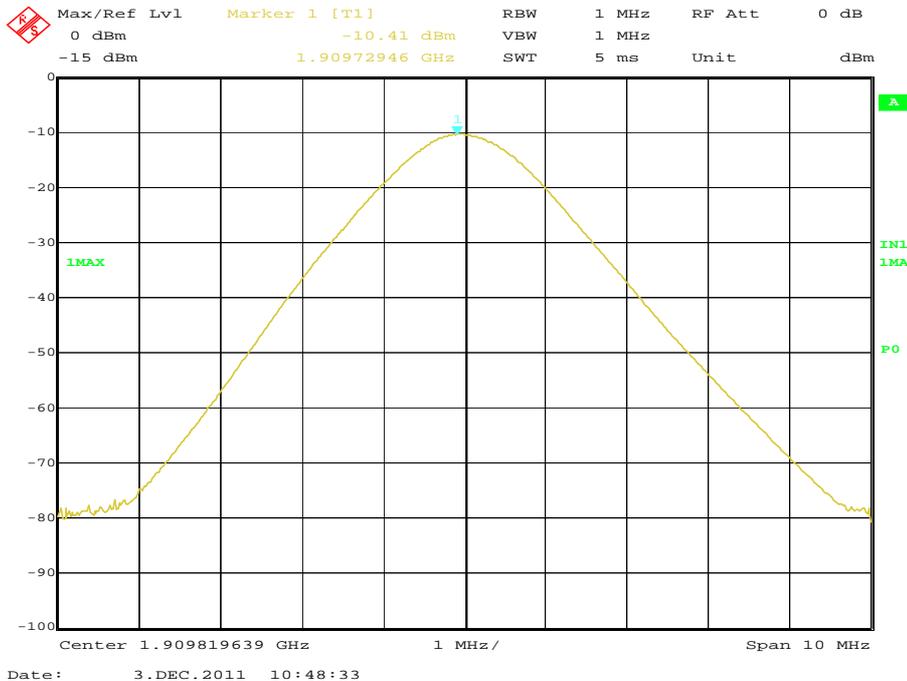

Limit Clause

Mobile – 7 W or 38.45 dBm
 Base Stations – 500 W or 57 dBm



2.4 MAXIMUM PEAK OUTPUT POWER - CONDUCTED

2.4.1 Specification Reference

FCC CFR 47 Part 2 and FCC CFR 47 Part 24, Clause 2.1046 and 24.232

2.4.2 Equipment Under Test and Modification State

CDMA SHX12 S/N: IMEI 004401113640953 - Modification State 0

2.4.3 Date of Test

29 November 2011

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals.

The EUT supports WCDMA and was tested in this mode of operation.

The spectrum analyser RBW and VBW were set to 1 MHz and the path loss measured and entered as a reference offset level.

2.4.6 Environmental Conditions

Ambient Temperature	25.9°C
Relative Humidity	36.0%



Product Service

2.4.7 Test Results

4.0 V DC Supply

1850.2 MHz

Mode	Result (dBm)	Result (W)
GPSK	30.01	1.002

1880.0 MHz

Mode	Result (dBm)	Result (W)
GPSK	30.07	1.016

1909.8 MHz

Mode	Result (dBm)	Result (W)
GPSK	30.05	1.012

Limit Clause

Mobile – 7 W or 38.45 dBm

Base Stations – 500 W or 57 dBm



2.5 MODULATION CHARACTERISTICS

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1047(d)

2.5.2 Equipment Under Test

CDMA SHX12

2.5.3 Test Results

Customer Description

Description Of Modulation Technique

The modulation scheme used in GSM is called Gaussian Minimum Shift Keying (GMSK). GMSK facilitates the use of narrow bandwidth and allows for both coherent and non coherent detection capabilities. It is a scheme in which the transitions from One to Zero or Zero to One do not occur quickly, but over a period of time. If pulses are transmitted quickly harmonics are transmitted. The power spectrum for a square wave is rich in harmonics, and the power within the side lobes is wasted, and can be a cause of potential interference.

A method to reduce the harmonics is to round off the edges of the pulses thus lowering the spectral components of the signal. In GSM this is done by using a Gaussian pre-filter which typically has a bandwidth of 81.25kHz. The output from the Gaussian filter then phase modulates the carrier. As there are no dramatic phase transitions of the carrier this gives a constant envelope and low spectral component output from the transmitter.

The spectral efficiency is calculated by

$\text{bit rate} / \text{Channel bandwidth} = 270.83333 \text{ kbit/s} / 200 \text{ kHz} = 1.354 \text{ bit/s/Hz}$.

The bandwidth product $BT = \text{Bandwidth} \times \text{bit duration} = 81.25 \text{ kHz} \times 3.6923 \text{ micros} = 0.3$


GMSK OVERVIEW

The modulation scheme used for the EUT is GMSK.

A brief overview of how GMSK works is shown below.

GMSK (Gaussian Minimum Shift Keying)

The fundamental principal behind GMSK is Phase shift keying. This splits a data stream into a series of 2-digit phase shifts, using the following phase shifts to represent data pairs.

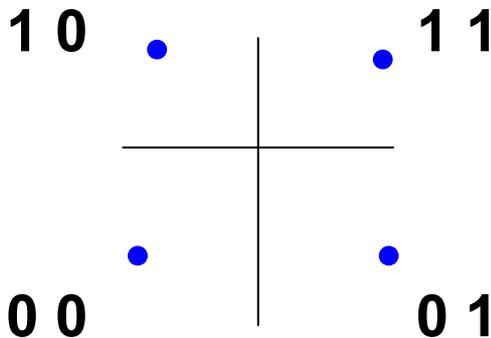

Therefore for the BIT sequence 0 0 1 1 1 0 0 1 The corresponding phase shift will be used

BIT SEQUENCE	0 0	1 1	1 0	0 1
PHASE	225°	45°	135°	315°

This is called QPSK (Quadratic Phase Shift Keying)

However

There is a problem with QPSK: transition from e.g. 00 to 11 gives phase shift of 180° (π radians). This has the effect of inverting the carrier waveform and this can lead to detection errors at the receiver.

Solution: restrict phase changes to $\pm 90^\circ$

1. Split bitstream into 2 streams e.g.

	0 0		1 1		0 1		1 0	
I Stream	0		1		0		1	
Q stream		0		1		1		0

2. Modulate each stream with PSK (1 = 90° or $\pi/2$, 0 = -90° or $-\pi/2$ phase shift)


I Stream	0		1		0		1	
	$-\pi/2$		$-\pi/2$		$-\pi/2$		$\pi/2$	
Q stream		0		1		1		0
		$-\pi/2$		$\pi/2$		$\pi/2$		$-\pi/2$



3. Combine (add) the two PSK signals:


Combined Phase	$-\pi/2$	$-\pi$	$-\pi/2$	0	$-\pi/2$	0	$\pi/2$	0
----------------	----------	--------	----------	---	----------	---	---------	---

Result: offset - QPSK, phase change is restricted to $\pm \pi/2$ radians:

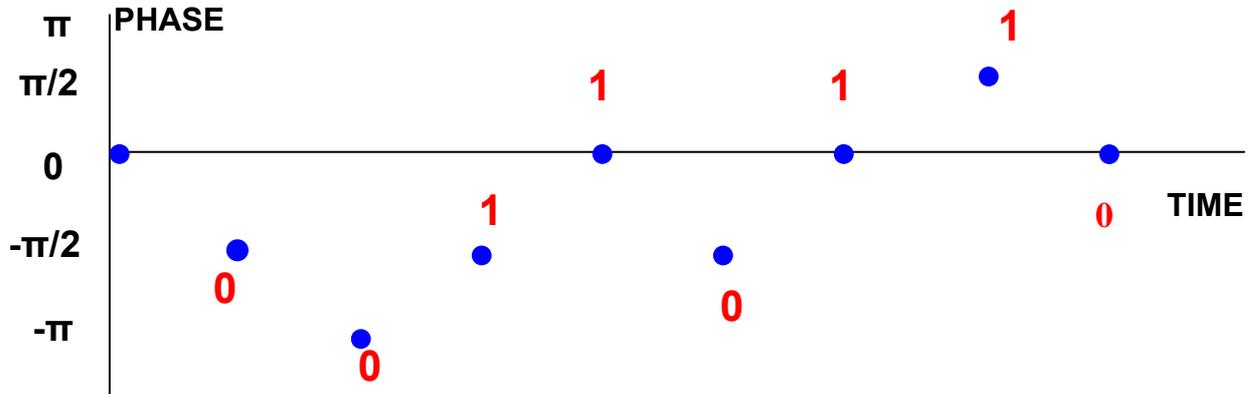

It would be preferable to have "gradual" changes in phase between each pair of bits (Continuous-phase modulation). Replacing each "rectangular" shaped pulse (for 1 or 0) with a sinusoidal pulse can do this:

Result: Minimum Shift Keying (MSK):

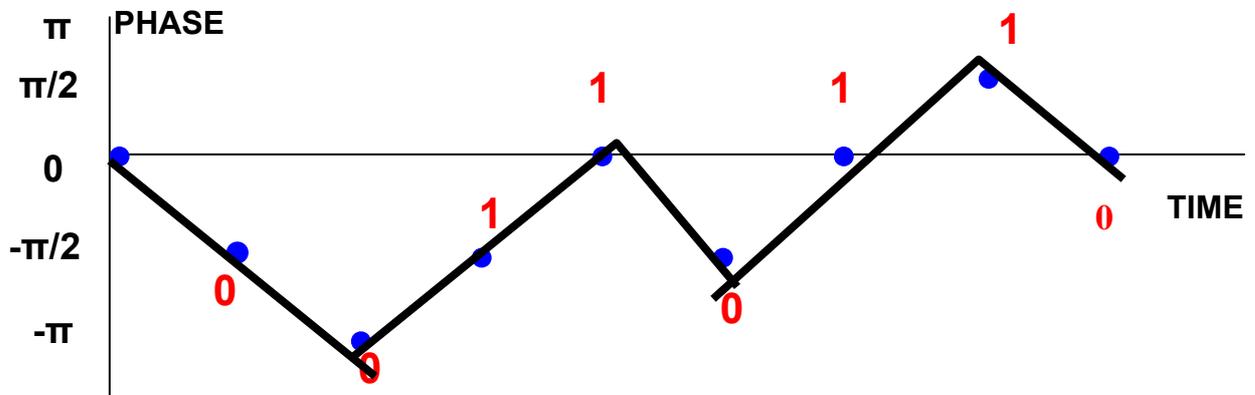

Gaussian Minimum Shift Keying

MSK has high sidebands relative to the main lobes in the frequency domain - this can lead to interference with adjacent signals.

If the rectangular pulses corresponding to the bitstream are filtered using a Gaussian-shaped impulse response filter, we get Gaussian MSK (GMSK) - this has low sidelobes compared to MSK.

Limit Clause

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.



Product Service

2.6 EMISSION FOR BROADBAND PCS EQUIPMENT

2.6.1 Specification Reference

FCC CFR 47 Part 2 and FCC CFR 47 Part 24, Clause 2.1051 and 24.238

2.6.2 Equipment Under Test and Modification State

CDMA SHX12 S/N: IMEI 004401113634311 - Modification State 0

2.6.3 Date of Test

3 December 2011

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions was obtained up to the 10th harmonic by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisation. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The EUT was set to transmit on full power on WCDMA modulation. The EUT was tested on bottom, middle and top channels at maximum power.

For any emissions found the EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result was determined by a calculation using the signal generator level, antenna gain and cable loss. The measurements were performed at a 3m distance unless otherwise stated.

2.6.6 Environmental Conditions


Ambient Temperature	20.9°C
Relative Humidity	35.0%




2.6.7 Test Results

1850.2 MHz

30 MHz to 1 GHz

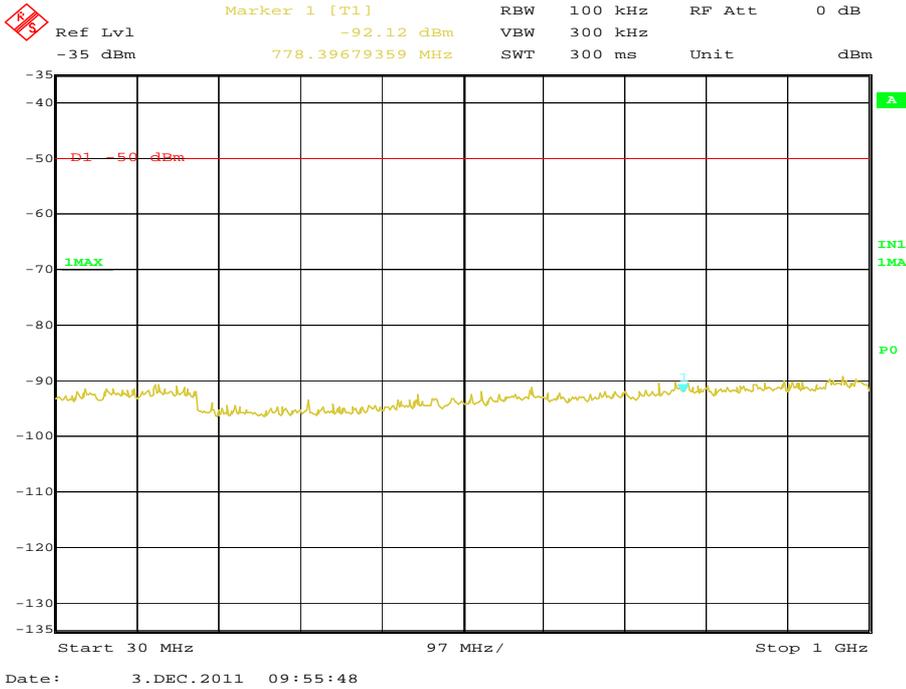


1 GHz to 3 GHz

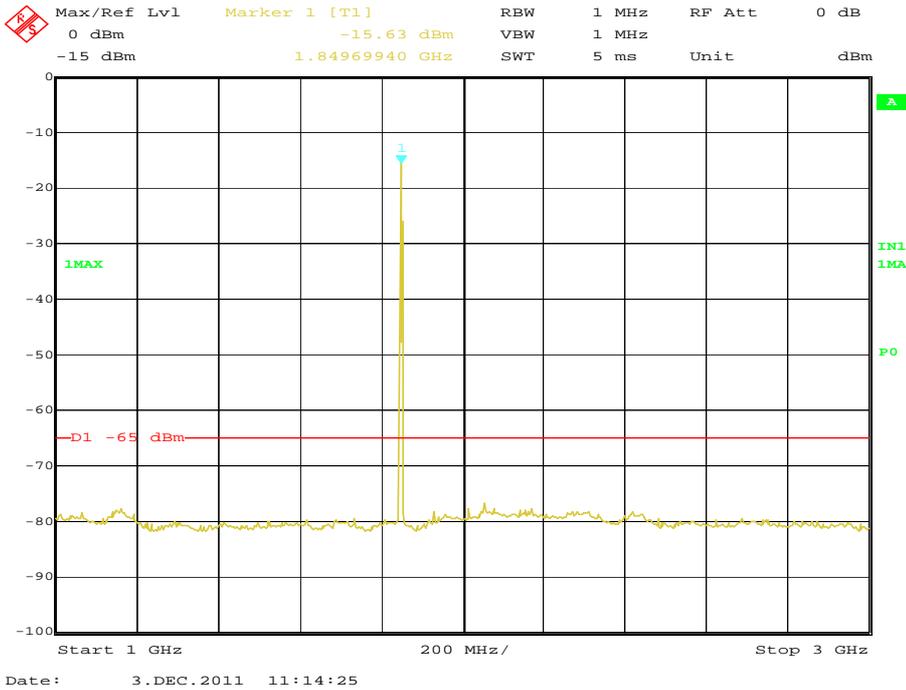




Product Service

3 GHz to 8 GHz

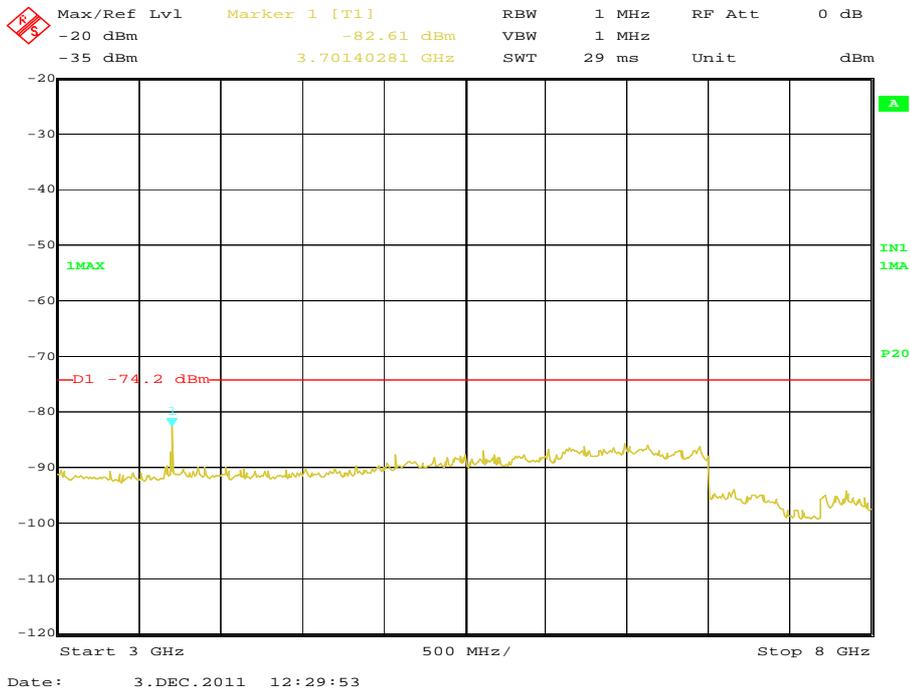


8 GHz to 18 GHz

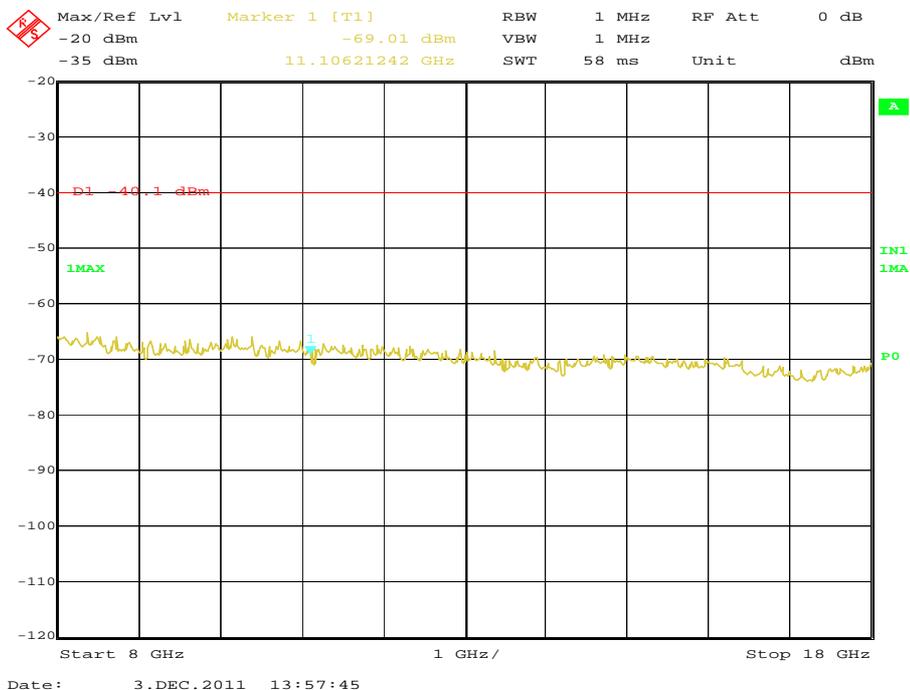



Product Service


18 GHz to 20 GHz

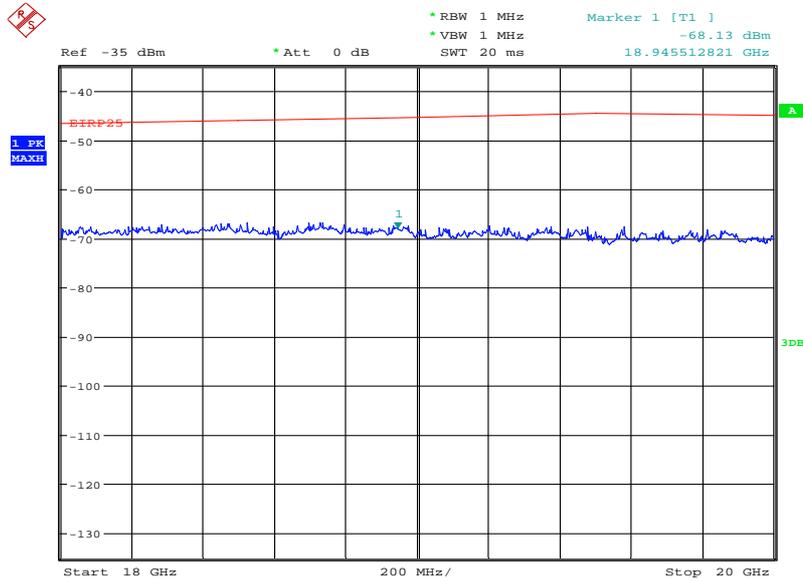

Date: 6.DEC.2011 21:47:33

1880.0 MHz

30 MHz to 1 GHz

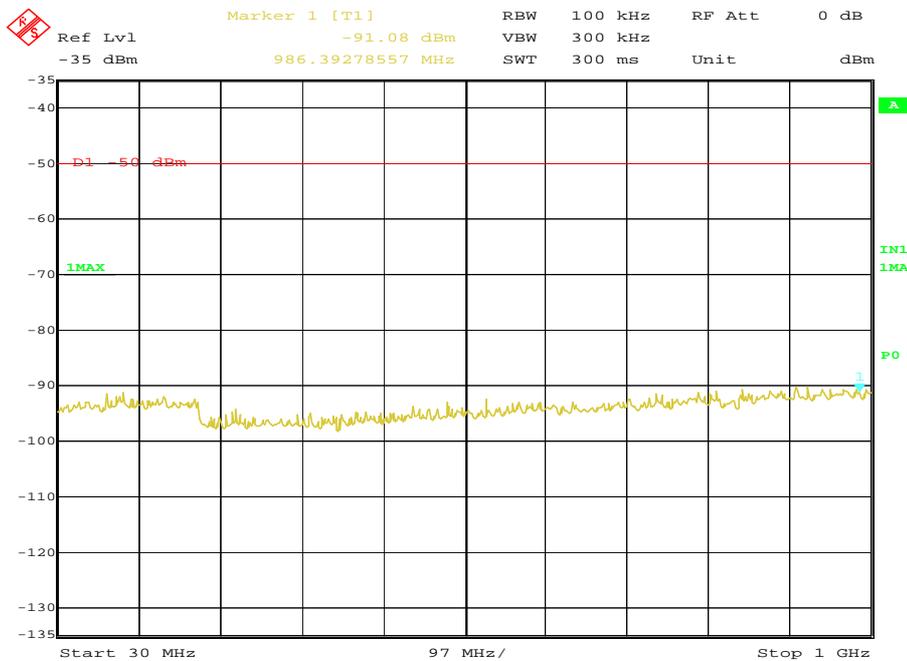


Date: 3.DEC.2011 09:45:47




Product Service

8 GHz to 18 GHz

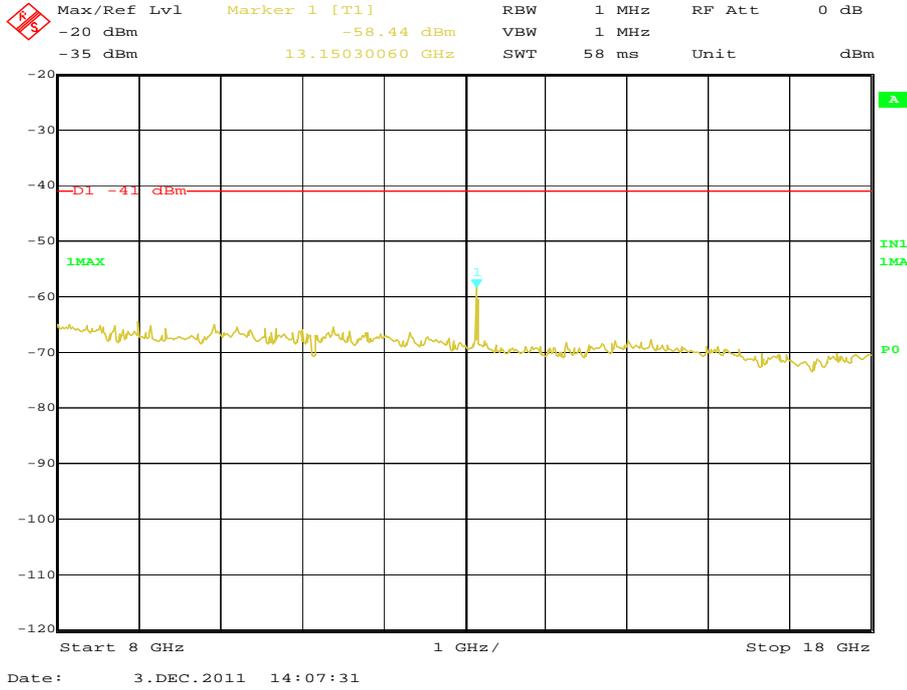


18 GHz to 20 GHz

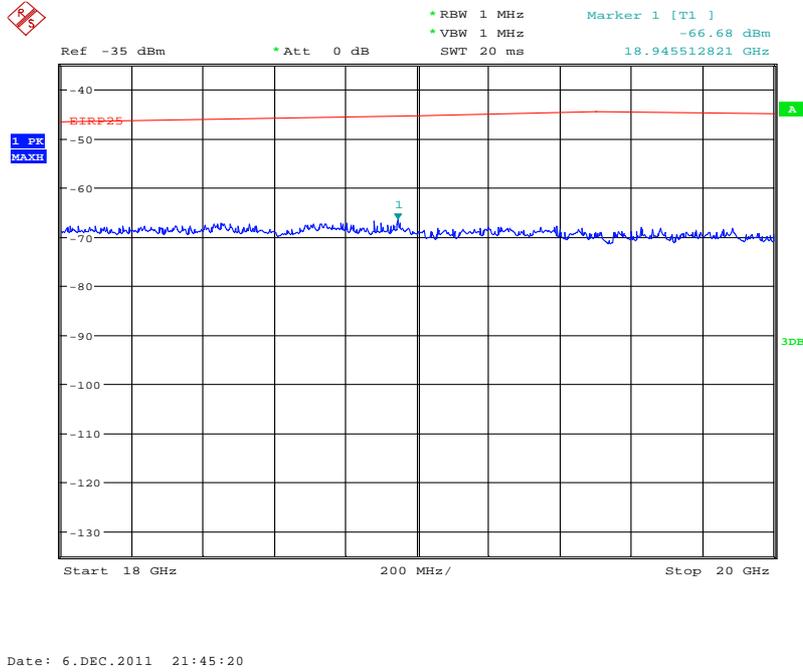




1909.8 MHz

30 MHz to 1 GHz

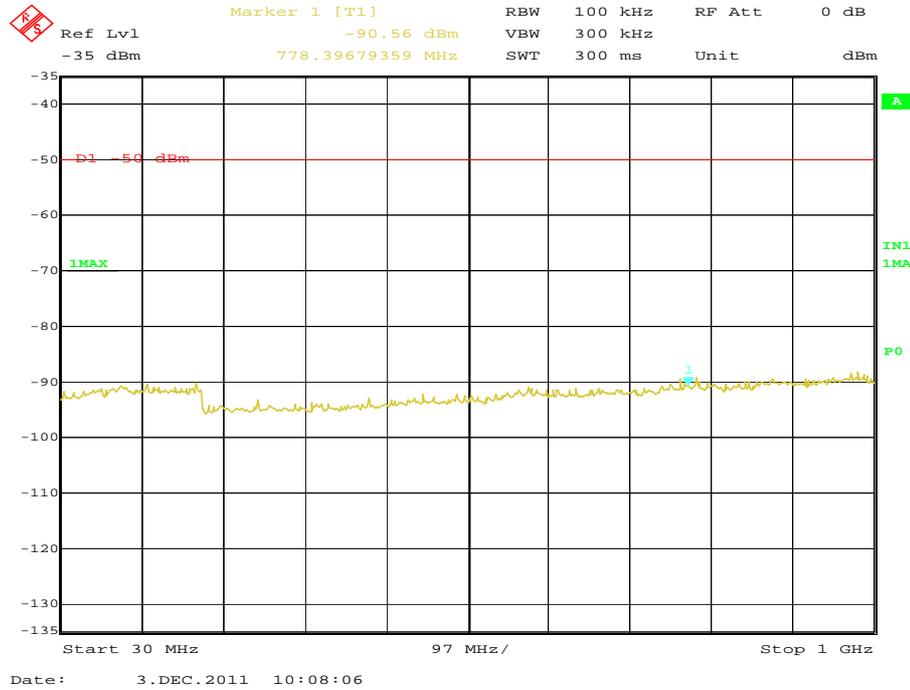

1 GHz to 3 GHz

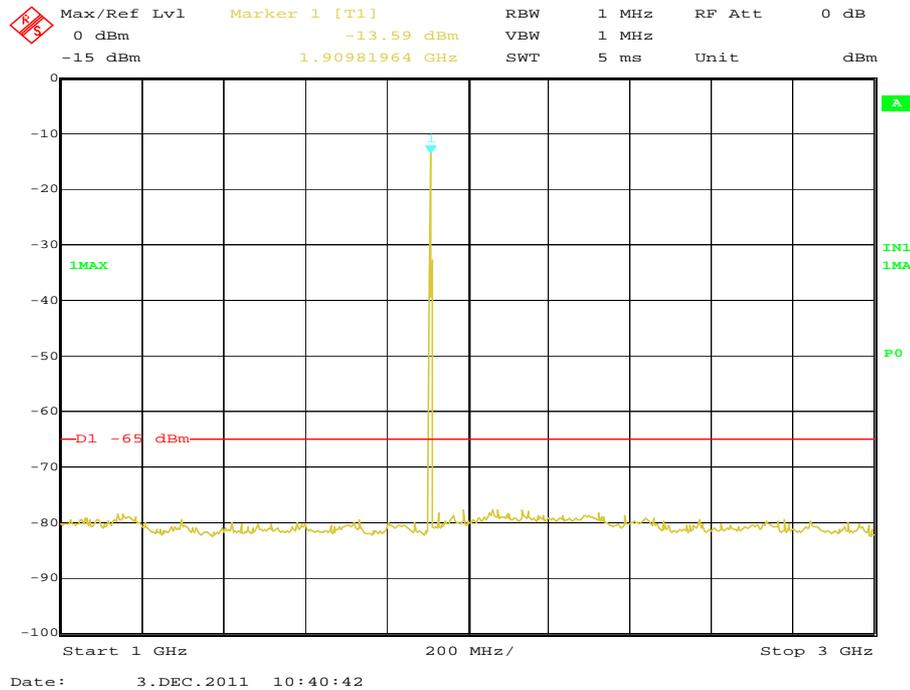




Product Service

3 GHz to 8 GHz


Max/Ref Lvl Marker 1 [T1] RBW 1 MHz RF Att 0 dB
-20 dBm -78.74 dBm VBW 1 MHz
-35 dBm 3.81972946 GHz SWT 29 ms Unit dBm

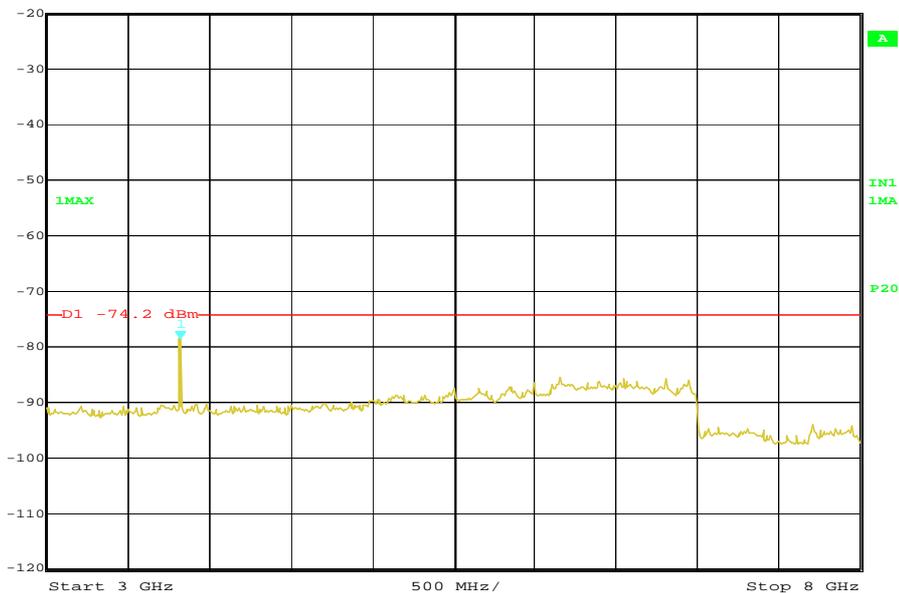

Date: 3.DEC.2011 12:54:51

8 GHz to 18 GHz

Max/Ref Lvl Marker 1 [T1] RBW 1 MHz RF Att 0 dB
-20 dBm -61.55 dBm VBW 1 MHz
-35 dBm 11.44689379 GHz SWT 58 ms Unit dBm

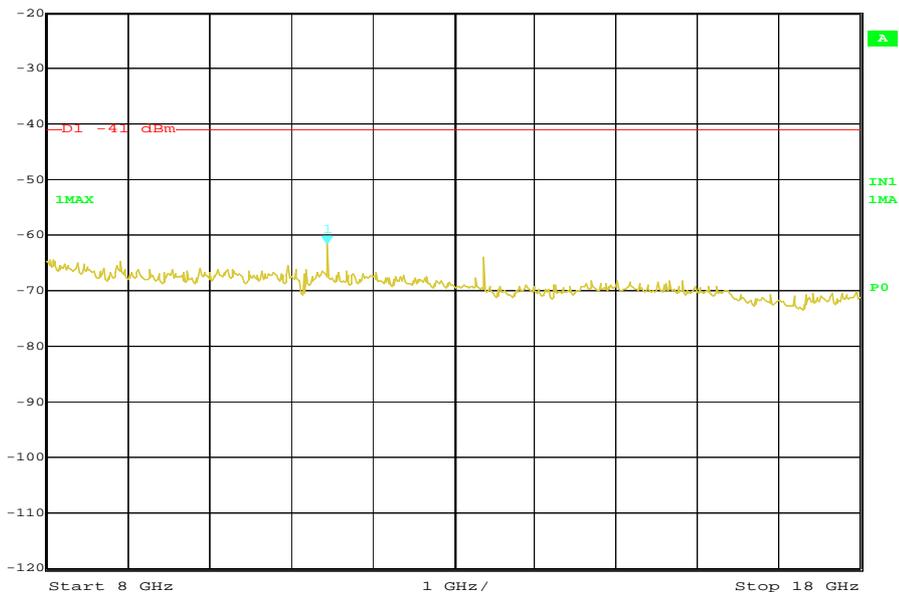


Date: 3.DEC.2011 14:19:20



Product Service

18 GHz to 20 GHz

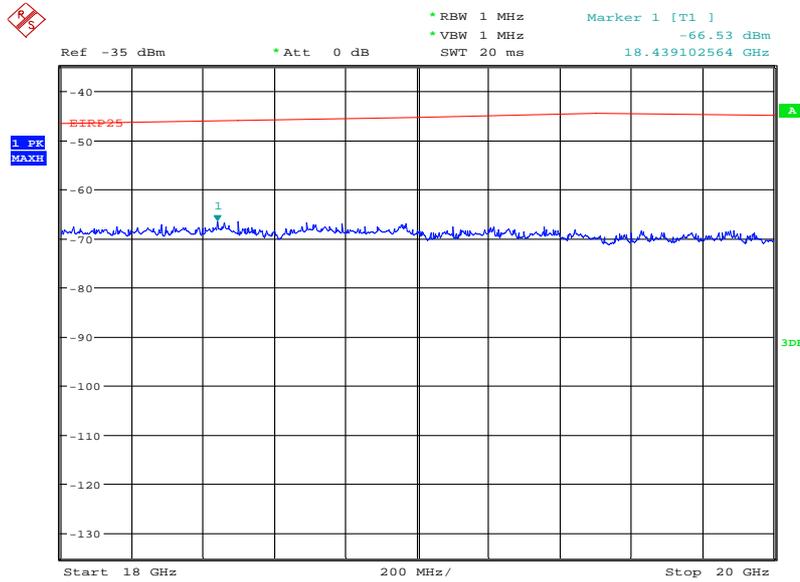

Date: 6.DEC.2011 21:49:31

Limit Clause

43+10log(P) or -13 dBm



Product Service

2.7 CONDUCTED SPURIOUS EMISSIONS

2.7.1 Specification Reference

FCC CFR 47 Part 2 and FCC CFR 47 Part 24, Clause 2.1051 and 24.238(a)

2.7.2 Equipment Under Test and Modification State

CDMA SHX12 S/N: IMEI 004401113640953 - Modification State 0

2.7.3 Date of Test

29 November 2011

2.7.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.5 Test Procedure

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9 kHz to 20 GHz. The EUT was set to transmit on full power with GMSK modulation. The EUT was tested on Bottom, Middle and Top channels at maximum power. The resolution and video bandwidths were set to 1 MHz and 3 MHz thus meeting the requirements of Part 24.238(a). The spectrum analyser detector was set to Max Hold.

From 9 kHz to 4 GHz, an attenuator was used. For measuring the range 4 GHz to 20 GHz an attenuator and high pass filter were used. This was to reduce saturation effects in the spectrum analyser.

The maximum path loss across the measurement bands were used as reference level offsets to ensure worst case.

2.7.6 Environmental Conditions

Ambient Temperature	25.9°C
Relative Humidity	36.0%




Product Service

2.7.7 Test Results

4.0 V DC Supply

1850.2 MHz


9kHz to 4 GHz

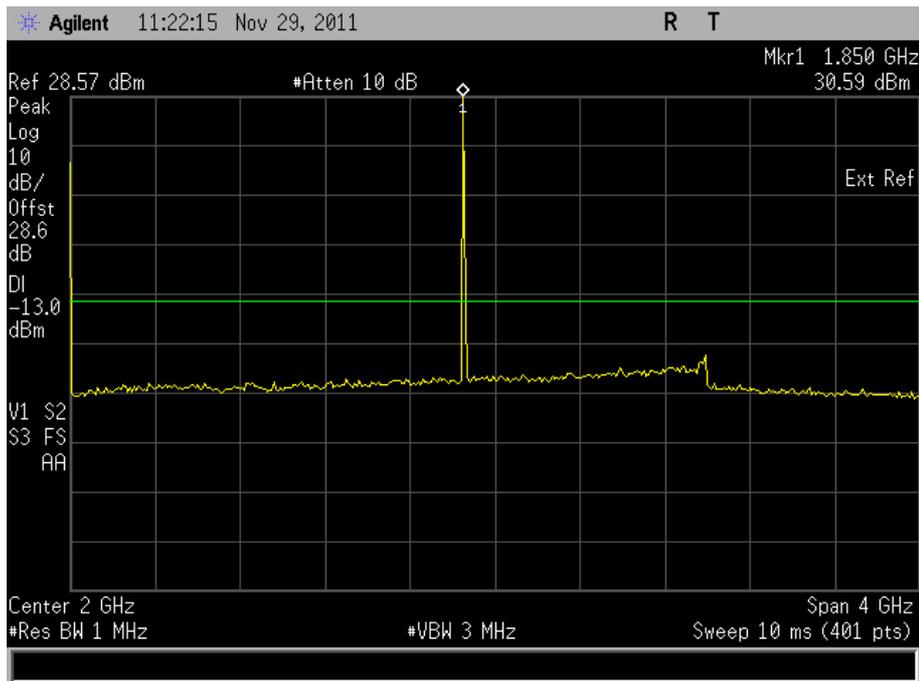




Product Service

4 GHz to 12 GHz

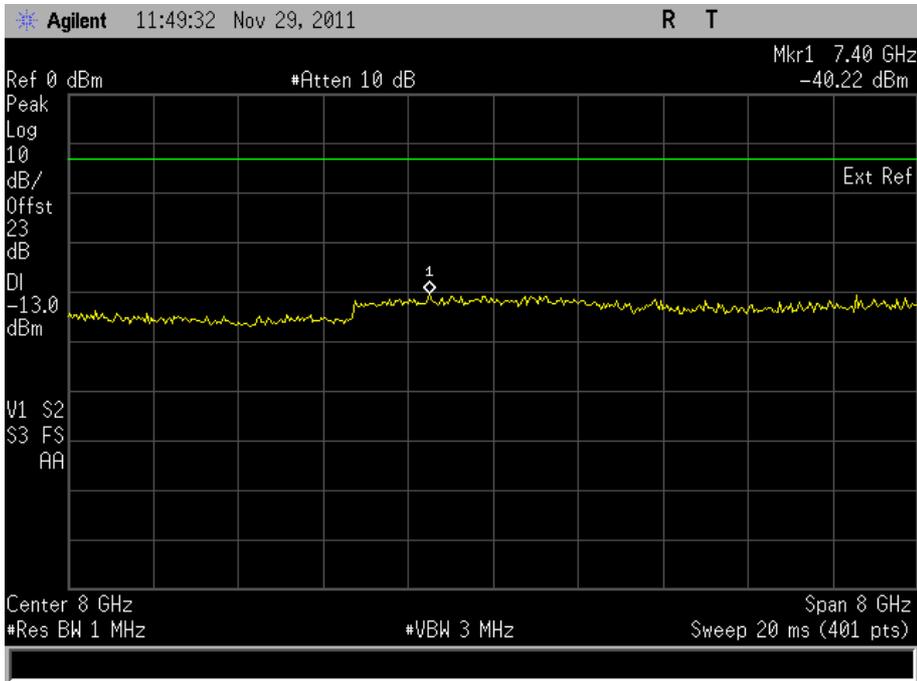

12 GHz to 20 GHz

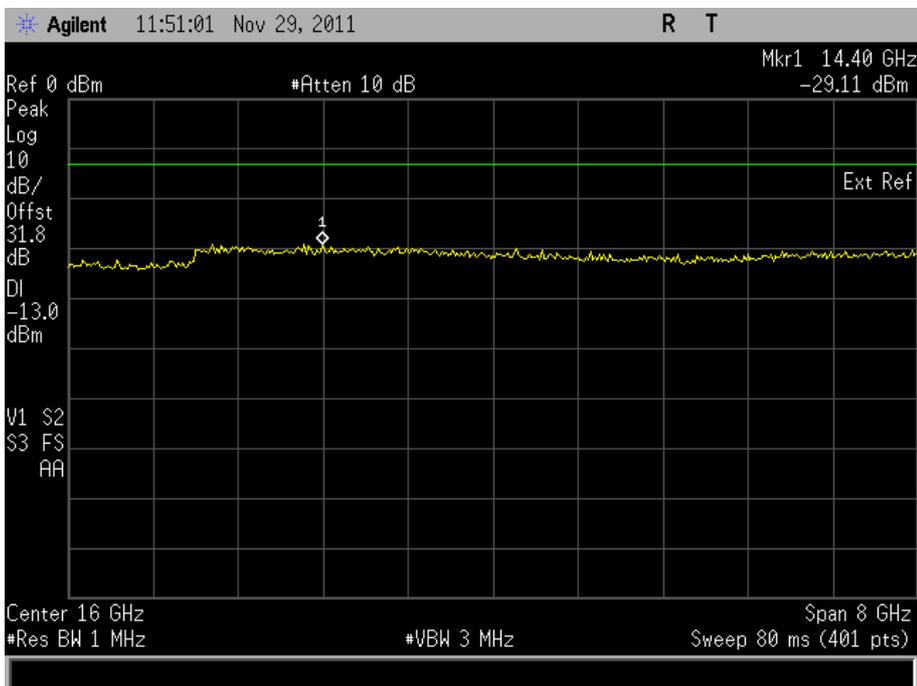





Product Service

1880.0 MHz

9kHz to 4 GHz

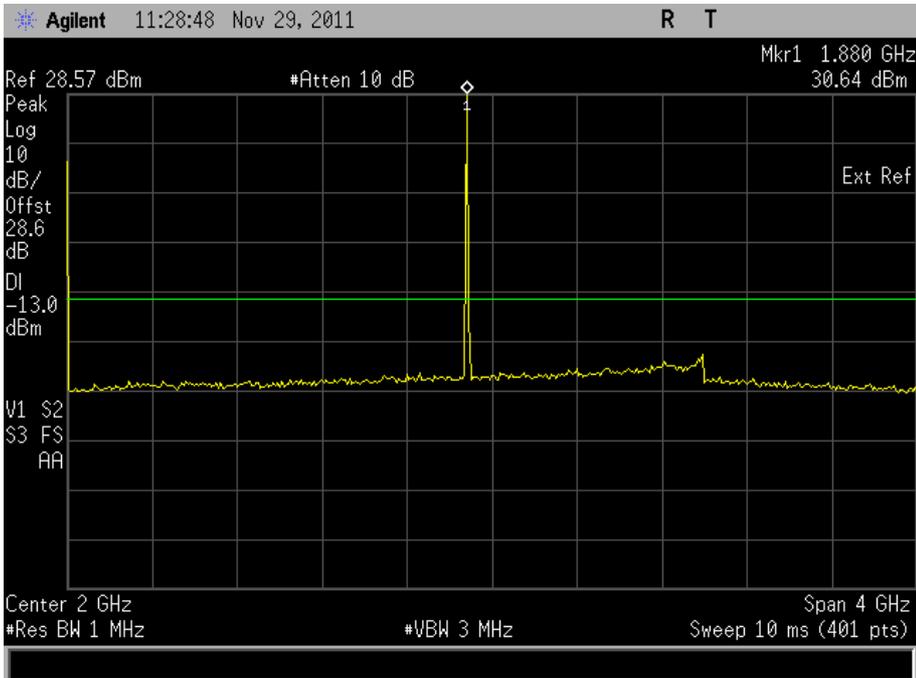


4 GHz to 12 GHz

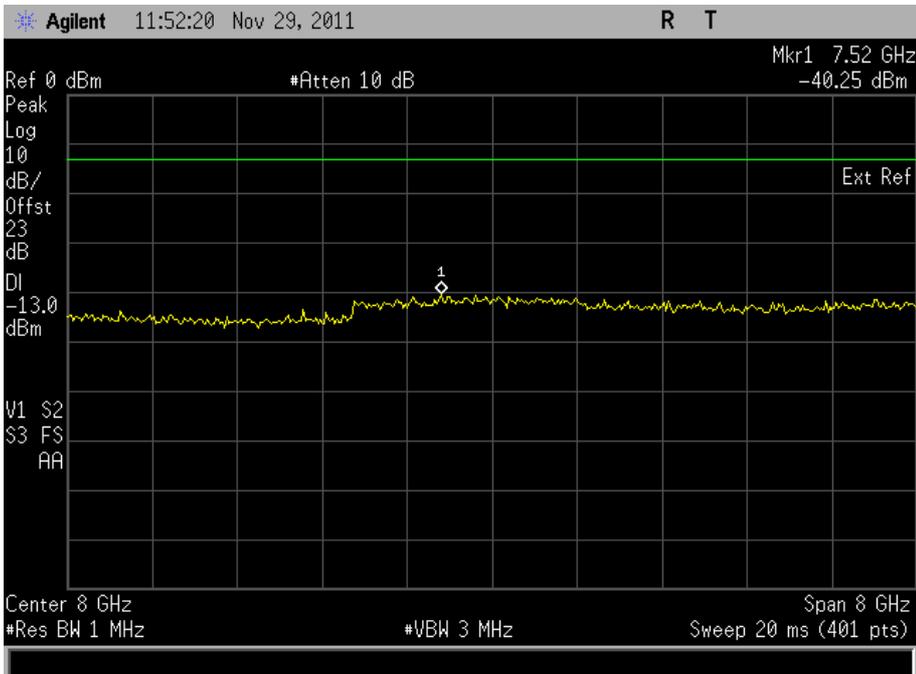




Product Service

12 GHz to 20 GHz

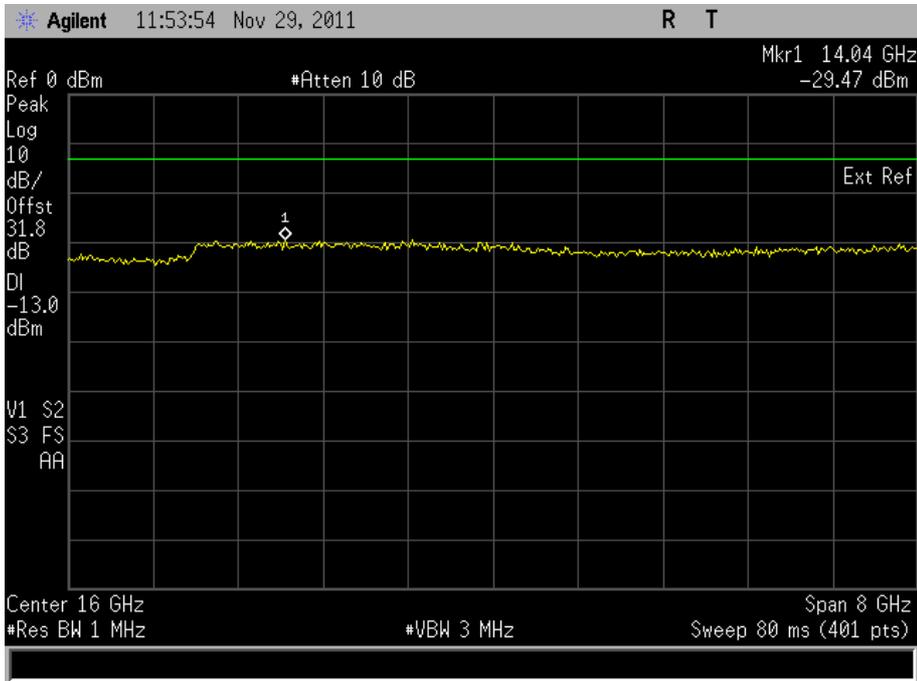

1909.8 MHz


9kHz to 4 GHz

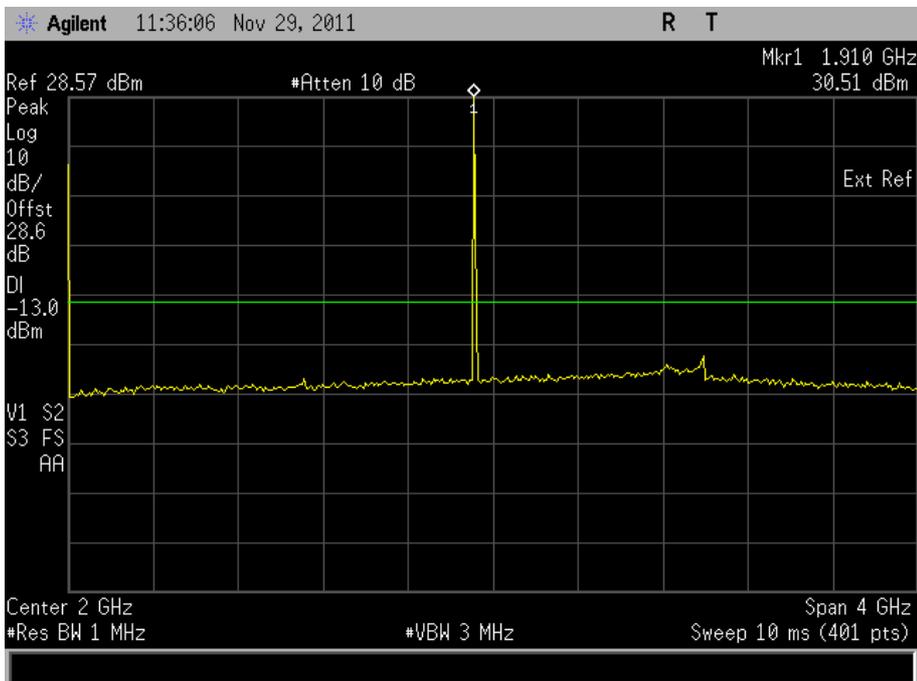




Product Service

4 GHz to 12 GHz

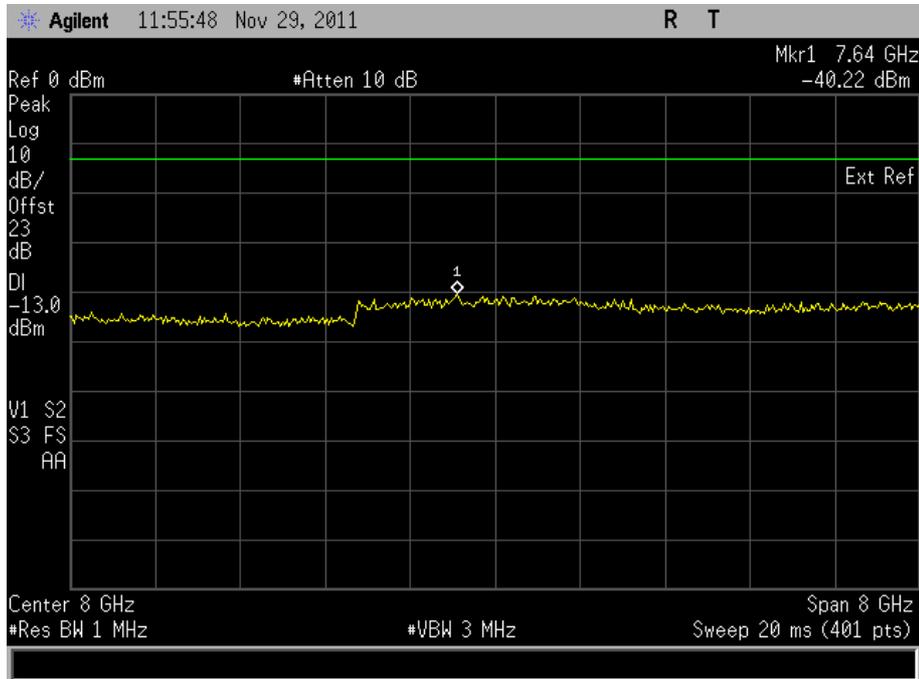

12 GHz to 20 GHz

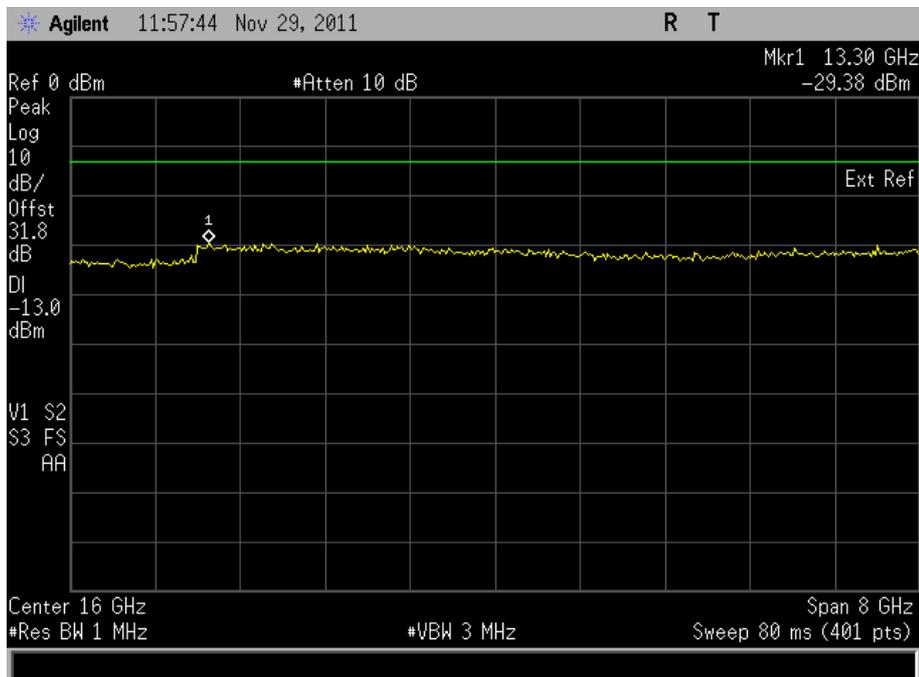

Limit Clause

43+10log(P) or -13 dBm



Product Service

2.8 OCCUPIED BANDWIDTH

2.8.1 Specification Reference

FCC CFR 47 Part 2 and FCC CFR 47 Part 24, Clause 2.1049(h) and 24.238(b)

2.8.2 Equipment Under Test and Modification State

CDMA SHX12 S/N: IMEI 004401113640953 - Modification State 0

2.8.3 Date of Test

29 November 2011

2.8.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.5 Test Procedure

The EUT was transmitting at maximum power, with WCDMA modulation. Using a resolution bandwidth of 10 kHz and a video bandwidth of 30 kHz, the -26 dBc points were established and the emission bandwidth determined.

The plot of the following pages shows the resultant display from the Spectrum Analyser.

2.8.6 Environmental Conditions

Ambient Temperature	25.9°C
Relative Humidity	36.0%




Product Service

2.8.7 Test Results

4.0 V DC Supply

1850.2 MHz

Mode	Occupied Bandwidth (kHz)
GMSK	327.5

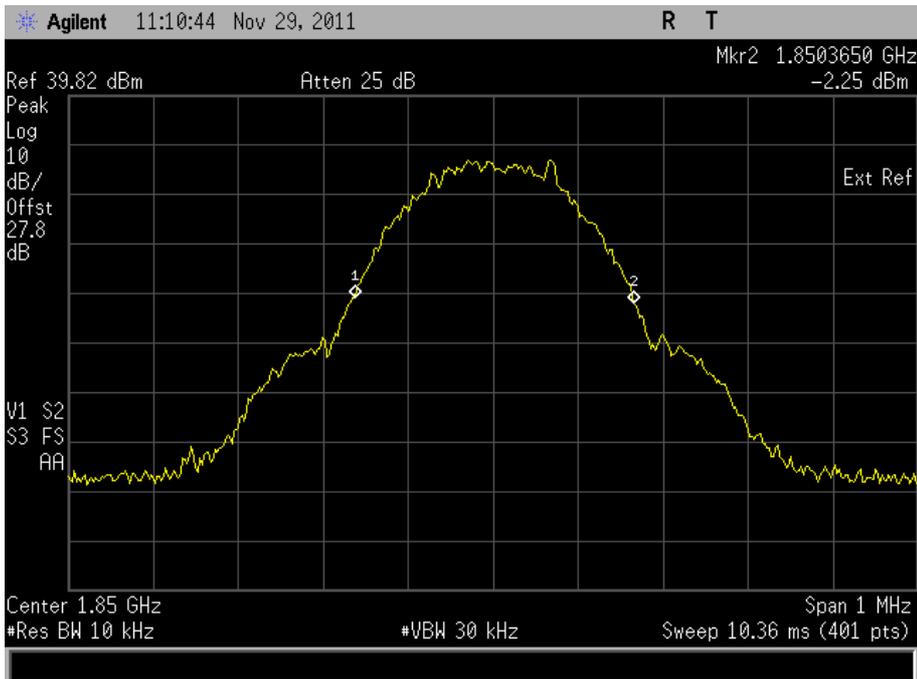




Product Service

1880.0 MHz

Mode	Occupied Bandwidth (kHz)
GMSK	322.5

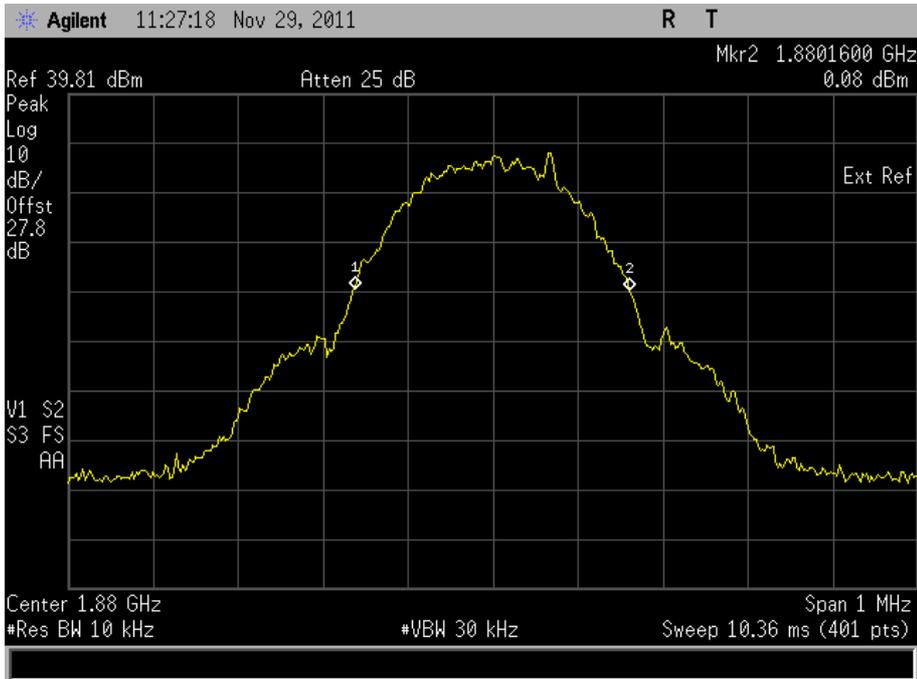




Product Service

1909.8 MHz

Mode	Occupied Bandwidth (kHz)
GSMK	322.5

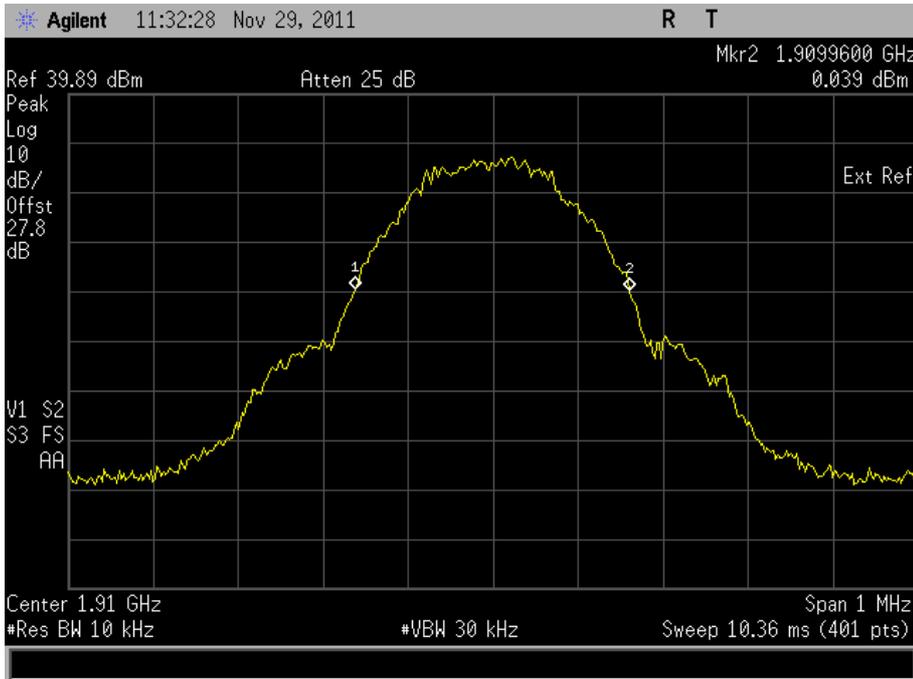

Limit Clause

The occupied bandwidth, that is the frequency bandwidth such that, below is lower and above is upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 – Frequency Stability					
Climatic Chamber	Votsch	VT4002	161	-	O/P Mon
Temperature Chamber	Montford	2F3	467	-	O/P Mon
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	21-Sep-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	13-Mar-2012
Attenuator (10dB, 10W)	Trilithic	HFP-50N	1377	12	19-Oct-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2421	12	26-Oct-2012
GSM Test Set	Rohde & Schwarz	CMU 200	2809	12	26-May-2012
Thermocouple Thermometer	Fluke	51	3172	12	23-Jul-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	6-Jun-2012
Power Supply	Farnell	ET30/2	3423	-	TU
Section 2.2 – Spurious Emissions at Band Edge					
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	23-Jun-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	21-Sep-2012
Broadband Resistive Power Divider	Weinschel	1506A	605	12	6-Sep-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	28-Jun-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	13-Mar-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2421	12	26-Oct-2012
Power Supply Unit	Weir	460	2754	-	TU
GSM Test Set	Rohde & Schwarz	CMU 200	2809	12	26-May-2012
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	10-Jun-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Power Divider	Weinschel	1506A	3345	12	4-May-2012
Power Meter	Rohde & Schwarz	NRP	3491	12	19-Apr-2012
Wideband Power Sensor, 50MHz - 18GHz	Rohde & Schwarz	NRP-Z81	3492	12	19-Apr-2012
Vector Signal Generator	Rohde & Schwarz	SMU 200A	3493	12	20-Sep-2012
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	11-Jan-2012
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3701	12	11-Jan-2012



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.3 – Effective Isotropic Radiated Power					
Peak Power Analyser	Hewlett Packard	8990A	107	12	11-Feb-2012
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESIB26	2028	12	4-Oct-2012
Power Sensor	Hewlett Packard	84812A	2743	-	TU
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	27-Apr-2012
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	22-Aug-2012
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2011
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	26-Aug-2012
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
P-Series Power Meter	Agilent	N1911A	3980	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	12-Sep-2012
Section 2.4 – Maximum Peak Output Power - Conducted					
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	23-Jun-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	21-Sep-2012
Power Divider	Weinschel	1506A	604	12	17-Mar-2012
Broadband Resistive Power Divider	Weinschel	1506A	605	12	6-Sep-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	28-Jun-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	13-Mar-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2421	12	26-Oct-2012
Multimeter	Iso-tech	IDM101	2424	12	5-Sep-2012
Power Supply Unit	Weir	460	2754	-	TU
GSM Test Set	Rohde & Schwarz	CMU 200	2809	12	26-May-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	8-Feb-2012
DC - 12.4 GHz 10 dB Attenuator 1 W	Suhner	6810.17.A	3964	12	24-Jun-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.6 – Emission for Broadband PCS Equipment					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Communications Tester	Rohde & Schwarz	CMU 200	442	12	13-Oct-2012
Antenna (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	2-Aug-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	20-Sep-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESIB26	2028	12	4-Oct-2012
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	27-Apr-2012
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	22-Aug-2012
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2011
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
Power magnetic field Coil (Horizontal 2.1m*2.2m)	TUV	N/A	3522	-	TU
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	14-Apr-2012
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3696	12	28-Jan-2012
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3703	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	26-Aug-2012
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Low Noise Amplifier	Wright Technologies	APS04-0085	3969	12	8-Jul-2012



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.7 - Conducted Spurious Emissions					
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	23-Jun-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	21-Sep-2012
Power Divider	Weinschel	1506A	604	12	17-Mar-2012
Broadband Resistive Power Divider	Weinschel	1506A	605	12	6-Sep-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	28-Jun-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	13-Mar-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
4GHz HPF	Sematron	F-100-4000-5-R	2245	-	TU
Multimeter	Iso-tech	IDM101	2421	12	26-Oct-2012
Multimeter	Iso-tech	IDM101	2424	12	5-Sep-2012
Power Supply Unit	Weir	460	2754	-	TU
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	22-Dec-2011
GSM Test Set	Rohde & Schwarz	CMU 200	2809	12	26-May-2012
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	10-Jun-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Power Divider	Weinschel	1506A	3345	12	4-May-2012
Power Meter	Rohde & Schwarz	NRP	3491	12	19-Apr-2012
Wideband Power Sensor, 50MHz - 18GHz	Rohde & Schwarz	NRP-Z81	3492	12	19-Apr-2012
Vector Signal Generator	Rohde & Schwarz	SMU 200A	3493	12	20-Sep-2012
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	8-Feb-2012
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	11-Jan-2012
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3701	12	11-Jan-2012
DC - 12.4 GHz 10 dB Attenuator 1 W	Suhner	6810.17.A	3964	12	24-Jun-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.8 - Occupied Bandwidth					
RF Coupler	TUV	TUV	415	-	TU
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	23-Jun-2012
Attenuator (10dB)	Weinschel	47-10-34	481	12	24-Mar-2012
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	21-Sep-2012
Power Divider	Weinschel	1506A	604	12	17-Mar-2012
Broadband Resistive Power Divider	Weinschel	1506A	605	12	6-Sep-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	28-Jun-2012
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	13-Mar-2012
Power Supply Unit	Farnell	TSV-70	2043	-	O/P Mon
Multimeter	Iso-tech	IDM101	2421	12	26-Oct-2012
Multimeter	Iso-tech	IDM101	2424	12	5-Sep-2012
Power Supply Unit	Weir	460	2754	-	TU
GSM Test Set	Rohde & Schwarz	CMU 200	2809	12	26-May-2012
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	10-Jun-2012
Hygrometer	Rotronic	I-1000	3220	12	3-May-2012
Power Divider	Weinschel	1506A	3345	12	4-May-2012
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	6-Jun-2012
Power Supply	Farnell	ET30/2	3423	-	TU
Power Meter	Rohde & Schwarz	NRP	3491	12	19-Apr-2012
Wideband Power Sensor, 50MHz - 18GHz	Rohde & Schwarz	NRP-Z81	3492	12	19-Apr-2012
Vector Signal Generator	Rohde & Schwarz	SMU 200A	3493	12	20-Sep-2012
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	23-Feb-2012
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	8-Feb-2012
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	11-Jan-2012
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3701	12	11-Jan-2012
DC - 12.4 GHz 10 dB Attenuator 1 W	Suhner	6810.17.A	3964	12	24-Jun-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Maximum Peak Output Power - Conducted	± 0.70 dB
Emission for Broadband PCS Equipment	± 3.08 dB
Conducted Spurious Emissions	± 3.454 dB
Effective Isotropic Radiated Power	± 3.08 dB
Spurious Emissions at Band Edge	± 2.20 dB
Occupied Bandwidth	± 10.14 kHz
Modulation Characteristics	-
Frequency Stability	± 99.54 Hz



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service Limited

© 2011 TÜV SÜD Product Service Limited