



EMI TEST REPORT

Test Report No. : 32EE0051-HO-B


Applicant : Sharp Corporation, Communication Systems Group.
Type of Equipment : Cellular Phone
Model No. : 105SH
FCC ID : APYHRO00166
Test standard : FCC Part 15 Subpart B 2011 Class B
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test:

December 16, 2011

Representative test engineer:



Hiroshi Kukita
Engineer of WiSE Japan,
UL Verification Service

Approved by:



Mitsuru Fujimura
Leader of WiSE Japan,
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13-EM-F0429

CONTENTS **PAGE**

SECTION 1: Customer information 3
SECTION 2: Equipment under test (E.U.T.) 3
SECTION 3: Test specification, procedures & results 4
SECTION 4: Operation of E.U.T. during testing 7
SECTION 5: Conducted Emission 9
SECTION 6: Radiated Emission 10
APPENDIX 1: Data of EMI test 11
Conducted Emission..... 11
Radiated Emission..... 13
APPENDIX 2: Test instruments 17
APPENDIX 3: Photographs of test setup..... 18
Conducted Emission..... 18
Radiated Emission..... 19
Worst Case Position (Horizontal: X-axis/ Vertical:X-axis) 20

SECTION 1: Customer information

Company Name : Sharp Corporation, Communication Systems Group.
Address : 2-13-1 Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192 Japan
Telephone Number : +81-82-420-1827
Facsimile Number : +81-82-420-1572
Contact Person : Hiroyuki Uwatoko

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Cellular Phone
Model No. : 105SH
Serial No. : Refer to Section 4, Clause 4.2
Receipt Date of Sample : December 16, 2011
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product description

Feature of EUT : 105SH is Dual-band (FDD I/FDD VIII) WCDMA & Tri-band
(900/1800/1900) GSM Dual mode Cellular Phone.
Clock frequencies in the system : CPU:208MHz (Max)
RTC:32.768kHz
Source oscillation:26MHz(wireless segment and CPU)/
32MHz(terrestrial digital tuner)

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test specification

Test Specification : Test specification: FCC Part 15 Subpart B: 2011, final revised on November 21, 2011 and effective December 21, 2011

Title : FCC 47CFR Part15 Radio Frequency Device
Subpart B Unintentional Radiators

*The revision on November 21, 2011 does not affect the test specification applied to the EUT.

3.2 Procedures and results

Item	Test Procedure	Limits	Deviation	Worst margin	Result
Conducted emission	ANSI C63.4: 2003 7. AC powerline conducted emission measurements	Class B	N/A	[QP] 14.6dB 0.17128MHz, N [AV] 14.1dB 0.17128MHz, N	Complied
Radiated emission	ANSI C63.4: 2003 8. Radiated emission measurements	Class B	N/A	6.6dB 447.356MHz, Horizontal, QP	Complied

*Note: UL Japan, Inc's EMI Work Procedure 13-EM-W0420.

3.3 Addition to standard

No addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Conducted emission (+dB)
	150kHz-30MHz
No.1	3.5dB
No.2	3.6dB
No.3	3.6dB
No.4	3.6dB

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(+dB)				(1m*)(+dB)		(0.5m*)(+dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	4.2dB	5.0dB	5.1dB	5.6dB	5.9dB	4.4dB	4.3dB
No.2	4.1dB	5.2dB	5.1dB	5.7dB	5.8dB	4.3dB	4.2dB
No.3	4.5dB	5.0dB	5.2dB	5.7dB	5.8dB	4.5dB	4.2dB
No.4	4.7dB	5.2dB	5.2dB	5.7dB	5.8dB	5.1dB	4.2dB

*3m/1m/0.5m = Measurement distance

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments


Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating modes

The mode(s) : 1) USB Data Com Mode
The USB data is communicated between EUT and Personal computer (Pair of EUT).
2) Standby Mode
Standby state for USB communication.

4.2 Configuration and peripherals

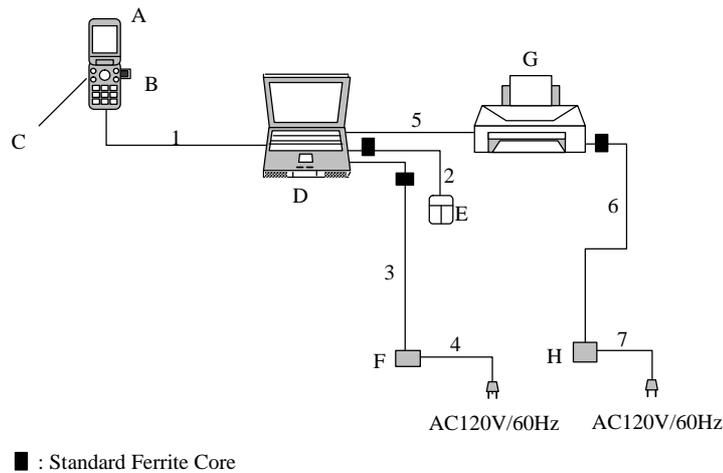

*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Cellular Phone	105SH	004401/11/375533/0	Sharp Corporation	EUT
B	microSD Memory Card	SD-MD008GA	None	TOSHIBA	-
C	Lithium-Ion Battery	SHBCU1	UJA	Sharp Corporation	EUT
D	Personal Computer	PP11L	CN-0D4571-48643-55V-1651	Dell	-
E	Mouse	M-BE55	LZE21450232	Logitech	-
F	AC Adapter(PC)	PA-1650-05D2	CN-0F7970-71615-561-14A1	Dell	-
G	Printer	895Cxi	SG8BL1W16V	Hewlett Packard	-
H	AC Adapter(Printer)	C4557-60004	C8K28B	Hewlett Packard	-

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	USB Data Cable	0.80	Shielded	Shielded	-
2	Mouse Cable	0.72	Unshielded	Unshielded	-
3	AC Adapter Cable(PC)	1.76	Unshielded	Unshielded	-
4	AC Power Cable(PC)	0.85	Unshielded	Unshielded	-
5	Parallel Cable	1.65	Shielded	Shielded	-
6	AC Adapter Cable(printer)	2.00	Unshielded	Unshielded	-
7	AC Power Cable(printer)	1.75	Unshielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted Emission

5.1 Operating environment

Test place : No. 1 semi anechoic chamber.
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from the LISN/AMN and excess AC cable was bundled in center. I/O cables that were connected to the other peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/AMN to the input power source. All unused 50 ohm connectors of the LISN/AMN were resistivity terminated in 50 ohm when not connected to the measuring equipment. Photographs of the set up are shown in Appendix 1.

Frequency range : 0.15 MHz-30MHz
EUT position : Table top
EUT operation mode : See Clause 4.1

5.3 Test procedure

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT within a semi anechoic chamber. The EUT was connected to a Line Impedance Stabilization Network (LISN)/ Artificial Mains network (AMN). An overview sweep with peak detection has been performed. The measurements have been performed with a quasi-peak detector and if required, with an average detector.

The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : Quasi-Peak and Average
IF Bandwidth : 9 kHz

5.4 Test result

Summary of the test results: Pass

Date: December 16, 2011

Test engineer: Hiroshi Kukita

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Radiated Emission

6.1 Operating environment

Test place : No. 1 semi anechoic chamber
Temperature : See data
Humidity : See data

6.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The EUT was set on the edge of the tabletop.
Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. Photographs of the set up are shown in Appendix 1.

6.3 Test conditions

Frequency range : 30MHz-300MHz (Biconical antenna) / 300MHz-1000MHz (Logperiodic antenna)
1000MHz - 2000MHz (Horn antenna)
Test distance : 3m
EUT position : Table top
EUT operation mode : See Clause 4.1

6.4 Test procedure

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.
The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.
The radiated emission measurements were made with the following detector function of the test receiver and the Spectrum analyzer.

Frequency	Below 1GHz	Above 1GHz
Instrument used	Test Receiver	Spectrum Analyzer
IF Bandwidth	QP: BW 120kHz	PK: RBW:1MHz/VBW: 3MHz AV *1): RBW:1MHz/VBW:10Hz

*1) When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

- The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at representative X-axis since no difference was found among each position.

6.5 Test result

Summary of the test results: Pass

Date: December 16, 2011

Test engineer: Hiroshi Kukita

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

APPENDIX 1: Data of EMI test

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/12/16

Report No. : 32EE0051-HO
Temp./Humi. : 25deg. C / 32% RH
Engineer : Hiroshi Kukita

Mode / Remarks : USB data com mode

LIMIT : FCC15.107(a) QP ClassB
FCC15.107(a) AV ClassB

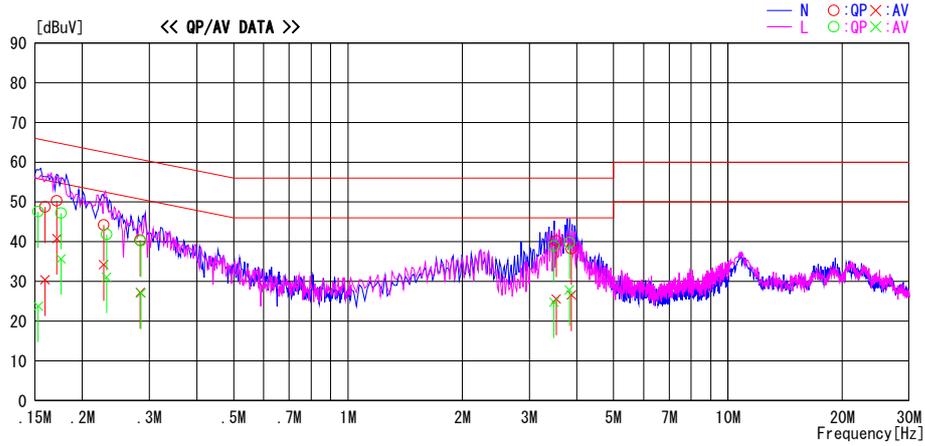

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15941	35.5	17.2	13.2	48.7	30.4	65.5	55.5	16.8	25.1	N	
0.17128	37.1	27.6	13.2	50.3	40.8	64.9	54.9	14.6	14.1	N	
0.22755	30.9	20.9	13.3	44.2	34.2	62.5	52.5	18.3	18.3	N	
0.28378	27.1	13.9	13.3	40.4	27.2	60.7	50.7	20.3	23.5	N	
3.53339	26.4	11.8	13.8	40.2	25.6	56.0	46.0	15.8	20.4	N	
3.87073	24.4	12.8	13.8	38.2	26.6	56.0	46.0	17.8	19.4	N	
0.15302	34.4	10.6	13.2	47.6	23.8	65.8	55.8	18.2	32.0	L	
0.17575	34.0	22.5	13.2	47.2	35.7	64.7	54.7	17.5	19.0	L	
0.23156	28.5	17.8	13.3	41.8	31.1	62.4	52.4	20.6	21.3	L	
0.28501	26.9	13.8	13.3	40.2	27.1	60.7	50.7	20.5	23.6	L	
3.48060	25.1	11.0	13.8	38.9	24.8	56.0	46.0	17.1	21.2	L	
3.82518	25.9	14.1	13.8	39.7	27.9	56.0	46.0	16.3	18.1	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT=READING+C. F (LISM LOSS+ATT LOSS +CABLE LOSS)
Except for the above table : adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Conducted Emission


DATA OF CONDUCTED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/12/16

Report No. : 32EE0051-HO
Temp./Humi. : 25deg. C / 32% RH
Engineer : Hiroshi Kukita

Mode / Remarks : Standby mode

LIMIT : FCC15.107(a) QP ClassB
FCC15.107(a) AV ClassB

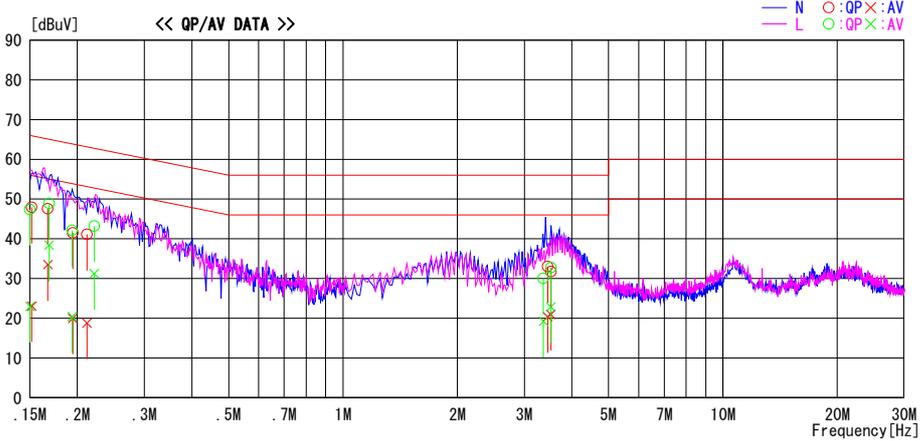

Frequency [MHz]	Reading Level		Corr. Factor [dB]	Results		Limit		Margin		Phase	Comment
	QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]		
0.15174	34.7	9.9	13.2	47.9	23.1	65.9	55.9	18.0	32.8	N	
0.16711	34.4	20.3	13.2	47.6	33.5	65.1	55.1	17.5	21.6	N	
0.19437	28.3	6.8	13.2	41.5	20.0	63.8	53.8	22.3	33.8	N	
0.21188	27.9	5.6	13.2	41.1	18.8	63.1	53.1	22.0	34.3	N	
3.45566	19.2	6.6	13.8	33.0	20.4	56.0	46.0	23.0	25.6	N	
3.52469	17.9	7.2	13.8	31.7	21.0	56.0	46.0	24.3	25.0	N	
0.15000	34.2	9.8	13.2	47.4	23.0	66.0	56.0	18.6	33.0	L	
0.16847	35.7	25.2	13.2	48.9	38.4	65.0	55.0	16.1	16.6	L	
0.19385	28.9	7.2	13.2	42.1	20.4	63.9	53.9	21.8	33.5	L	
0.22155	29.9	17.9	13.3	43.2	31.2	62.8	52.8	19.6	21.6	L	
3.36891	16.2	5.4	13.8	30.0	19.2	56.0	46.0	26.0	26.8	L	
3.52399	18.9	9.1	13.8	32.7	22.9	56.0	46.0	23.3	23.1	L	

CHART: WITH FACTOR, Peak hold data. CALCULATION: RESULT=READING+C. F (L1SN LOSS+ATT LOSS +CABLE LOSS)
Except for the above table : adequate margin data below the limits.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission
(Below 1GHz)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/12/16

Report No. : 32EE0051-HO
Temp./Humi. : 25deg. C / 32% RH
Engineer : Hiroshi Kukita

Mode / Remarks : USB data com mode, Worst axis:X

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

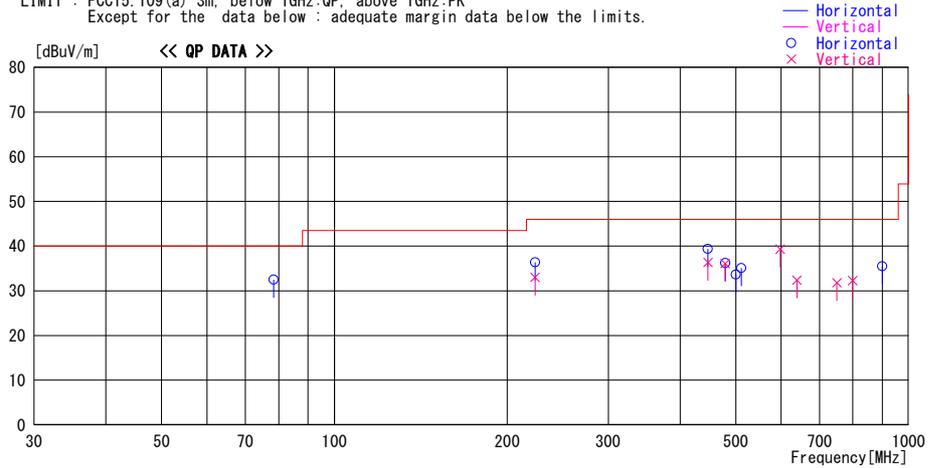

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
78.414	56.6	QP	6.4	-30.5	32.5	121	272	Hori.	40.0	7.5	
223.678	47.9	QP	17.2	-28.7	36.4	292	152	Hori.	46.0	9.6	
223.678	44.5	QP	17.2	-28.7	33.0	0	100	Vert.	46.0	13.0	
447.358	44.8	QP	17.9	-26.4	36.3	170	100	Vert.	46.0	9.7	
447.356	47.9	QP	17.9	-26.4	39.4	209	100	Hori.	46.0	6.6	
479.311	44.1	QP	18.1	-26.1	36.1	188	100	Vert.	46.0	9.9	
479.310	44.2	QP	18.1	-26.1	36.2	210	100	Hori.	46.0	9.8	
500.365	41.2	QP	18.2	-25.8	33.6	52	100	Hori.	46.0	12.4	
511.264	42.6	QP	18.3	-25.8	35.1	211	100	Hori.	46.0	10.9	
597.702	44.8	QP	19.4	-24.9	39.3	342	100	Vert.	46.0	6.7	
639.079	37.2	QP	19.9	-24.7	32.4	191	100	Vert.	46.0	13.6	
750.006	34.4	QP	21.3	-23.9	31.8	351	100	Vert.	46.0	14.2	
798.852	33.9	QP	22.0	-23.6	32.3	353	100	Vert.	46.0	13.7	
900.657	36.0	QP	22.1	-22.6	35.5	293	100	Hori.	46.0	10.5	

CHART:WITH FACTOR ANT TYPE:-30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission
(Below 1GHz)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/12/16

Report No. : 32EE0051-HO
Temp./Humi. : 25deg. C / 32% RH
Engineer : Hiroshi Kukita

Mode / Remarks : Standby mode, Worst axis:X

LIMIT : FCC15.109(a) 3m. below 1GHz:QP, above 1GHz:PK
Except for the data below : adequate margin data below the limits.

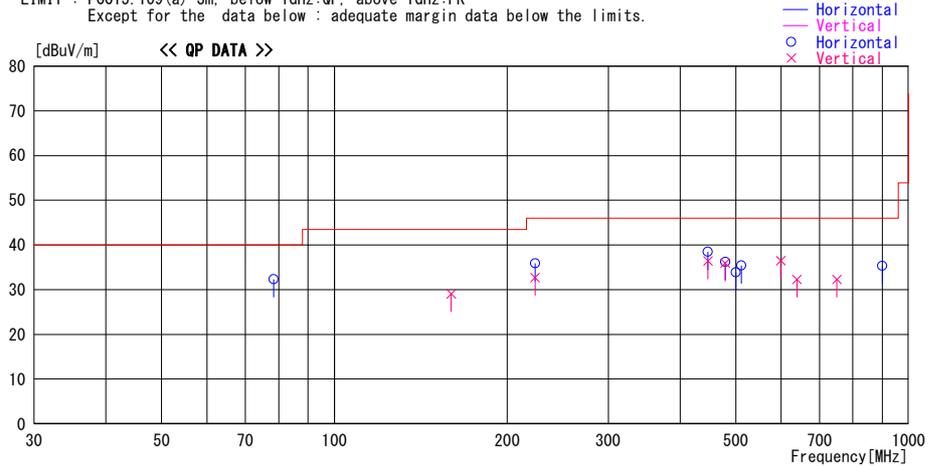

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
78.411	56.4	QP	6.4	-30.5	32.3	133	272	Hori.	40.0	7.7	
159.771	43.3	QP	15.4	-29.6	29.1	126	100	Vert.	43.5	14.4	
223.678	44.2	QP	17.2	-28.7	32.7	197	100	Vert.	46.0	13.3	
223.677	47.4	QP	17.2	-28.7	35.9	293	153	Hori.	46.0	10.1	
447.360	44.9	QP	17.9	-26.4	36.4	168	100	Vert.	46.0	9.6	
447.356	47.0	QP	17.9	-26.4	38.5	219	100	Hori.	46.0	7.5	
479.309	43.9	QP	18.1	-26.1	35.9	189	100	Vert.	46.0	10.1	
479.307	44.2	QP	18.1	-26.1	36.2	213	100	Hori.	46.0	9.8	
500.368	41.5	QP	18.2	-25.8	33.9	43	100	Hori.	46.0	12.1	
511.261	42.9	QP	18.3	-25.8	35.4	218	100	Hori.	46.0	10.6	
598.861	42.0	QP	19.4	-24.9	36.5	341	100	Vert.	46.0	9.5	
639.083	37.1	QP	19.9	-24.7	32.3	190	100	Vert.	46.0	13.7	
750.006	34.9	QP	21.3	-23.9	32.3	351	100	Vert.	46.0	13.7	
900.660	35.8	QP	22.1	-22.6	35.3	292	100	Hori.	46.0	10.7	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.

*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission
(Above 1GHz)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/12/16

Report No. : 32EE0051-H0
Temp./Humi. : 25deg. C / 32% RH
Engineer : Hiroshi Kukita

Mode / Remarks : USB data com mode, Worst axis:X

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

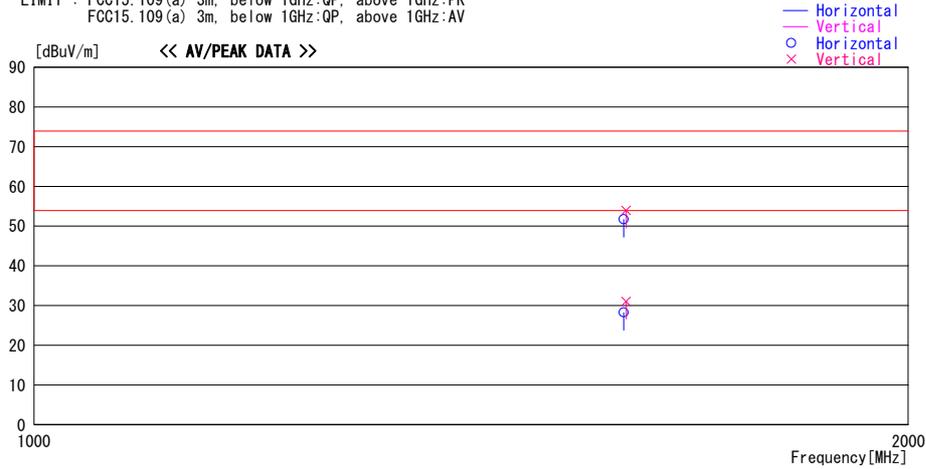

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
1595.880	62.4	PK	26.2	-36.9	51.7	121	100	Hori.	73.9	22.2	
1595.880	39.0	AV	26.2	-36.9	28.3	121	100	Hori.	53.9	25.6	
1598.960	64.7	PK	26.2	-36.9	54.0	76	100	Vert.	73.9	19.9	
1598.960	41.8	AV	26.2	-36.9	31.1	76	100	Vert.	53.9	22.8	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE+ATTEN.) - GAIN (AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

Radiated Emission
(Above 1GHz)


DATA OF RADIATED EMISSION TEST

UL Japan, Inc. Head Office EMC Lab. No.1 Semi Anechoic Chamber
Date : 2011/12/16

Report No. : 32EE0051-H0
Temp./Humi. : 25deg. C / 32% RH
Engineer : Hiroshi Kukita

Mode / Remarks : Standby mode, Worst axis:X

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

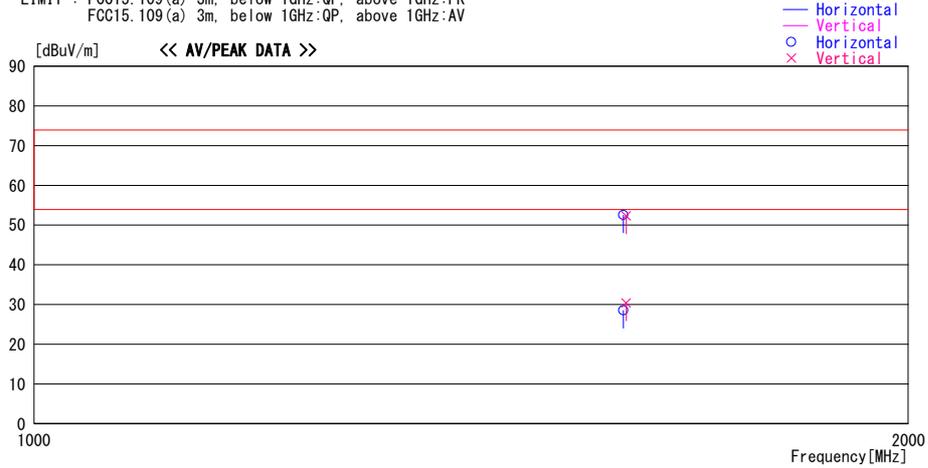

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
1595.512	63.3	PK	26.2	-36.9	52.6	121	100	Hori.	73.9	21.3	
1595.512	39.3	AV	26.2	-36.9	28.6	121	100	Hori.	53.9	25.3	
1598.886	63.0	PK	26.2	-36.9	52.3	101	100	Vert.	73.9	21.6	
1598.886	41.1	AV	26.2	-36.9	30.4	101	100	Vert.	53.9	23.5	

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz--:HORN
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

*The limit is rounded down to one decimal place.
*The test result is rounded off to one or two decimal places, so some differences might be observed.

APPENDIX 2: Test instruments

EMI Test Instruments

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-01	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	RE/CE	2011/07/10 * 12
MOS-01	Digital Humidity Indicator	N.T	NT-1800	MOS01	RE/CE	2011/02/23 * 12
MJM-01	Measure	KDS	ES19-55	-	RE/CE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE/CE	-
MTR-01	Test Receiver	Rohde & Schwarz	ESI40	100084	RE/CE	2010/12/07 * 12
MHA-05	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	253	RE	2011/06/19 * 12
MCC-134	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336167/4(1m) / 340641(5m)	RE	2011/09/07 * 12
AF-06	Pre Amplifier	Agilent	HP8449B	3008A01672	RE	2011/12/06 * 12
MLS-06	LISN(AMN)	Schwarzbeck	NSLK8127	8127363	CE(EUT)	2011/02/20 * 12
MLS-03	LISN(AMN)	Schwarzbeck	NSLK8127	8127384	CE(AE)	2011/07/11 * 12
MTA-30	Terminator	TME	CT-01	-	CE	2011/01/05 * 12
MCC-03	Coaxial Cable	Fujikura/Suhner/TSJ	5D-2W(20m)/3D-2W(7.5m)/RG400u(1.5m)/RFM-E421(Switcher)	-/01068 (Switcher)	CE	2011/01/16 * 12
MAT-64	Attenuator(13dB)	JFW Industries, Inc.	50FP-013H2 N	-	CE	2011/02/22 * 12
KBA-05	Biconical Antenna	Schwarzbeck	BBA9106	2513	RE	2011/11/23 * 12
KLA-04	Logperiodic Antenna	Schwarzbeck	USLP9143	361	RE	2011/11/23 * 12
MAT-08	Attenuator(6dB)	Weinschel Corp	2	BK7971	RE	2011/11/02 * 12
MCC-02	Coaxial Cable	Suhner/storm/Agilent/TSJ	-	-	RE	2011/09/17 * 12
MPA-19	Pre Amplifier	MITEQ	MLA-10K01-B01-35	1237616	RE	2011/02/28 * 12

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

CE: Conducted Emissions

RE: Radiated Emissions

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124