

TEST REPORT

APPLICANT : Sharp Corporation, Communication Systems Group
ADDRESS : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
PRODUCTS : Cellular Phone
MODEL NO. : SH-05D
SERIAL NO. : 004401113775130
FCC ID : APYHRO00167
TEST STANDARD : CFR 47 FCC Rules and Regulations Part 22
TESTING LOCATION : Japan Quality Assurance Organization
KITA-KANSAI Testing Center
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan
TEST RESULTS : **Passed**
DATE OF TEST : October 19 ~ 23, 2011 / January 14, 2012



A handwritten signature in black ink, appearing to read 'K. Shibata', written over a horizontal line.

Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
Testing Dept. SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
Documentation	3
1 Test Regulation.....	3
2 Test Location.....	3
3 Recognition of Test Laboratory.....	3
4 Description of the Equipment Under Test.....	4
5 Test Condition.....	5
6 Preliminary Test and Test Setup	7
7 Equipment Under Test Modification.....	16
8 Responsible Party	16
9 Deviation from Standard.....	16
10 Test Results.....	17
11 Summary	20
12 Operating Condition.....	21
13 Test Configuration.....	22
14 Equipment Under Test Arrangement (Drawings)	23
Appendix A: Test Data	24
Appendix B: Test Arrangement (Photographs)	44
Appendix C: Test Instruments.....	46

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

EUT	: Equipment Under Test	EMC	: Electromagnetic Compatibility
AE	: Associated Equipment	EMI	: Electromagnetic Interference
N/A	: Not Applicable	EMS	: Electromagnetic Susceptibility
N/T	: Not Tested		

☒ - indicates that the listed condition, standard or equipment is applicable for this report.

☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

Documentation

1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 22
Subpart H – Cellular Radiotelephone Service

Test Requirements : CFR 47 FCC Rules and Regulations Part 2
§2.1046, §2.1047, §2.1049, §2.1051, §2.1053, §2.1055 and §2.1057

Test Procedure : ANSI C63.4–2003, TIA/EIA–603-C-2004

2 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center Testing Department SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan
MINOH Test Site (KITA-KANSAI Testing Center)
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
KAMEOKA EMC Branch
9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto, 621-0126, Japan

3 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center Testing Dept. SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : March 30, 2012)
BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006
(Effective through : September 14, 2013)
IC Registration No. : 2079E-2 (Effective through : January 25, 2014)
2079E-3, 2079E-4 (Effective through : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Effective through : February 22, 2012)

4 Description of the Equipment Under Test

4.1 General Information

1. Manufacturer : Sharp Corporation, Communication Systems Group
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH-05D
4. Serial No. : 004401113775130
5. Product Type : Pre-production
6. Date of Manufacture : December, 2011
7. Transmitting Frequency : 826.4 MHz(4132CH) – 846.6MHz(4233CH)
8. Receiving Frequency : 871.4 MHz(4357CH) – 891.6MHz(4458CH)
9. Emission Designations : 4M14F9W
10. Max. RF Output Power : 0.603W (ERP)
11. Power Rating : 4.0VDC (Lithium-ion Battery Pack SH34 1150mAh)
12. EUT Grounding : None
13. Category : WCDMA850
14. EUT Authorization : Certification
15. Receive Date of EUT : December 19, 2011

4.2 Channel Plan

The carrier spacing is 200 kHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $826.4 + 0.2 \times (n - 4132)$
where, n : channel number ($4132 \leq n \leq 4233$)

Receiving Frequency (in MHz) = $871.4 + 0.2 \times (n - 4357)$
where, n : channel number ($4357 \leq n \leq 4458$)

5 Test Condition**5.1 RF Power Output (§2.1046)****5.1.1 Conducted RF Power Output**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : SAITO ☐ - Shielded room (S1) ☐ - Shielded room (S2)
☒ - Shielded room (S4)
MINOH ☐ - Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.1.2 ERP / EIRP RF Power Output

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : SAITO ☐ - Anechoic chamber (A1) ☒ - Anechoic chamber (A2)
KAMEOKA ☐ - 1st open site

Test instruments : Refer to Appendix C.

5.2 Modulation Characteristics (§2.1047)

The requirements are ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Test site : SAITO ☐ - Shielded room (S1) ☐ - Shielded room (S2)
☐ - Shielded room (S4)
MINOH ☐ - Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix B.

5.3 Occupied Bandwidth (§2.1049)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : SAITO ☐ - Shielded room (S1) ☐ - Shielded room (S2)
☒ - Shielded room (S4)
MINOH ☐ - Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.4 Spurious Emissions at Antenna Terminals (§2.1051)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : SAITO ☐ - Shielded room (S1) ☐ - Shielded room (S2)
☒ - Shielded room (S4)
MINOH ☐ - Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.5 Band-Edge Emission (§2.1051)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : SAITO ☐ - Shielded room (S1) ☐ - Shielded room (S2)
☒ - Shielded room (S4)
MINOH ☐ - Shielded room
KAMEOKA ☐ - Shielded room ☐ - Conducted emission facility

Test instruments : Refer to Appendix C.

5.6 Field Strength of Spurious Radiation (§2.1053)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : SAITO ☐ - Anechoic chamber (A1) ☒ - Anechoic chamber (A2)
KAMEOKA ☐ - 1st open site

Test instruments : Refer to Appendix C.

5.7 Frequency Stability (§2.1055)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Test site : SAITO ☒ - Environment Testing Room
MINOH ☐ - Environment Testing Room


Test instruments : Refer to Appendix C.

6 Preliminary Test and Test Setup

6.1 RF Power Output (§2.1046)

6.1.1 Conducted RF Power Output

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.



6.1.2 ERP / EIRP RF Power Output

Step 1:

In order to obtain the maximum emission, the EUT was placed at the height 1.5 m on the non-conducted support and was varying at three orthogonal axes, at the distance 3 m from the receiving antenna and rotated around 360 degrees.

The receiving antenna height was varied from 1 m to 4 m.

The EUT on the table was placed to be maximum emission against at the receiving antenna polarized (vertical and horizontal).

Then the meter reading of the spectrum analyzer at the maximum emission was A dB(μV).

Step 2:

The EUT was replaced to substitution antenna at the same polarized under the same condition as step 1.

The RF power was fed to the transmitting antenna through the RF amplifier from the signal generator.

In order to obtain the maximum emission level, the height of the receiving antenna was varied from 1 m to 4 m.

The level of maximum emission was A dB(μV), same as the recorded level in the step 1.

Then the RF power into the substitution horn antenna was P (dBm).


The ERP/EIRP output power was calculated in the following equation.

$$\text{ERP (dBm)} = P \text{ (dBm)} - \text{Balun loss of the tuned dipole antenna (dB)} + \text{Cable loss (dB)}$$


$$\text{EIRP (dBm)} = P \text{ (dBm)} + G_h \text{ (dBi)}$$

where, $G_h \text{ (dBi)}$: Gain of the substitution horn antenna.

– Side View –

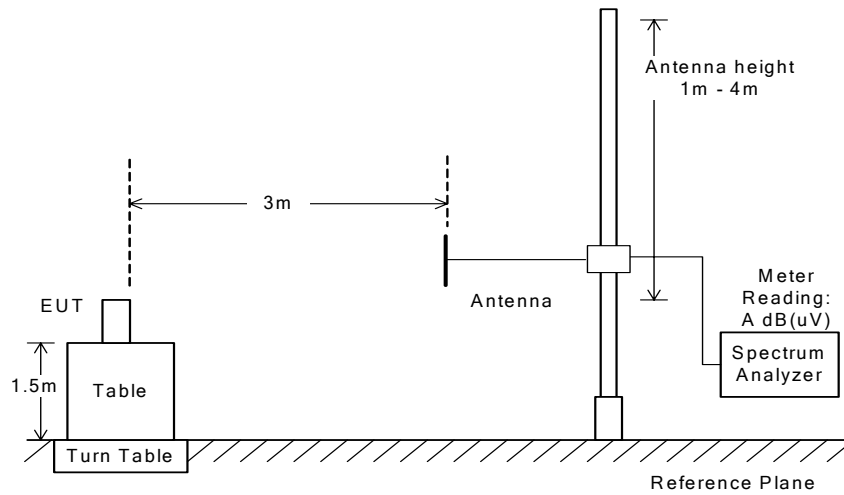

(a) EUT

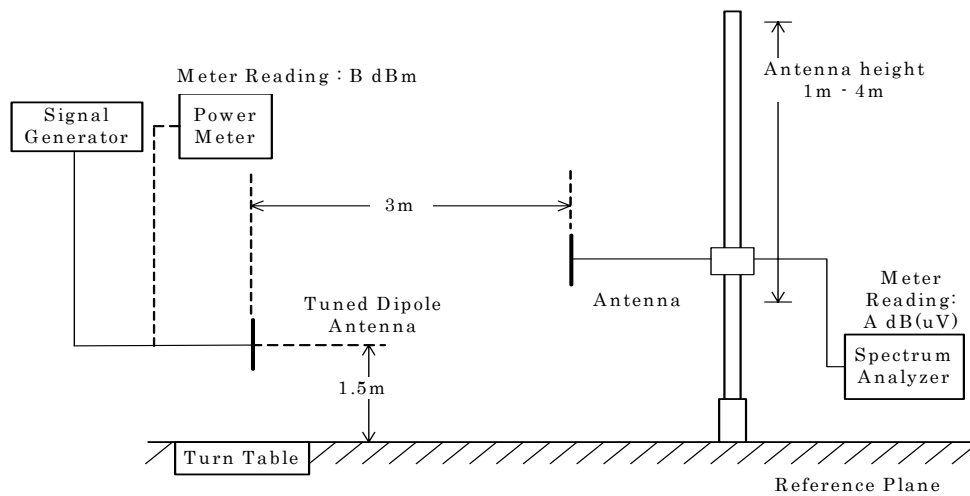


(b) Substitution Half-wave Dipole Antenna

6.2 Modulation Characteristics (§2.1047)

Not Applicable

6.3 Occupied Bandwidth (§2.1049)

The test system is shown as follows:




The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	30 kHz
Video Bandwidth	100 kHz
Span	5 MHz
Sweep Time	AUTO
Trace	Maxhold


6.4 Spurious Emissions at Antenna Terminals (§2.1051)

The Antenna Conducted Emission was measured with a spectrum analyzer. The test system is shown as follows:

a) Frequency Range : 9kHz - 1.2GHz



b) Frequency Range : 1.2GHz - 10GHz




The setting of the spectrum analyzer are shown as follows:

Frequency Range	9 kHz - 150 kHz	150 kHz - 30 MHz	30 MHz - 10 GHz
Res. Bandwidth	200 Hz	10 kHz	1 MHz
Video Bandwidth	1 kHz	30 kHz	3 MHz
Sweep Time	AUTO	AUTO	AUTO
Trace	Maxhold	Maxhold	Maxhold

6.5 Band-Edge Emission (§2.1051)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

TX Frequency	826.40 MHz / 846.60 MHz
Band-Edge Frequency	824.00 MHz / 849.00 MHz
Res. Bandwidth	51 kHz
Video Bandwidth	51 kHz
Span	5 MHz
Sweep Time	AUTO
Trace	Maxhold

6.6 Field Strength of Spurious Radiation (§2.1053)

Step 1) The spurious radiation for transmitter were measured at the distance 3 m away from the EUT which was placed on a non-conducted support 0.8 m in height and was varying at three orthogonal axes. The receiving antenna was oriented for vertical polarization and varied from 1 m to 4 m until the maximum emission level was detected on the measuring instrument. The EUT was rotated 360 degrees until the maximum emission was received. The measurement was also repeated with the receiving antenna in the horizontal polarization.

This test was carried out using the half-wave dipole antenna for up to 1GHz and using the horn antenna for above 1 GHz.

Step 2)

A) Up to 1 GHz

The ERP measurement was carried out with according to Step 2 in page 8. Then the RF power in the substitution antenna half-wave dipole antenna for up to 1 GHz and the substitution horn antenna for above 1 GHz.

The ERP is calculated in the following equation.

$$\text{ERP(dBm)} = P \text{ (dBm)} - (\text{Balun Loss of the half-wave dipole Ant. (dB)}) + \text{Cable Loss (dB)}$$

B) Above 1 GHz

The ERP is calculated from the maximum emission level by the following formula.

$$\frac{e^2}{120\pi} = \frac{\text{eirp}}{4\pi d^2} \text{ ----(Eq.1)}$$

$$\text{erp} = \text{eirp} - Gd \text{ ----(Eq.2)}$$

Where, $e[V/m]$: Field Strength at measuring distance($d=3m$)

$\text{eirp}[W]$: Equivalent Isotropic Radiated Power

$\text{erp}[W]$: Effective Radiated Power

$Gd(dBi)$: Gain of the substitution half-wave dipole antenna(2.15dBi)

$$\text{eirp} = \frac{(de)^2}{30} = \frac{3}{10} e^2$$

$$\therefore 10 \log(\text{eirp}) = 20 \log(e) + 10 \log(3/10) = 20 \log(e) - 5.23$$

$$10 \log(\text{eirp}) = \text{EIRP}[dBm] - 30$$


$$20 \log(e) = E[dB(\mu V/m)] - 120$$

$$\therefore \text{EIRP} = E - 120 + 30 - 5.23 = E - 95.23$$


$$\therefore \text{ERP}[dBm] = \text{EIRP} - 2.15 = E - 97.38$$

The respective calculated ERP of the spurious and harmonics were compared with the ERP of fundamental frequency by specified attenuation limits, $43 + 10 \log_{10}(\text{TP in watt})[dB]$. Where, TP = Transmitter power at the ANT OUT under test configuration as the hands free unit used.

Radiated Emission 30 MHz to 1000 MHz

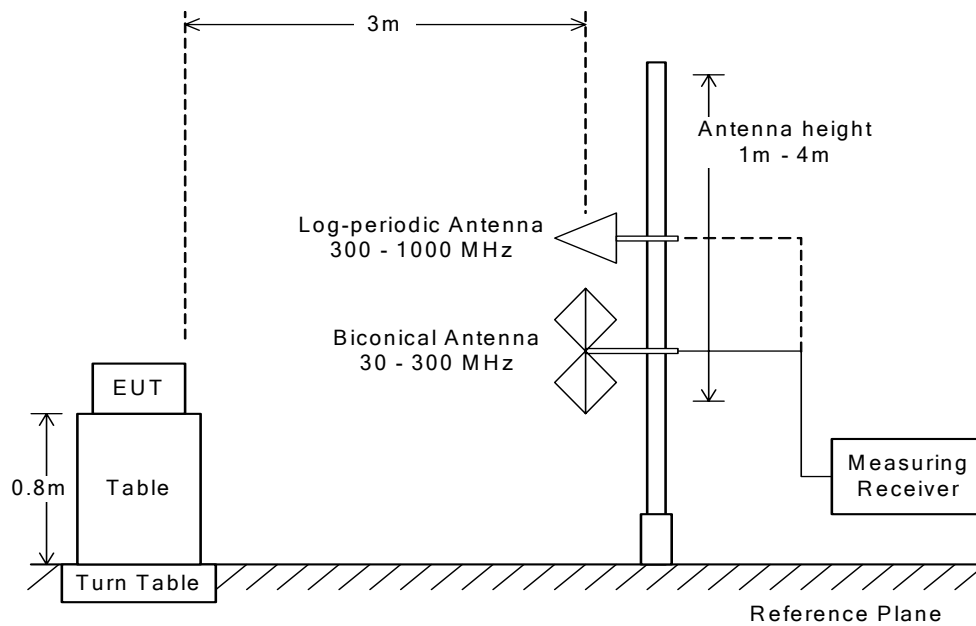


Radiated Emission above 1 GHz

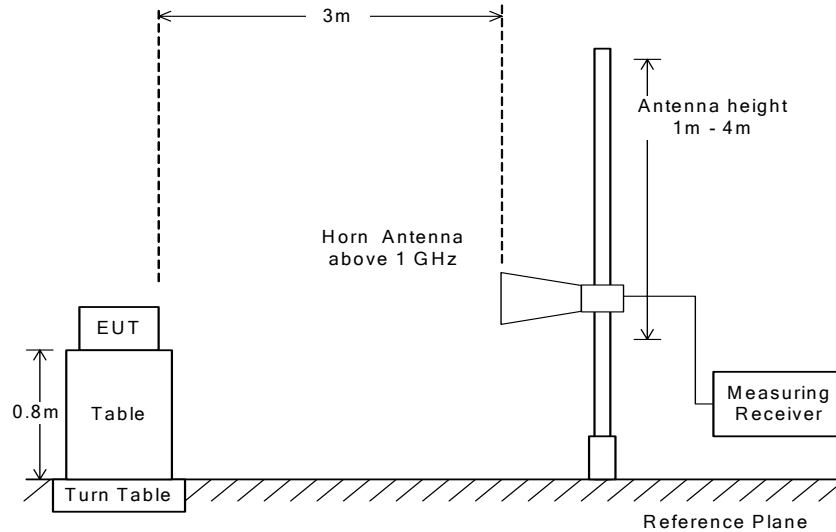

NOTE

The antenna height is scanned depending on the EUT's size and mounting height.

Radiated Emission 30 to 1000 MHz – Substitution Method

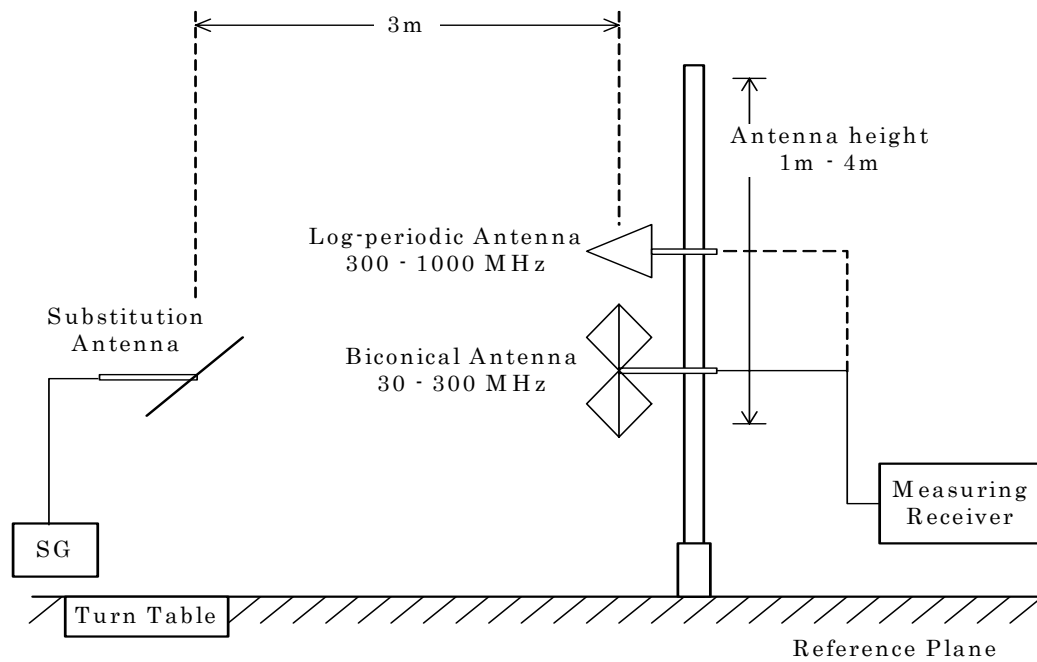


6.7 Frequency Stability (§2.1055)

Frequency Stability versus Temperature

The EUT was placed in an environmental chamber and was tested in the range from –30 to +50 degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from –30 to +50 degrees Celsius at the interval of 10 degrees.

Frequency Stability versus Power Supply Voltage

The EUT was placed in an environmental chamber and was tested at the temperature of +20 degrees Celsius. The EUT was stabilized at the temperature. The power (4.0VDC) and the power (3.7VDC, the ending voltage) was applied to the EUT allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup.

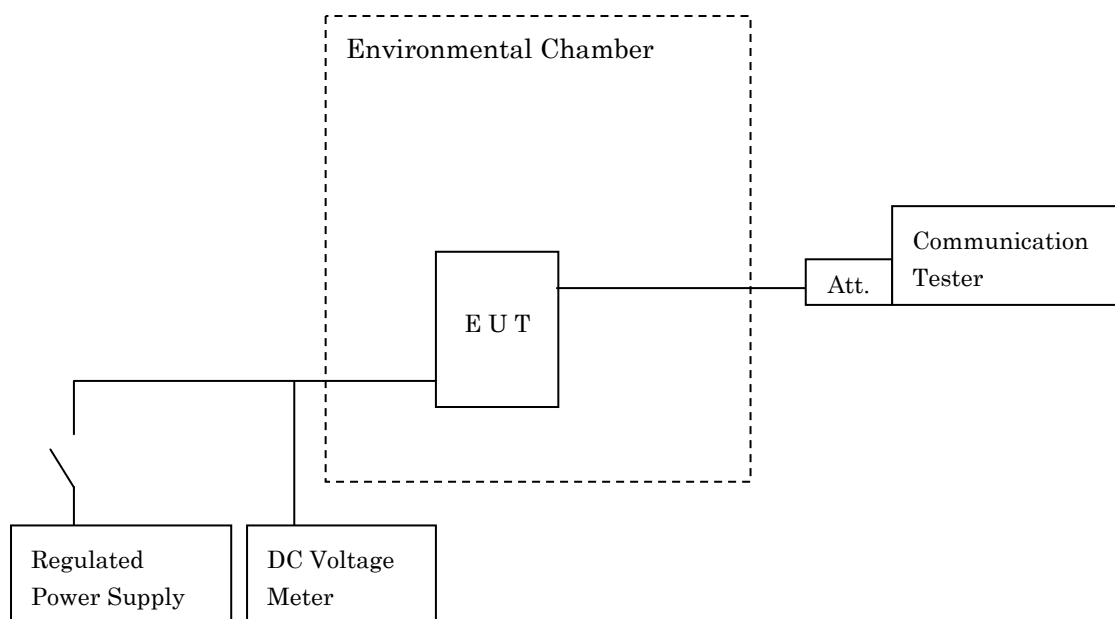

7 Equipment Under Test Modification

- ☒ - No modifications were conducted by JQA to achieve compliance to the limitations.
☐ - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory : Not Applicable

8 Responsible PartyResponsible Party of Test Item (Product)

Responsible Party :

Contact Person :

Signatory

9 Deviation from Standard

- ☒ - No deviations from the standard described in clause 1.
☐ - The following deviations were employed from the standard described in clause 1.

10 Test Results**10.1 RF Power Output (§2.1046)****10.1.1 Conducted RF Power Output**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

Transmitter Power is 483.1 mW at 826.400 MHz(Peak)
215.8 mW at 826.400 MHz(Average)

Uncertainty of Measurement Results at Amplitude +/-0.7 dB(2 σ)

Remarks : _____

10.1.2 ERP / EIRP RF Power Output

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin 10.7 dB at 846.600 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results +/-1.4 dB(2 σ)

Remarks : The maximum ERP is 0.603 W at 846.600 MHz.

10.2 Modulation Characteristics (§2.1047)

The requirements are ☐ - Applicable ☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

☐ - Passed ☐ - Failed ☐ - Not judged

Remarks : _____

10.3 Occupied Bandwidth (§2.1049)

The requirements are ☒ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

The 99% Bandwidth is 4.14 MHz at 836.4/846.6 MHz
The 26dB Bandwidth is 4.64 MHz at 836.4/846.6 MHz

Uncertainty of Measurement Results +/-0.9 %(2σ)

Remarks : _____

10.4 Spurious Emissions at Antenna Terminals (§2.1051)

The requirements are ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin >28.6 dB at 8364/8466 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results
9 kHz – 1GHz +/-1.0 dB(2σ)
1GHz – 18GHz +/-1.2 dB(2σ)
18GHz – 40GHz +/-1.6 dB(2σ)

Remarks : _____

10.5 Band-Edge Emission (§2.1051)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

The Band-Edge level is -19.2 dBm at 849.000 MHz

Uncertainty of Measurement Results +/-1.2 dB(2 σ)

Remarks : _____

10.6 Field Strength of Spurious Radiation (§2.1053)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin 32.9 dB at 1652.800 MHz

Max. Limit Exceeding _____ dB at _____ MHz

Uncertainty of Measurement Results 30 MHz – 1000 MHz +/-1.4 dB(2 σ)
above 1 GHz +/-2.2 dB(2 σ)

Remarks : _____

10.7 Frequency Stability (§2.1055)

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

The Frequency Stability level is +0.04 ppm at 836.400 MHz

Uncertainty of Measurement Results +/-0.02 ppm(2 σ)

Remarks : _____

11 Summary**General Remarks :**

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 22

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Test Results :

The “as received” sample;

- ☒ - fulfill the test requirements of the regulation mentioned on clause 1.
- ☐ - doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:

Tested by:



Shigeru Kinoshita
Deputy Manager
JQA KITA-KANSAI Testing Center
Testing Dept. SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
Testing Dept. SAITO EMC Branch

12 Operating Condition

Transmitting/Receiving

Transmitting and wireless charging as Test Configuration d)Single Unit with Wireless Charger in page 23.

The test were carried under one modulation type shown as follows:

Modulation Data : BPSK Spreading : HPSK

The Radiated Emission test were carried under 4 test configurations shown in clause 14.

In all tests, the fully charged battery is used for the EUT.

Detailed Transmitter portion:

Transmitter frequency : 826.4 MHz(4132CH) – 846.6 MHz(4233CH)

Local frequency : 3305.6 MHz(4132CH) – 3386.4 MHz(4233CH)

Detailed Receiver portion:

Receiver frequency : 871.4 MHz(4357CH) – 891.6 MHz(4458CH)

Local frequency : 3485.6 MHz(4357CH) – 3566.4 MHz(4458CH)

Other Clock Frequency

(Cellular Phone) 32.768 kHz, 32 MHz, 37.4 MHz, 48 MHz, 52 MHz

(Wireless Charger) 8 MHz

13 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	SH-05D	004401113 775130	APYHRO00167
B	Lithium-ion Battery	Sharp	SH34	--	N/A
C	AC Adapter for Global use	NTT DoCoMo	MAS-BH0008 -A 002	--	N/A
D	Flat-plug Stereo Earphone Set	NTT DoCoMo	P01	--	N/A
E	Arib Connector Adaptor	SMK	--	--	N/A
F	Wireless Charger	Sharp	Wireless Charger SH01	--	APYHRO00167
G	AC Adapter (Wireless Charger)	Sharp	Wireless Charger SH01	--	N/A

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Power Cord	--	--	NO	NO	1.5
2	AC Power Cord	--	--	NO	NO	0.5
3	Stereo Earphone Cable	--	--	NO	NO	1.8
4	Arib Connector Cable	--	--	NO	NO	0.1
5	DC Power Cord (Wireless Charger)	--	--	NO	YES	2.0

14 Equipment Under Test Arrangement (Drawings)


a) Single Unit




b) AC Adapter used



c) Stereo Earphone used



d) Single Unit with Wireless Charger



■ : Ferrite Core

Appendix A: Test Data

A.1 RF Power Output (§2.1046)

A.1.1 Conducted RF Power Output

(WCDMA850)

Test Date: December 21, 2011

Temp.: 20 °C, Humi: 33 %

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Peak) [dBm]	Results (Peak) [dBm]	[mW]
4132	826.400	11.56	15.28	26.84	483.1
4182	836.400	11.58	14.84	26.42	438.5
4233	846.600	11.60	15.10	26.70	467.7

Transmitting Frequency CH	[MHz]	Correction Factor [dB]	Meter Reading (Average) [dBm]	Results (Average) [dBm]	[mW]
4132	826.400	11.56	11.78	23.34	215.8
4182	836.400	11.58	11.44	23.02	200.4
4233	846.600	11.60	11.67	23.27	212.3

Calculated result at 826.400 MHz, as the maximum level point shown on underline:

Correction Factor	=	11.56	dB
+) Meter Reading	=	15.28	dBm
Result	=	26.84	dBm = 483.1 mW

NOTE : The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.

A.1.2 ERP /EIRP Power Output

(WCDMA850)

Test Date: December 23, 2011

Temp.: 21 °C, Humi: 33 %

1. Measurement Results

CH	Transmitting Frequency [MHz]	Emission Measurement [dB(uV)]		Substitution Measurement [dB(uV)]		Supplied Power to Substitution Antenna [dBm]	Balun Loss of Substitution Antenna [dB]
		Hori. (Mh)	Vert. (Mv)	Hori. (Msh)	Vert. (Msv)		
4132	826.400	100.1	99.1	61.3	60.2	-10.0	1.4
4182	836.400	99.3	98.1	60.2	59.1	-10.0	1.4
4233	846.600	98.7	98.1	60.8	58.9	-10.1	1.4

2. Calculation Results

CH	Transmitting Frequency [MHz]	Peak ERP [dBm]		Maximum Peak ERP [W]	Limits [dBm]	Margin [dB]
		Hori. (ERPh)	Vert. (ERPv)			
4132	826.400	27.4	27.5	0.562	38.5	+11.0
4182	836.400	27.7	27.6	0.589	38.5	+10.8
4233	846.600	26.5	27.8	0.603	38.5	+10.7

Calculated result at 846.600 MHz, as the worst point shown on underline:

Emission Measurement (Mv)	=	98.1 dB(uV)
Substitution Measurement (Msv)	=	-58.9 dB(uV)
Supplied Power to Substitution Antenna	=	-10.1 dBm
+) Balun Loss of Substitution Antenna	=	-1.4 dB
Result (ERPv)	=	27.8 dBm = 0.603 W

Minimum Margin: 38.5 - 27.8 = 10.7 (dB)

NOTE : Setting of measuring instrument(s) :

Detector Function	Resolution B.W.	V.B.W.	Sweep Time
Peak	5 MHz	5 MHz	AUTO

A.2 Modulation Characteristics (§2.1047)

Not Applicable


A.3 Occupied Bandwidth (§2.1049)

The resolution bandwidth was set to about 1% of emission bandwidth, -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.


Test Date : December 21, 2011Temp.:20°C, Humi:33%

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-26dBc Bandwidth (MHz)
4132	826.40	4.13	4.61
4182	836.40	4.14	4.64
4233	846.60	4.14	4.64


Low Channel

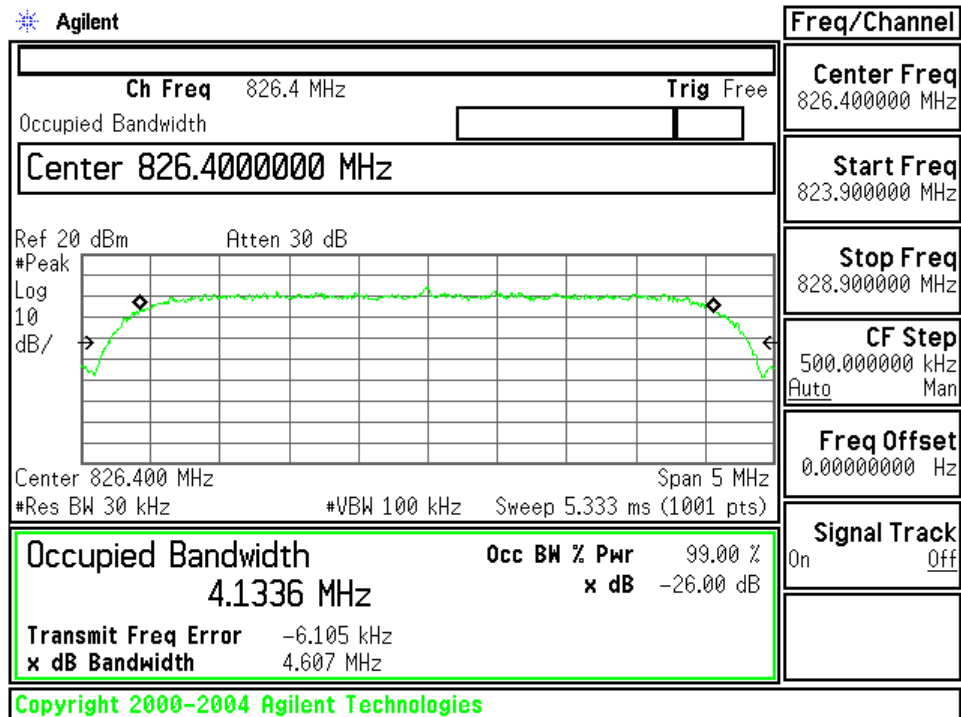

Middle Channel

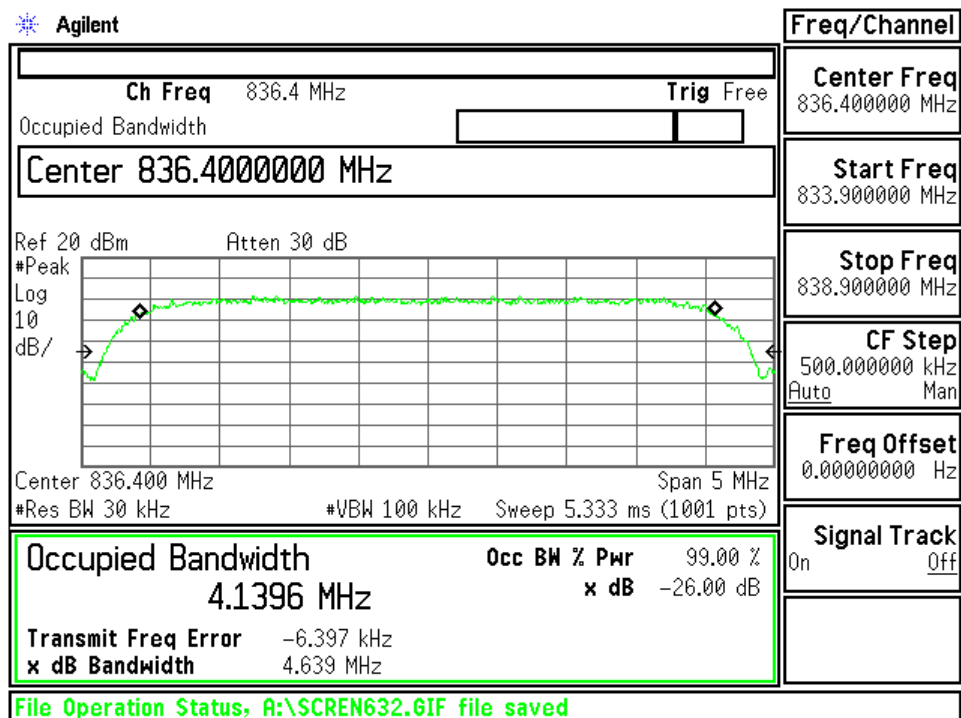

High Channel

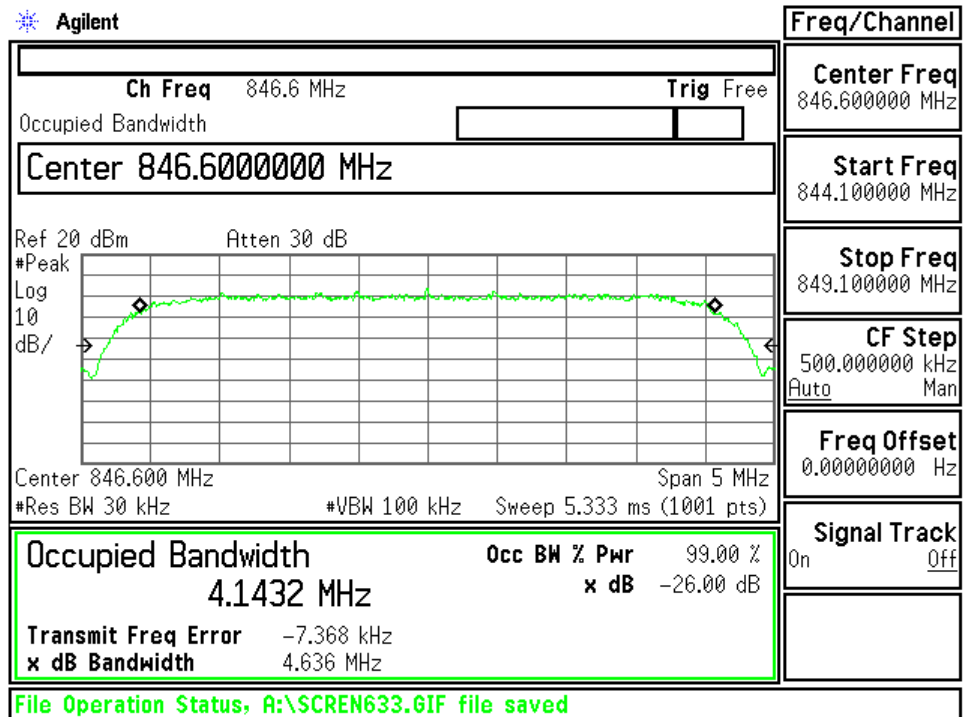

A.4 Spurious Emissions at Antenna Terminals (§2.1051)

(WCDMA850)

Test Date: December 21, 2011

Temp.: 20 °C, Humi: 33 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dBm]	Limits [dBm]	Results [dBm]	Margin [dB]	Remarks
4132	826.400	1652.800	14.0	-60.3	-13.0	-46.3	+33.3	C
		2479.200	14.8	< -63.0	-13.0	< -48.2	> +35.2	C
		3305.600	15.6	< -63.0	-13.0	< -47.4	> +34.4	C
		4132.000	16.6	< -63.0	-13.0	< -46.4	> +33.4	C
		4958.400	17.2	< -63.0	-13.0	< -45.8	> +32.8	C
		5784.800	18.2	< -63.0	-13.0	< -44.8	> +31.8	C
		6611.200	19.1	< -63.0	-13.0	< -43.9	> +30.9	C
		7437.600	20.3	< -63.0	-13.0	< -42.7	> +29.7	C
		8264.000	21.3	< -63.0	-13.0	< -41.7	> +28.7	C
4182	836.400	1672.800	13.9	-61.7	-13.0	-47.8	+34.8	C
		2509.200	14.9	< -63.0	-13.0	< -48.1	> +35.1	C
		3345.600	15.6	< -63.0	-13.0	< -47.4	> +34.4	C
		4182.000	16.7	< -63.0	-13.0	< -46.3	> +33.3	C
		5018.400	17.3	< -63.0	-13.0	< -45.7	> +32.7	C
		5854.800	18.3	< -63.0	-13.0	< -44.7	> +31.7	C
		6691.200	19.2	< -63.0	-13.0	< -43.8	> +30.8	C
		7527.600	20.4	< -63.0	-13.0	< -42.6	> +29.6	C
		8364.000	21.4	< -63.0	-13.0	< -41.6	> +28.6	C
4233	846.600	1693.200	13.9	-61.6	-13.0	-47.7	+34.7	C
		2539.800	14.9	< -63.0	-13.0	< -48.1	> +35.1	C
		3386.400	15.7	< -63.0	-13.0	< -47.3	> +34.3	C
		4233.000	16.6	< -63.0	-13.0	< -46.4	> +33.4	C
		5079.600	17.3	< -63.0	-13.0	< -45.7	> +32.7	C
		5926.200	18.4	< -63.0	-13.0	< -44.6	> +31.6	C
		6772.800	19.3	< -63.0	-13.0	< -43.7	> +30.7	C
		7619.400	20.5	< -63.0	-13.0	< -42.5	> +29.5	C
		8466.000	21.4	< -63.0	-13.0	< -41.6	> +28.6	C

Calculated result at 8364.0 MHz, as the worst point shown on underline:

Corr. Factor	=	21.4 dB
+) Meter Reading	=	< 63.0 dBm
Result	=	< 41.6 dBm


Minimum Margin: -13.0 - (<41.6) = >28.6 (dB)

NOTES


- The spectrum was checked from 9 kHz to 10 GHz.
- Applied limits : $-13.0 \text{ [dBm]} = 10\log(\text{TP[mW]}) - (43 + 10\log(\text{tp[W]})) = 10\log(\text{TP[mW]}) - (43 + (10 \log(\text{TP[mW]}) - 30))$
where, $\text{tp[W]} = \text{TP[mW]} / 1000$: Transmitter power at antenna terminal
- The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. [dB] (9 kHz - 2 GHz)
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. + High Pass Filter Loss (D-96) [dB] (over 2 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	200 Hz	1 kHz	AUTO
B	Peak	10 kHz	30 kHz	AUTO
C	Peak	1 MHz	3 MHz	AUTO


Low Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

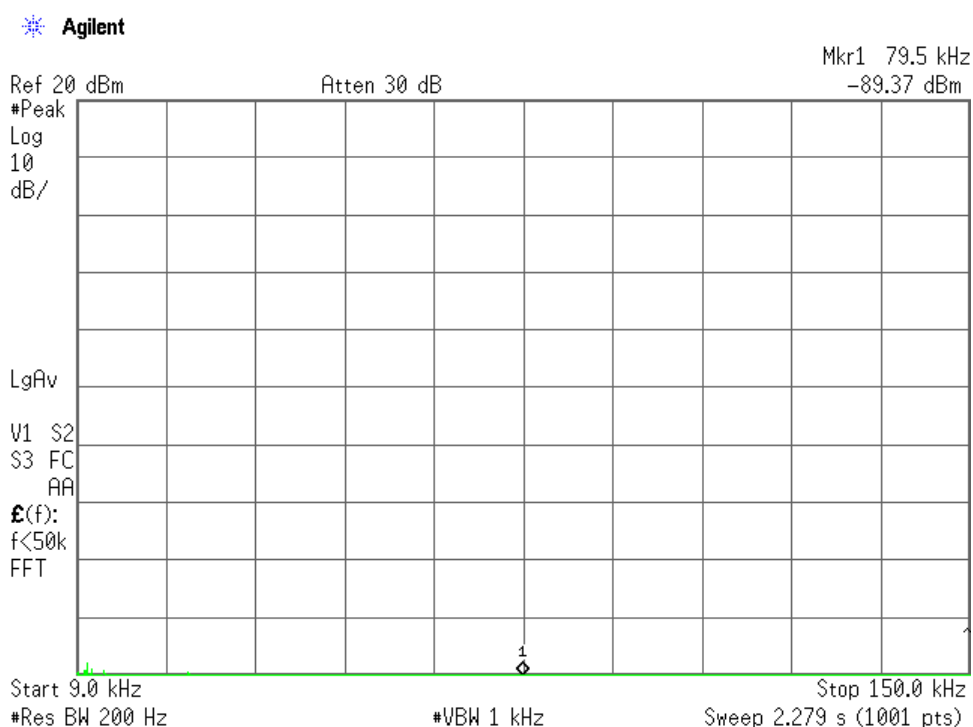


Low Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

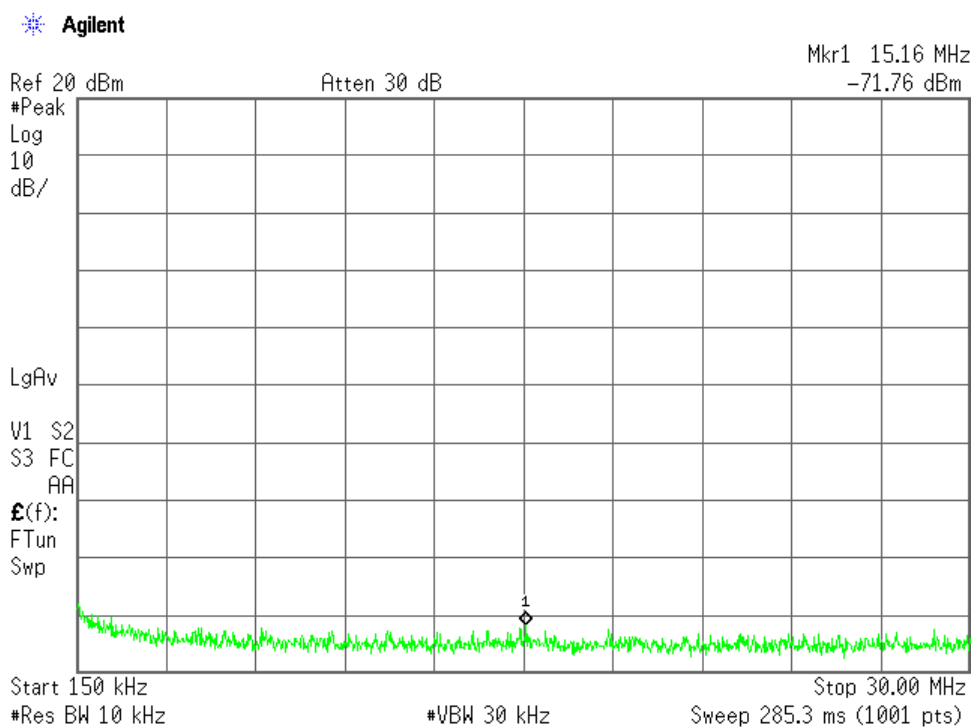


Low Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

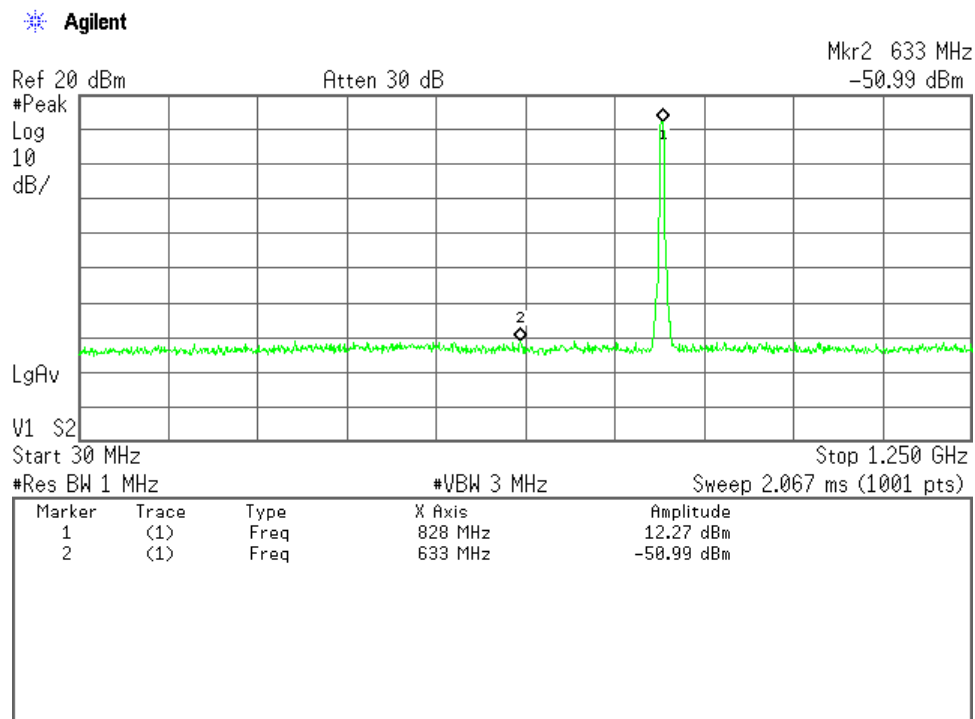


Low Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

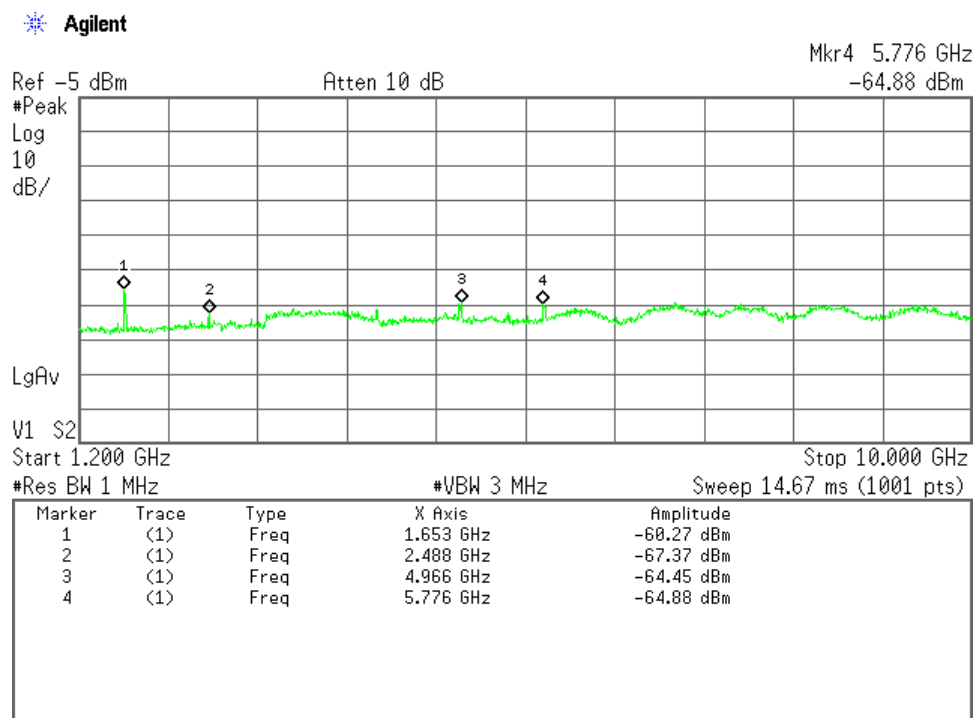


Middle Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

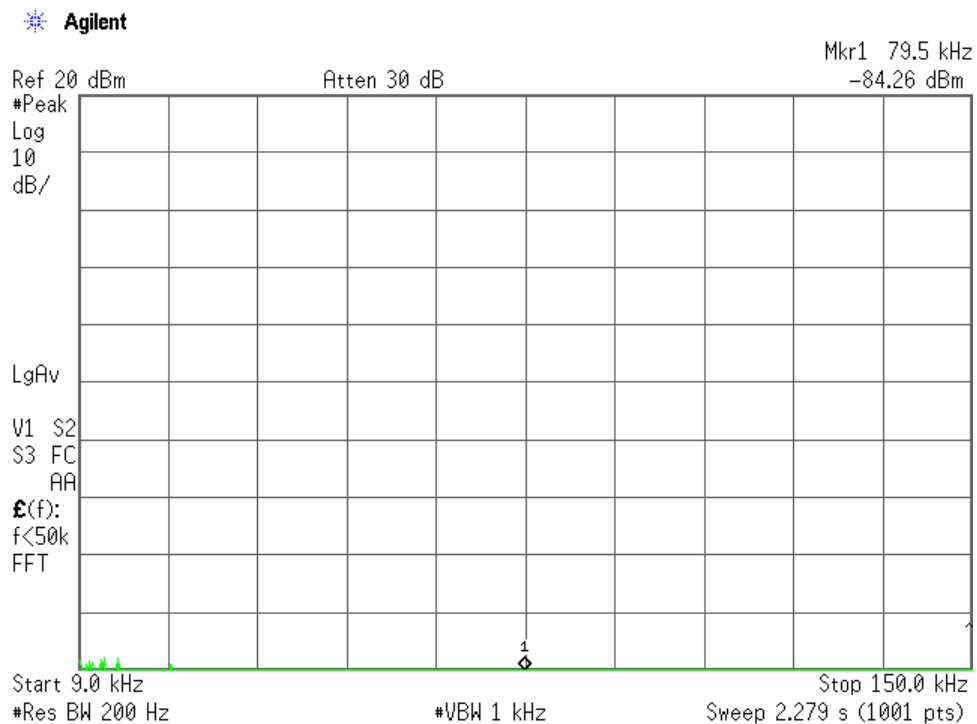


Middle Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

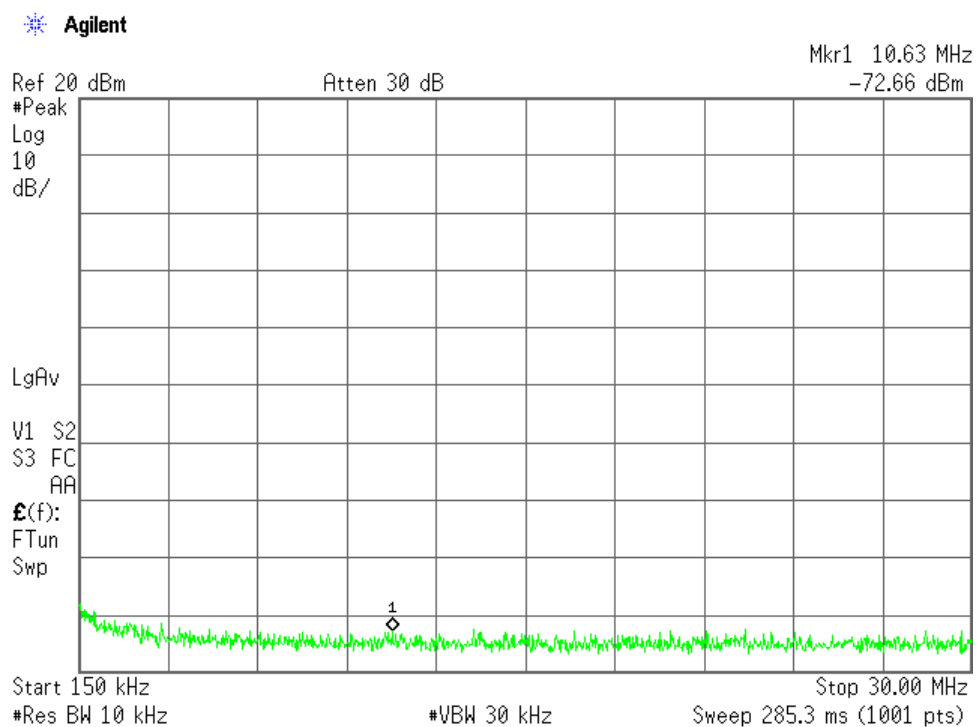


Middle Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

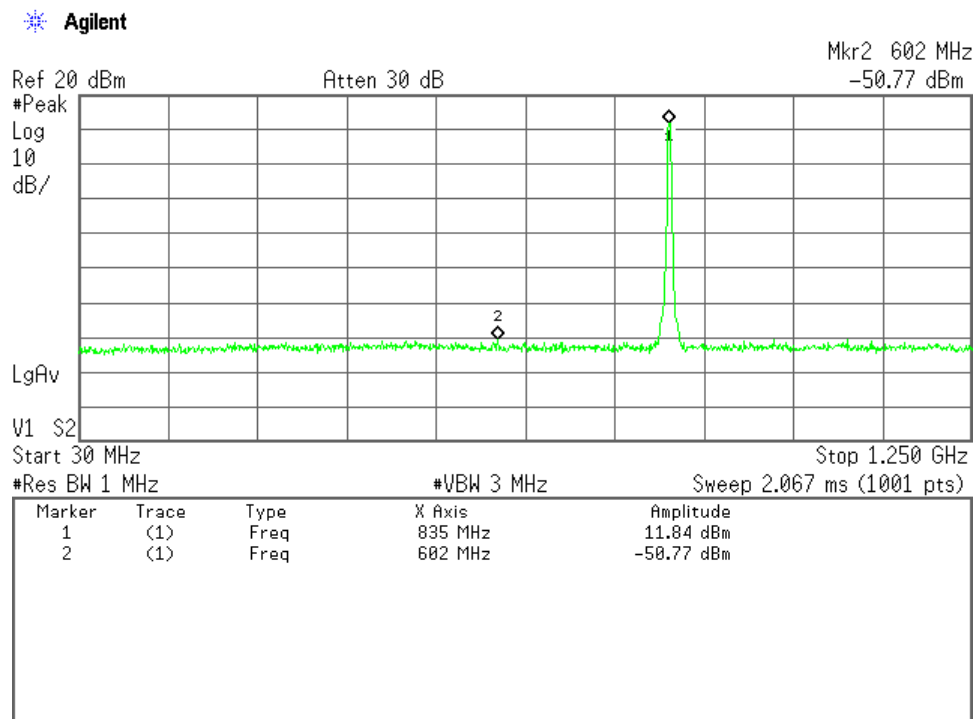


Middle Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

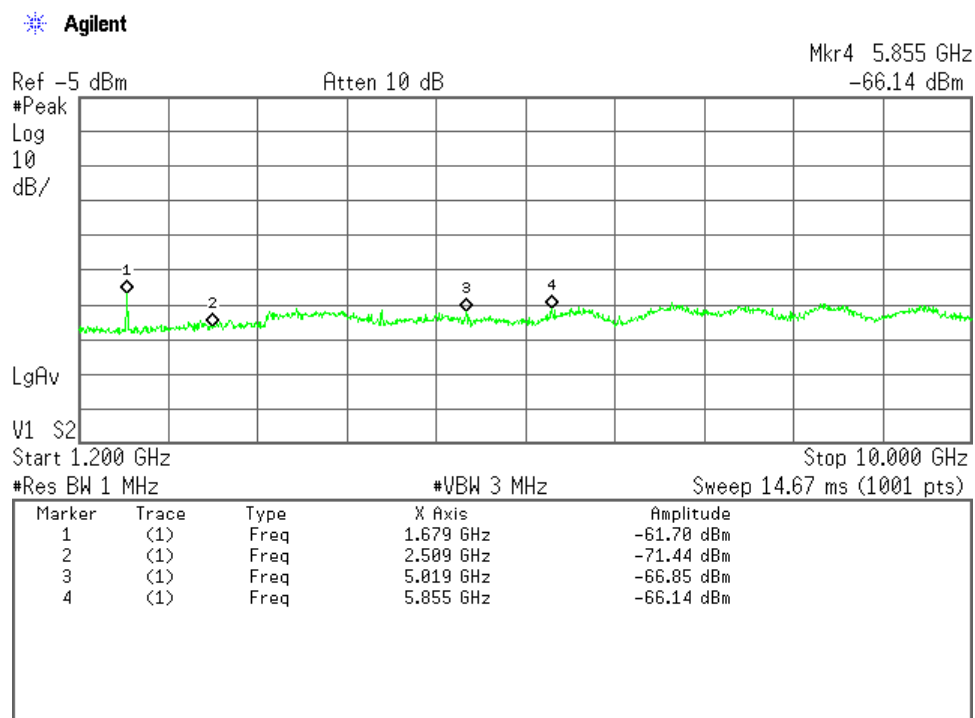


High Channel, Out-Of-Band Emissions (9 kHz – 150 kHz)

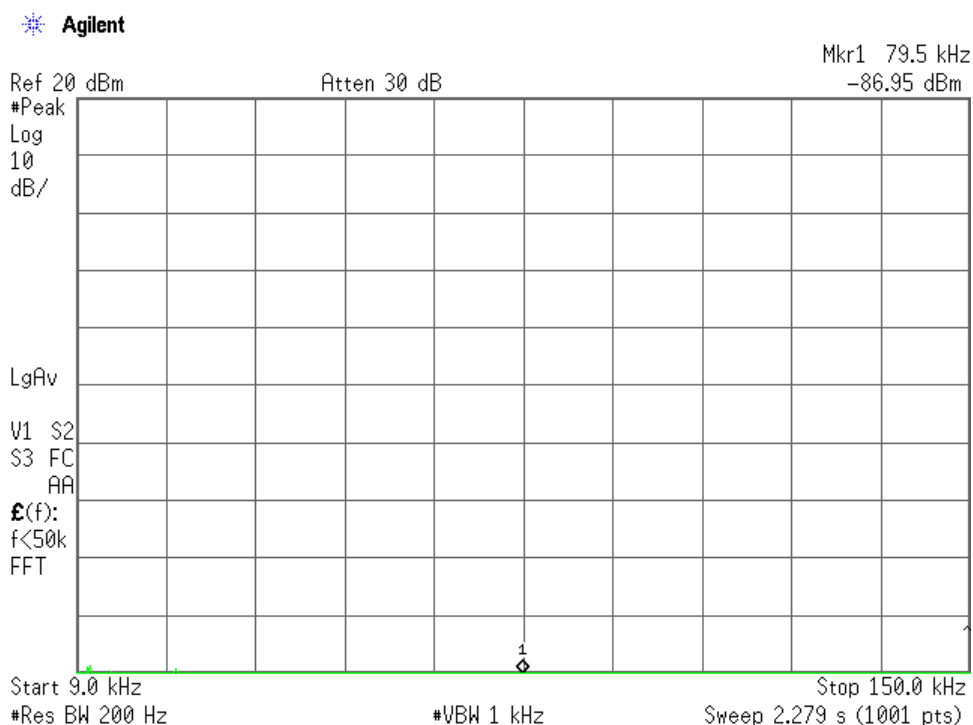


High Channel, Out-Of-Band Emissions (150 kHz – 30 MHz)

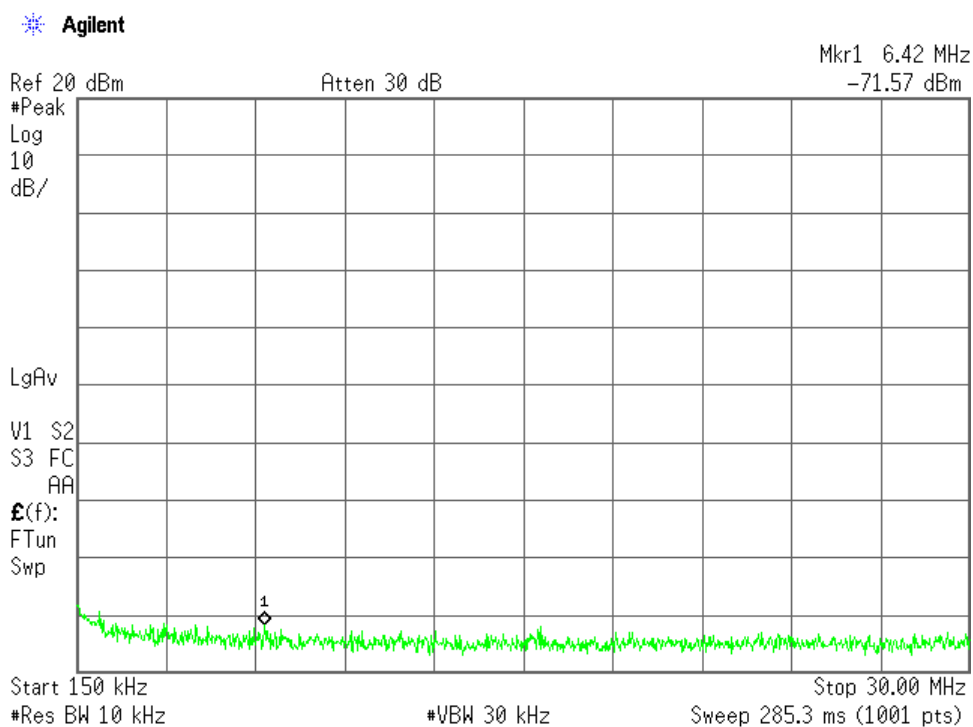

High Channel, Out-Of-Band Emissions (30 MHz – 1.2 GHz)

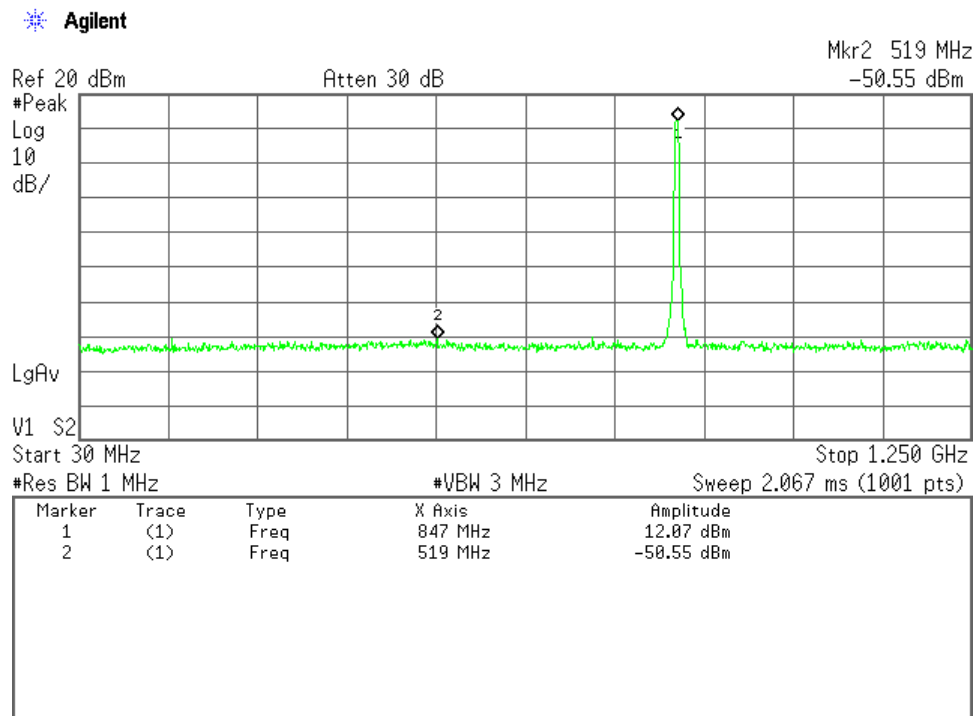


High Channel, Out-Of-Band Emissions (1.2 GHz – 10 GHz)

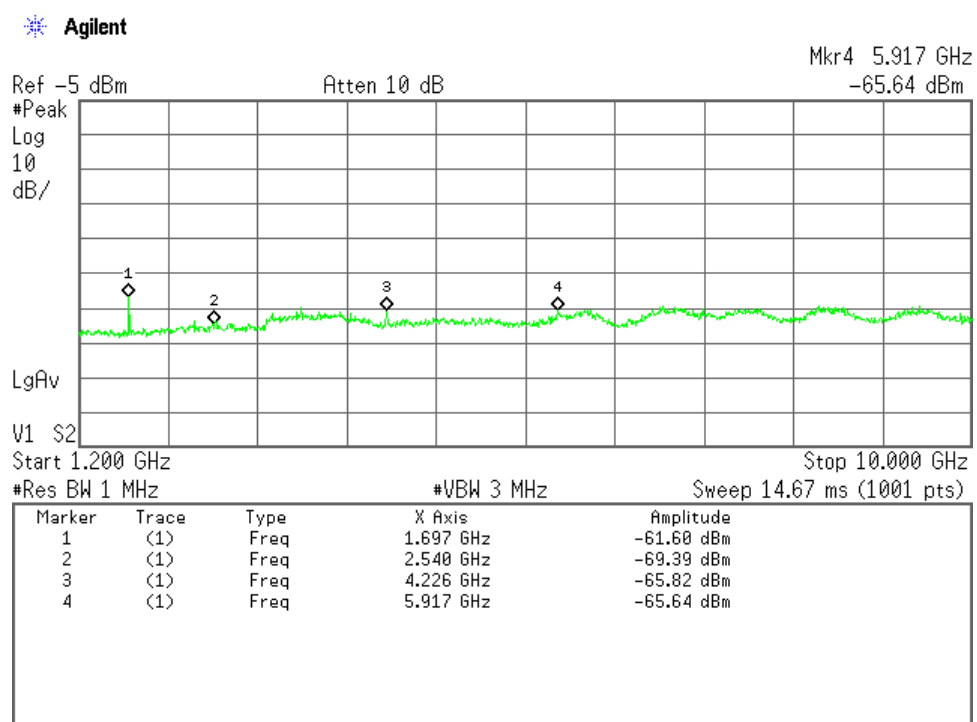


A.5 Band-Edge Emission(\$2.1051)Test Date : December 21, 2011Temp.:20°C, Humi:33%

Channel	Frequency (MHz)	Band-Edge Frequency (MHz)	Band-Edge Level (dBm)
4132	826.4	824.0	-21.2
4233	846.6	849.0	-19.2

Low Channel, Band-Edge Emission

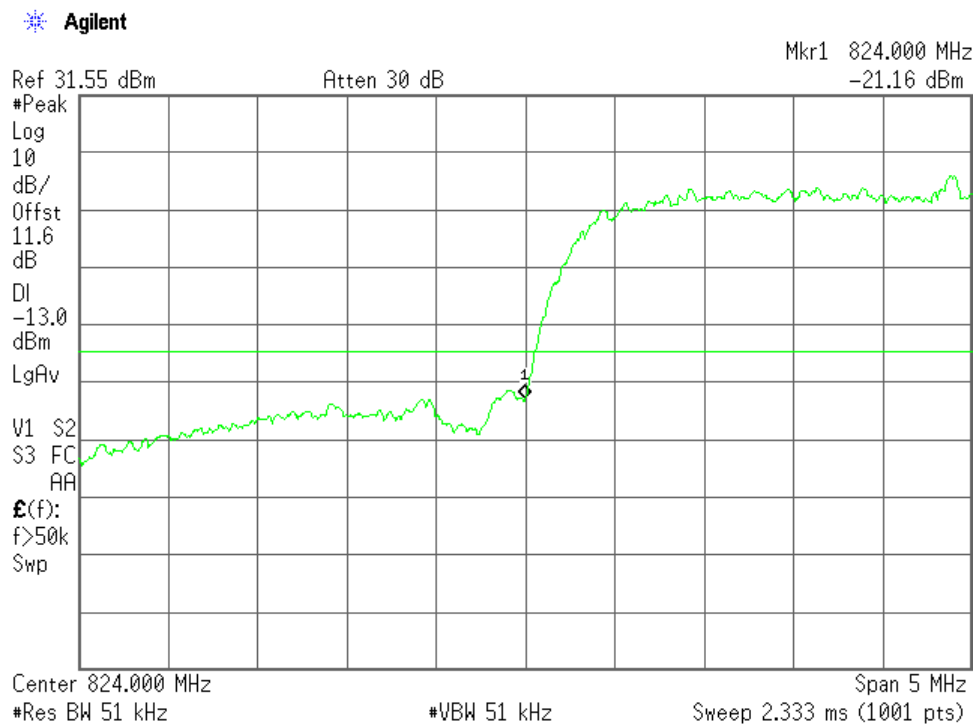

High Channel, Band-Edge Emission

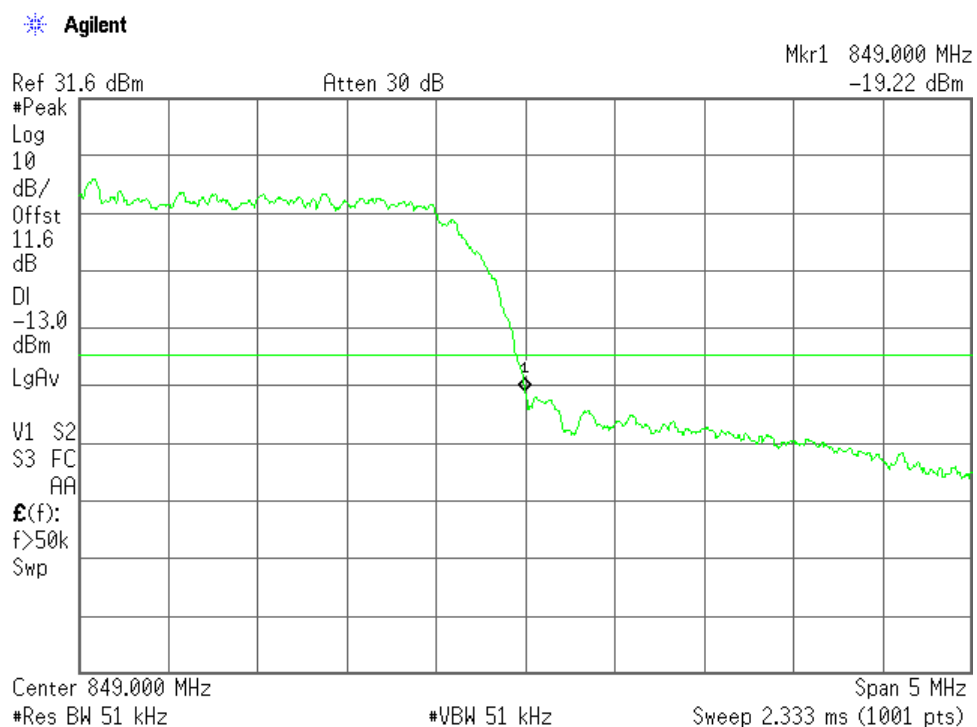

A.6 Field Strength of Spurious Radiation (§2.1053)

A.6.1 Single Unit

(WCDMA850)

Test Configuration : Single Unit

Test Date: December 22, 2011

Temp.: 21 °C, Humi: 37 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
4132	826.400	1652.800	-45.9	-48.9	-13.0	+32.9	C
		2479.200	< -58.3	< -58.3	-13.0	> +45.3	C
		3305.600	< -57.0	< -57.0	-13.0	> +44.0	C
		4132.000	< -51.0	< -51.0	-13.0	> +38.0	C
		4958.400	< -51.6	< -51.6	-13.0	> +38.6	C
		5784.800	< -50.4	< -50.4	-13.0	> +37.4	C
		6611.200	< -47.6	< -47.6	-13.0	> +34.6	C
		7437.600	< -57.1	< -57.1	-13.0	> +44.1	C
		8264.000	< -50.8	< -50.8	-13.0	> +37.8	C
4182	836.400	1672.800	-46.2	-48.2	-13.0	+33.2	C
		2509.200	-53.7	-52.2	-13.0	+39.2	C
		3345.600	< -56.7	< -56.7	-13.0	> +43.7	C
		4182.000	< -51.0	< -51.0	-13.0	> +38.0	C
		5018.400	< -51.6	< -51.6	-13.0	> +38.6	C
		5854.800	< -50.4	< -50.4	-13.0	> +37.4	C
		6691.200	< -47.5	< -47.5	-13.0	> +34.5	C
		7527.600	< -57.0	< -57.0	-13.0	> +44.0	C
		8364.000	< -50.9	< -50.9	-13.0	> +37.9	C
4233	846.600	1693.200	-46.5	-48.2	-13.0	+33.5	C
		2539.800	-53.6	-52.8	-13.0	+39.8	C
		3386.400	< -56.8	< -56.8	-13.0	> +43.8	C
		4233.000	< -51.1	< -51.1	-13.0	> +38.1	C
		5079.600	< -51.5	< -51.5	-13.0	> +38.5	C
		5926.200	< -49.8	< -49.8	-13.0	> +36.8	C
		6772.800	< -47.6	< -47.6	-13.0	> +34.6	C
		7619.400	< -54.9	< -54.9	-13.0	> +41.9	C
		8466.000	< -50.7	< -50.7	-13.0	> +37.7	C

Calculated result at 1652.8 MHz, as the worst point shown on underline:
Minimum Margin: $-13.0 - (-45.9) = 32.9$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

A.6.2 Single Unit with Wireless Charger

(WCDMA850)

Test Date: January 14, 2012

Temp.: 20 °C, Humi: 37 %

CH	Transmitting Frequency [MHz]	Measured Frequency [MHz]	ERP [dBm]		Limits [dBm]	Margin [dB]	Remarks
			Hori.	Vert.			
4132	826.400	1652.800	-48.8	-59.8	-13.0	+35.8	C
		2479.200	-51.5	< -55.5	-13.0	+38.5	C
		3305.600	< -53.5	< -53.5	-13.0	> +40.5	C
		4132.000	< -46.9	< -46.9	-13.0	> +33.9	C
		4958.400	< -46.6	< -46.6	-13.0	> +33.6	C
		5784.800	< -44.7	< -44.7	-13.0	> +31.7	C
		6611.200	< -49.4	< -49.4	-13.0	> +36.4	C
		7437.600	< -48.5	< -48.5	-13.0	> +35.5	C
		8264.000	< -44.3	< -44.3	-13.0	> +31.3	C
4182	836.400	1672.800	-48.9	-59.9	-13.0	+35.9	C
		2509.200	-46.5	< -55.6	-13.0	+33.5	C
		3345.600	< -53.1	< -53.1	-13.0	> +40.1	C
		4182.000	< -46.9	< -46.9	-13.0	> +33.9	C
		5018.400	< -46.5	< -46.5	-13.0	> +33.5	C
		5854.800	< -44.4	< -44.4	-13.0	> +31.4	C
		6691.200	< -49.3	< -49.3	-13.0	> +36.3	C
		7527.600	< -48.4	< -48.4	-13.0	> +35.4	C
		8364.000	< -44.3	< -44.3	-13.0	> +31.3	C
4233	846.600	1693.200	-48.8	-60.1	-13.0	+35.8	C
		2539.800	-50.7	< -55.6	-13.0	+37.7	C
		3386.400	< -53.1	< -53.1	-13.0	> +40.1	C
		4233.000	< -46.9	< -46.9	-13.0	> +33.9	C
		5079.600	< -46.4	< -46.4	-13.0	> +33.4	C
		5926.200	< -43.8	< -43.8	-13.0	> +30.8	C
		6772.800	< -49.2	< -49.2	-13.0	> +36.2	C
		7619.400	< -48.3	< -48.3	-13.0	> +35.3	C
		8466.000	< -44.2	< -44.2	-13.0	> +31.2	C

Calculated result at 5926.2 MHz, as the worst point shown on underline:
Minimum Margin: $-13.0 - (<43.8) = >30.8$ (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 10 GHz.
3. All emissions not reported were more than 20 dB below the applied limits.
4. Applied limits : -13.0 [dBm] = $10\log(TP[mW]) - (43 + 10\log(tp[W])) = 10\log(TP[mW]) - (43 + (10\log(TP[mW]) - 30))$
where, $tp[W] = TP[mW] / 1000$: Transmitter power at antenna terminal
5. The symbol of "<" means "or less".
6. The symbol of ">" means "more than".
7. Setting of measuring instrument(s) :

	Detector Function	RES B.W.	V.B.W.	Sweep Time
A	Peak	10 kHz	30 kHz	20 msec.
B	Peak	100 kHz	300 kHz	20 msec.
C	Peak	1 MHz	3 MHz	20 msec.

A.7 Frequency Stability (§2.1055)

(WCDMA850)

Test Date: December 19, 2011

- December 20, 2011

1. Frequency Stability Measurement versus Temperature

Transmitting Frequency : 836.400 MHz (4182 ch)

DC Supply Voltage : 4.0 VDC

Ambient Temperature [°C]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
-30	<u>+ 0.04</u>	- 0.01	- 0.01	- 0.01	2.50	2.46
-20	<u>+ 0.04</u>	- 0.01	- 0.01	- 0.01	2.50	2.46
-10	+ 0.02	- 0.01	- 0.01	+ 0.00	2.50	2.48
0	+ 0.03	+ 0.00	- 0.01	- 0.01	2.50	2.47
10	+ 0.03	+ 0.00	- 0.01	- 0.01	2.50	2.47
20	+ 0.01	+ 0.00	+ 0.00	+ 0.00	2.50	2.49
30	+ 0.02	+ 0.00	+ 0.00	- 0.01	2.50	2.48
40	+ 0.03	+ 0.00	- 0.01	+ 0.00	2.50	2.47
50	- 0.01	- 0.01	- 0.01	+ 0.00	2.50	2.49

2. Frequency Stability Measurement versus Power Supply Voltage

Transmitting Frequency : 836.400 MHz (4182 ch)

Ambient Temperature: : 20 °C

DC Supply Voltage [V]	Startup	Deviation [ppm]			Limits [ppm]	Margin [ppm]
		2 minutes	5 minutes	10 minutes		
4.0	+ 0.01	+ 0.00	+ 0.00	+ 0.00	2.50	2.49
3.7(Ending)	+ 0.02	+ 0.00	- 0.01	+ 0.00	2.50	2.48

Test condition example as the maximum deviation point shown on underline:

Ambient Temperature : -30 °C / Startup

DC Supply Voltage : 4 VDC

Minimum Margin: 2.50 - 0.04 = 2.46 (ppm)

NOTE : The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.

Appendix B: Test Arrangement (Photographs)

Radiated Emission

This page is CONFIDENTIAL.

This page is CONFIDENTIAL.

Appendix C: Test Instruments**C.1 RF Power Output****C.1.1 Conducted RF Power Output**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	N1911A	Agilent	B-63	2011/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2011/7	1 Year
Attenuator	54A-10	Weinschel	D-29	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

C.1.2 ERP /EIRP Power Output

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU26	Rohde & Schwarz	A-6	2011/5	1 Year
Signal Generator	E8257D	Agilent	B-39	2011/8	1 Year
Power Meter	N1911A	Agilent	B-63	2011/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2011/7	1 Year
Attenuator(TX)	2-10	Weinschel	D-79	2011/11	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2011/5	1 Year
Dipole Antenna(TX)	KBA-611	Kyoritsu	C-20	2011/8	2 Years

C.2 Modulation Characteristics

Not Applicable

C.3 Occupied Bandwidth

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

C.4 Spurious Emissions at Antenna Terminals

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year
HPF	HPM5010S	MICRO-TRONICS	D-94	2011/2	1 Year

C.5 Band-Edge Emission

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

C.6 Field Strength of Spurious Radiation

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU26	Rohde & Schwarz	A-6	2011/5	1 Year
Signal Generator	E8257A	Agilent	B-39	2011/8	1 Year
Power Meter	N1911A	Agilent	B-63	2011/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2011/7	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2011/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2011/6	1 Year
Horn Antenna	3160-05	EATON	C-56	2011/6	2 Years
Horn Antenna	3160-06	EATON	C-57	2011/6	2 Years
Horn Antenna	3160-07	EATON	C-58	2011/6	2 Years
RF Cable	SUCOFLEX104	SUHNER	C-40-11	2010/12	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-40-14	2010/12	1 Year
Attenuator	2-10	Weinschel	D-79	2011/10	1 Year
Attenuator	54-10	Weinschel	D-29	2011/9	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2010/12	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2010/12	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2010/12	1 Year
HPF	HPM5010S	MICRO-TRONICS	D-94	2011/2	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	12704013E1	2011/3	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	12704501E1	2011/3	1 Year
Pre-Amplifier	WJ-6870-506	Watkins Johnson	12704502E1	2011/3	1 Year
RF Cable	SUCOFLEX104P	SUHNER	15521521E1	2011/3	1 Year
RF Cable	SUCOFLEX104P	SUHNER	15521522E1	2011/3	1 Year

C.7 Frequency Stability

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Radio Communication Analyzer	MT8815B	Anritsu	B-69	2011/9	1 Year
DC Voltage Meter	2011-39	YEW	B-33	2011/4	1 Year
Environmental Chamber	SH-641	ESPEC	F-32	2011/6	1 Year
DC Power Supply	NL035-10	TAKASAGO	F-4	N/A	N/A