

## TEST REPORT

**APPLICANT** : Sharp Corporation, Communication Systems Group  
**ADDRESS** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN

**PRODUCTS** : Cellular Phone

**MODEL NO.** : SH-07D  
**SERIAL NO.** : 004401113925313  
004401113925115

**FCC ID** : APYHRO00168

**TEST STANDARD** : CFR 47 FCC Rules and Regulations Part 15

**TESTING LOCATION** : Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

**TEST RESULTS** : **Passed**

**DATE OF TEST** : April 9 ~ 16, 2012



Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

Testing Dept. SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- 
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
  - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
  - The test results presented in this report relate only to the offered test sample.
  - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
  - This test report shall not be reproduced except in full without the written approval of JQA.
  - VLAC does not approve, certify or warrant the product by this test report.

**TABLE OF CONTENTS****Page**

<b>Documentation .....</b>	<b>3</b>
1 Test Regulation.....	3
2 Test Location.....	3
3 Recognition of Test Laboratory.....	3
4 Description of the Equipment Under Test.....	4
5 Test Condition.....	5
6 Preliminary Test and Test Setup.....	7
7 Equipment Under Test Modification.....	13
8 Responsible Party.....	13
9 Deviation from Standard.....	13
10 Test Results.....	14
11 Summary.....	17
12 Operating Condition.....	18
13 Test Configuration.....	18
14 Equipment Under Test Arrangement (Drawings).....	19
<b>Appendix A: Test Data.....</b>	<b>20</b>
<b>Appendix B: Test Arrangement (Photographs).....</b>	<b>106</b>
<b>Appendix C: Test Instruments.....</b>	<b>108</b>

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT****EUT** : Equipment Under Test**EMC** : Electromagnetic Compatibility**AE** : Associated Equipment**EMI** : Electromagnetic Interference**N/A** : Not Applicable**EMS** : Electromagnetic Susceptibility**N/T** : Not Tested - indicates that the listed condition, standard or equipment is applicable for this report. - indicates that the listed condition, standard or equipment is not applicable for this report.

**Documentation****1 Test Regulation**

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.4–2003

The tests were performed with reference to the FCC KDB 558074 D01 DTS Meas Guidance, released January 18, 2012. The test set-up was made in accordance to the general provisions of ANSI C63.4-2003.

**2 Test Location**

Japan Quality Assurance Organization (JQA)  
KITA-KANSAI Testing Center Testing Department SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan  
MINOH Test Site (KITA-KANSAI Testing Center)  
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan  
KAMEOKA EMC Branch  
9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto, 621-0126, Japan

**3 Recognition of Test Laboratory**

JQA KITA-KANSAI Testing Center Testing Dept. SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : March 30, 2014)  
VCCI Registration No. : A-0002 (Expiry date : March 30, 2014)  
BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006  
(Effective through : September 14, 2013)  
IC Registration No. : 2079E-3, 2079E-4 (Effective through : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Effective through : February 22, 2013)

## 4 Description of the Equipment Under Test

### 4.1 General Information

1. Manufacturer : Sharp Corporation, Communication Systems Group  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH-07D
4. Serial No. : 004401113925313  
: 004401113925115
5. Product Type : Pre-production
6. Date of Manufacture : March, 2012
7. Transmitting Frequency : 2412.0 MHz(01CH) –2462.0MHz(11CH)
8. Receiving Frequency : 2412.0 MHz(01CH) –2462.0MHz(11CH)
9. Max. RF Output Power : 17.66dBm(Measure Value of IEEE802.11b)  
: 20.58dBm(Measure Value of IEEE802.11g)  
: 19.86dBm(Measure Value of IEEE802.11n)
10. Power Rating : 4.0VDC (Lithium-ion Battery Pack SH35 1520mAh)
11. EUT Grounding : None
12. EUT Authorization : Certification
13. Receive Date of EUT : April 3, 2012

### 4.2 Channel Plan

The carrier spacing is 5 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

$$\text{Transmitting Frequency (in MHz)} = 2407.0 + 5*n$$

$$\text{Receiving Frequency (in MHz)} = 2407.0 + 5*n$$

where, n : channel number ( $1 \leq n \leq 11$ )

**5 Test Condition****5.1 Channel Separation**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
		<input type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
	MINOH	<input type="checkbox"/> - Shielded room	
	KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.2 Minimum Hopping Channel**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
		<input type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
	MINOH	<input type="checkbox"/> - Shielded room	
	KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.3 Occupied Bandwidth**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
		<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)
	MINOH	<input type="checkbox"/> - Shielded room	
	KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.4 Dwell Time**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site :	SAITO	<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
		<input type="checkbox"/> - Shielded room (S3)	<input type="checkbox"/> - Shielded room (S4)
	MINOH	<input type="checkbox"/> - Shielded room	
	KAMEOKA	<input type="checkbox"/> - Shielded room	<input type="checkbox"/> - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.5 Peak Output Power and Density (Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO  - Shielded room (S1)  - Shielded room (S2)  
 - Shielded room (S3)  - Shielded room (S4)  
MINOH  - Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.6 Spurious Emission (Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO  - Shielded room (S1)  - Shielded room (S2)  
 - Shielded room (S3)  - Shielded room (S4)  
MINOH  - Shielded room  
KAMEOKA  - Shielded room  - Conducted emission facility

Test instruments : Refer to Appendix C.

**5.7 AC Powerline Conducted Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO  - Anechoic chamber (A1)  - Measurement room (M1)  
 - Measurement room (M2)  - Measurement room (M3)  
 - Shielded room (S1)  - Shielded room (S2)  
MINOH  - Shielded room  
 - Anechoic chamber  
KAMEOKA  - Shielded room  - Conducted emission facility  
 - 1st open site

Test instruments : Refer to Appendix C.

**5.8 Field Strength of Spurious Radiation**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Test site : SAITO  - Anechoic chamber (A1)  - Anechoic chamber (A2)  
KAMEOKA  - 1st open site

Test instruments : Refer to Appendix C.

## 6 Preliminary Test and Test Setup

### 6.1 Channel Separation


Not Applicable

### 6.2 Minimum Hopping Channel

Not Applicable

### 6.3 Occupied Bandwidth

The test system is shown as follows:

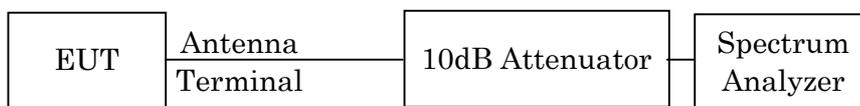

The setting of the spectrum analyzer are shown as follows:


Res. Bandwidth	300 kHz
Video Bandwidth	1 MHz
Span	30 MHz
Sweep Time	AUTO
Trace	Maxhold

### 6.4 Dwell Time

Not Applicable

### 6.5 Peak Output Power and Peak Power Density

The test system is shown as follows:

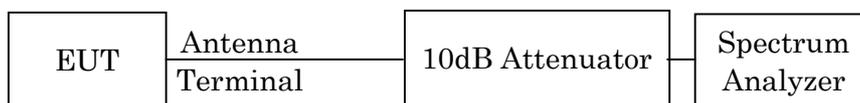

## 6.6 Spurious Emission(Conduction)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


**6.7 AC Powerline Conducted Emission**

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

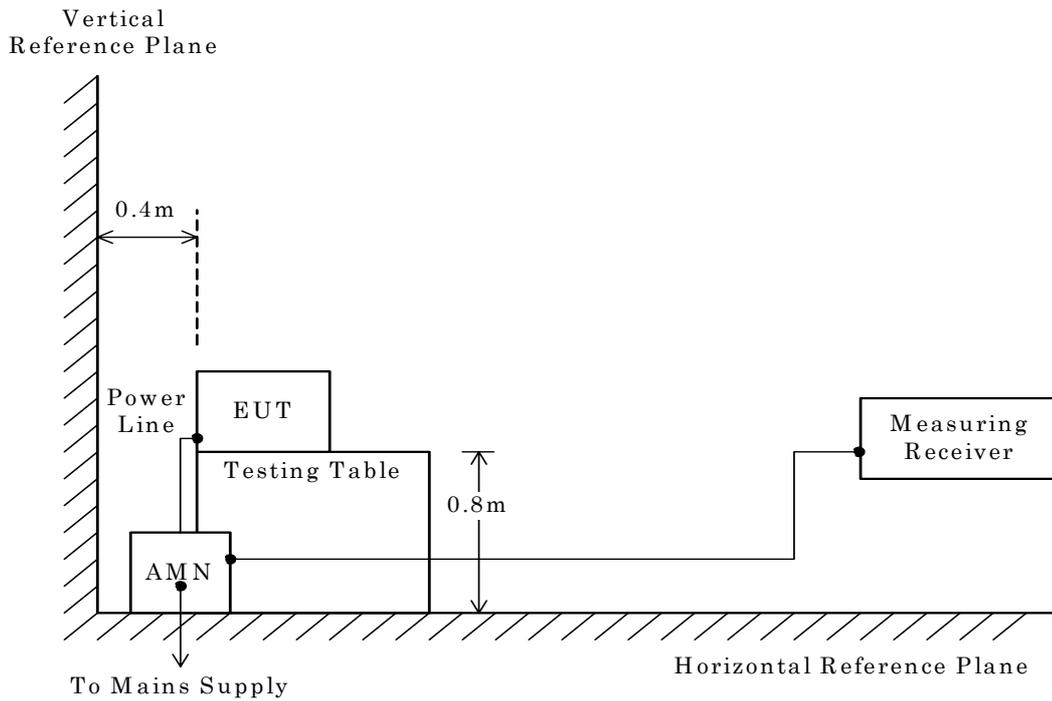

NOTE

AMN : Artificial Mains Network

## 6.8 Field Strength of Spurious Emission

### 6.8.1 Field Strength of Spurious Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –




**6.8.2 Field Strength of Spurious Emission 30 MHz – 1000 MHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

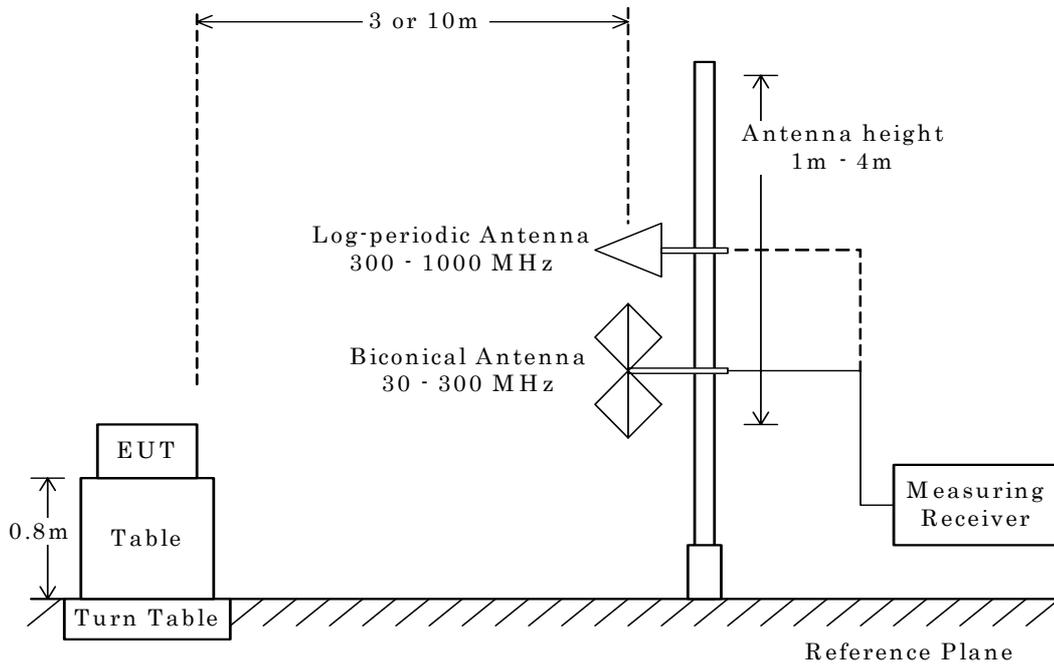


**6.8.3 Field Strength of Spurious Emission above 1 GHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

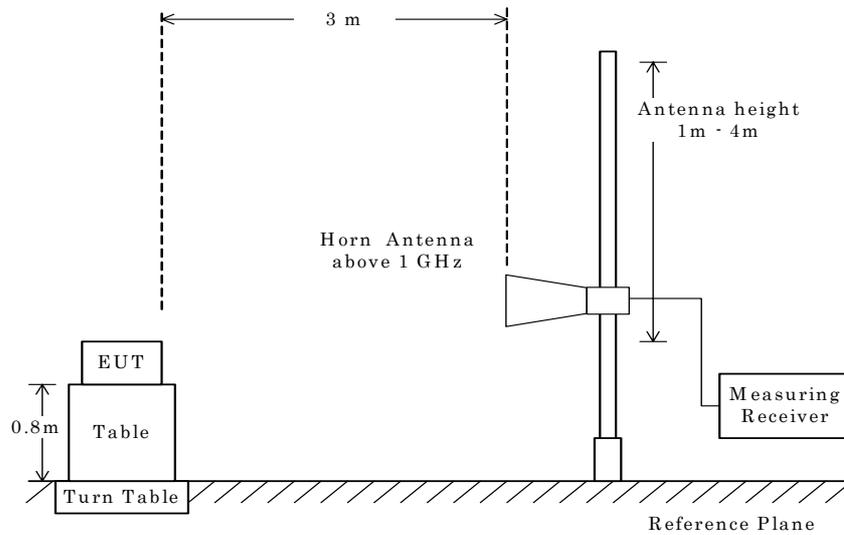

**NOTE**

The antenna height is scanned depending on the EUT's size and mounting height.

**7 Equipment Under Test Modification**

- No modifications were conducted by JQA to achieve compliance to the limitations.  
 - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

Signatory : Not Applicable

**8 Responsible Party**Responsible Party of Test Item (Product)

Responsible Party :	
Contact Person :	_____
	Signatory

**9 Deviation from Standard**

- No deviations from the standard described in clause 1.  
 - The following deviations were employed from the standard described in clause 1.
-

**10 Test Results****10.1 RF Power Output (§2.1046)****10.1.1 Channel Separation**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Channel Separation is \_\_\_\_\_ MHz  
 Channel Separation(Inquiry) is \_\_\_\_\_ MHz

Uncertainty of Measurement Results +/-0.9 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.2 Minimum Hopping Channel**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Number of Channel is \_\_\_\_\_  
 Number of Channel (Inquiry) is \_\_\_\_\_

Remarks : \_\_\_\_\_

**10.1.3 Occupied Bandwidth**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

The 99% Bandwidth of IEEE802.11b is 12.373 MHz at 2412.0 MHz  
 The 99% Bandwidth of IEEE802.11g is 16.510 MHz at 2412.0 MHz  
 The 99% Bandwidth of IEEE802.11n is 17.568 MHz at 2462.0 MHz

The 6dB Bandwidth of IEEE802.11b is 7.648 MHz at 2412.0 MHz  
 The 6dB Bandwidth of IEEE802.11g is 16.101 MHz at 2462.0 MHz  
 The 6dB Bandwidth of IEEE802.11n is 17.532 MHz at 2462.0 MHz

Uncertainty of Measurement Results +/-0.9 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.4 Dwell Time**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Dwell Time is \_\_\_\_\_ msec

Dwell Time (Inquiry) is \_\_\_\_\_ msec

Uncertainty of Measurement Results +/-0.6 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.5 Peak Output Power(Conduction)**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Peak Output Power of IEEE802.11b is 17.66 dBm at 2462.0 MHz

Peak Output Power of IEEE802.11g is 20.58 dBm at 2462.0 MHz

Peak Output Power of IEEE802.11n is 19.86 dBm at 2462.0 MHz

Uncertainty of Measurement Results at Amplitude +/-1.2 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.1.6 Peak Power Density(Conduction)**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

Peak Power Density of IEEE802.11b is -10.25 dBm at 2412.0 MHz

Peak Power Density of IEEE802.11g is -14.20 dBm at 2462.0 MHz

Peak Power Density of IEEE802.11n is -14.68 dBm at 2462.0 MHz

Uncertainty of Measurement Results at Amplitude +/-0.8 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**10.2 Spurious Emissions(Conduction)**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Uncertainty of Measurement Results	9 kHz – 1GHz	<u>+/-1.0</u>	dB(2σ)
	1GHz – 18GHz	<u>+/-1.2</u>	dB(2σ)
	18GHz – 40GHz	<u>+/-1.6</u>	dB(2σ)

Remarks : \_\_\_\_\_

**10.3 AC Powerline Conducted Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Min. Limit Margin (Quasi-Peak) 12.6 dB at 2.69 MHz

Max. Limit Exceeding (Quasi-Peak) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results +/-2.7 dB(2σ)

Remarks : \_\_\_\_\_

**10.4 Field Strength of Spurious Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Min. Limit Margin (Quasi-Peak) 4.3 dB at 36.4 MHz

Max. Limit Exceeding (Average) \_\_\_\_\_ dB at \_\_\_\_\_ MHz

Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>+/-1.9</u>	dB(2σ)
	30 MHz – 300 MHz	<u>+/-4.3</u>	dB(2σ)
	300 MHz – 1000 MHz	<u>+/-5.4</u>	dB(2σ)
	1 GHz – 6 GHz	<u>+/-4.6</u>	dB(2σ)
	6 GHz – 18 GHz	<u>+/-5.2</u>	dB(2σ)
	18 GHz – 40 GHz	<u>+/-5.4</u>	dB(2σ)

Remarks : The measurement result is within the range of measurement uncertainty.

**11 Summary****General Remarks :**

The EUT was tested according to the requirements of the following standard.

CFR 47 FCC Rules and Regulations Part 15

The test configuration is shown in clause 12 to 14.

The conclusion for the test items of which are required by the applied regulation is indicated under the test results.

Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

**Test Results :**

The "as received" sample;

- fulfill the test requirements of the regulation mentioned on clause 1.
- doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:

Tested by:



---

Shigeru Kinoshita  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
Testing Dept. SAITO EMC Branch



---

Shigeru Osawa  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
Testing Dept. SAITO EMC Branch

## 12 Operating Condition

Transmitting/Receiving

Transmitting frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Receiver frequency : 2412.0 MHz(1CH) – 2462.0 MHz(11CH)

Modulation Type

1. 802.11b : DSSS

2. 802.11g : OFDM

3. 802.11n : OFDM

Other Clock Frequency

32.768 kHz, 19.2 MHz, 24.576 MHz, 27.12 MHz

## 13 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	SH-07D	0044011139 25313*1) 0044011139 25115*2)	APYHRO00168
B	Lithium-ion Battery	Sharp	SH35	--	N/A
C	AC Adapter	Panasonic Mobile	03	--	N/A
D	Stereo Handsfree	Sharp	SHLDL1	--	N/A

\*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

\*2) Used for Antenna Conducted Emission

The auxiliary equipment used for testing :


	Item	Manufacturer	Model No.	Serial No.	FCC ID
E	Wireless Charger	Sharp	NC-WP04	--	N/A
F	AC Adapter (Wireless Charger)	Sharp	NC-WP04	--	N/A

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	USB conversion cable (For AC Adapter)	--	--	NO	YES	1.2
2	Handsfree Cable	--	NO	--	NO	1.5
3	DC Power Cable (For Wireless Charger)	--	--	NO	YES	1.9

**14 Equipment Under Test Arrangement (Drawings)**


a) Single Unit




b) AC Adapter used

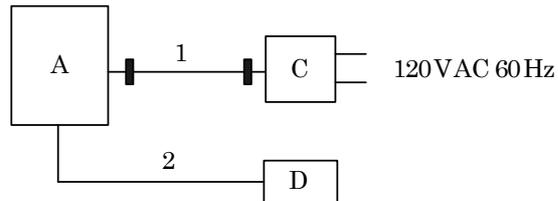

c) Wireless Charger used

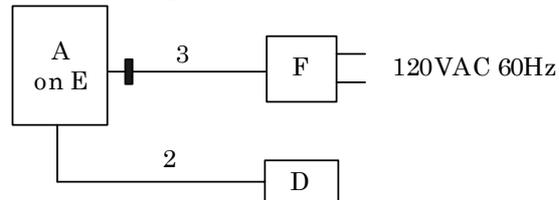

d) Single Unit with Wireless Charger

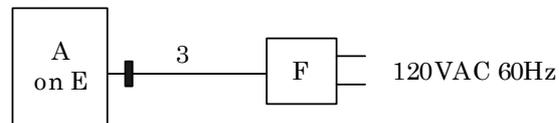

■ : Ferrite Core

**Appendix A: Test Data****A.1 Channel Separation**

Not Applicable

**A.2 Minimum Hopping Channel**

Not Applicable

**A.3 Occupied Bandwidth**

Test Date : April 10, 2012

Temp.:20°C, Humi:50%

The resolution bandwidth was set to about 1% of emission bandwidth, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

A) IEEE 802.11b

1)Data Rate : 1Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	12.328	7.648
06	2437.0	12.245	7.637
11	2462.0	12.243	7.637

2)Data Rate : 2Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	12.373	7.603
06	2437.0	12.296	7.599
11	2462.0	12.304	7.596

3)Data Rate : 5.5Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	11.882	6.626
06	2437.0	11.897	6.635
11	2462.0	11.919	6.671

4)Data Rate : 11Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	12.089	7.024
06	2437.0	12.032	7.148
11	2462.0	12.024	6.858

## B) IEEE 802.11g

## 1) Data Rate : 6Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	16.510	15.808
06	2437.0	16.474	16.033
11	2462.0	16.457	16.101

## 2) Data Rate : 54Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	16.466	15.950
06	2437.0	16.492	15.917
11	2462.0	16.471	16.026

## C) IEEE 802.11n


## 1) Data Rate : 6.5Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	17.475	17.470
06	2437.0	17.464	17.146
11	2462.0	17.485	17.103


## 2) Data Rate : 65Mbps

Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)
01	2412.0	17.545	17.517
06	2437.0	17.533	17.497
11	2462.0	17.568	17.532


1)Data Rate : 1Mbps(IEEE 802.11b)  
Low Channel

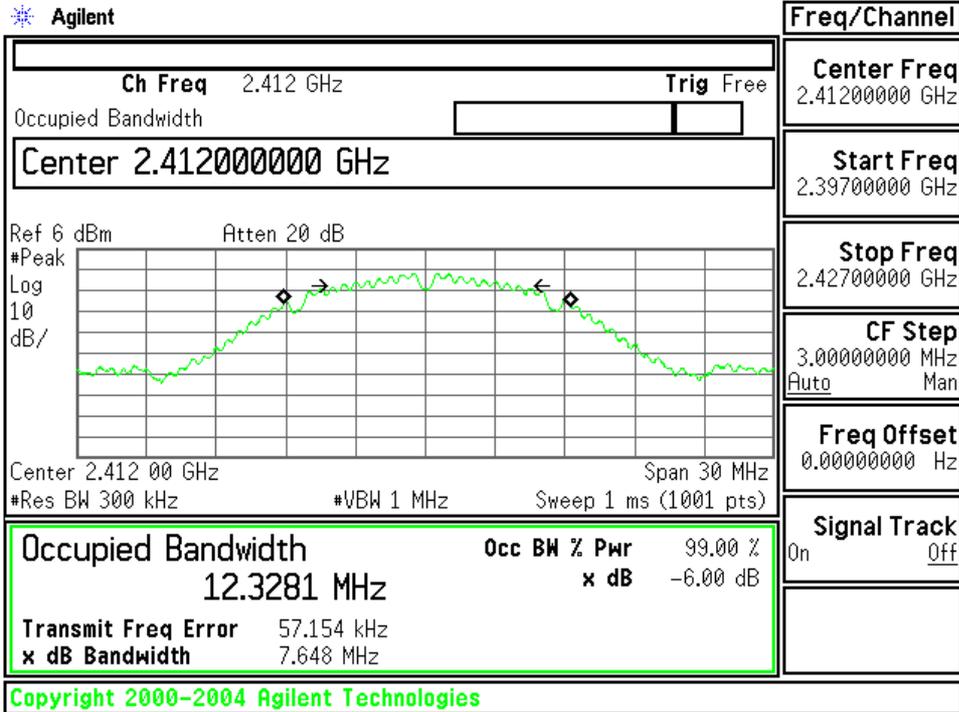

Middle Channel

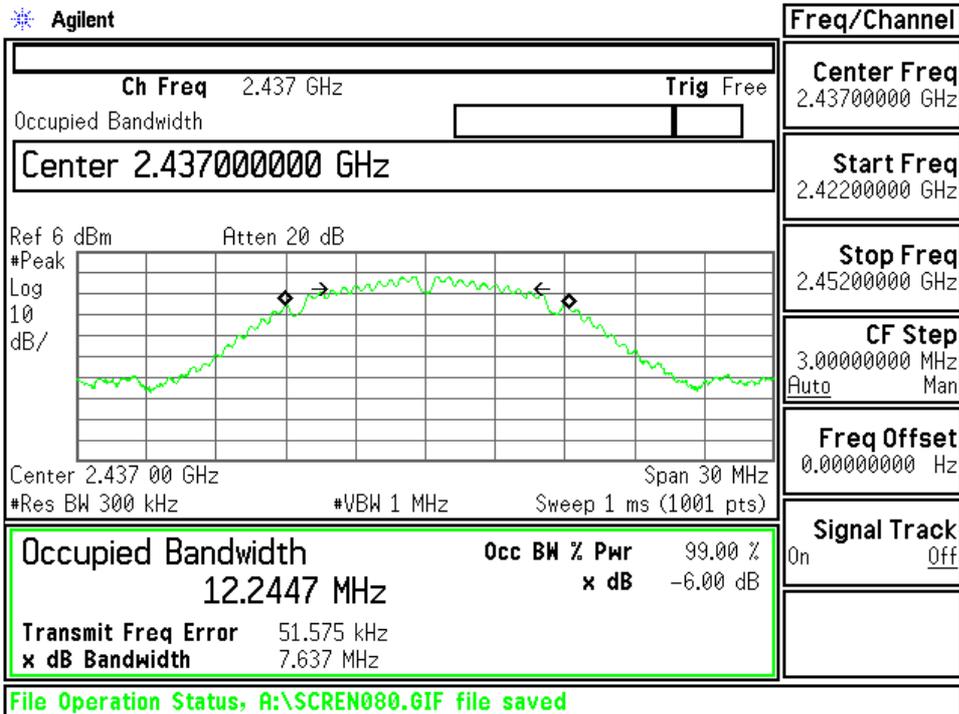


## High Channel

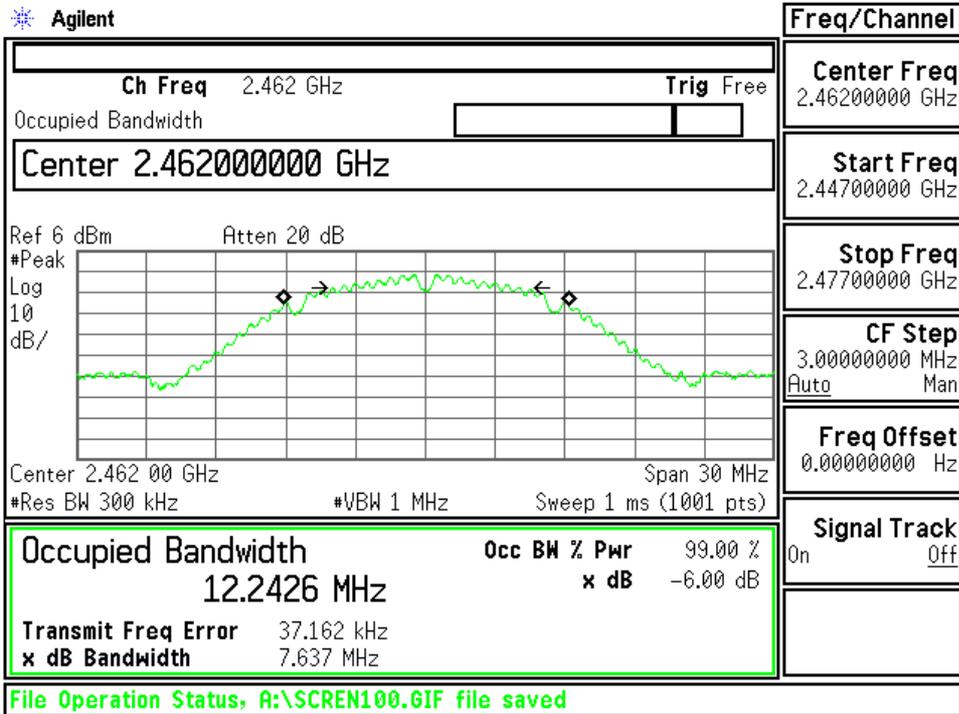


2)Data Rate : 2Mbps(IEEE 802.11b)


## Low Channel

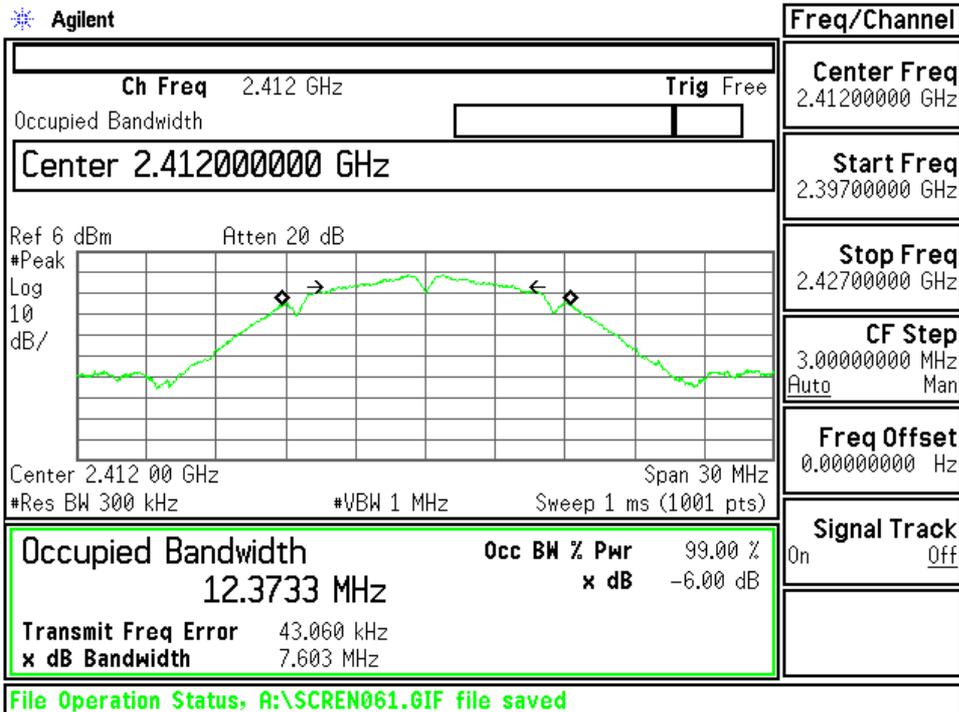


### Middle Channel

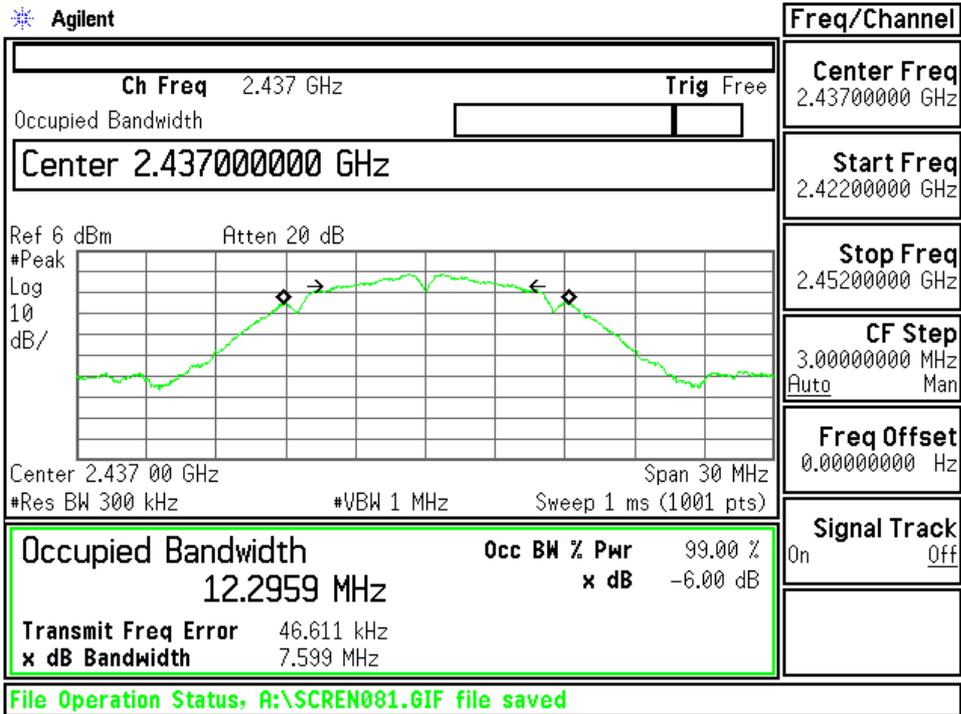


### High Channel

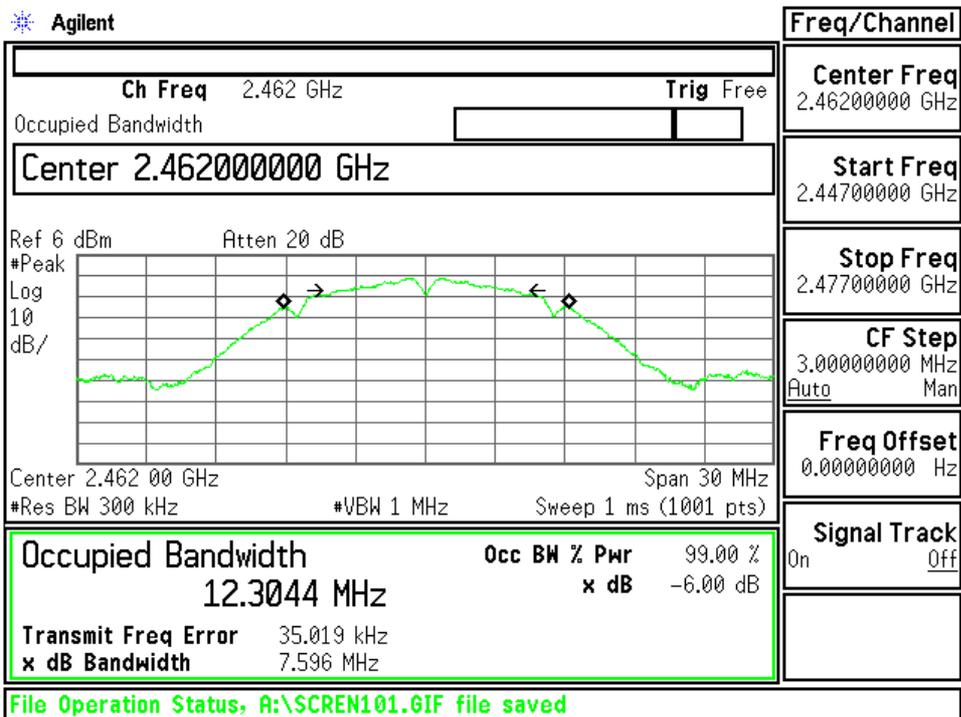


3)Data Rate : 5.5Mbps(IEEE 802.11b)  
Low Channel

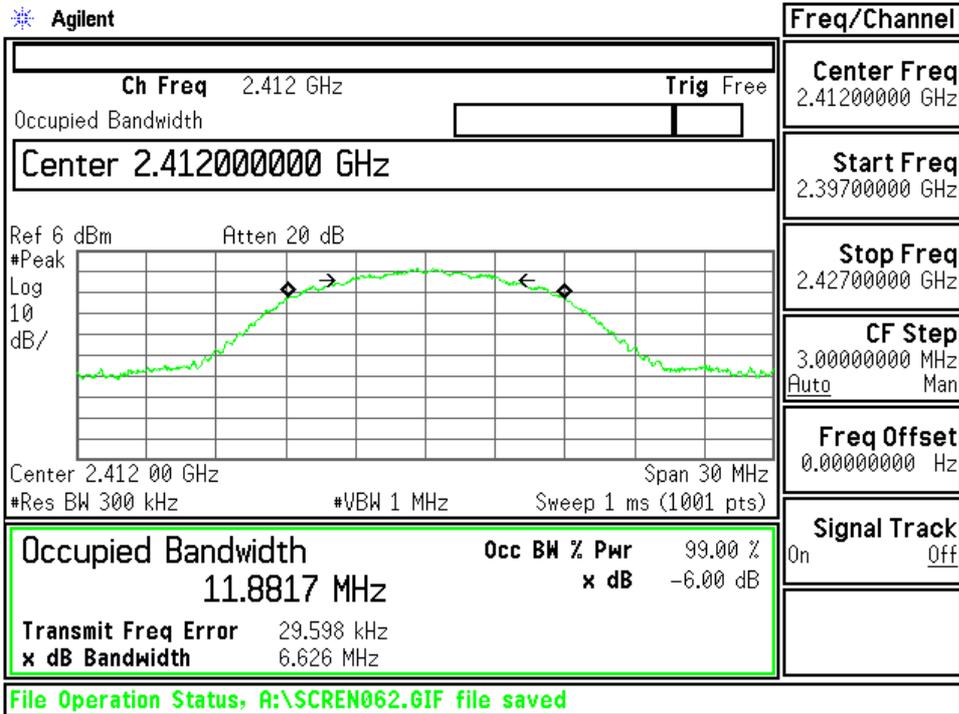

Middle Channel

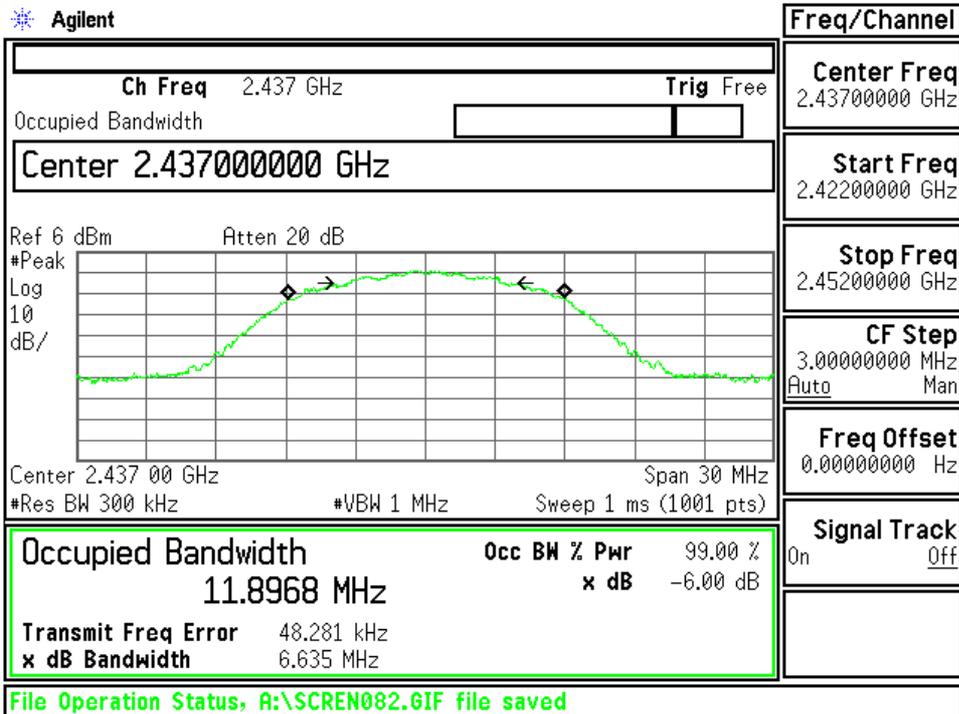


### High Channel

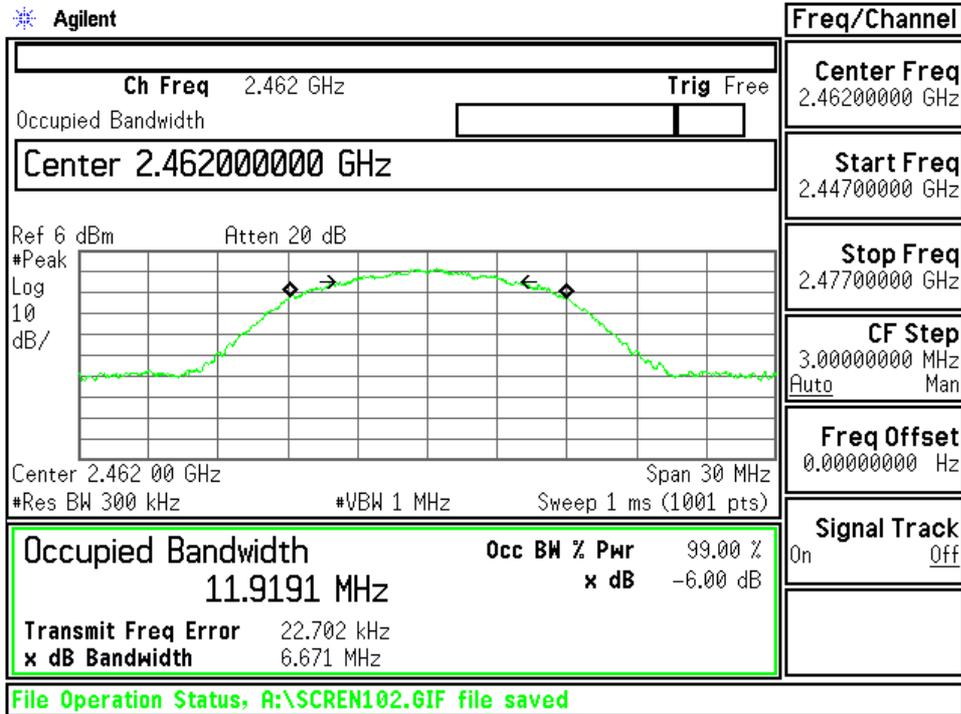


4)Data Rate : 11Mbps(IEEE 802.11b)


### Low Channel

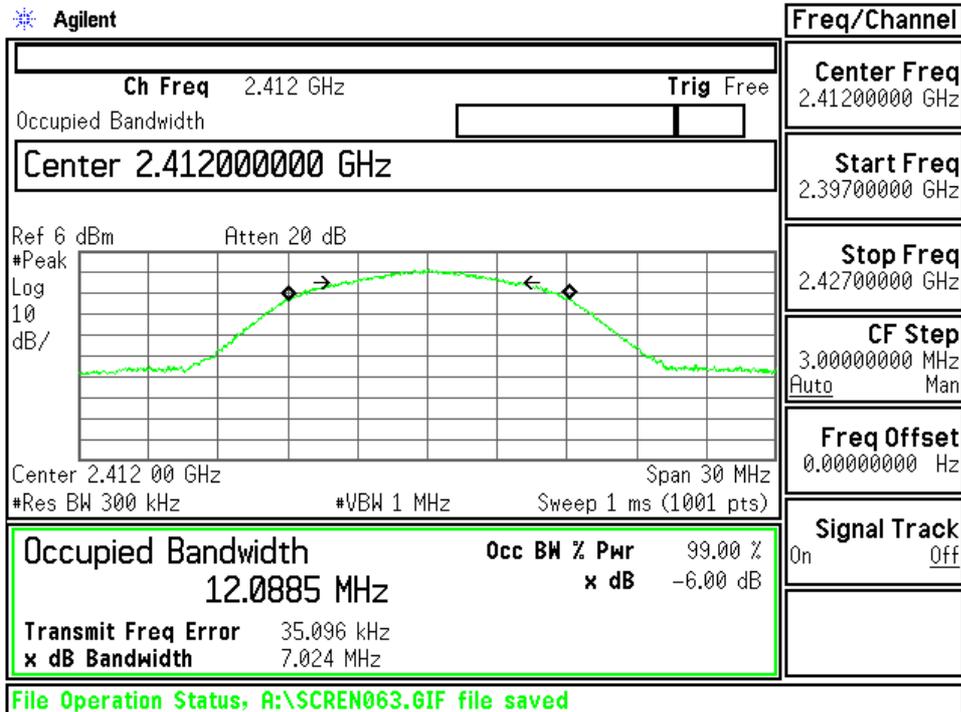


### Middle Channel

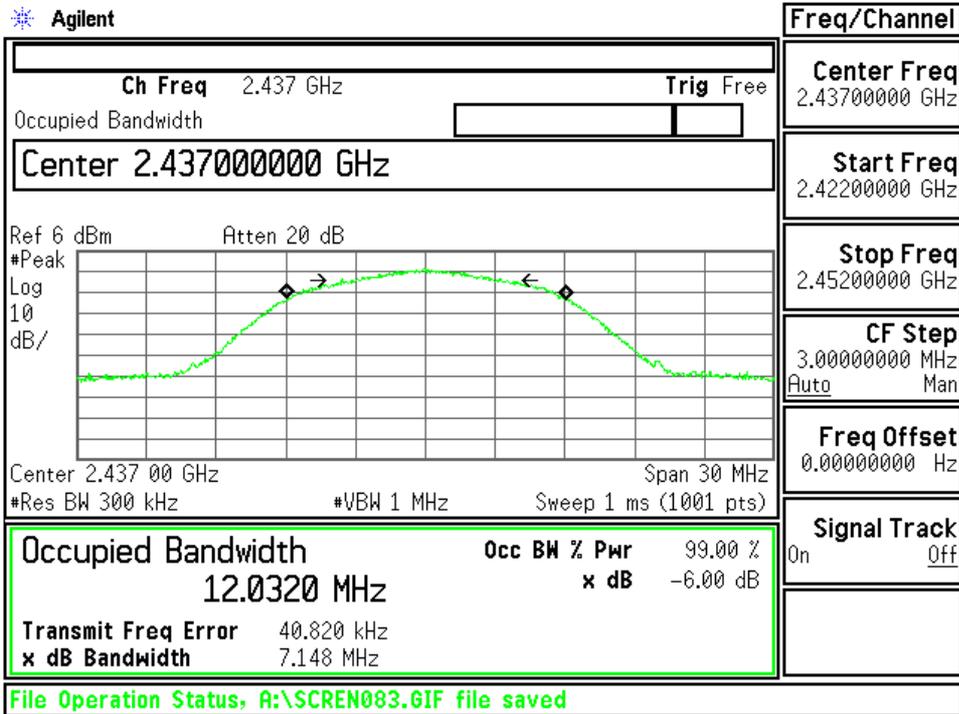


### High Channel

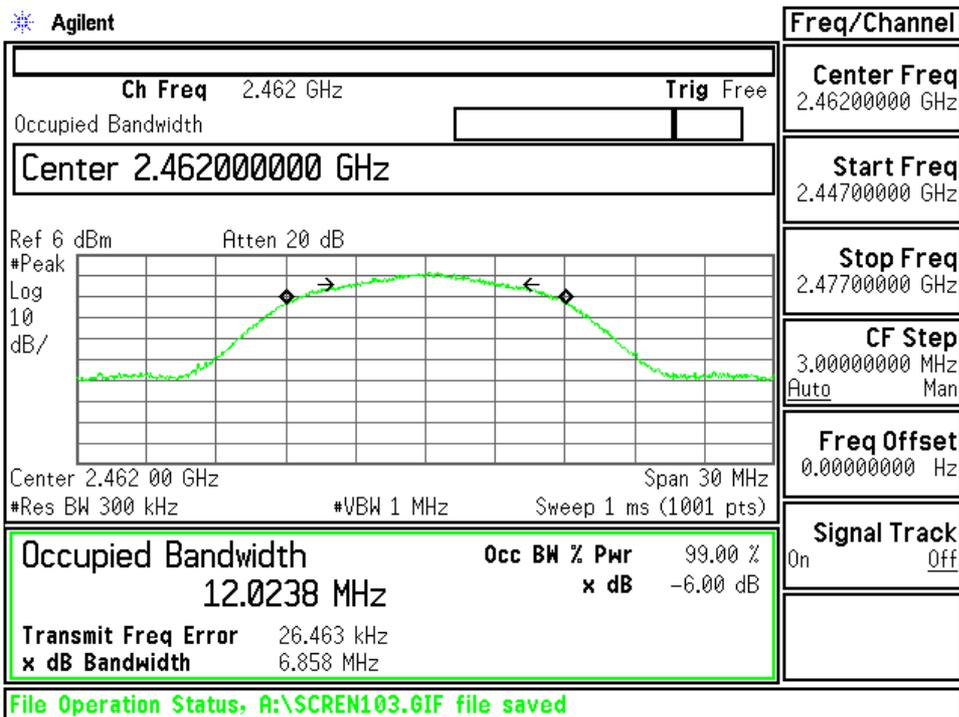


5)Data Rate : 6Mbps(IEEE 802.11g)  
Low Channel

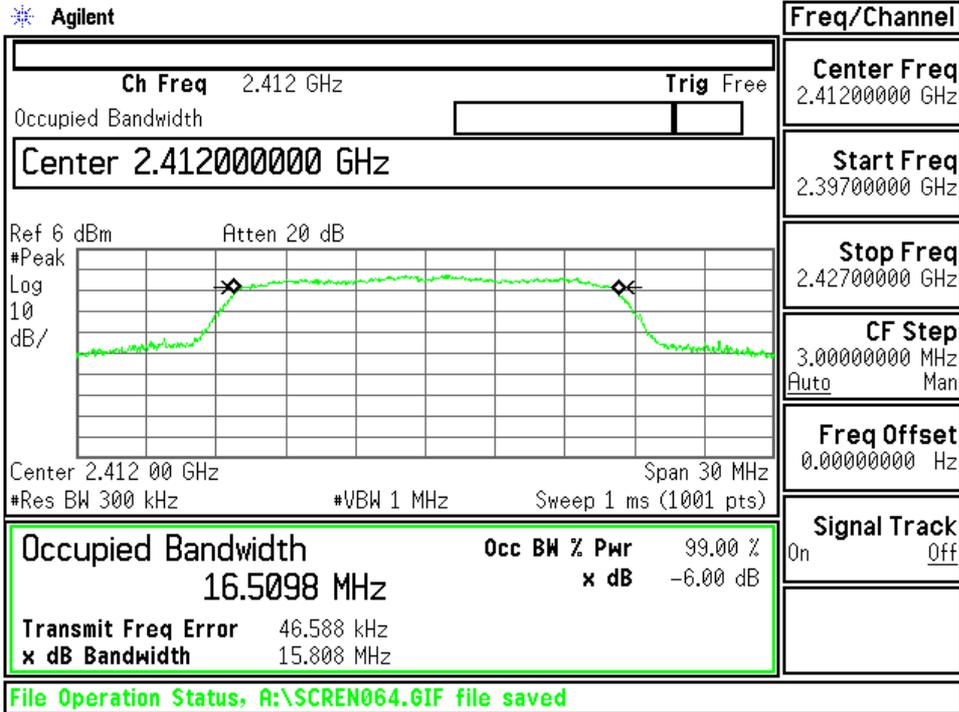

Middle Channel

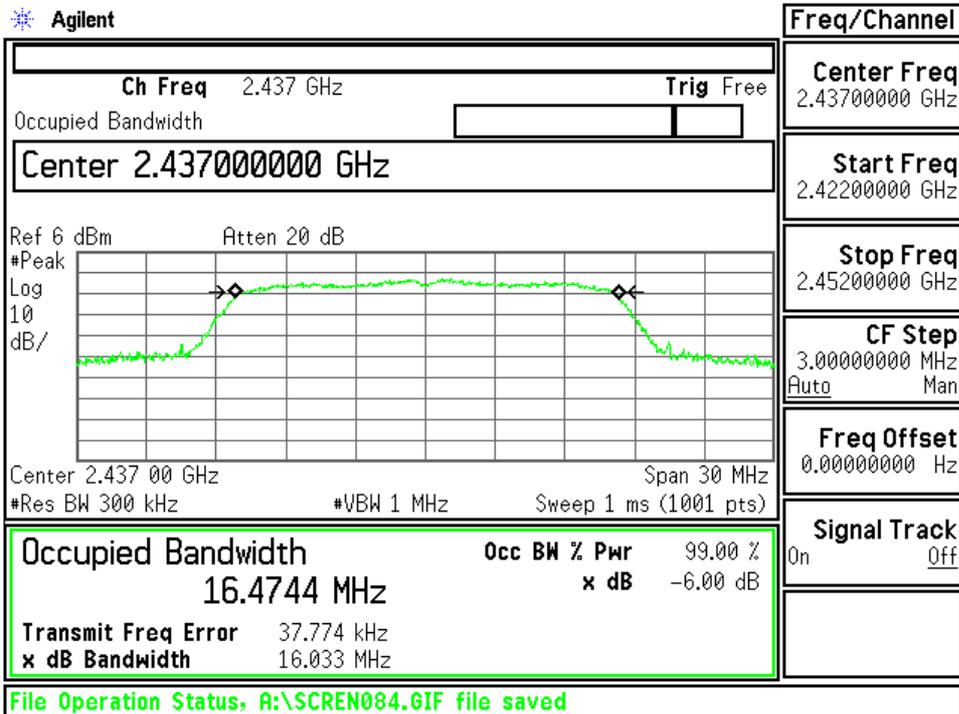


### High Channel

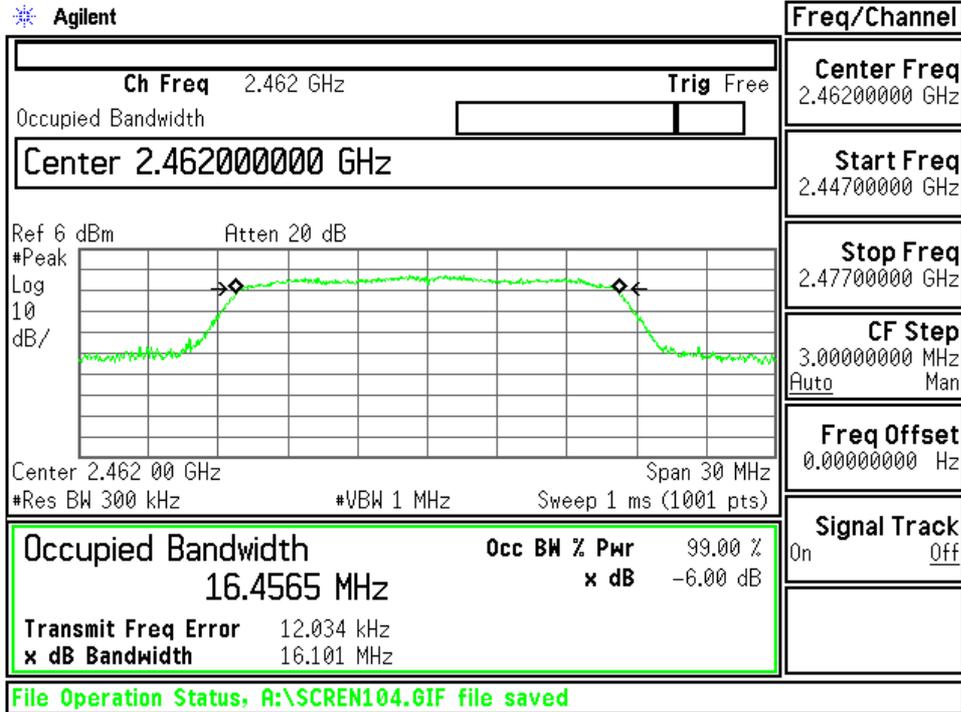


6)Data Rate : 54Mbps(IEEE 802.11g)


### Low Channel

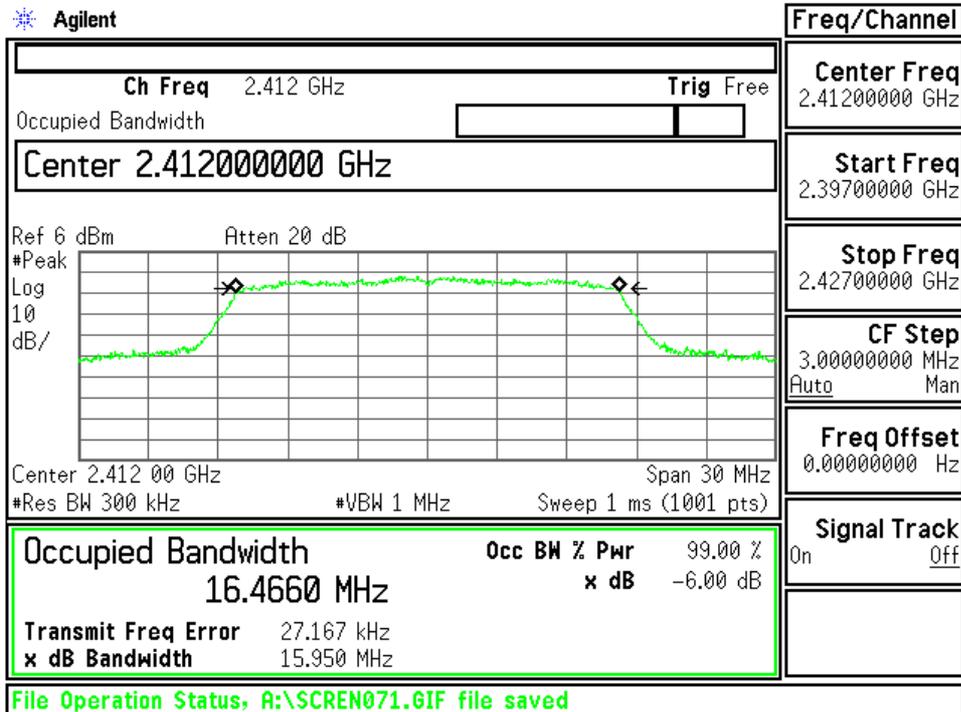


### Middle Channel

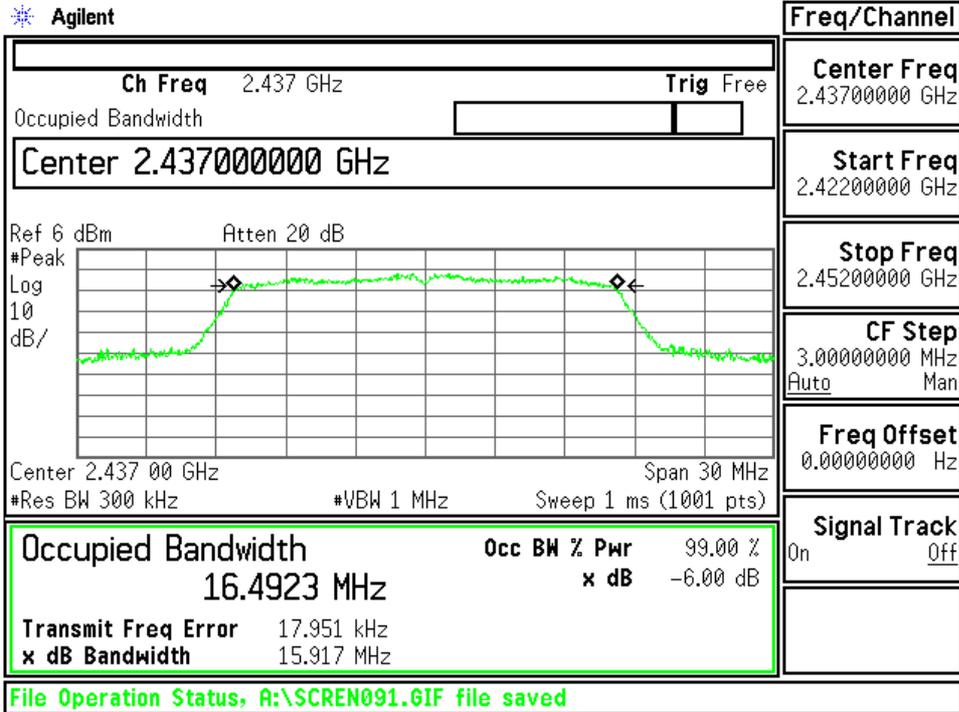


### High Channel

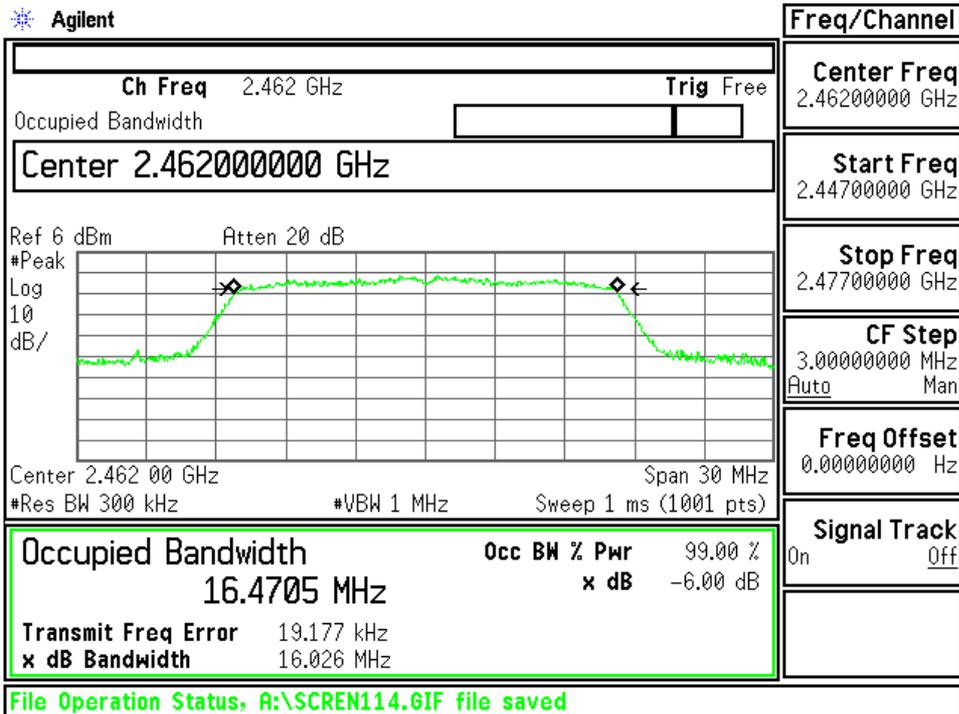


7)Data Rate : 6.5Mbps(IEEE 802.11n)  
Low Channel

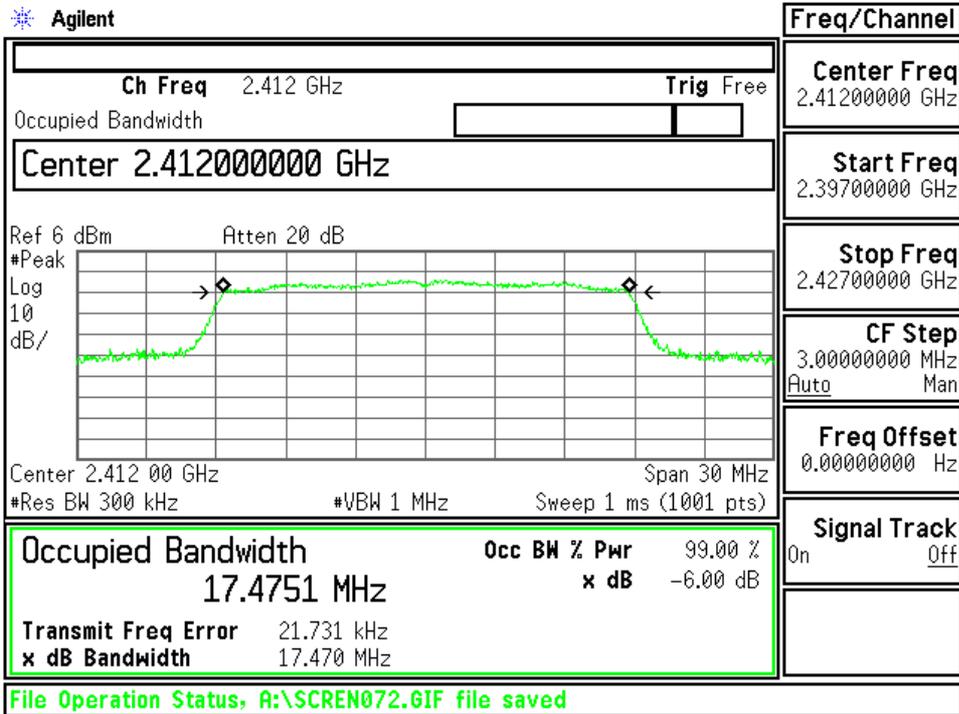

Middle Channel

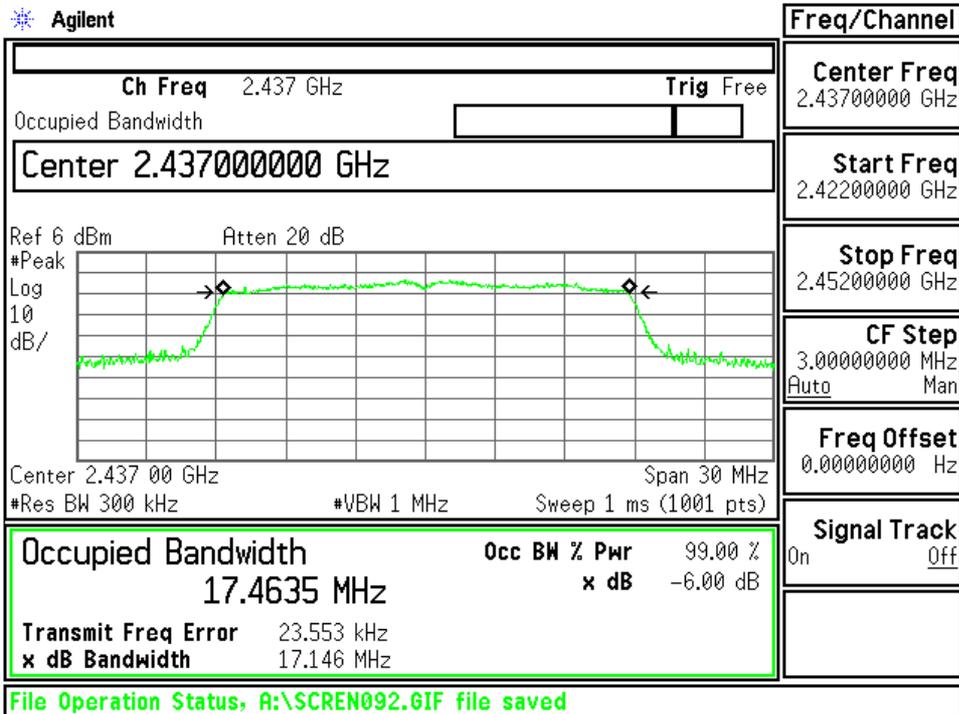


### High Channel

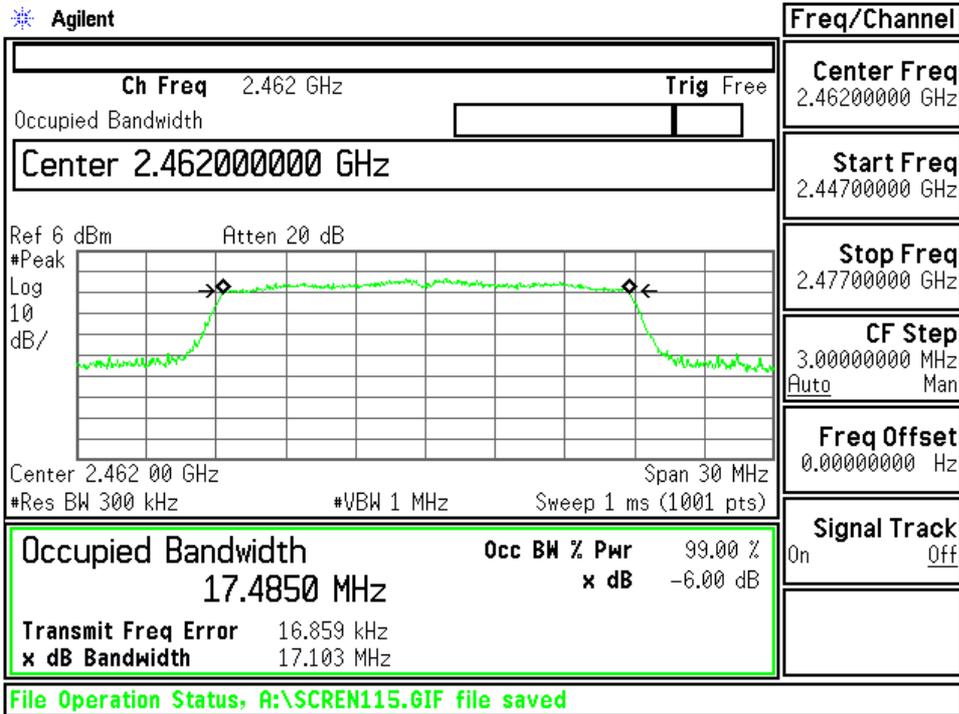


8)Data Rate : 65Mbps(IEEE 802.11n)


### Low Channel

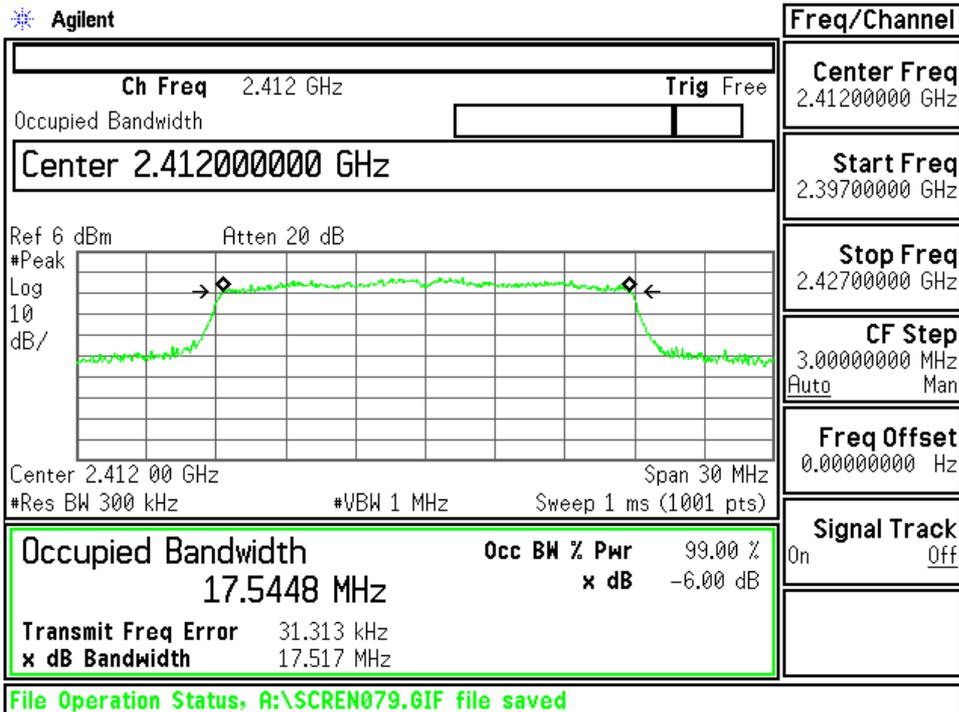

### Middle Channel

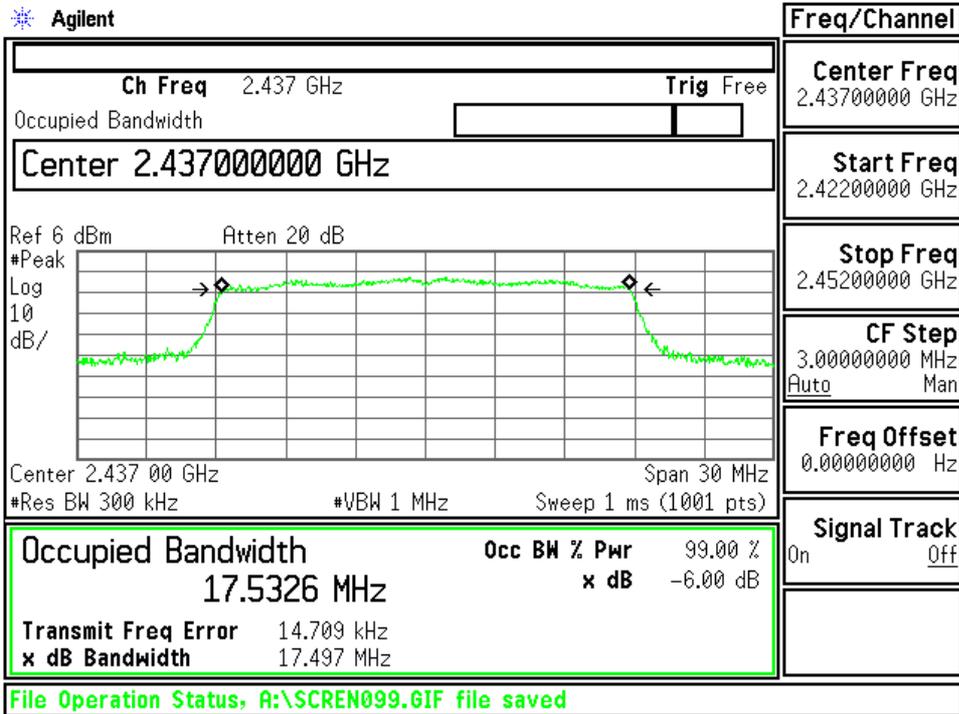

### High Channel

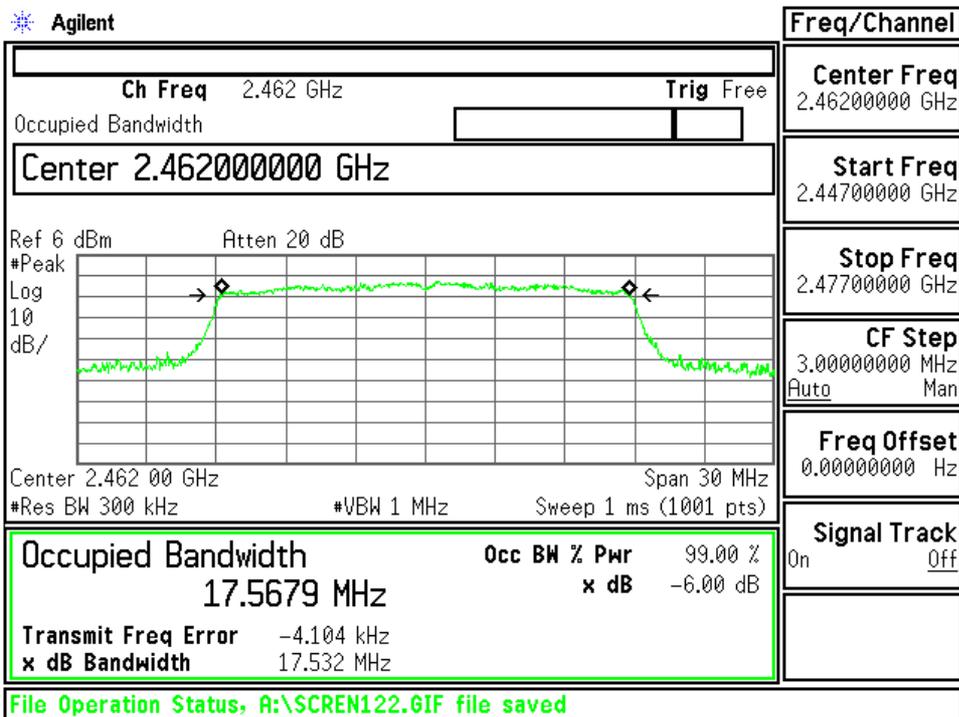

**A.4 Dwell Time**

Not Applicable

**A.5 Peak Output Power(Conduction)**

1)Data Rate : 1Mbps(IEEE 802.11b)

Test Date: April 9, 2012  
Temp.: 19 °C. Humi: 46 %

Data Rate : 1Mbps

Transmitting Frequency	Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin	
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dB]	
01	2412	10.04	3.48	13.52	22.49	30.00	+16.48
06	2437	10.04	3.53	13.57	22.75	30.00	+16.43
11	2462	10.04	3.66	13.70	23.44	30.00	+16.30

Calculated result at 2462.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.04 dB
+ ) Meter Reading	=	3.66 dBm
Result	=	13.70 dBm = 23.44 mW

Minimum Margin: 30.00 - 13.70 = 16.30 (dB)


**NOTES**

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :


Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.

Agilent

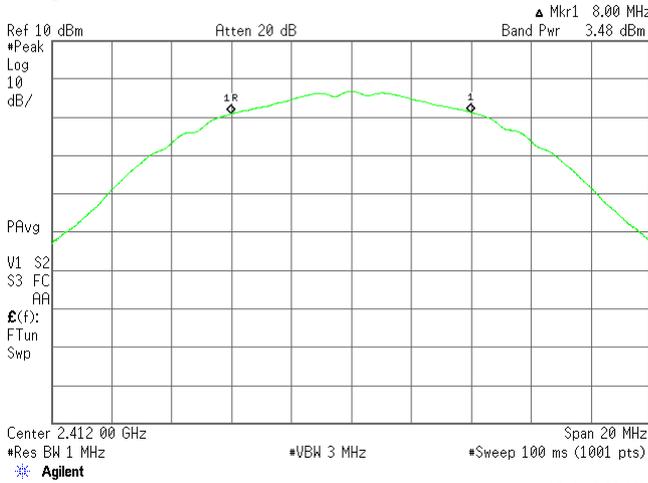

Agilent

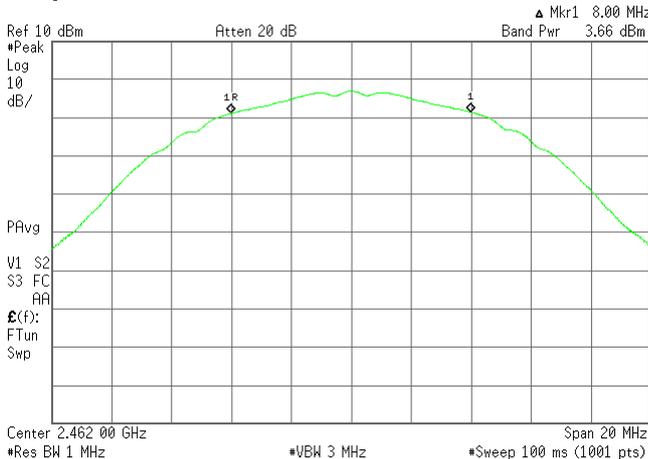

2)Data Rate : 2Mbps(IEEE 802.11b)

Test Date: April 9, 2012  
Temp.: 19 °C, Humi: 46 %

Data Rate : 2Mbps

CH	Transmitting Frequency		Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]			[dBm]	[mW]		
01	2412		10.04	3.77	13.81	24.04	30.00	+16.19
06	2437		10.04	3.75	13.79	23.93	30.00	+16.21
11	2462		10.04	3.99	14.03	25.29	30.00	+15.97

Calculated result at 2462.000 MHz, as the worst point shown on underline:

$$\begin{array}{rcl}
 \text{Correction Factor} & = & 10.04 \text{ dB} \\
 +) \text{ Meter Reading} & = & 3.99 \text{ dBm} \\
 \hline
 \text{Result} & = & 14.03 \text{ dBm} = 25.29 \text{ mW}
 \end{array}$$

Minimum Margin: 30.00 - 14.03 = 15.97 (dB)


NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :


Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.


Agilent

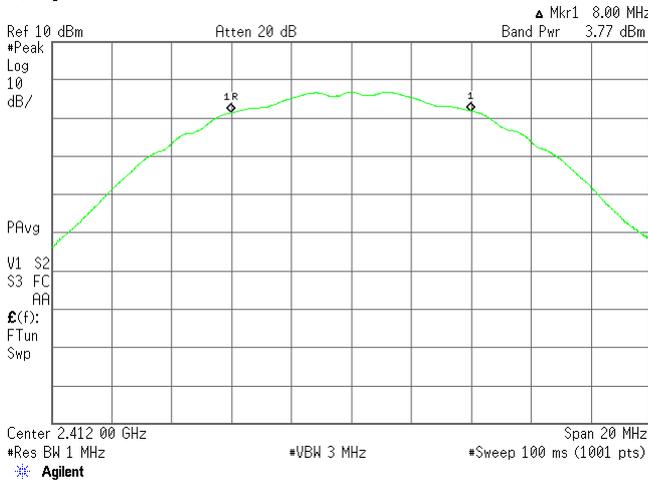

Agilent

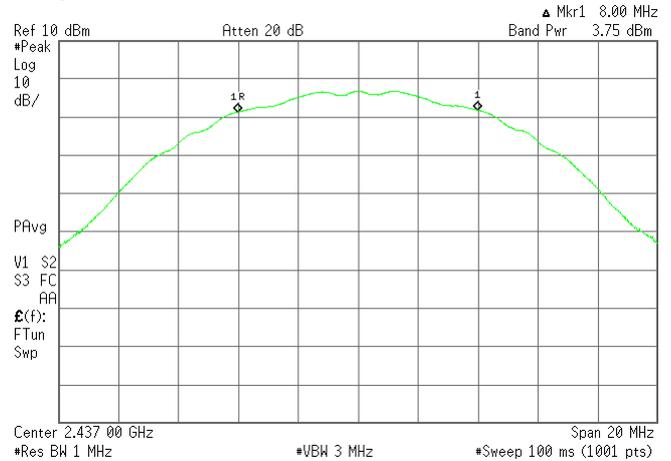

Agilent

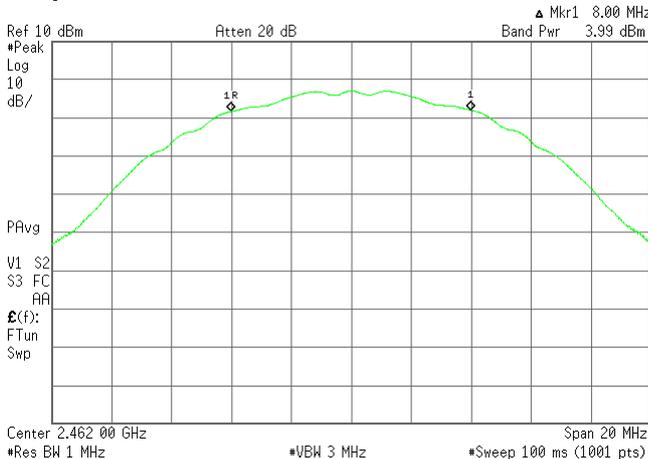

3)Data Rate : 5.5Mbps(IEEE 802.11b)

Test Date: April 9, 2012  
Temp.: 19 °C. Humi: 46 %

Data Rate : 5.5Mbps

CH	Transmitting Frequency		Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]			[dBm]	[mW]		
01	2412		10.04	5.50	15.54	35.81	30.00	+14.46
06	2437		10.04	5.56	15.60	36.31	30.00	+14.40
11	2462		10.04	5.66	15.70	37.15	30.00	+14.30

Calculated result at 2462.000 MHz, as the worst point shown on underline:

$$\begin{array}{rcl}
 \text{Correction Factor} & = & 10.04 \text{ dB} \\
 +) \text{ Meter Reading} & = & 5.66 \text{ dBm} \\
 \hline
 \text{Result} & = & 15.70 \text{ dBm} = 37.15 \text{ mW}
 \end{array}$$

Minimum Margin: 30.00 - 15.70 = 14.30 (dB)


NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :


Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.


\* Agilent

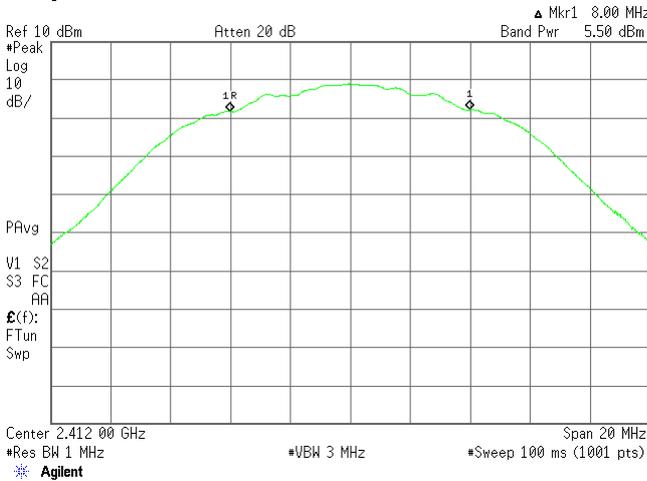

\* Agilent

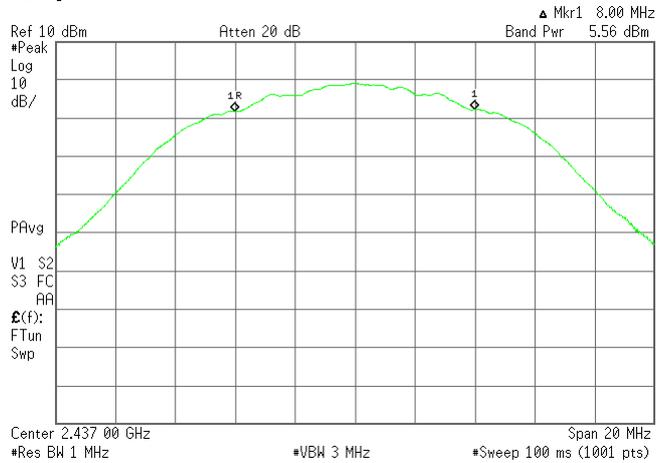

\* Agilent

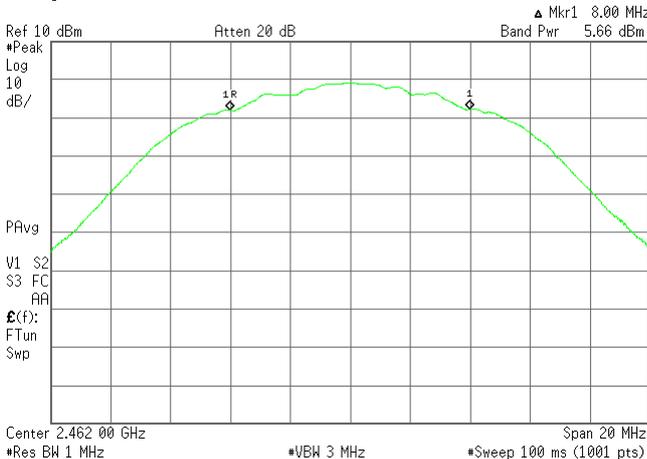

4)Data Rate : 11Mbps(IEEE 802.11b)

Test Date: April 9, 2012  
Temp: 19 °C, Humi: 46 %

Data Rate : 11Mbps



CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power [dBm]	[mW]	Limits [dBm]	Margin [dB]
01	2412	10.04	7.44	17.48	55.98	30.00	+12.52
06	2437	10.04	7.45	17.49	56.10	30.00	+12.51
11	2462	10.04	7.62	17.66	58.34	30.00	+12.34

Calculated result at 2462.000 MHz, as the worst point shown on underline:  
 Correction Factor = 10.04 dB  
 +) Meter Reading = 7.62 dBm  
 Result = 17.66 dBm = 58.34 mW  
 Minimum Margin: 30.00 - 17.66 = 12.34 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.

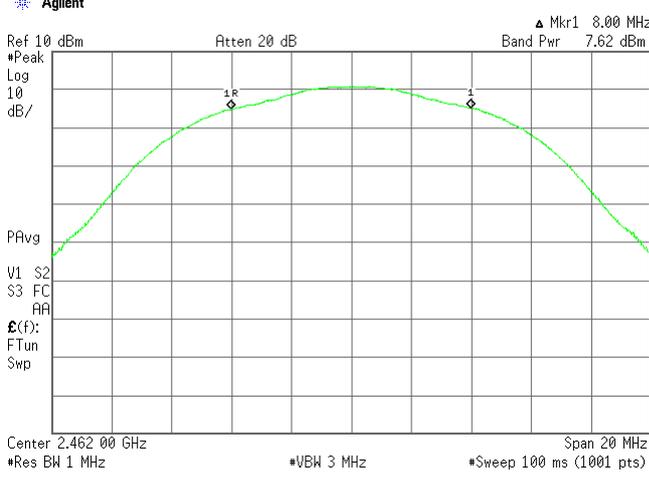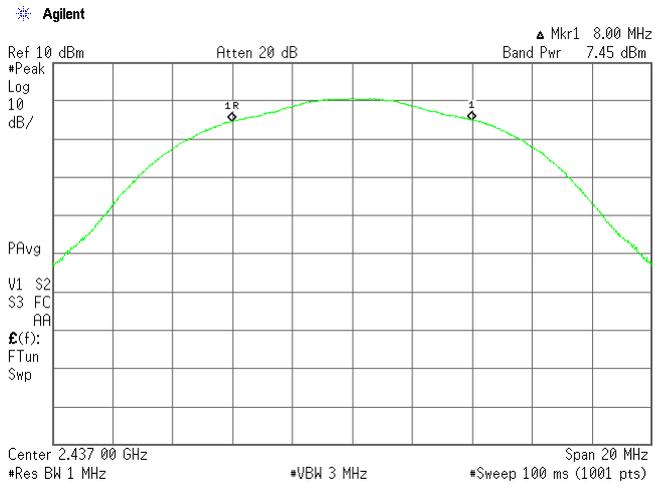

5)Data Rate : 6Mbps(IEEE 802.11g)

Test Date: April 9, 2012  
Temp.: 19 °C, Humi: 46 %

Data Rate : 6Mbps

CH	Transmitting Frequency		Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]				[dBm]	[mW]		
01	2412		10.04	9.43	19.47	88.51	30.00	+10.53
06	2437		10.04	9.63	19.67	92.68	30.00	+10.33
11	2462		10.04	9.80	19.84	96.38	30.00	+10.16

Calculated result at 2462.000 MHz, as the worst point shown on underline:

$$\begin{array}{rcl}
 \text{Correction Factor} & = & 10.04 \text{ dB} \\
 +) \text{ Meter Reading} & = & 9.80 \text{ dBm} \\
 \hline
 \text{Result} & = & 19.84 \text{ dBm} = 96.38 \text{ mW}
 \end{array}$$

Minimum Margin: 30.00 - 19.84 = 10.16 (dB)


NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :


Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.


Agilent

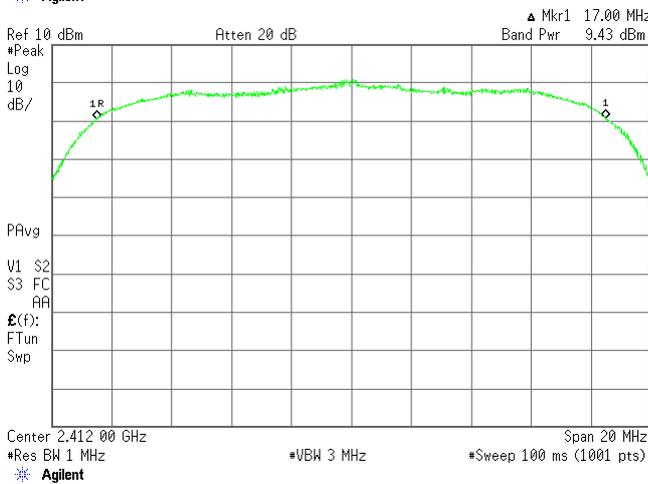

Agilent

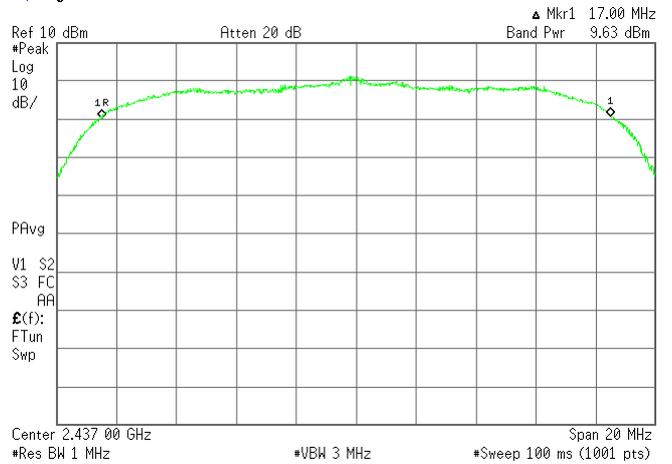

Agilent

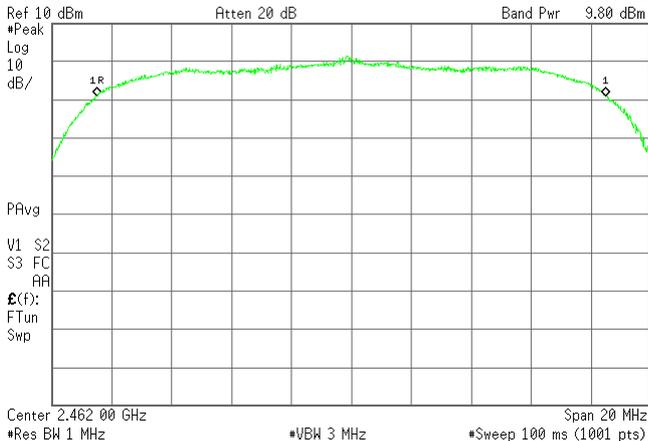

6) Data Rate : 54Mbps(IEEE 802.11g)

Test Date: April 9, 2012  
Temp.: 19 °C, Humi: 46 %

Data Rate : 54Mbps

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
01	2412	10.04	10.11	20.15	103.51	30.00	+ 9.85
06	2437	10.04	10.32	20.36	108.64	30.00	+ 9.64
11	2462	10.04	10.54	20.58	114.29	30.00	+ 9.42

Calculated result at 2462.000 MHz, as the worst point shown on underline:

$$\begin{aligned}
 &\text{Correction Factor} = 10.04 \text{ dB} \\
 &+ \text{Meter Reading} = 10.54 \text{ dBm} \\
 \hline
 &\text{Result} = 20.58 \text{ dBm} = 114.29 \text{ mW}
 \end{aligned}$$

Minimum Margin: 30.00 - 20.58 = 9.42 (dB)


NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :



Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.

\* Agilent

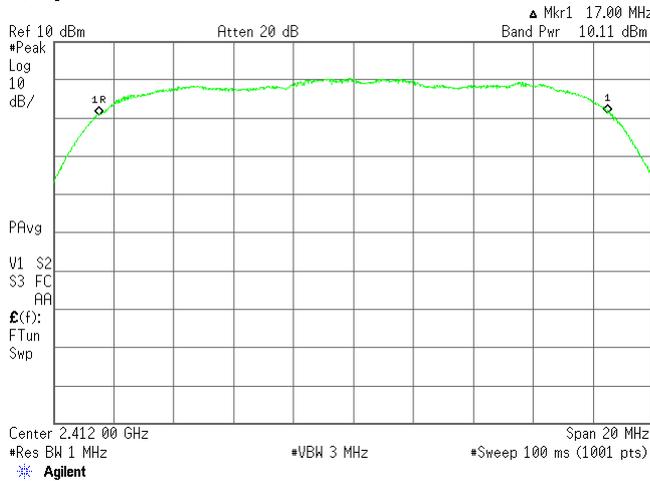

\* Agilent

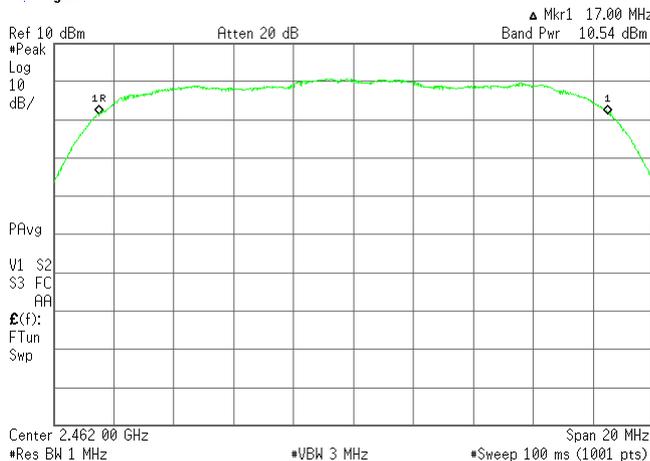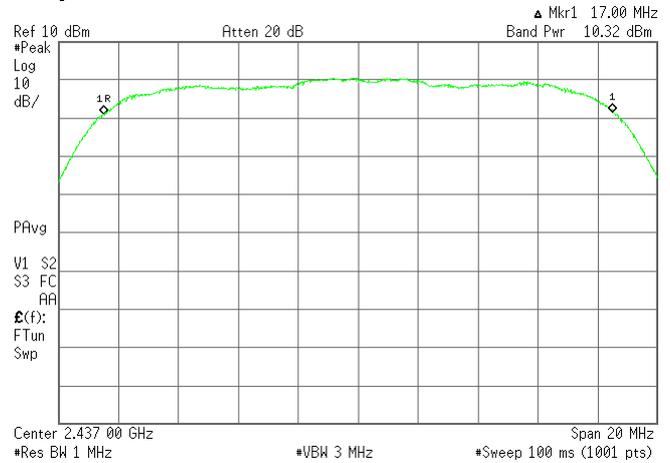

7)Data Rate : 6.5Mbps(IEEE 802.11n)

Test Date: April 9, 2012  
Temp.: 19 °C. Humi: 46 %

Data Rate : 6.5Mbps

CH	Transmitting Frequency		Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]			[dBm]	[mW]		
01	2412		10.04	8.79	18.83	76.38	30.00	+11.17
06	2437		10.04	8.96	19.00	79.43	30.00	+11.00
11	2462		10.04	9.05	19.09	81.10	30.00	+10.91

Calculated result at 2462.000 MHz, as the worst point shown on underline:

$$\begin{array}{rcl}
 \text{Correction Factor} & = & 10.04 \text{ dB} \\
 +) \text{ Meter Reading} & = & 9.05 \text{ dBm} \\
 \hline
 \text{Result} & = & 19.09 \text{ dBm} = 81.10 \text{ mW}
 \end{array}$$


Minimum Margin: 30.00 - 19.09 = 10.91 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.

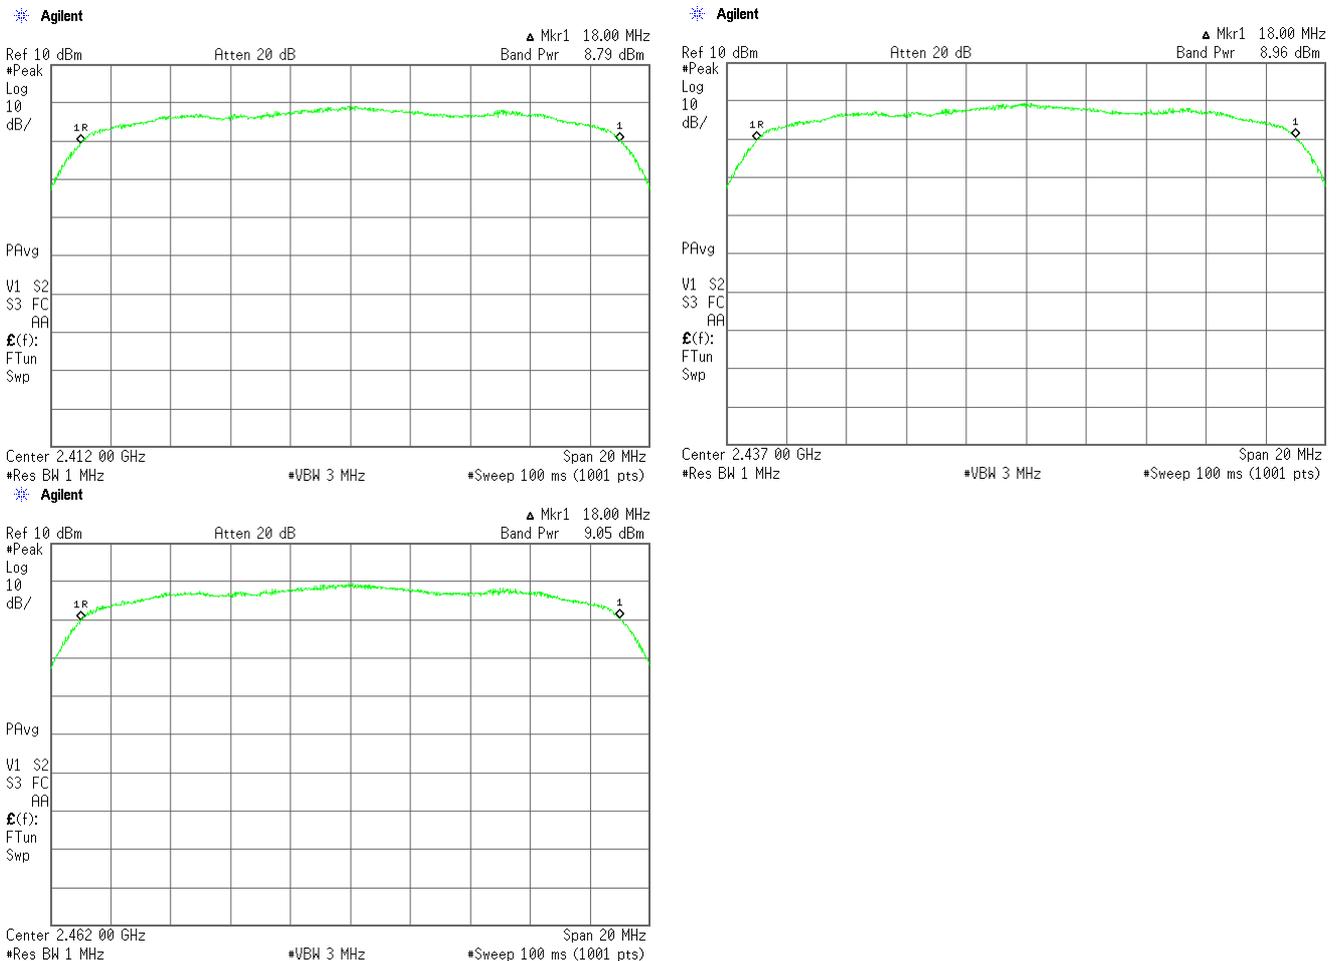

8)Data Rate : 65Mbps(IEEE 802.11n)

Test Date: April 9, 2012  
Temp.: 19 °C. Humi: 46 %

Data Rate : 65Mbps

CH	Transmitting Frequency		Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]			[dBm]	[mW]		
01	2412		10.04	9.51	19.55	90.16	30.00	+10.45
06	2437		10.04	9.51	19.55	90.16	30.00	+10.45
11	2462		10.04	9.82	19.86	96.83	30.00	+10.14

Calculated result at 2462.000 MHz, as the worst point shown on underline:

$$\begin{array}{rcl}
 \text{Correction Factor} & = & 10.04 \text{ dB} \\
 +) \text{ Meter Reading} & = & 9.82 \text{ dBm} \\
 \hline
 \text{Result} & = & 19.86 \text{ dBm} = 96.83 \text{ mW}
 \end{array}$$




Minimum Margin: 30.00 - 19.86 = 10.14 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	1MHz	3MHz

The band power function was used.

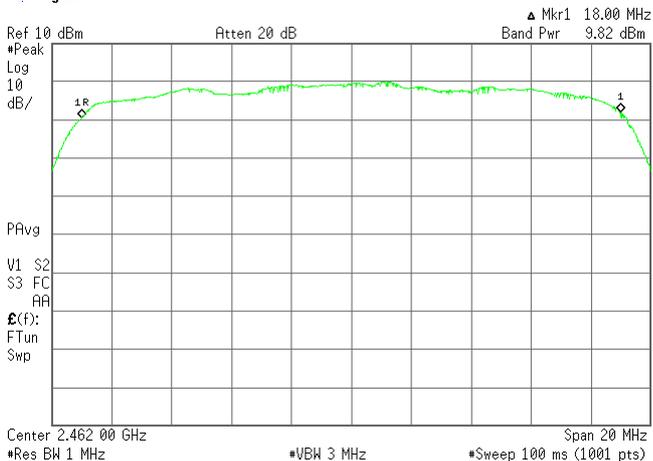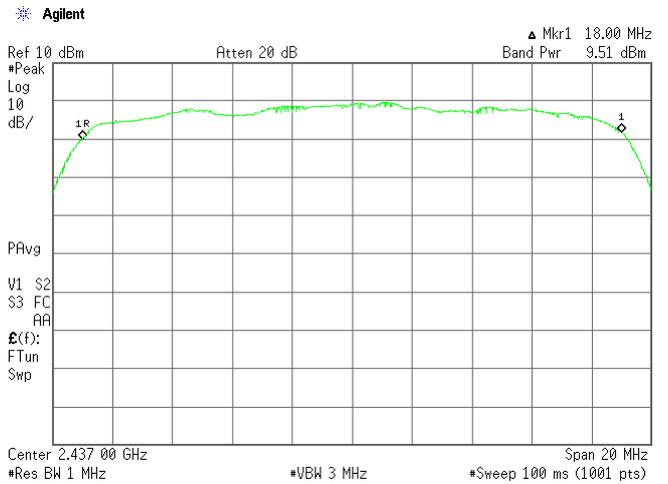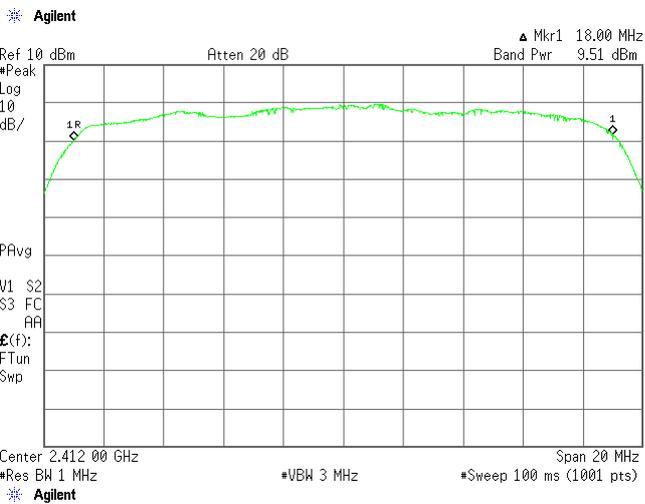

## A.6 Peak Power Density(Conduction)

1)Data Rate : 1Mbps(IEEE 802.11b)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %

Data Rate : 1Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]				[dBm]	[mW]		
01	2412		10.04	-15.20	-6.28	-11.44	0.07	8.00	+19.44
06	2437		10.04	-15.20	-6.01	-11.17	0.08	8.00	+19.17
11	2462		10.04	-15.20	-5.95	-11.11	0.08	8.00	+19.11

Calculated result at 2462.000 MHz, as the worst point shown on underline:




Correction Factor	=	10.04 dB
BWCF	=	-15.20 dB
+ ) Meter Reading	=	-5.95 dBm
Result	=	-11.11 dBm = 0.08 mW

Minimum Margin: 8.00 - -11.11 = 19.11 (dB)

### NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- BWCF(bandwidth correction factor) =  $10 \log (3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

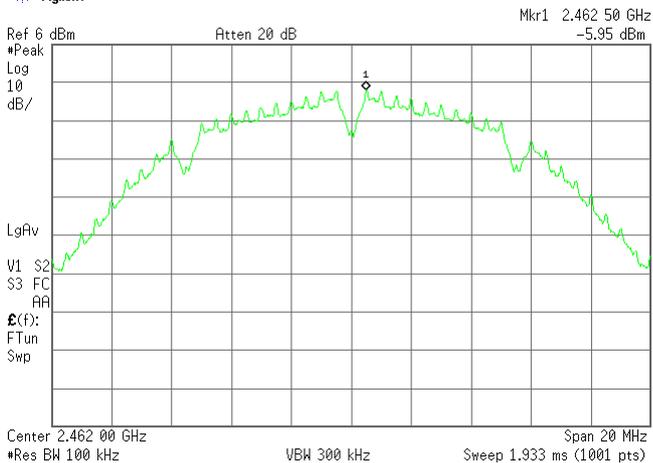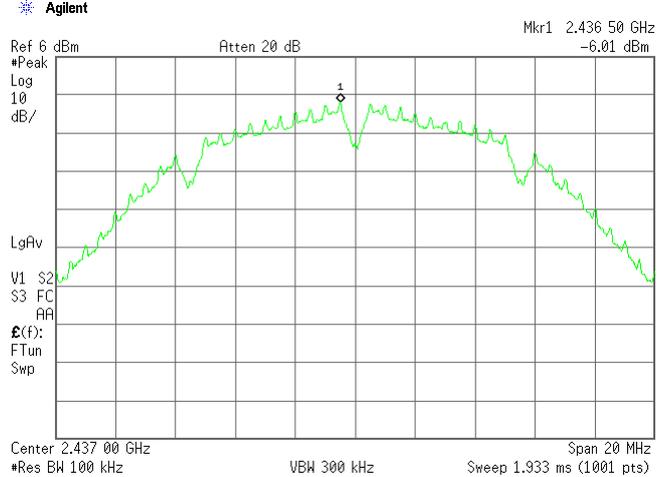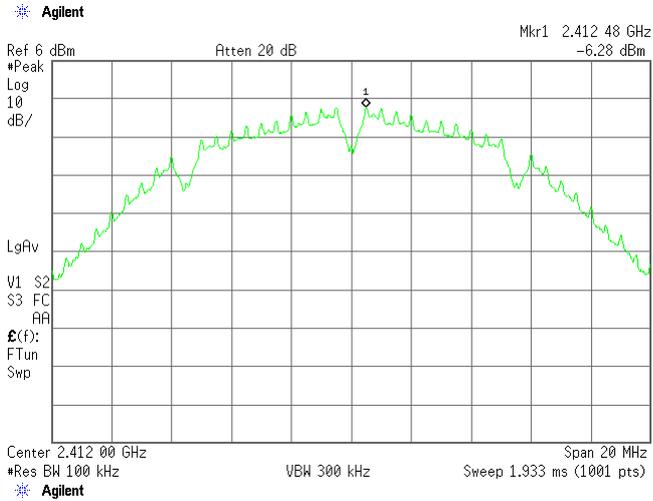

2)Data Rate : 2Mbps(IEEE 802.11b)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %

Data Rate : 2Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]				[dBm]	[mW]		
01	2412		10.04	-15.20	-5.75	-10.91	0.08	8.00	+18.91
06	2437		10.04	-15.20	-5.75	-10.91	0.08	8.00	+18.91
11	2462		10.04	-15.20	-6.08	-11.24	0.08	8.00	+19.24

Calculated result at 2412.000 MHz, as the worst point shown on underline:




Correction Factor	=	10.04 dB
BWCF	=	-15.20 dB
+ ) Meter Reading	=	-5.75 dBm
Result	=	-10.91 dBm = 0.08 mW

Minimum Margin: 8.00 - -10.91 = 18.91 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- BWCF(bandwidth correction factor) =  $10 \log (3 \text{ kHz}/100 \text{ kHz}) = -15.2 \text{ dB}$
- Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

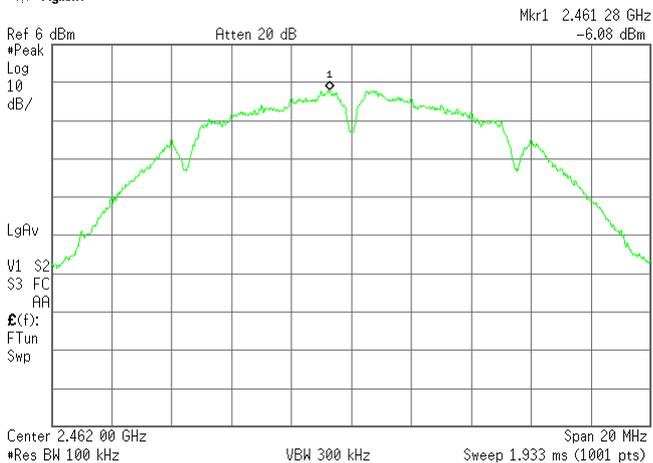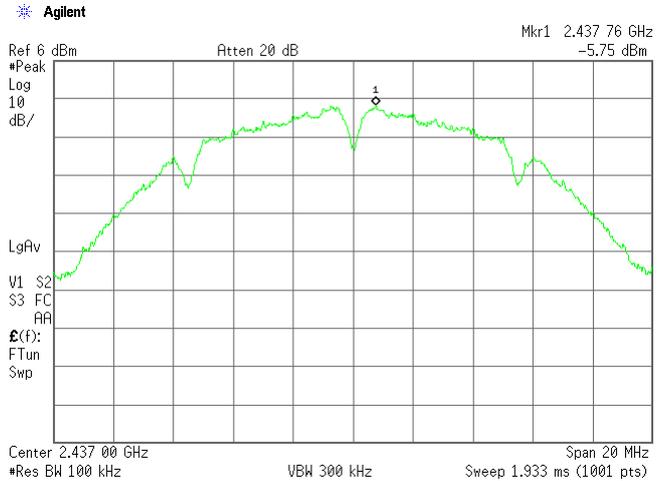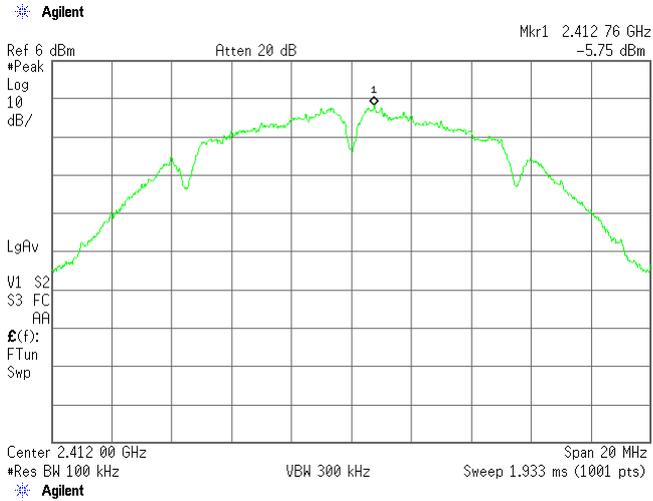

3)Data Rate : 5.5Mbps(IEEE 802.11b)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %




Data Rate : 5.5Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[dB]				[dBm]	[mW]		
01	2412	10.04	-15.20	-5.09	-10.25	0.09	8.00	+18.25	
06	2437	10.04	-15.20	-5.46	-10.62	0.09	8.00	+18.62	
11	2462	10.04	-15.20	-5.27	-10.43	0.09	8.00	+18.43	

Calculated result at 2412.000 MHz, as the worst point shown on underline:  
 Correction Factor = 10.04 dB  
 BWCF = -15.20 dB  
 + ) Meter Reading = -5.09 dBm  
 Result = -10.25 dBm = 0.09 mW  
 Minimum Margin: 8.00 - -10.25 = 18.25 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. BWCF(bandwidth correction factor) = 10 log (3 kHz/100 kHz) = -15.2 dB  
 3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

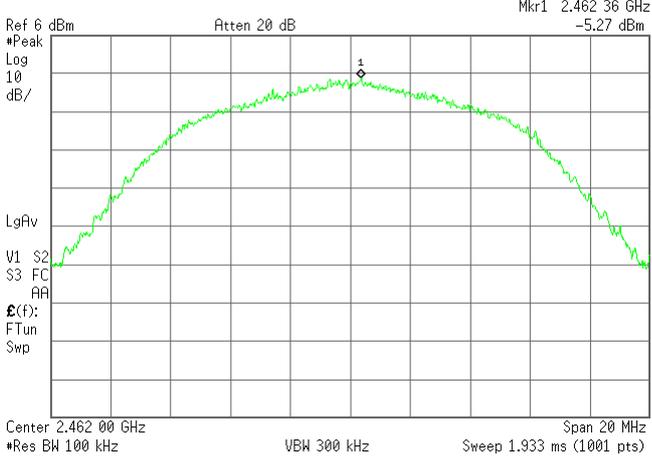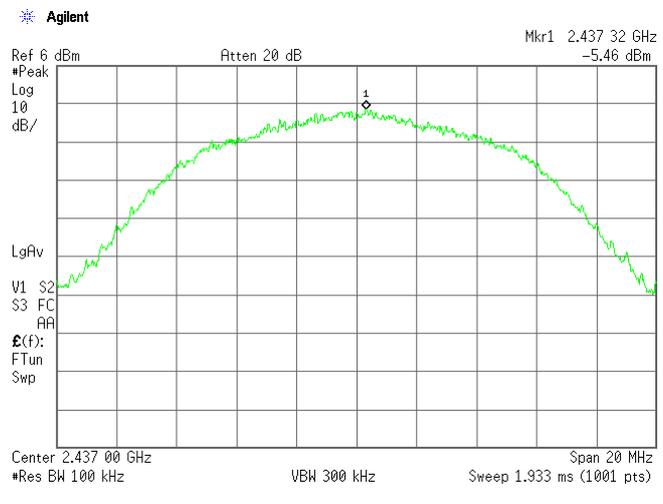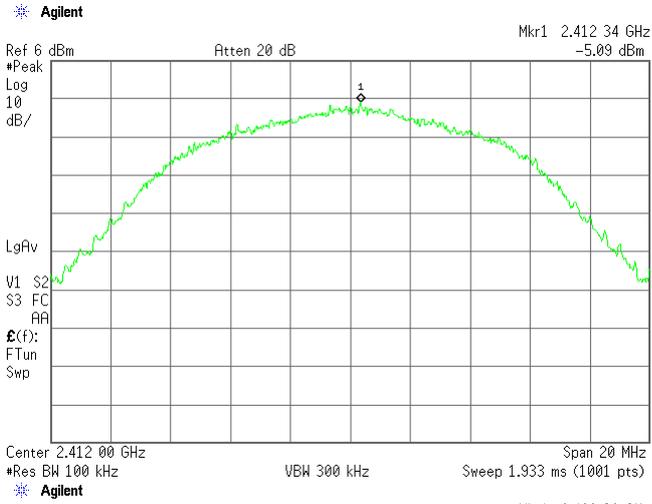

4)Data Rate : 11Mbps(IEEE 802.11b)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %



Data Rate : 11Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[dB]				[dBm]	[mW]		
01	2412	10.04	-15.20	-5.95	-11.11	0.08	8.00	+19.11	
06	2437	10.04	-15.20	-6.09	-11.25	0.07	8.00	+19.25	
11	2462	10.04	-15.20	-5.55	-10.71	0.08	8.00	+18.71	

Calculated result at 2462.000 MHz, as the worst point shown on underline:  
 Correction Factor = 10.04 dB  
 BWCF = -15.20 dB  
 + ) Meter Reading = -5.55 dBm  
 Result = -10.71 dBm = 0.08 mW  
 Minimum Margin: 8.00 - -10.71 = 18.71 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. BWCF(bandwidth correction factor) = 10 log (3 kHz/100 kHz) = -15.2 dB  
 3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

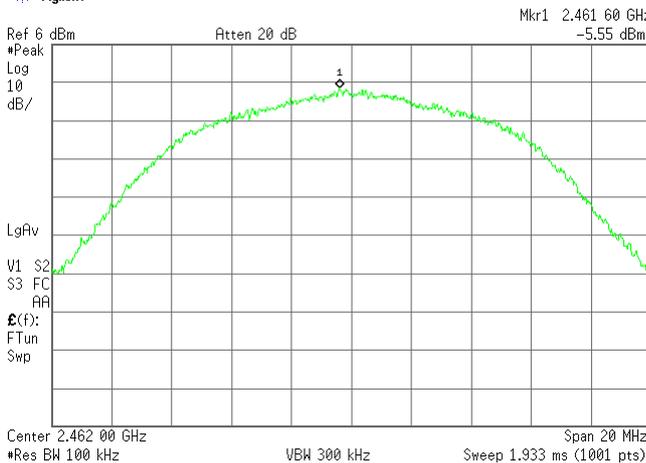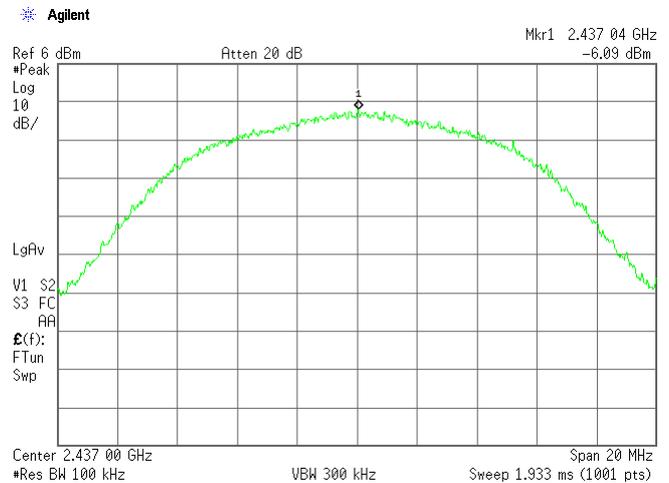

5) Data Rate : 6Mbps(IEEE 802.11g)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %




Data Rate : 6Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[dB]				[dBm]	[mW]		
01	2412	10.04	-15.20	-9.31	-14.47	0.04	8.00	+22.47	
06	2437	10.04	-15.20	-9.97	-15.13	0.03	8.00	+23.13	
11	2462	10.04	-15.20	-9.04	-14.20	0.04	8.00	+22.20	

Calculated result at 2462.000 MHz, as the worst point shown on underline:  
 Correction Factor = 10.04 dB  
 BWCF = -15.20 dB  
 + ) Meter Reading = -9.04 dBm  
 Result = -14.20 dBm = 0.04 mW  
 Minimum Margin: 8.00 - -14.20 = 22.20 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. BWCF(bandwidth correction factor) = 10 log (3 kHz/100 kHz) = -15.2 dB  
 3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

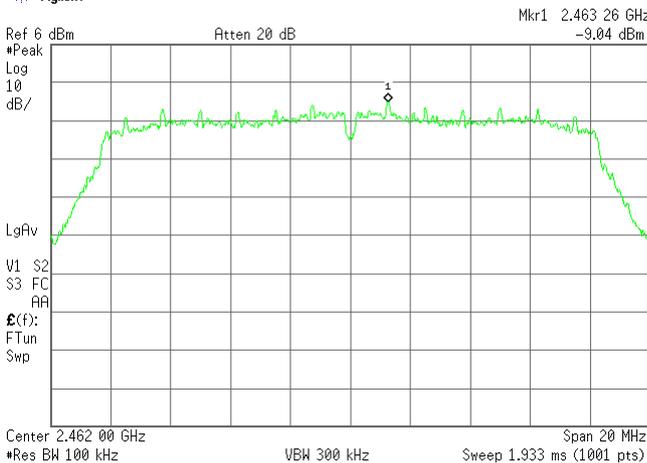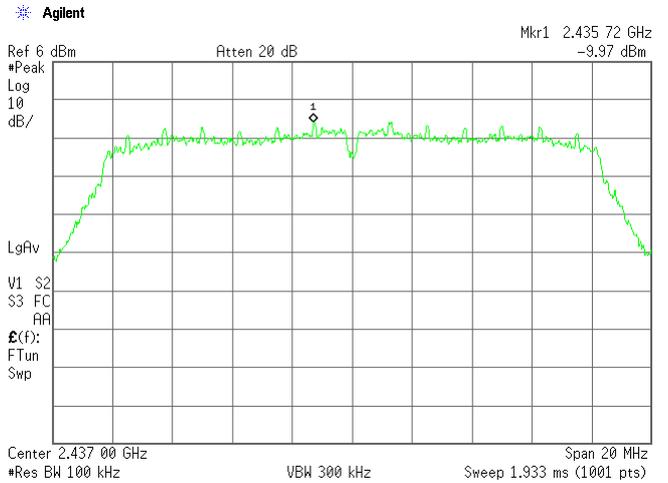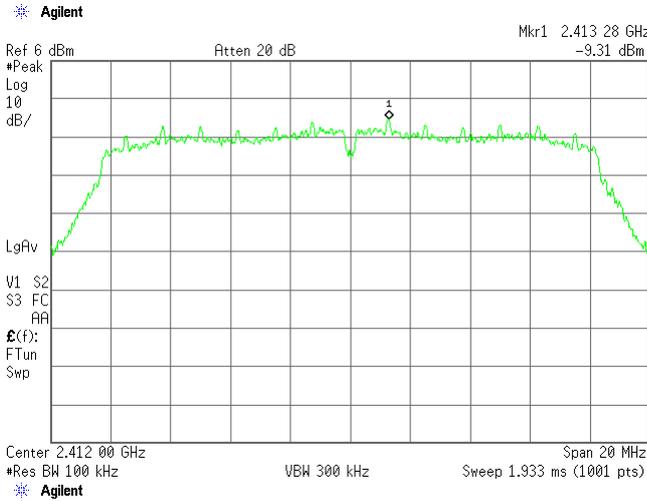

6)Data Rate : 54Mbps(IEEE 802.11g)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %




Data Rate : 54Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[dB]				[dBm]	[mW]		
01	2412	10.04	-15.20	-9.18	-14.34	0.04	8.00	+22.34	
06	2437	10.04	-15.20	-9.22	-14.38	0.04	8.00	+22.38	
11	2462	10.04	-15.20	-9.11	-14.27	0.04	8.00	+22.27	

Calculated result at 2462.000 MHz, as the worst point shown on underline:  
 Correction Factor = 10.04 dB  
 BWCF = -15.20 dB  
 + ) Meter Reading = -9.11 dBm  
 Result = -14.27 dBm = 0.04 mW  
 Minimum Margin: 8.00 - -14.27 = 22.27 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. BWCF(bandwidth correction factor) = 10 log (3 kHz/100 kHz) = -15.2 dB  
 3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

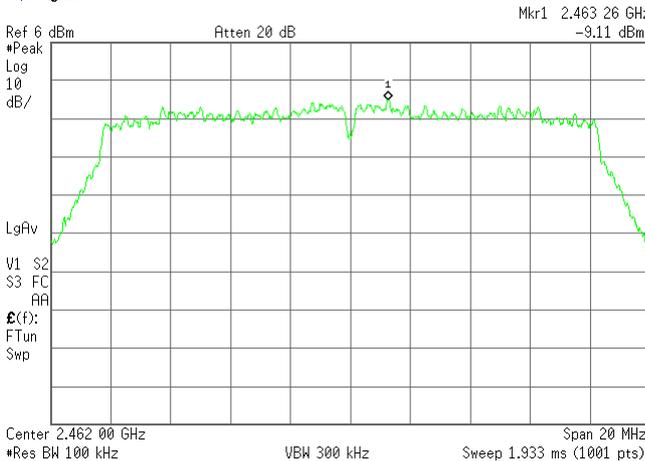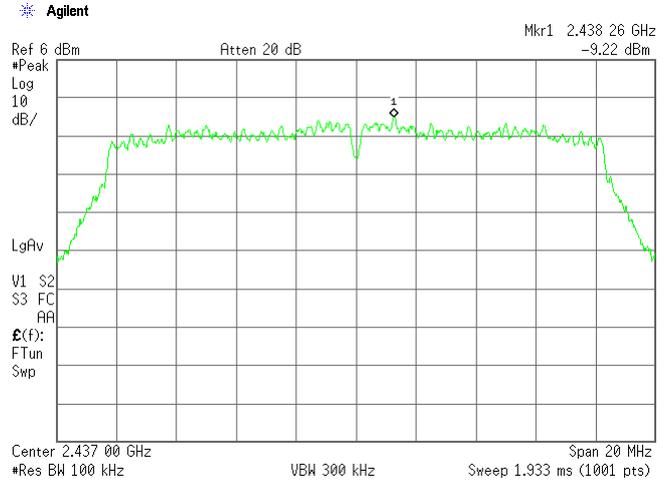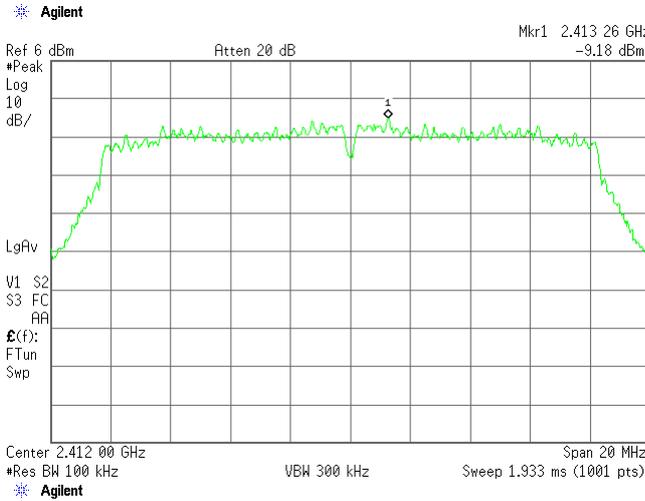

7)Data Rate : 6.5Mbps(IEEE 802.11n)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %




Data Rate : 6.5Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[dB]				[dBm]	[mW]		
01	2412	10.04	-15.20	-9.78	-14.94	0.03	8.00	+22.94	
06	2437	10.04	-15.20	-9.89	-15.05	0.03	8.00	+23.05	
11	2462	10.04	-15.20	-9.55	-14.71	0.03	8.00	+22.71	

Calculated result at 2462.000 MHz, as the worst point shown on underline:  
 Correction Factor = 10.04 dB  
 BWCF = -15.20 dB  
 + ) Meter Reading = -9.55 dBm  
 Result = -14.71 dBm = 0.03 mW  
 Minimum Margin: 8.00 - -14.71 = 22.71 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. BWCF(bandwidth correction factor) = 10 log (3 kHz/100 kHz) = -15.2 dB  
 3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

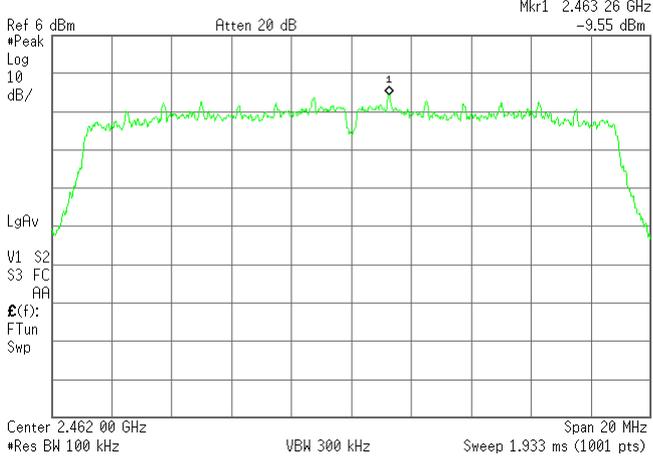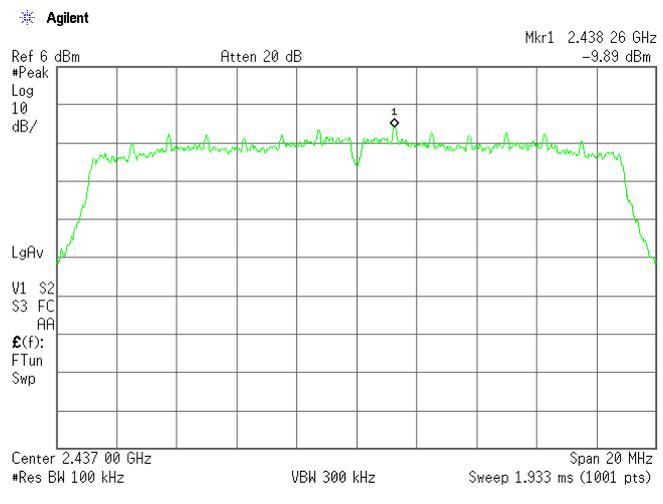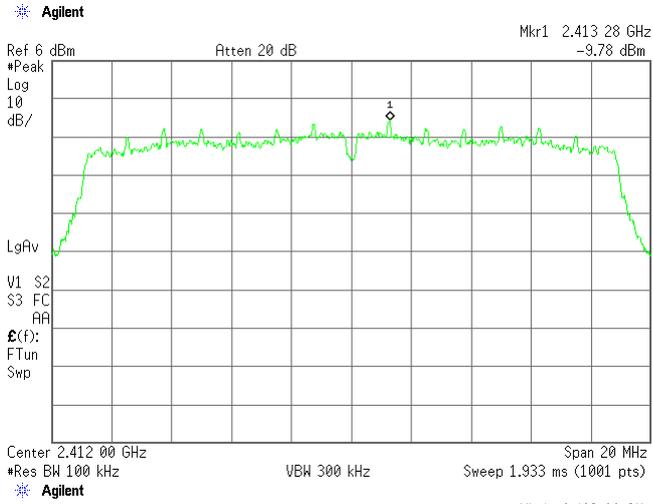

8)Data Rate : 65Mbps(IEEE 802.11n)

Test Date: April 10, 2012  
Temp.: 20 °C. Humi: 50 %




Data Rate : 65Mbps

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]	[dB]				[dBm]	[mW]		
01	2412	10.04	-15.20	-9.81	-14.97	0.03	8.00	+22.97	
06	2437	10.04	-15.20	-9.80	-14.96	0.03	8.00	+22.96	
11	2462	10.04	-15.20	-9.52	-14.68	0.03	8.00	+22.68	

Calculated result at 2462.000 MHz, as the worst point shown on underline:  
 Correction Factor = 10.04 dB  
 BWCF = -15.20 dB  
 + ) Meter Reading = -9.52 dBm  
 Result = -14.68 dBm = 0.03 mW  
 Minimum Margin: 8.00 - -14.68 = 22.68 (dB)

NOTES  
 1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.  
 2. BWCF(bandwidth correction factor) = 10 log (3 kHz/100 kHz) = -15.2 dB  
 3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	100kHz	300kHz

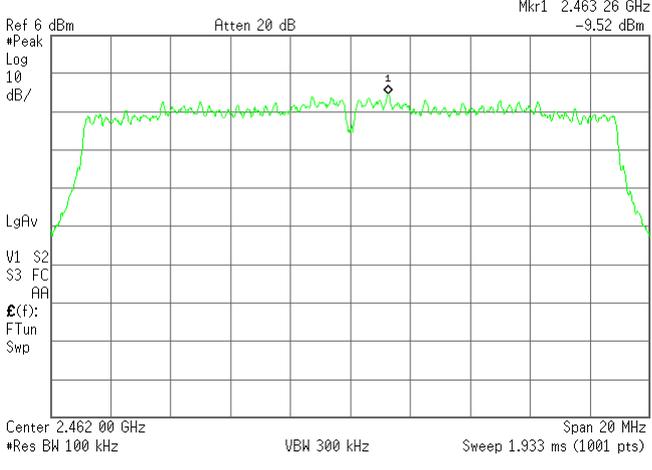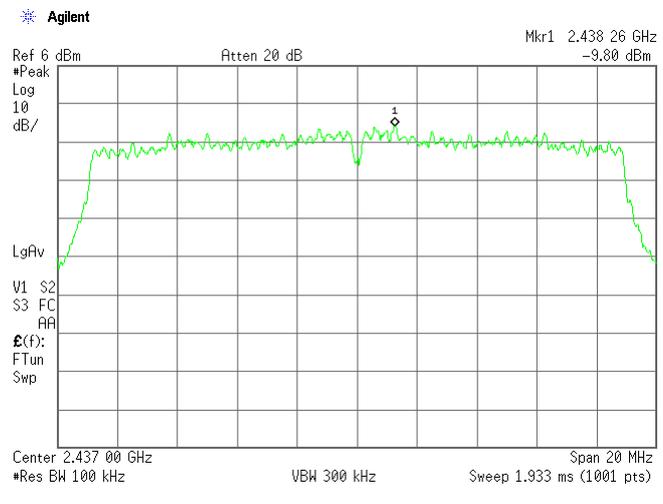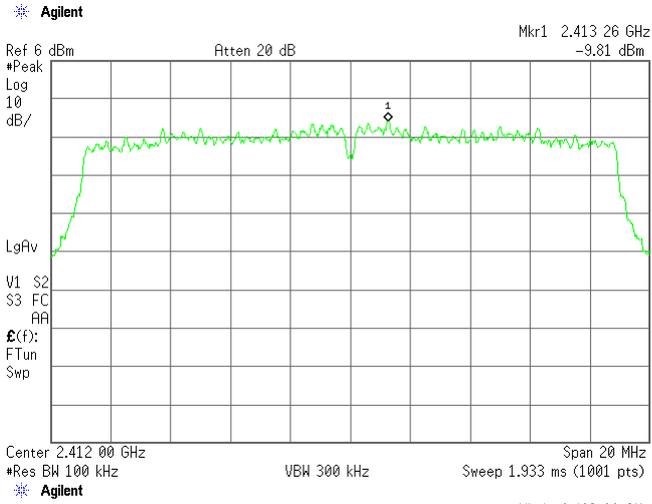


**A.7 Spurious Emission(Conduction)**


Test Date : April 10, 2012

Temp.:20°C, Humi:50%


1)Data Rate : 1Mbps(IEEE 802.11b)  
Low Channel

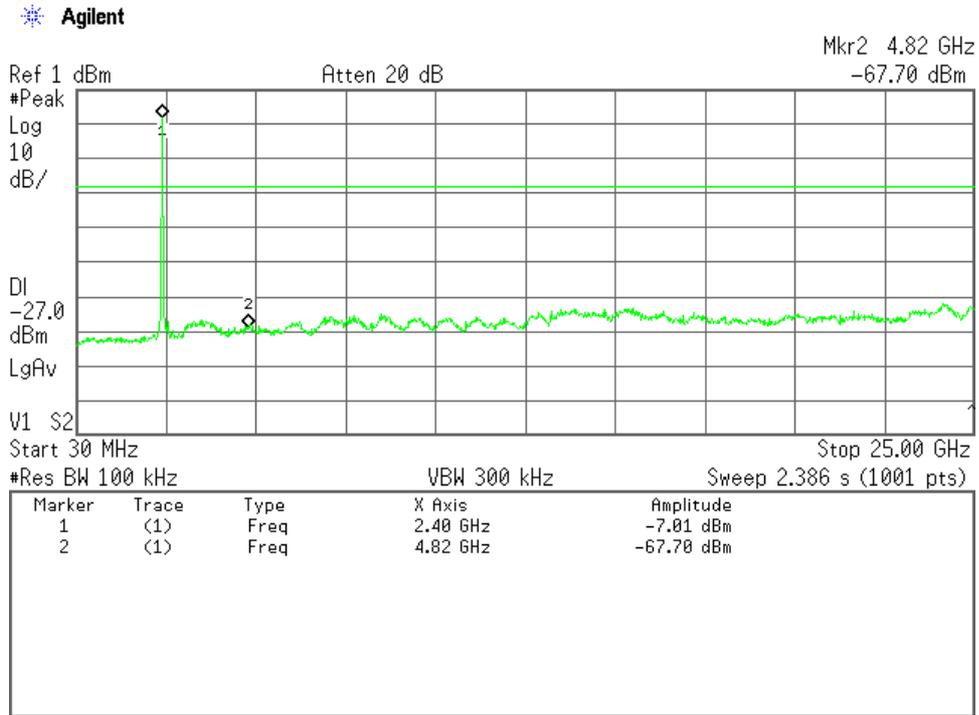

Middle Channel

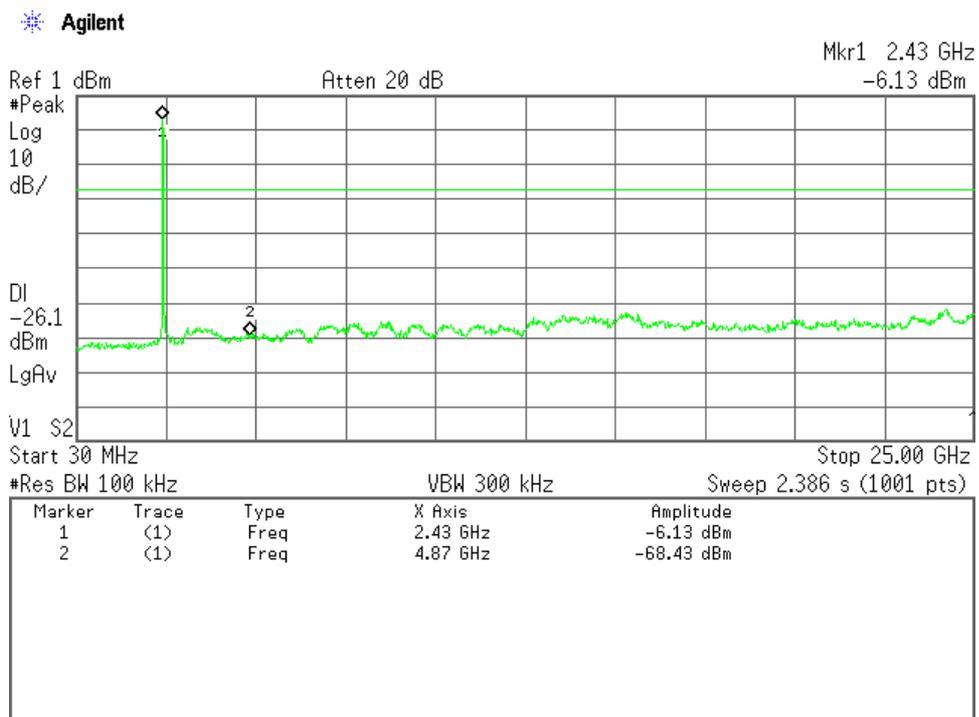


High Channel

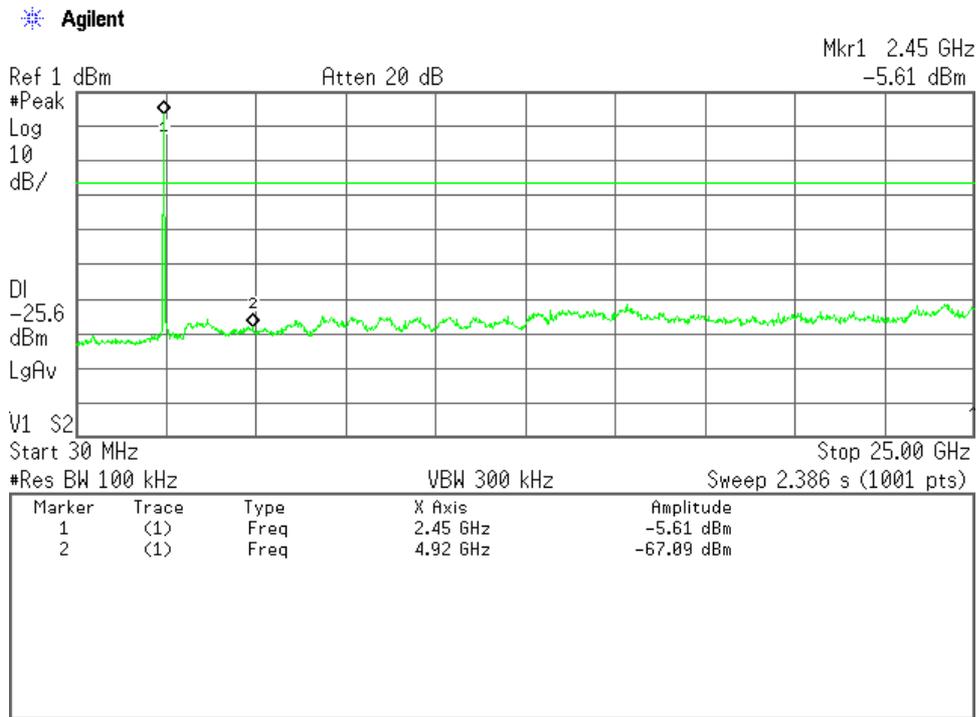


2)Data Rate : 11Mbps(IEEE 802.11b)


Low Channel

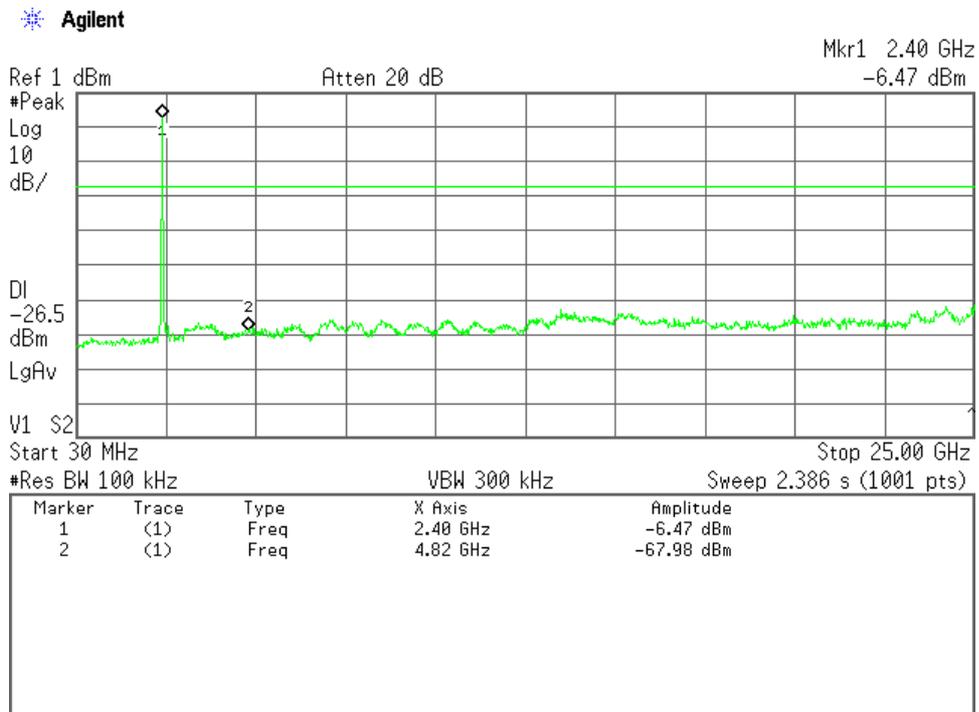


Middle Channel

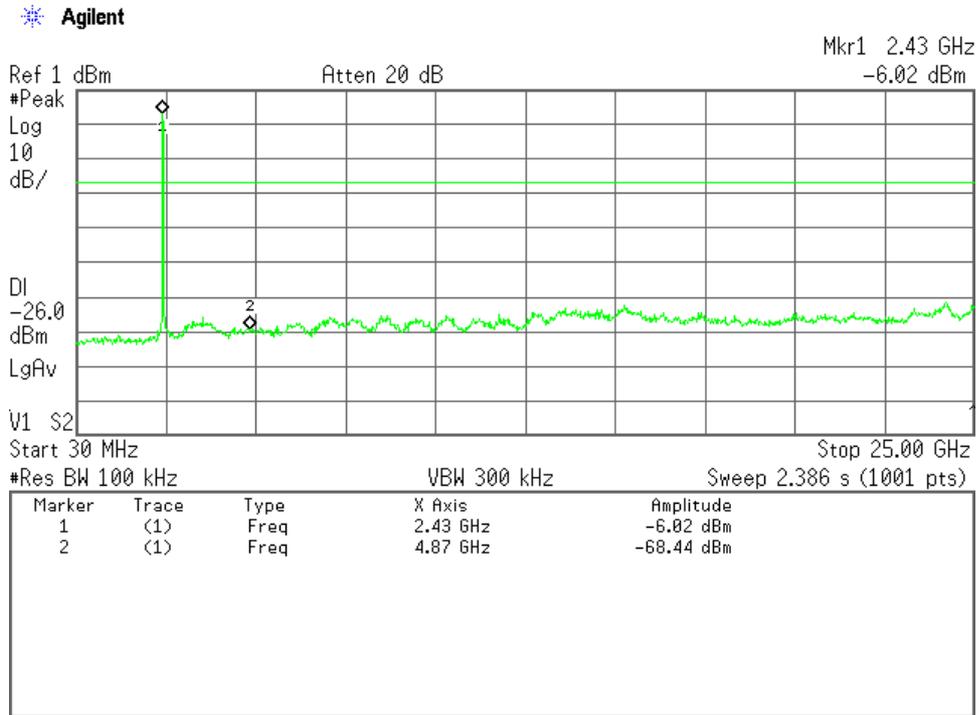


High Channel

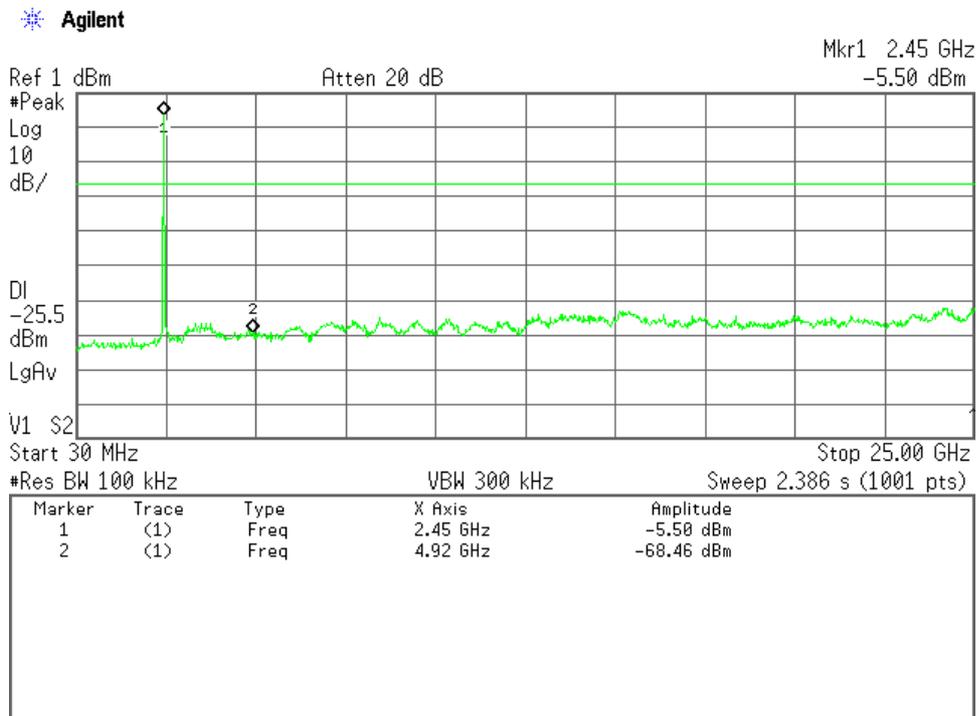


3)Data Rate : 6Mbps(IEEE 802.11g)  
Low Channel

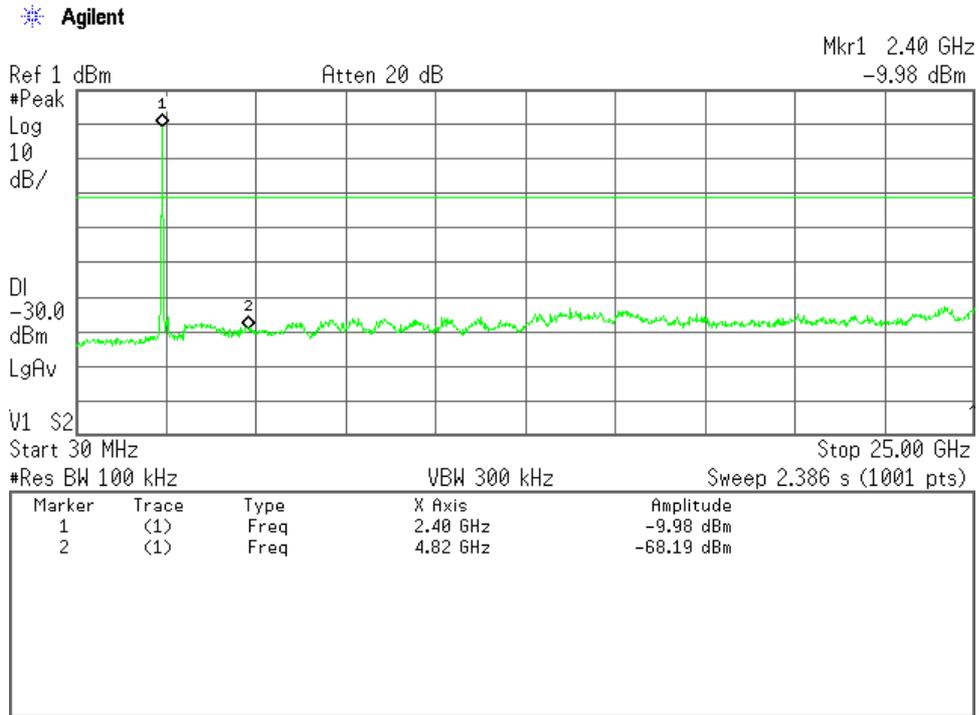

Middle Channel

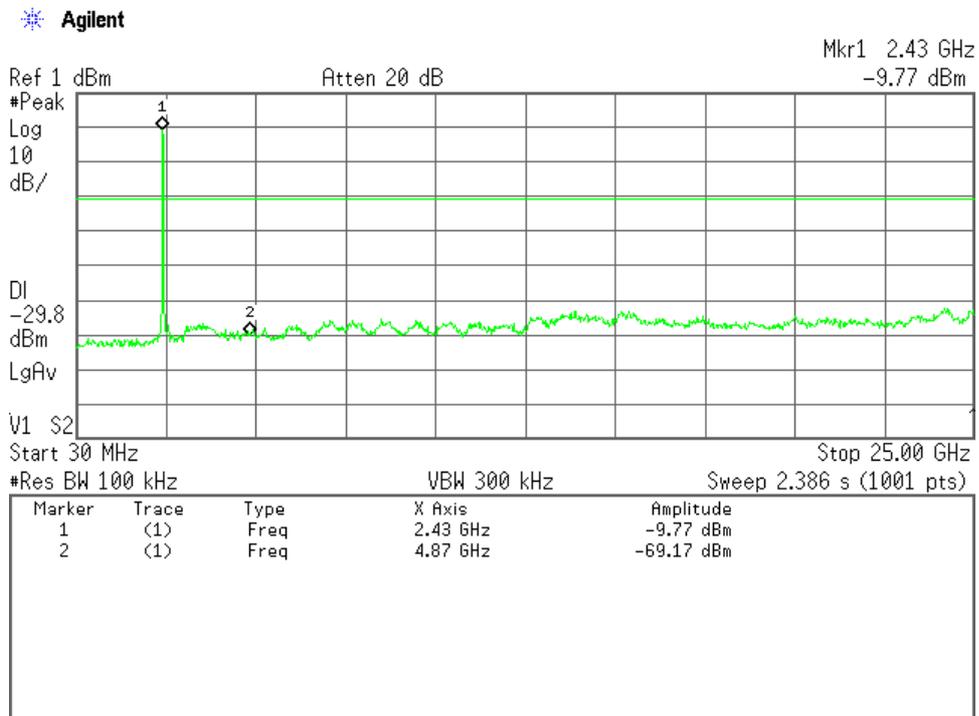


High Channel

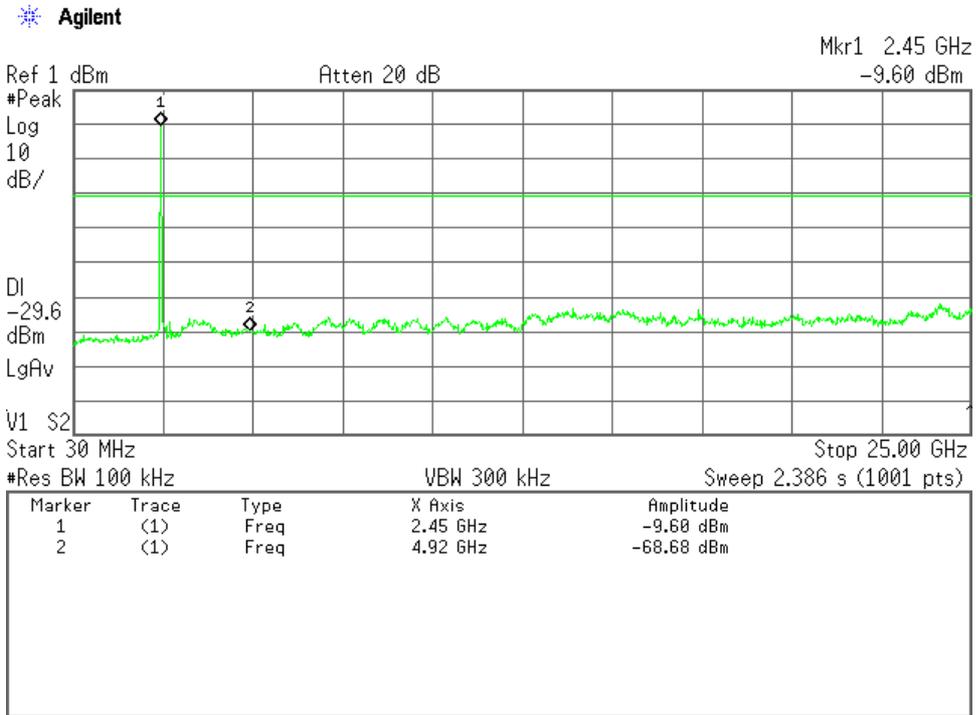


4)Data Rate : 54Mbps(IEEE 802.11g)


Low Channel

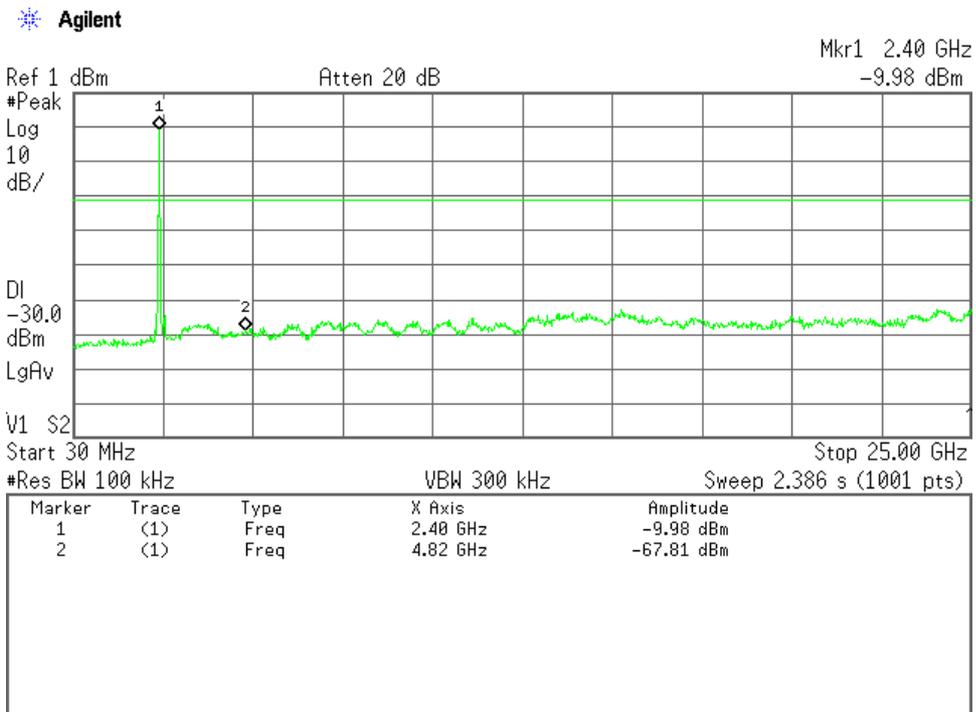


### Middle Channel

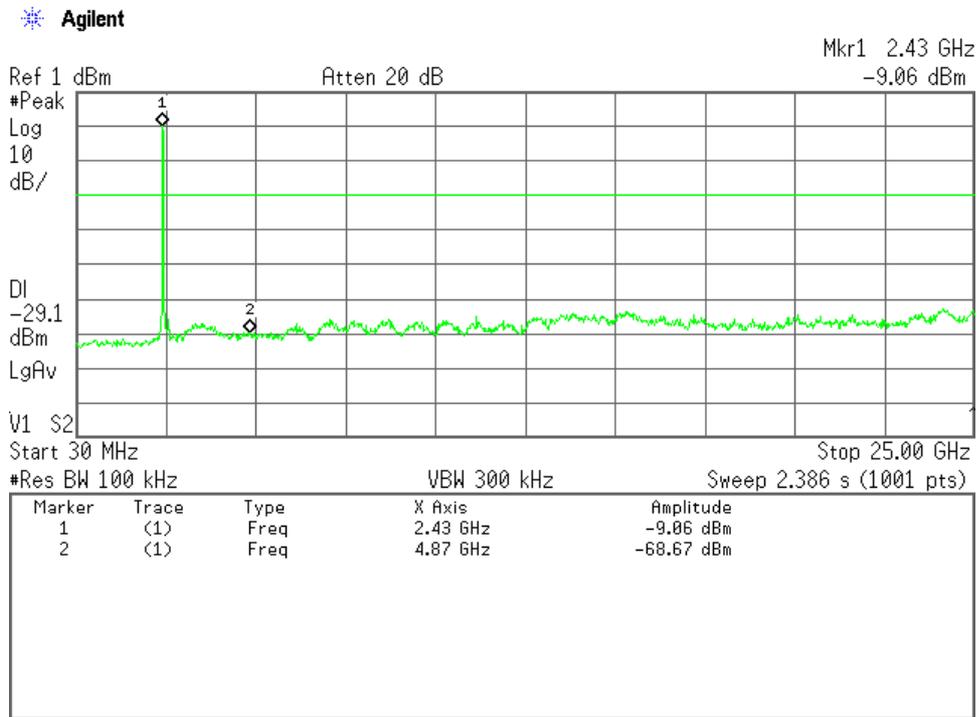


### High Channel

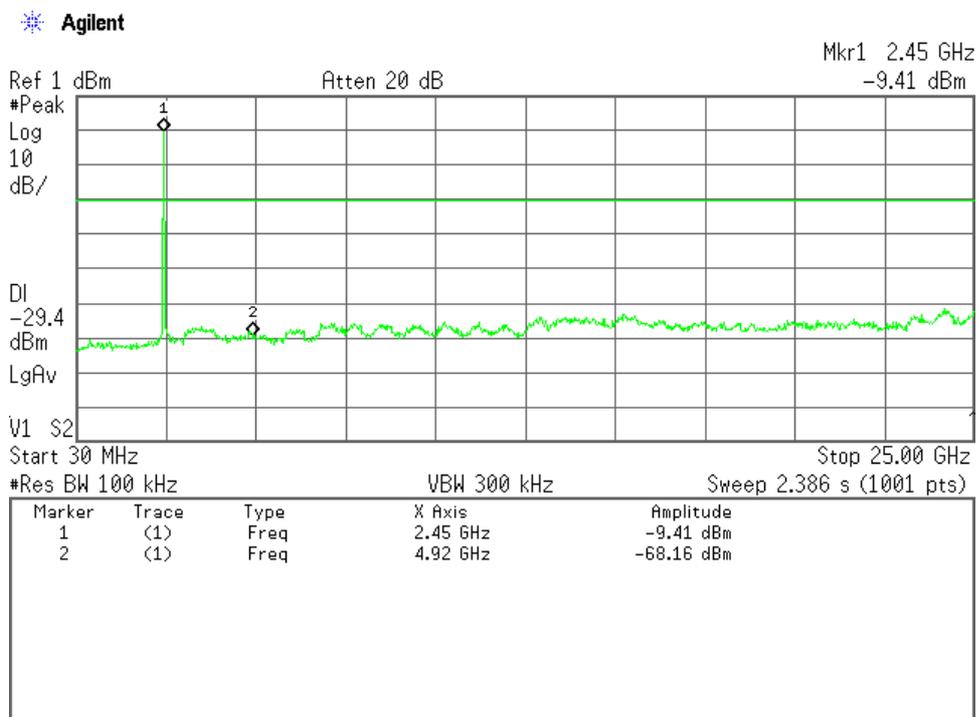


5)Data Rate : 6.5Mbps(IEEE 802.11n)  
Low Channel

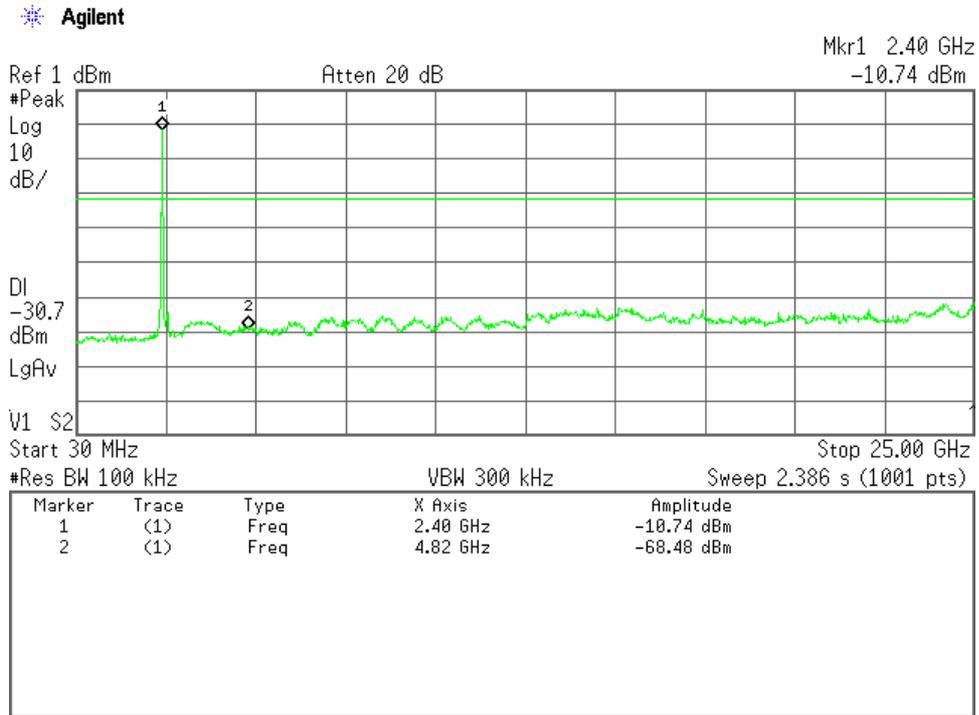

Middle Channel

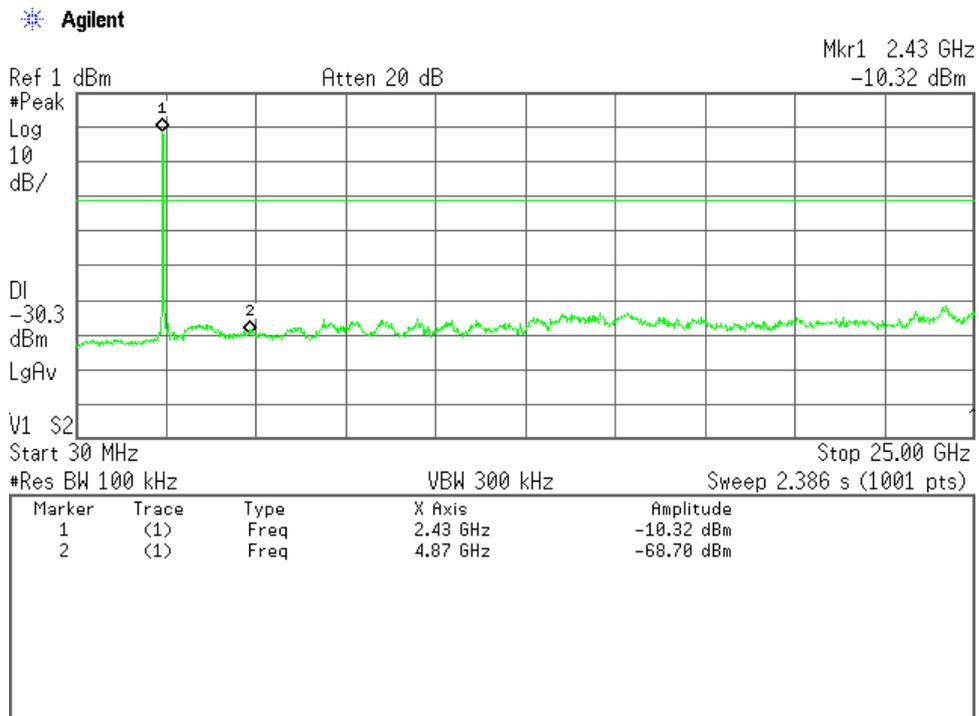


High Channel

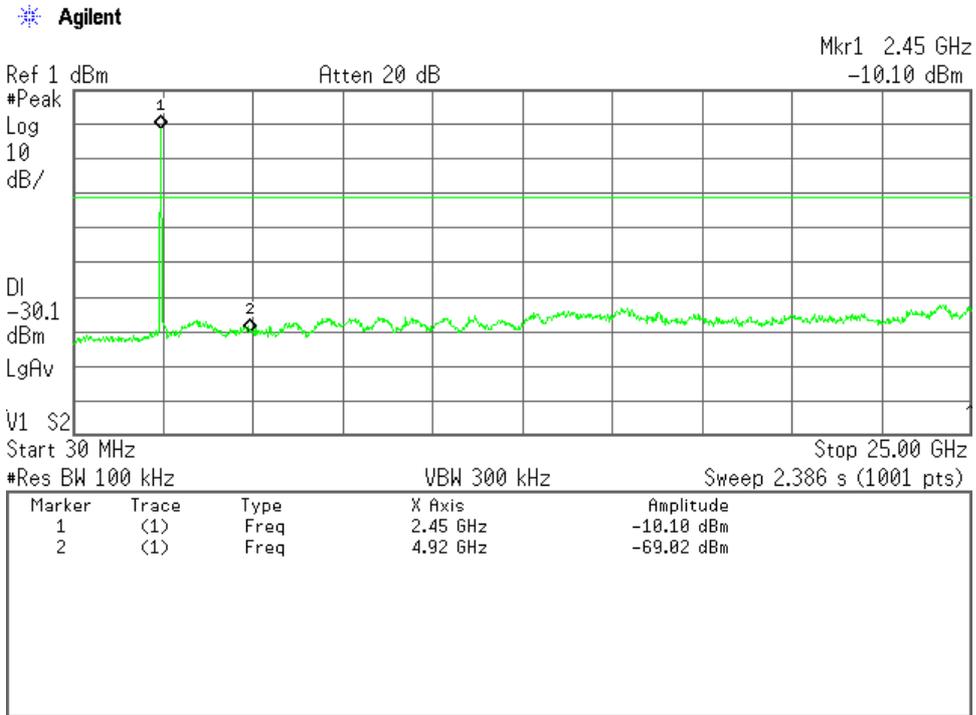


6)Data Rate : 65Mbps(IEEE 802.11n)


Low Channel

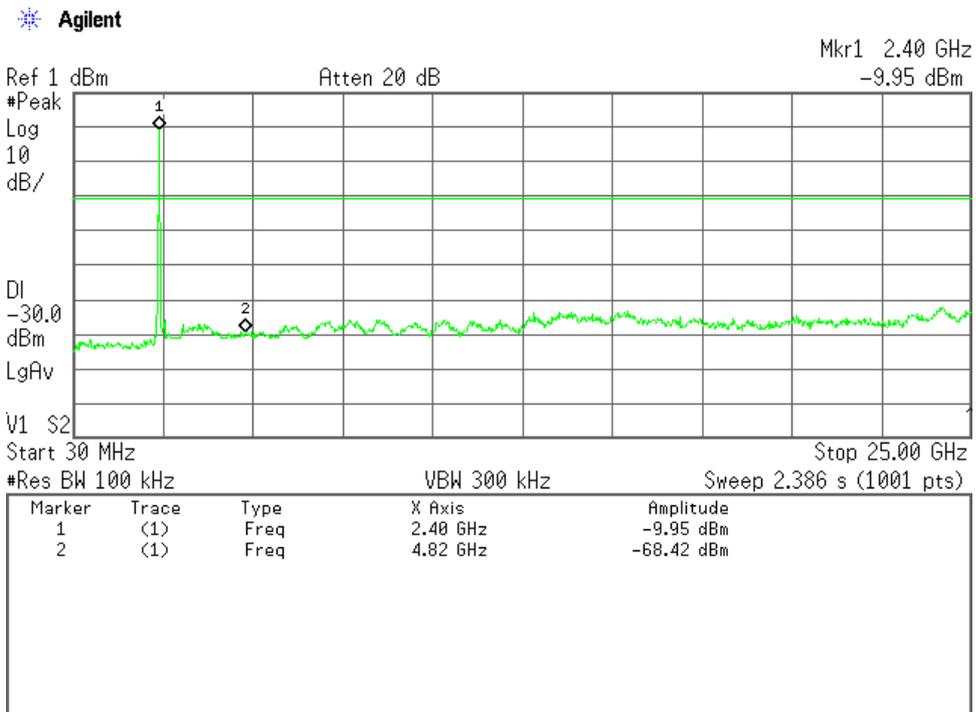

Middle Channel

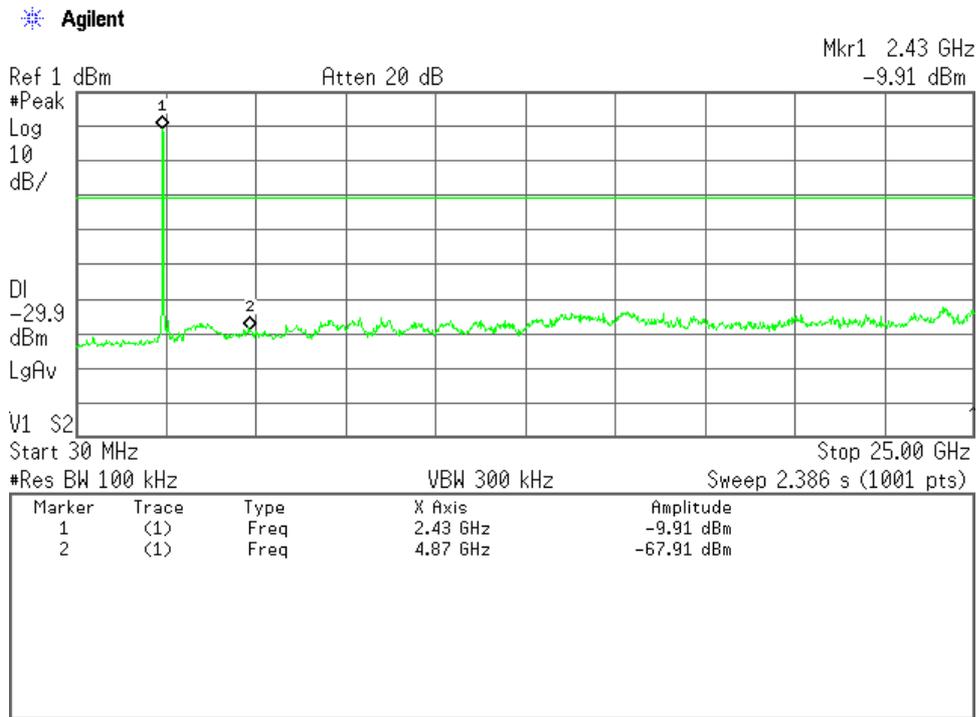


High Channel

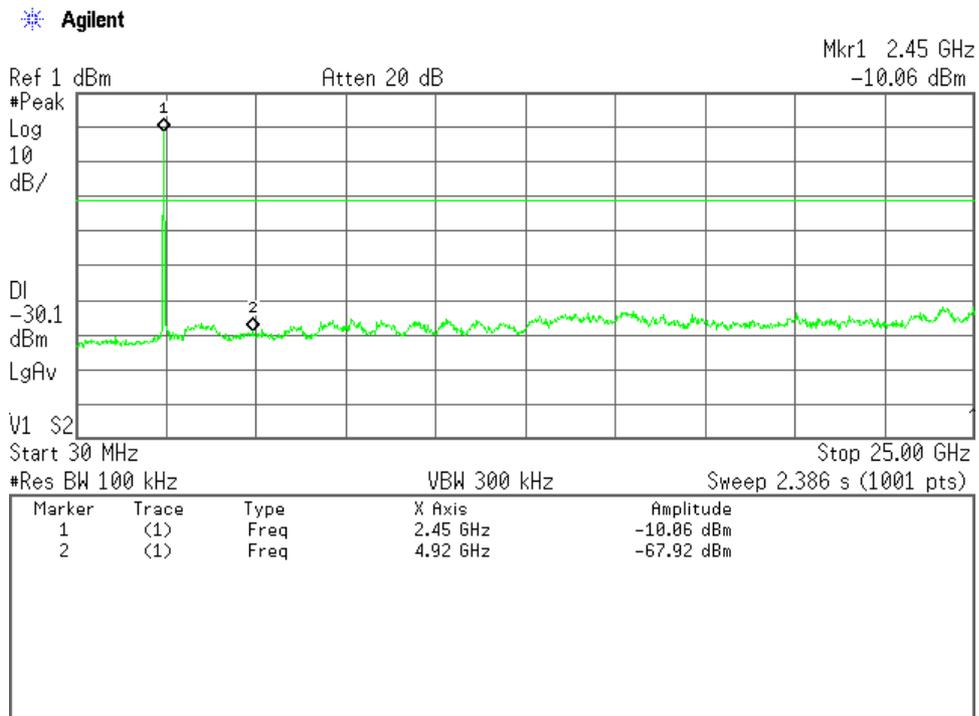


**Band-Edge Emission**

1)Data Rate : 1Mbps(IEEE 802.11b)  
Low Channel

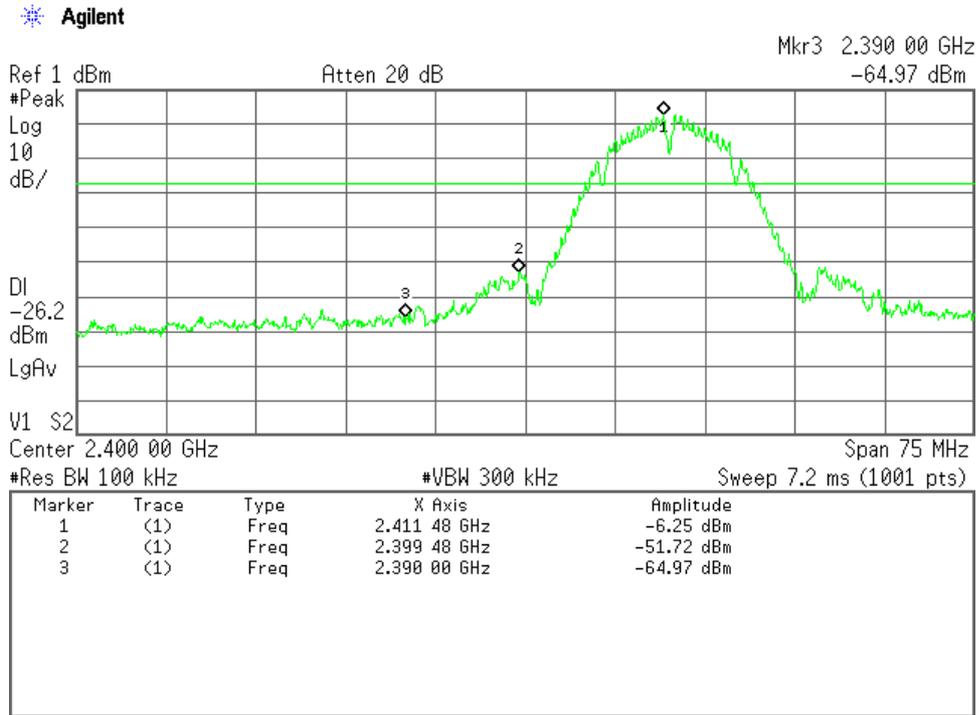


**High Channel**

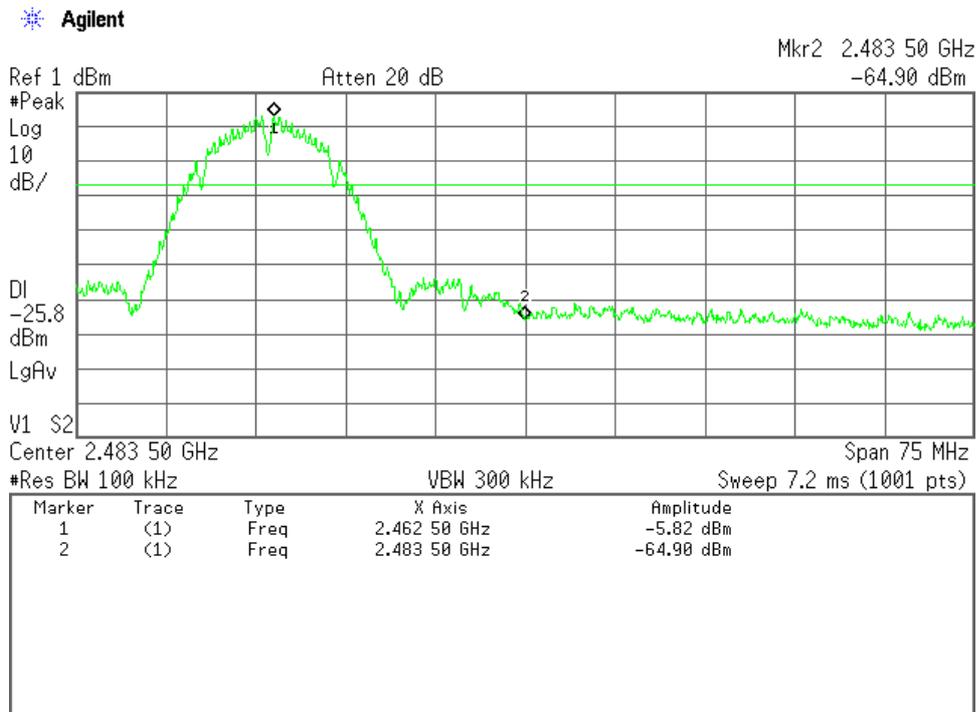





3)Data Rate : 6Mbps(IEEE 802.11g)  
Low Channel

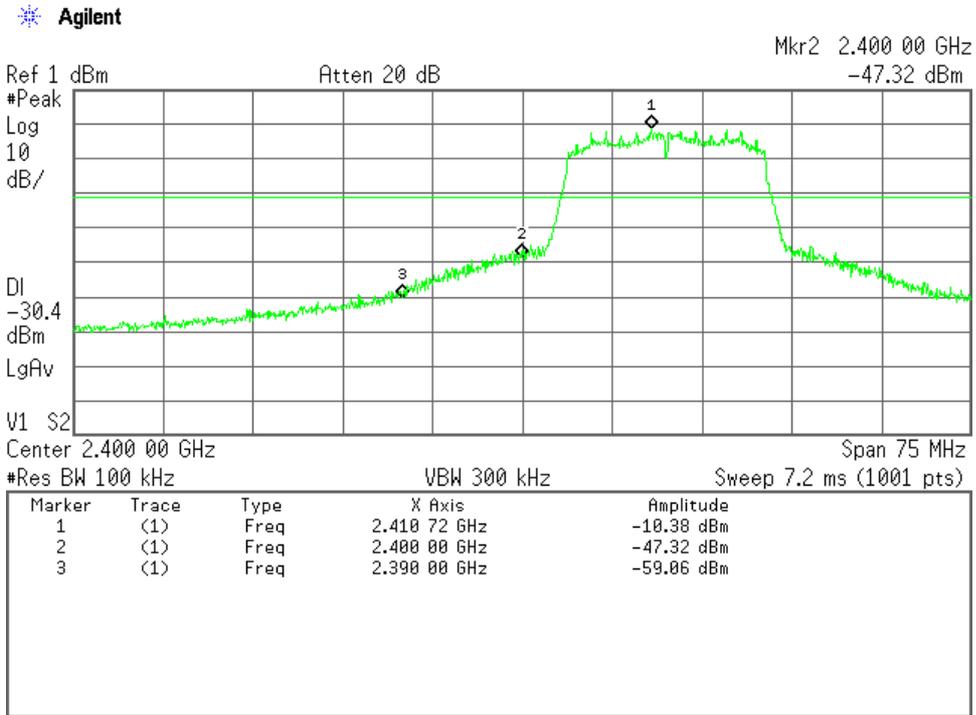


High Channel

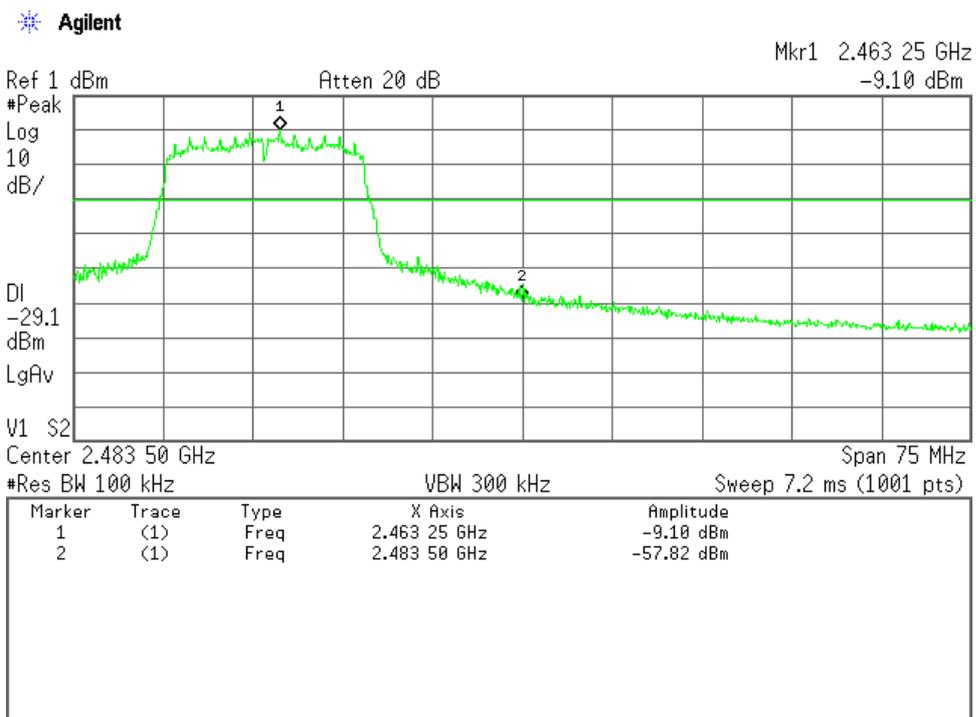


4)Data Rate : 54Mbps(IEEE 802.11g)  
Low Channel

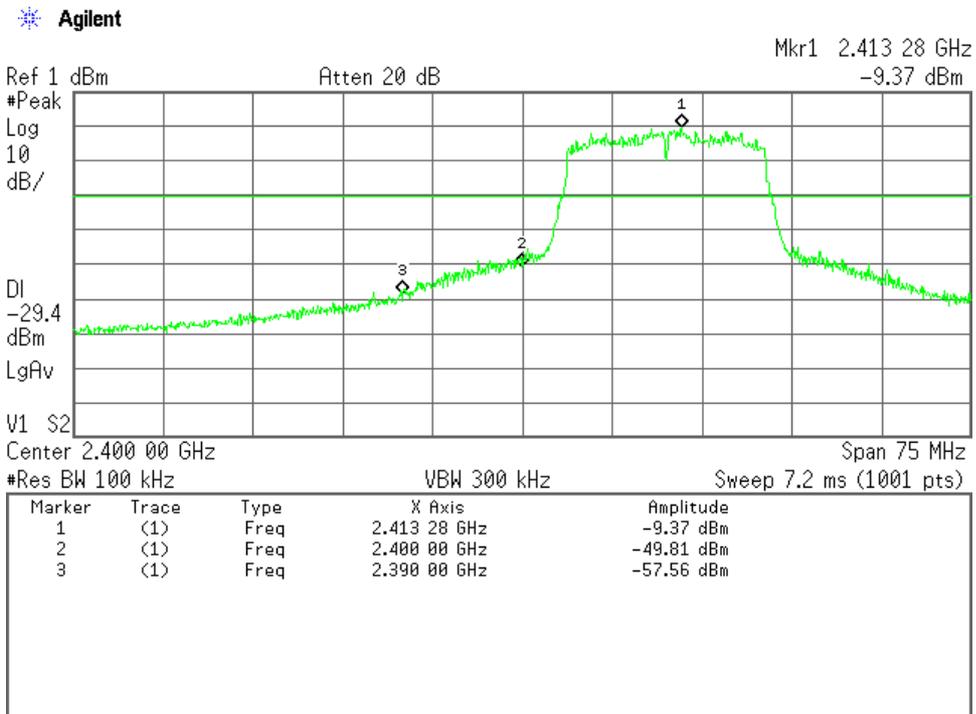


High Channel

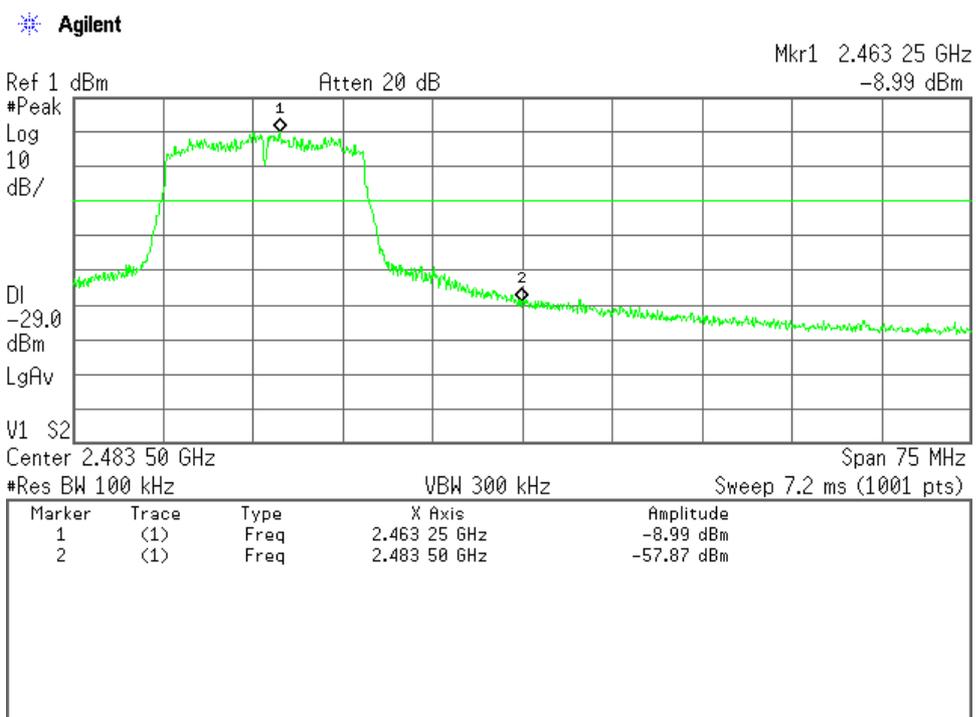


5)Data Rate : 6.5Mbps(IEEE 802.11n)  
Low Channel

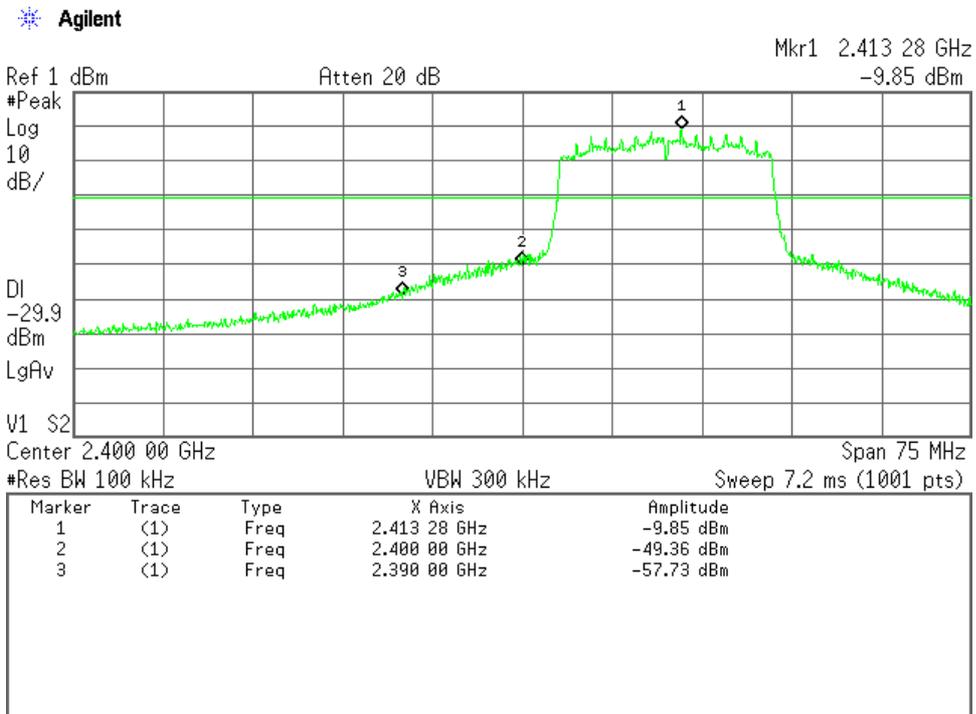


High Channel

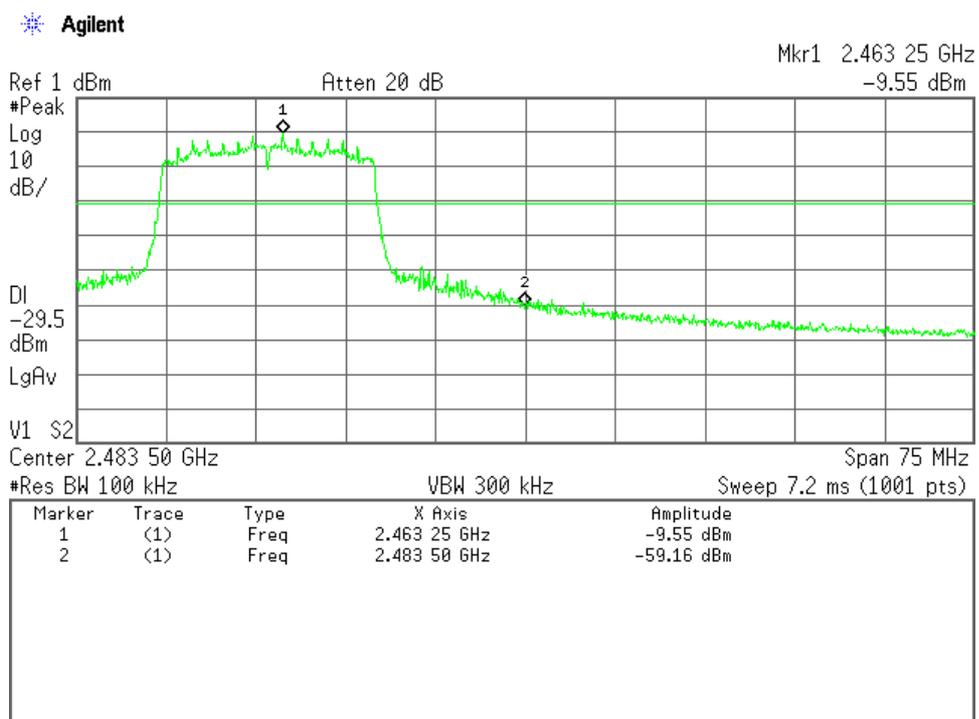

6)Data Rate : 65Mbps(IEEE 802.11n)  
Low Channel

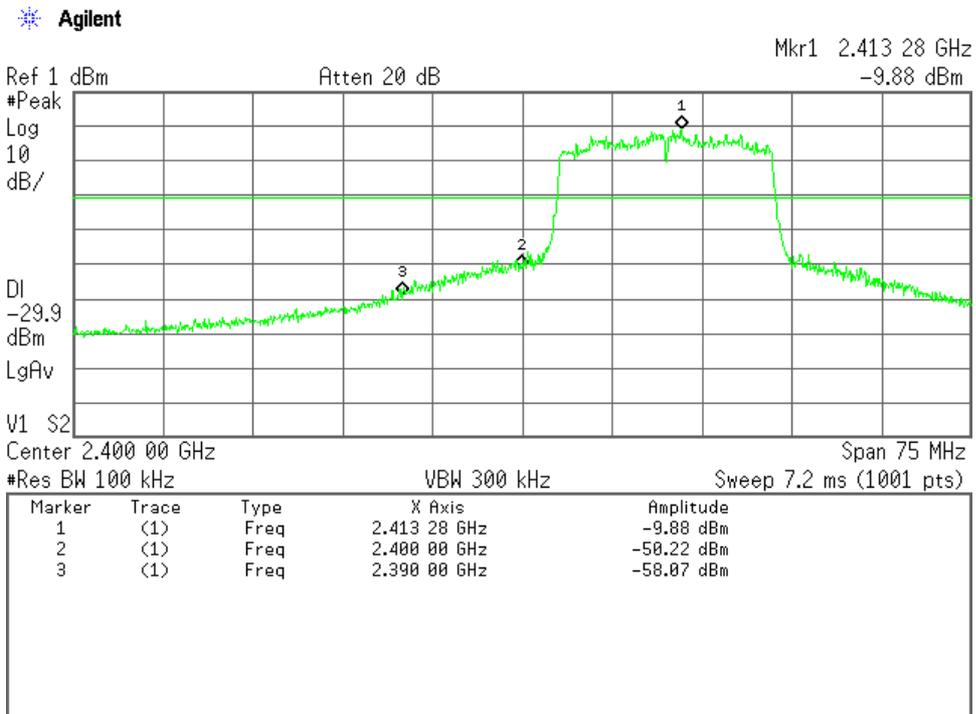

High Channel

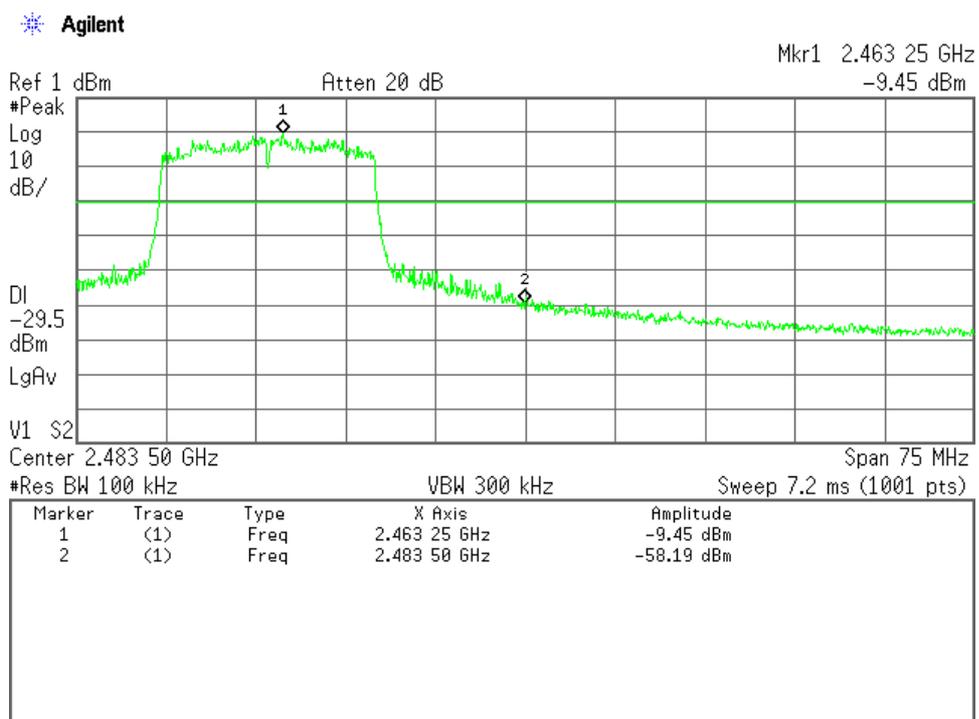


**A.8 AC Powerline Conducted Emission**

Mode of EUT : All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE 802.11b, IEEE 802.11g and IEEE 802.11n) has been listed.

Test condition : WLAN

Test Date: April 10, 2012  
Temp.: 22 °C, Humi.: 50 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]	Remarks
		VA	AVE	QP	AVE	QP	AVE	QP	AVE		
0.16	10.1	11.0	--	15.0	--	65.5	55.5	25.1	--	+40.4	-
0.32	10.2	19.2	--	25.0	--	59.7	49.7	35.2	--	+24.5	-
1.68	10.3	22.4	--	23.6	--	56.0	46.0	33.9	--	+22.1	-
1.71	10.3	21.5	--	22.7	--	56.0	46.0	33.0	--	+23.0	-
2.69	10.3	21.8	--	33.1	21.3	56.0	46.0	43.4	31.6	+12.6	-
11.53	10.8	18.5	--	< 10.0	--	60.0	50.0	29.3	--	+30.7	-

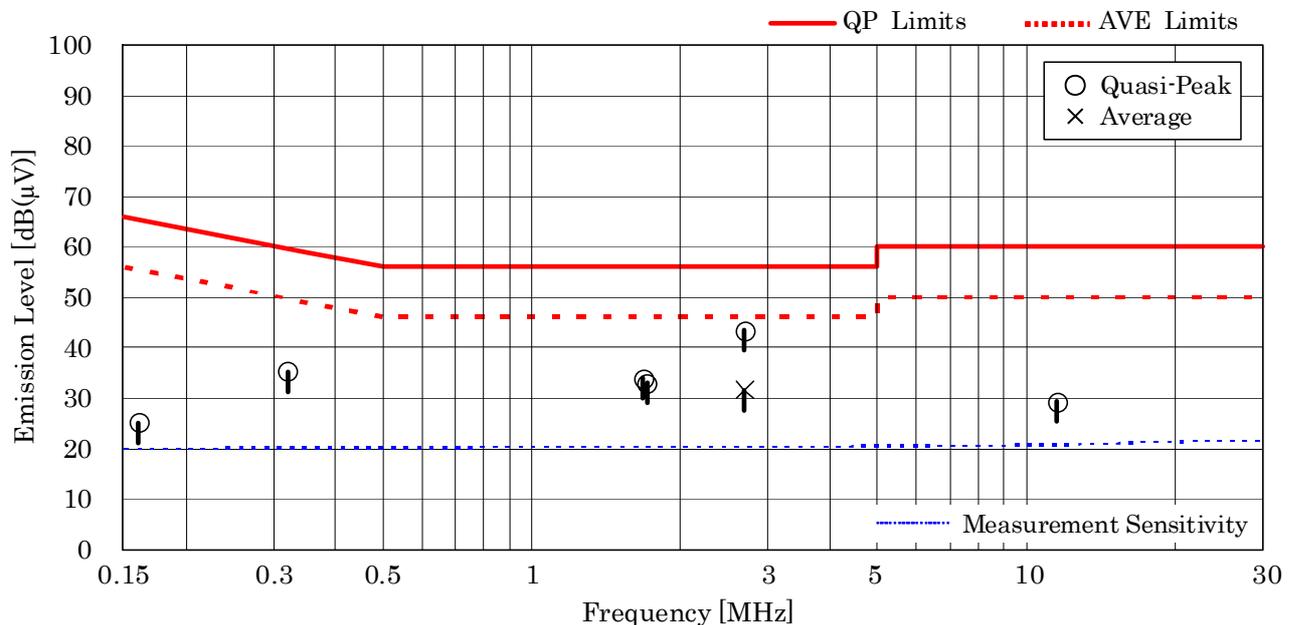


**NOTES**

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 2.69 MHz, as the worst point shown on underline:  
Correction Factor + Meter Reading = 10.3 + 33.1 = 43.4 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz



Mode of EUT : TX( 1ch: 2412 MHz, data rate : 1Mbps(IEEE 802.11b))


Antenna Polarization : Vertical

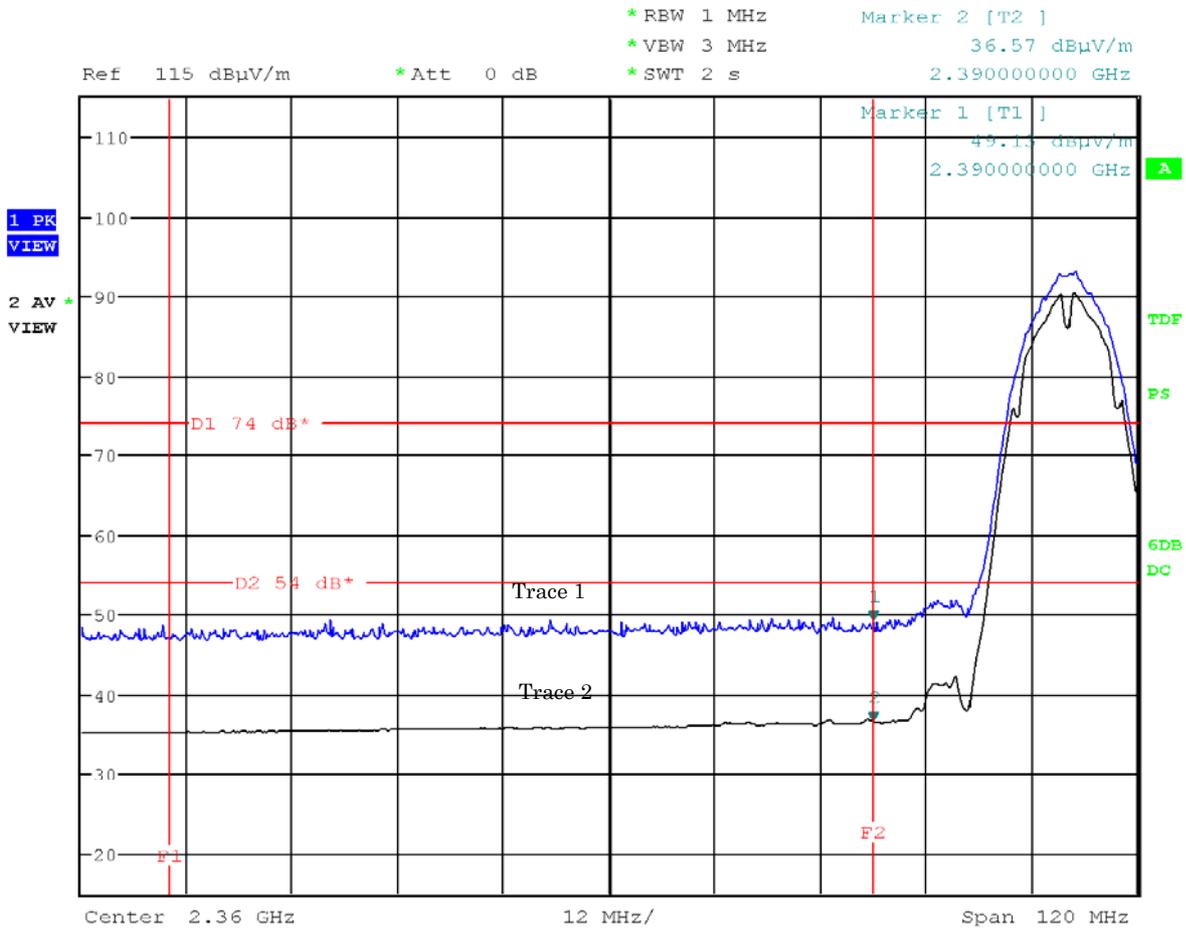

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 1Mbps(IEEE 802.11b))


Antenna Polarization : Horizontal

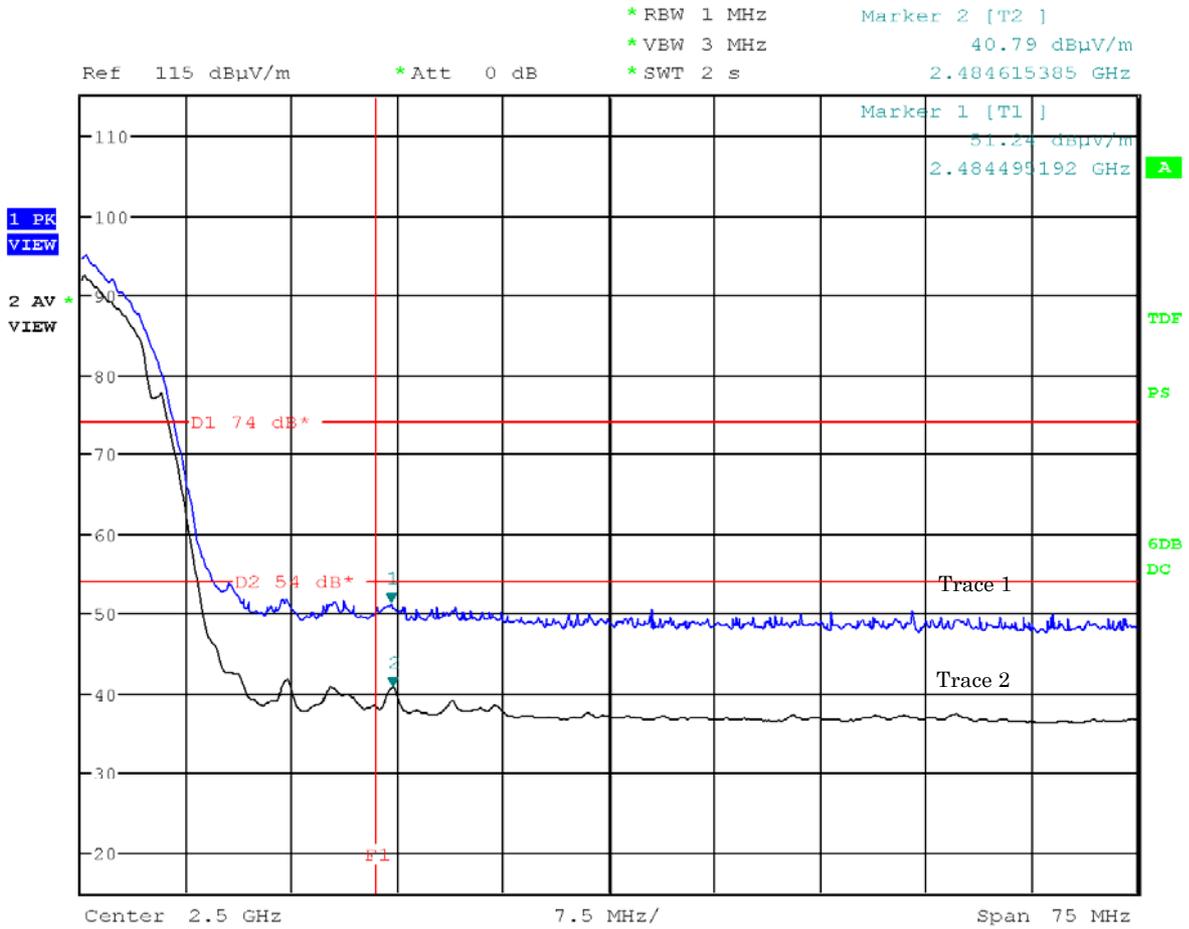

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 1Mbps(IEEE 802.11b))


Antenna Polarization : Vertical

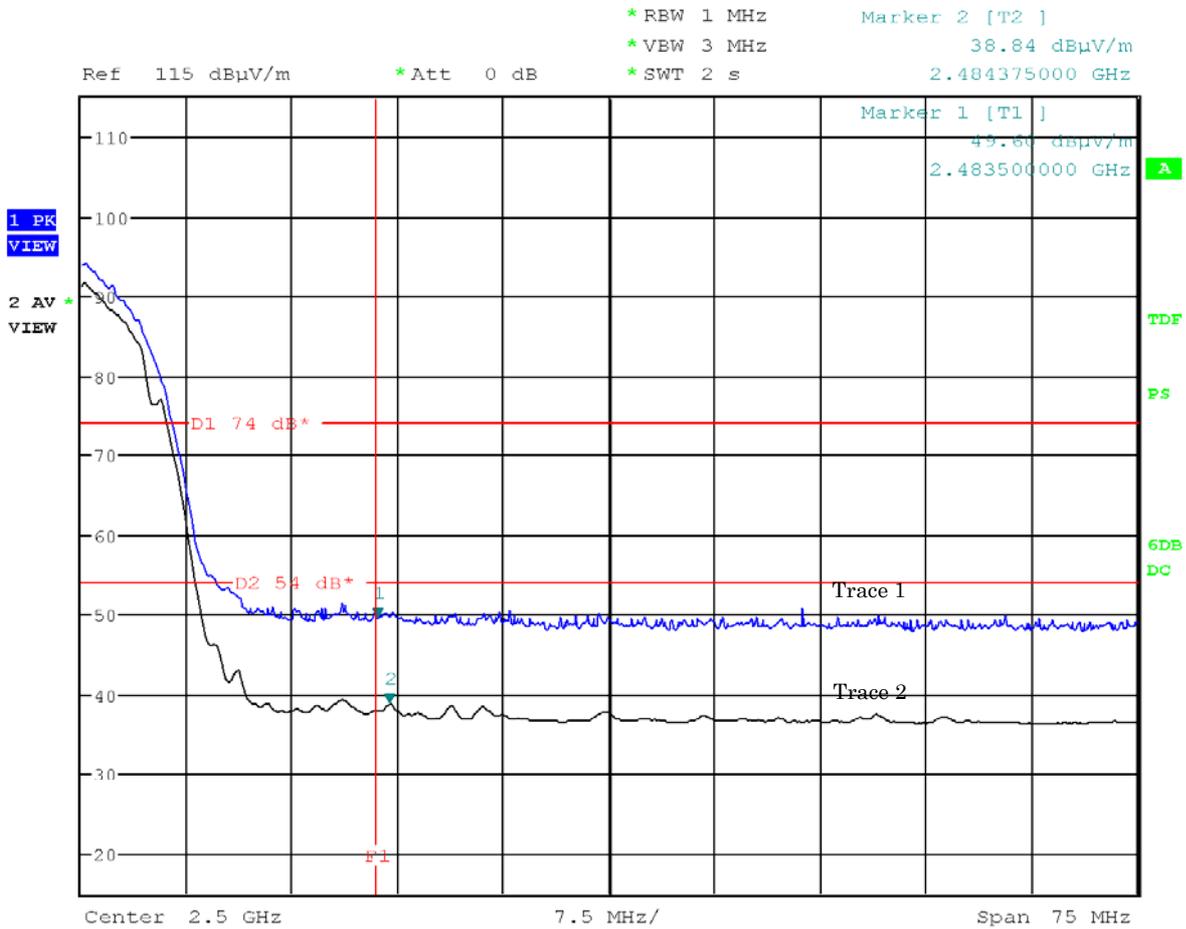

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 11Mbps(IEEE 802.11b))


Antenna Polarization : Horizontal

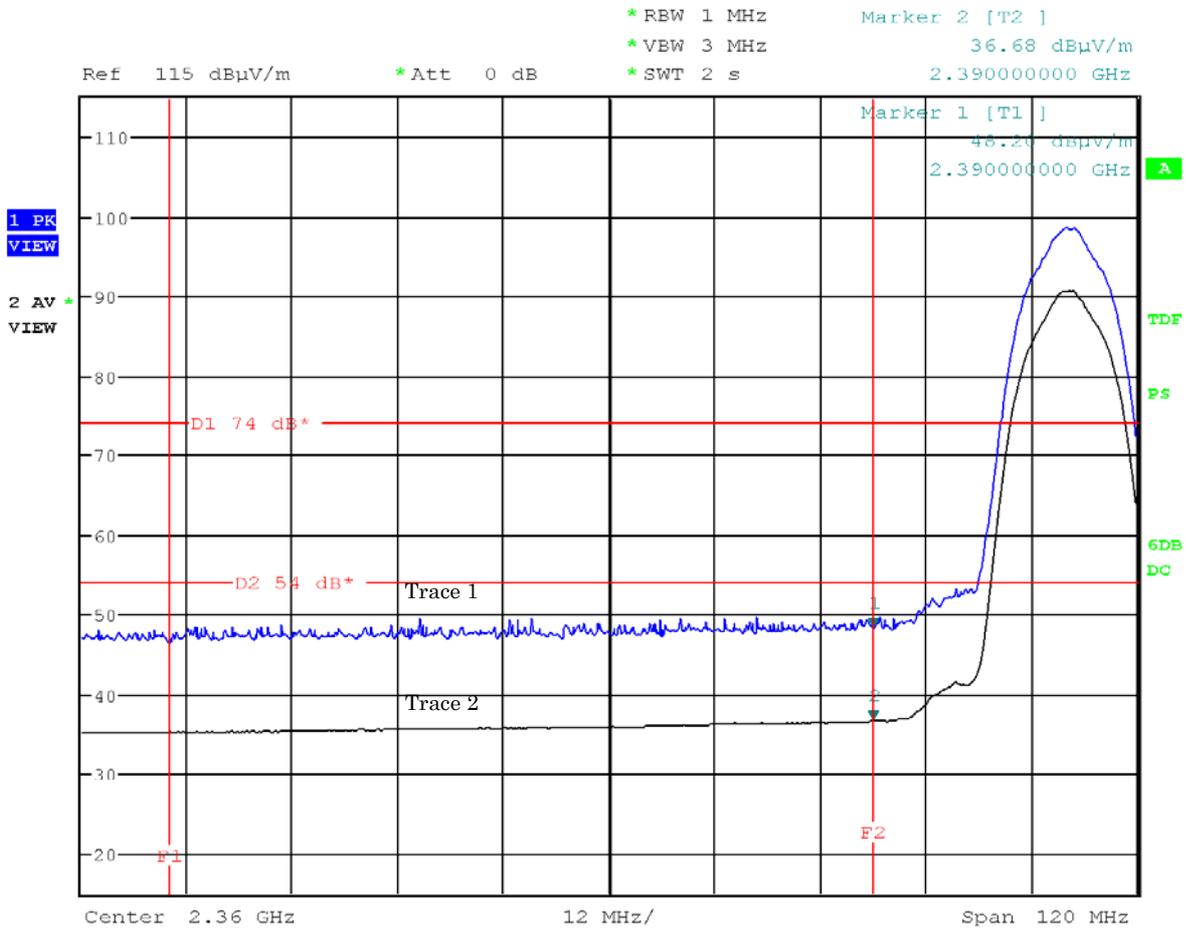

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 11Mbps(IEEE 802.11b))


Antenna Polarization : Vertical

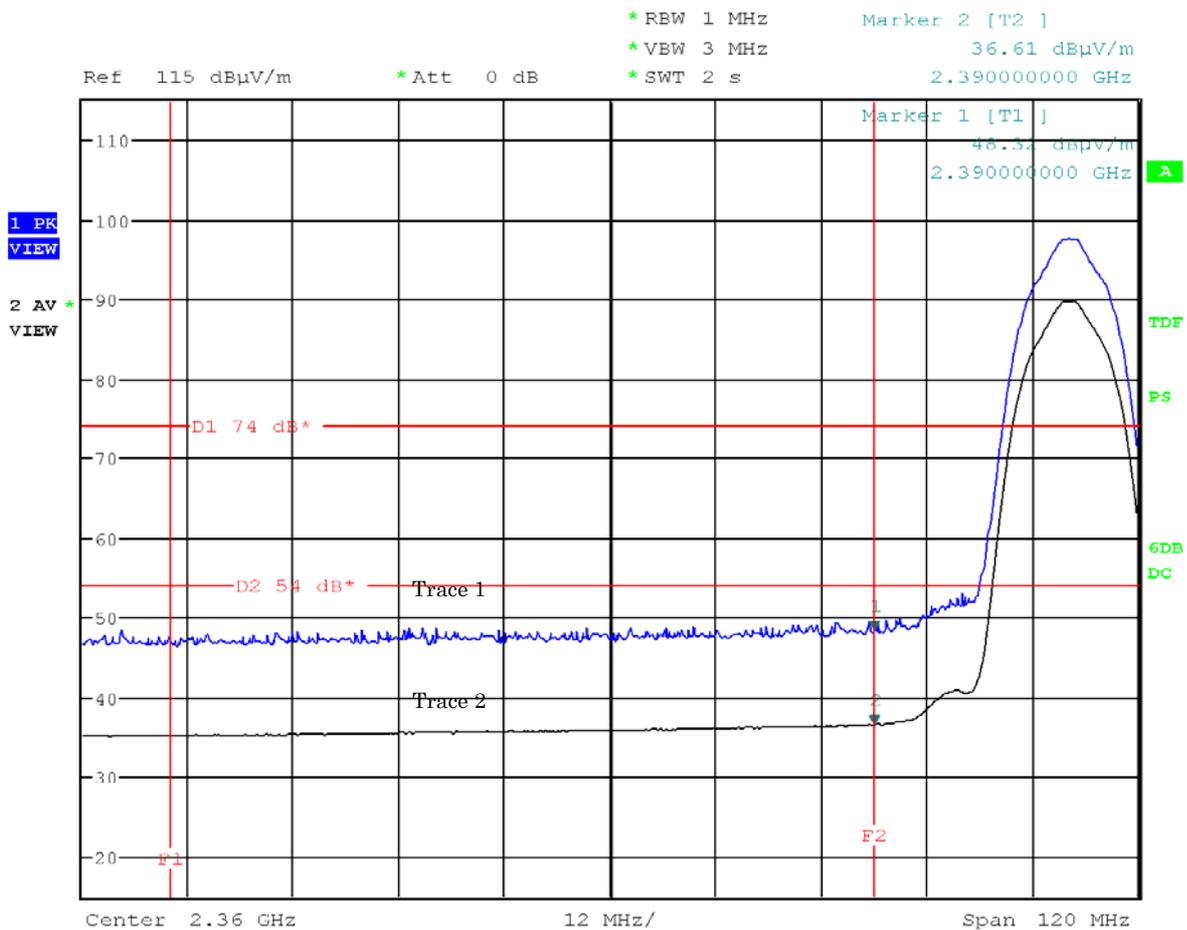

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 11Mbps(IEEE 802.11b))


Antenna Polarization : Horizontal

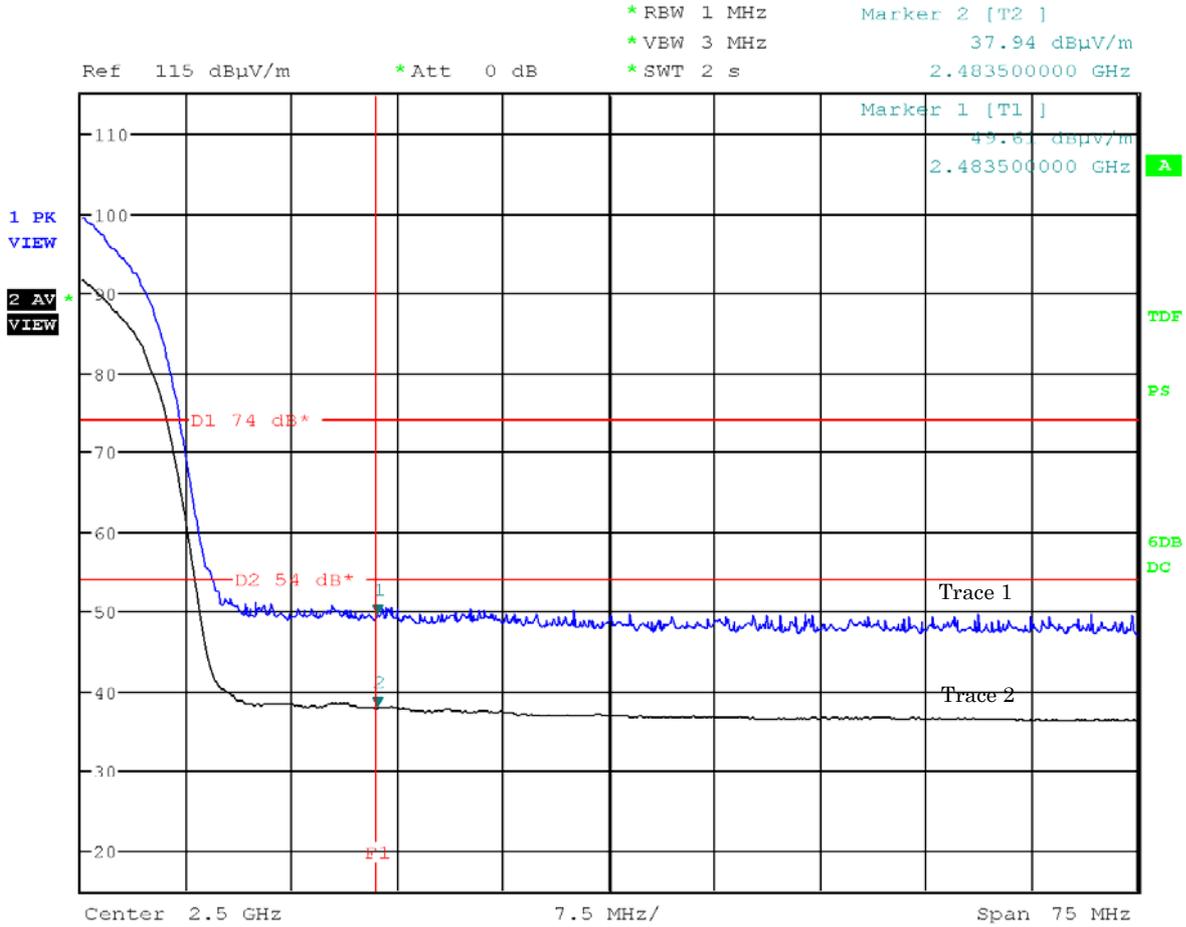

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 11Mbps(IEEE 802.11b))


Antenna Polarization : Vertical

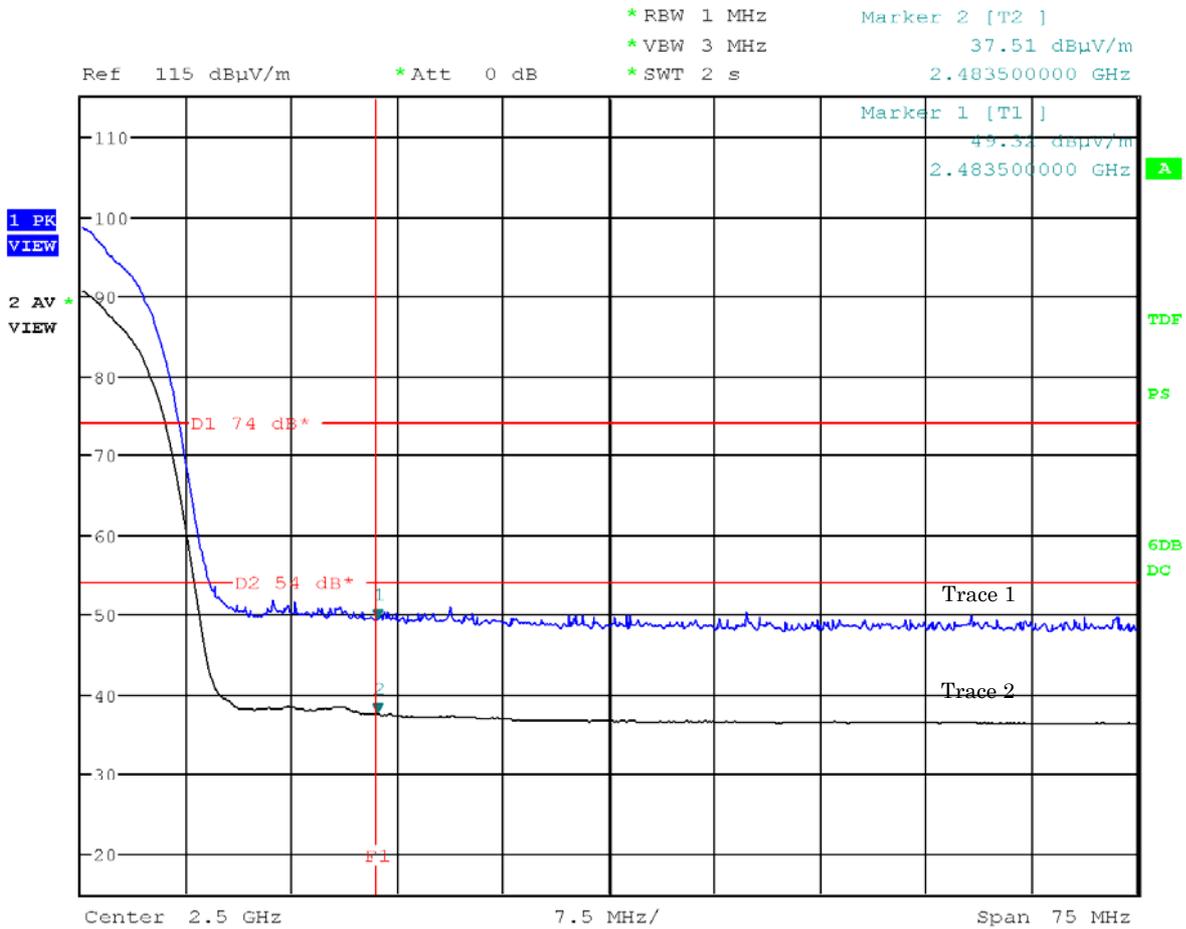

Note: The trace 1 is Peak detection. The trace 2 is Average detection.


Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6Mbps(IEEE 802.11g))

Antenna Polarization : Horizontal

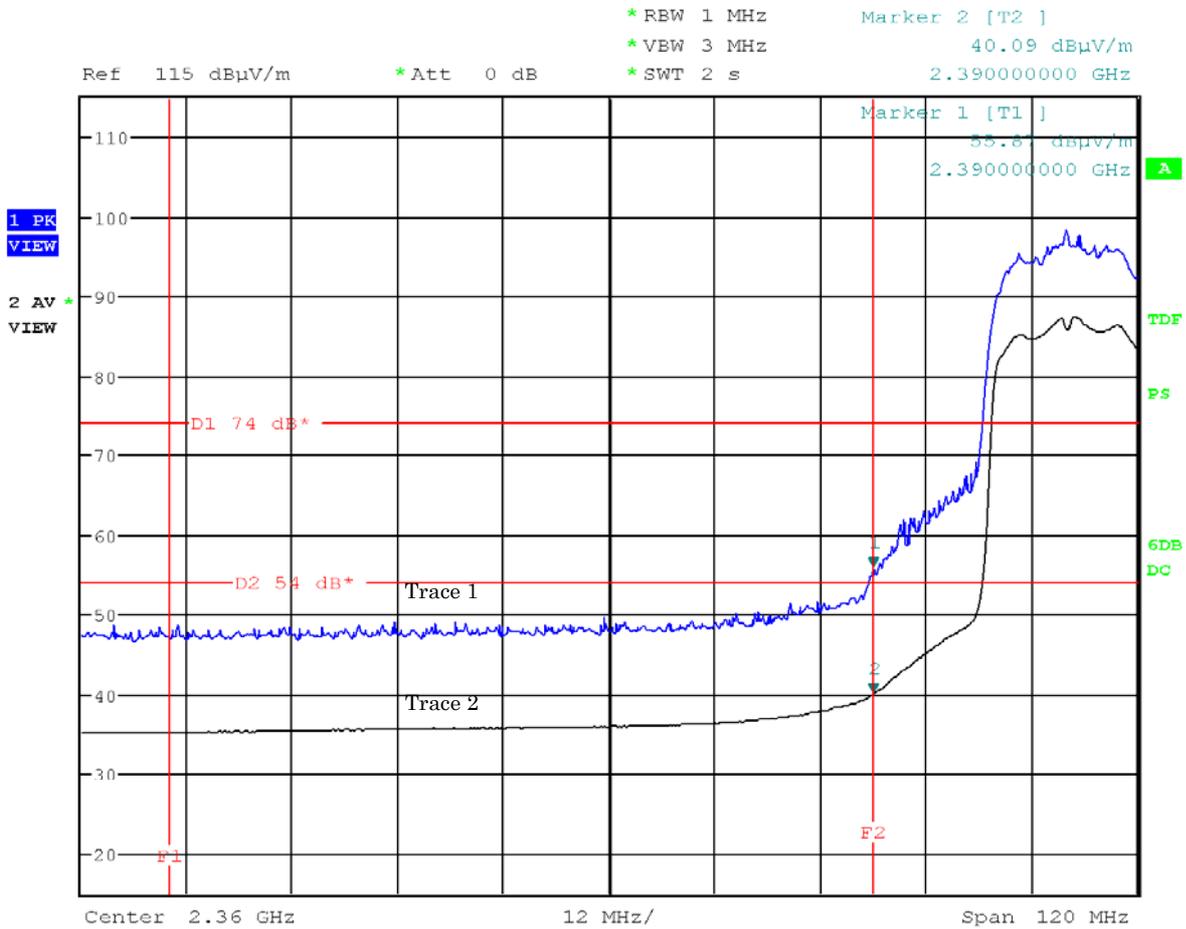

Note: The trace 1 is Peak detection. The trace 2 is Average detection.


Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6Mbps(IEEE 802.11g))  
 Antenna Polarization : Vertical

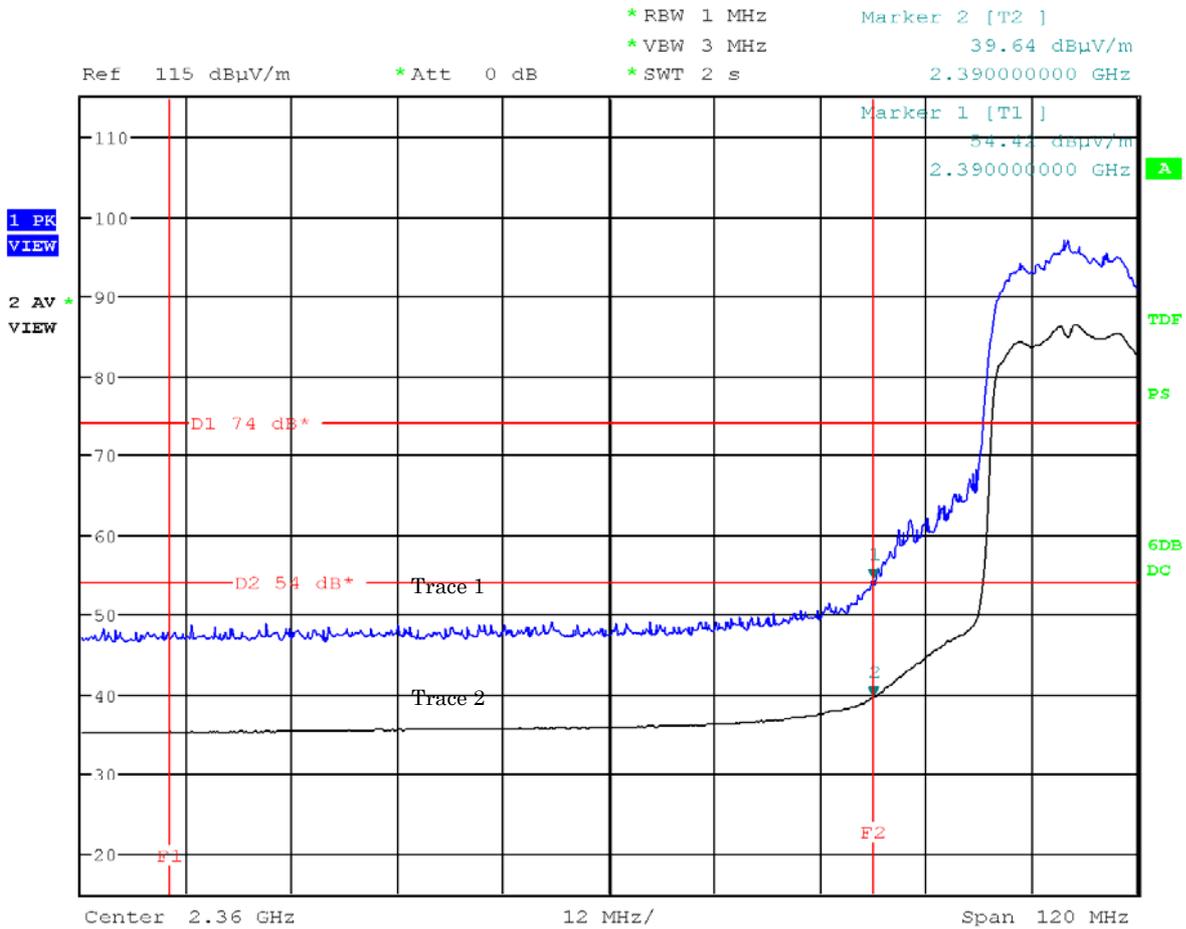

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6Mbps(IEEE 802.11g))

Antenna Polarization : Horizontal

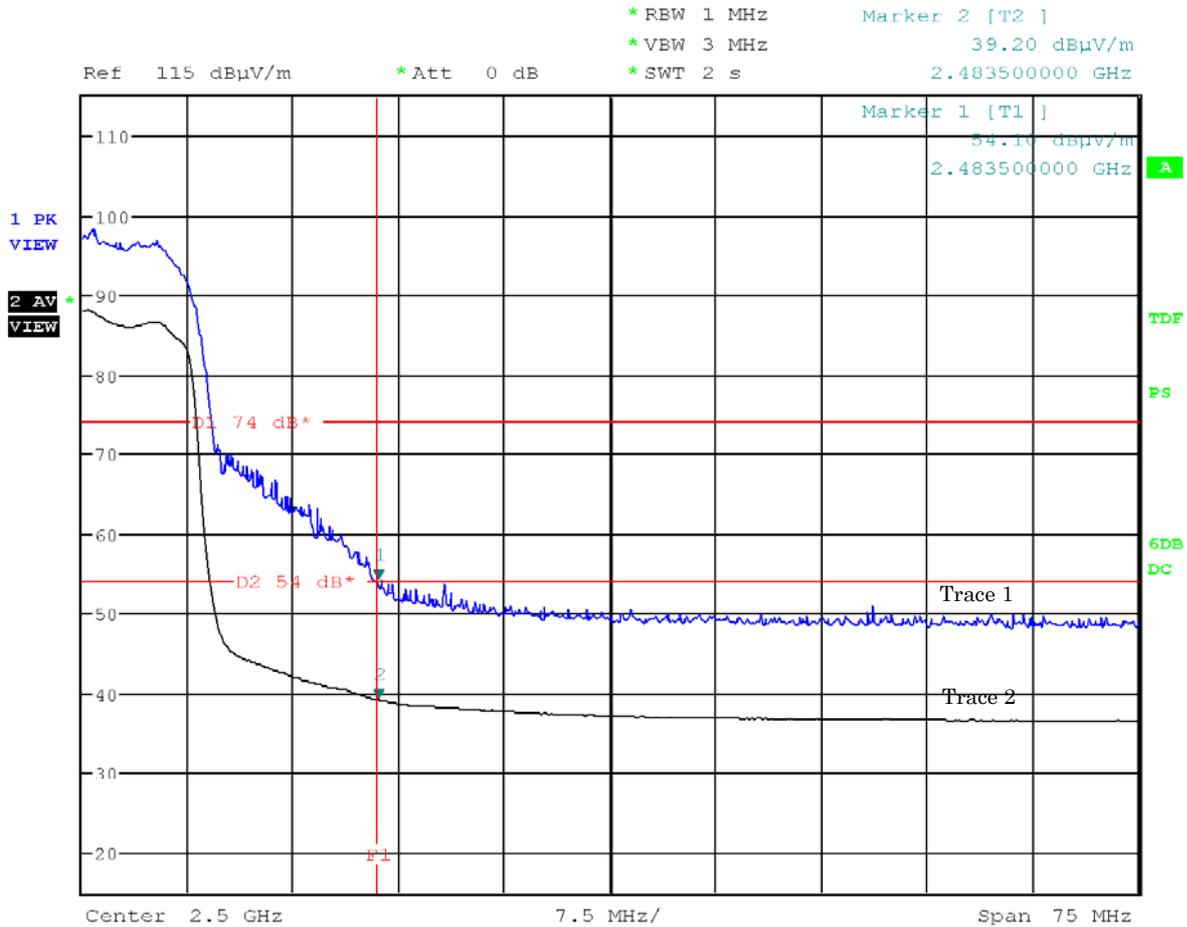


Note: The trace 1 is Peak detection. The trace 2 is Average detection.



Mode of EUT : TX( 1ch: 2412 MHz, data rate : 54Mbps(IEEE 802.11g))


Antenna Polarization : Horizontal

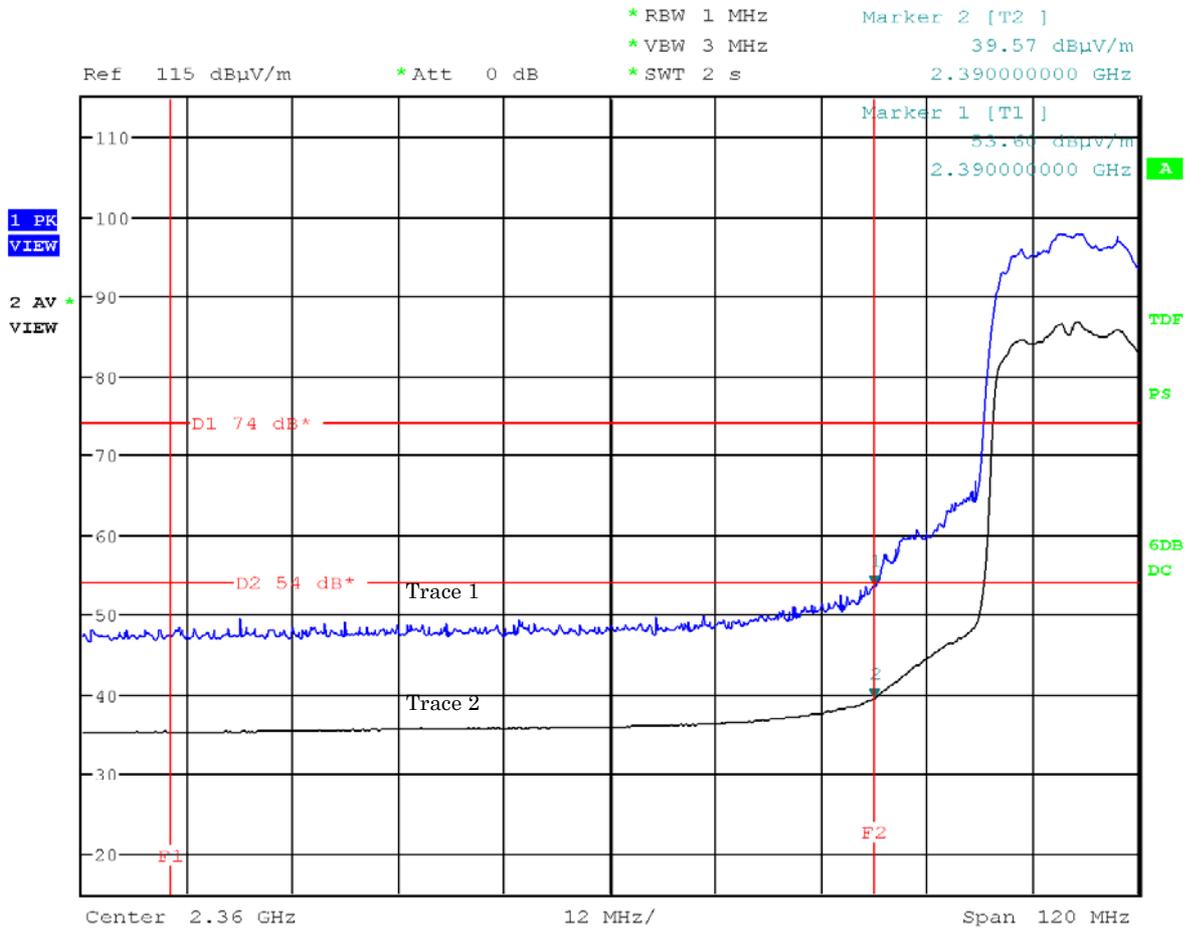

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 54Mbps(IEEE 802.11g))


Antenna Polarization : Vertical

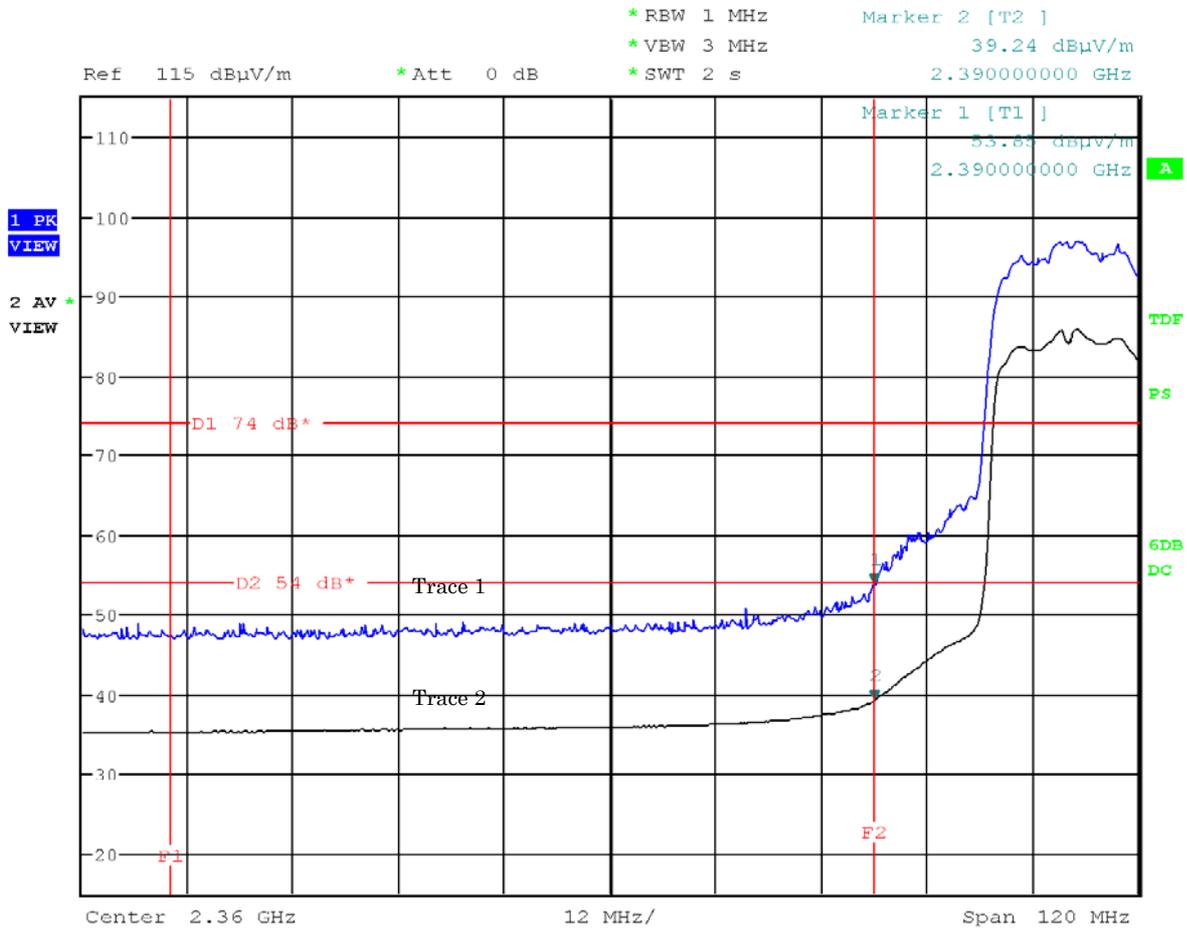

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 54Mbps(IEEE 802.11g))


Antenna Polarization : Horizontal

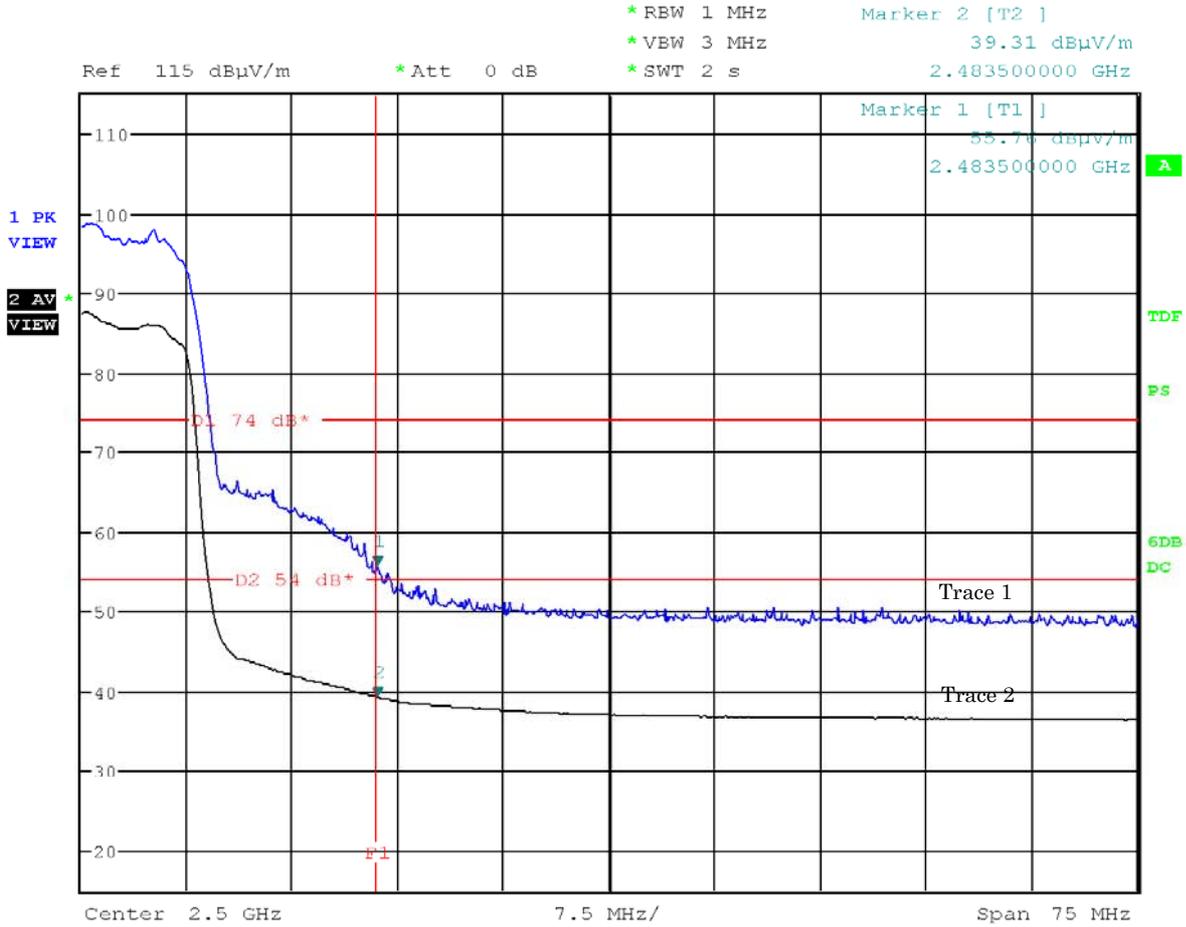

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 54Mbps(IEEE 802.11g))


Antenna Polarization : Vertical

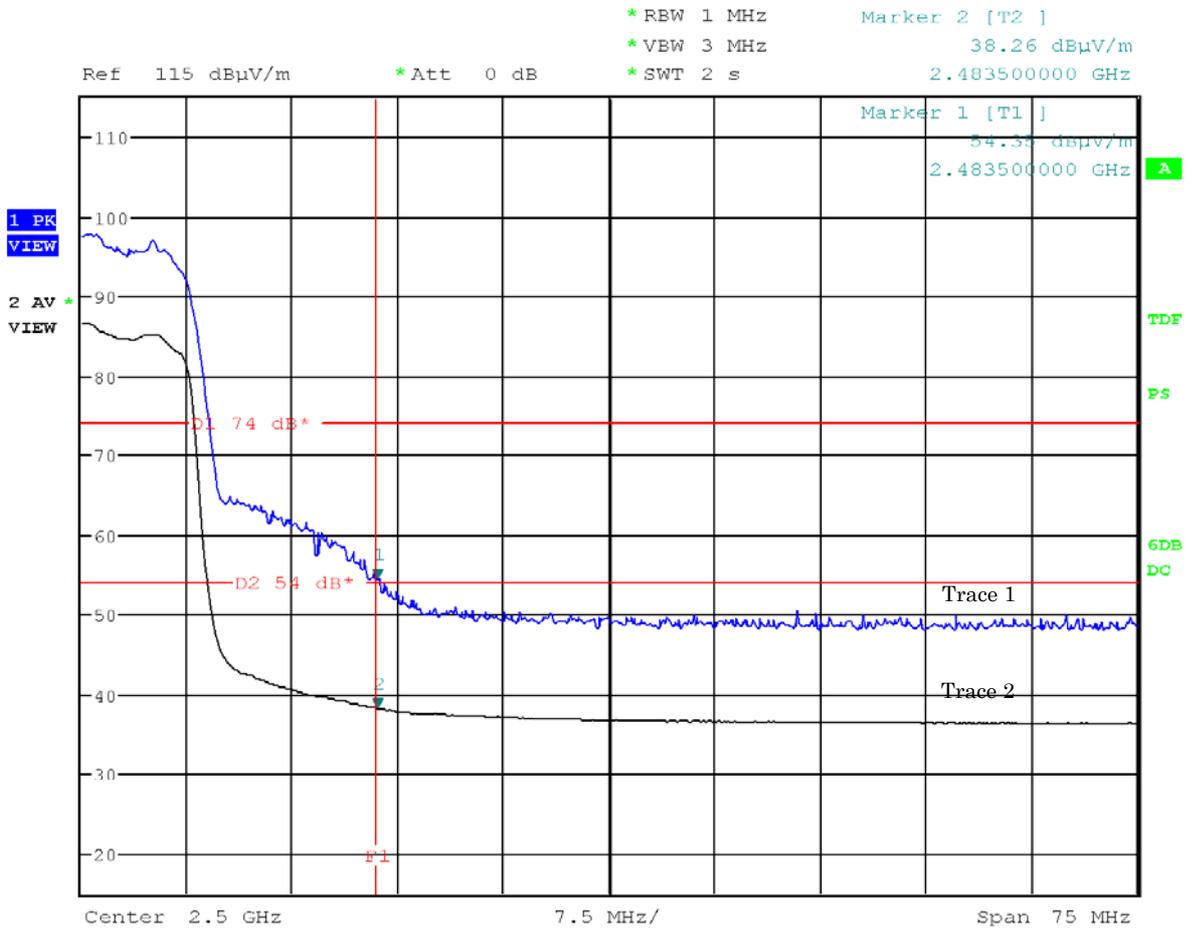

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6.5Mbps(IEEE 802.11n))


Antenna Polarization : Horizontal

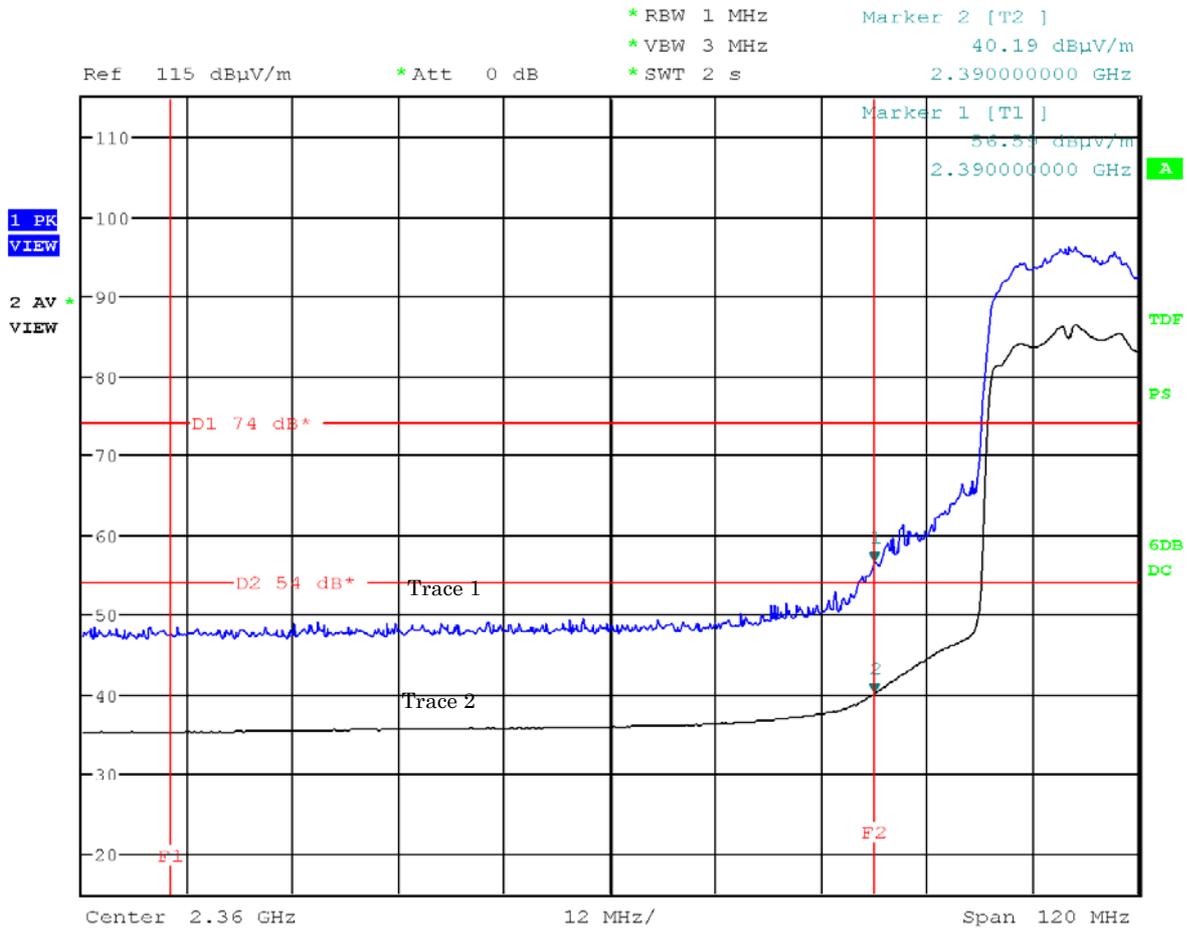

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6.5Mbps(IEEE 802.11n))


Antenna Polarization : Vertical

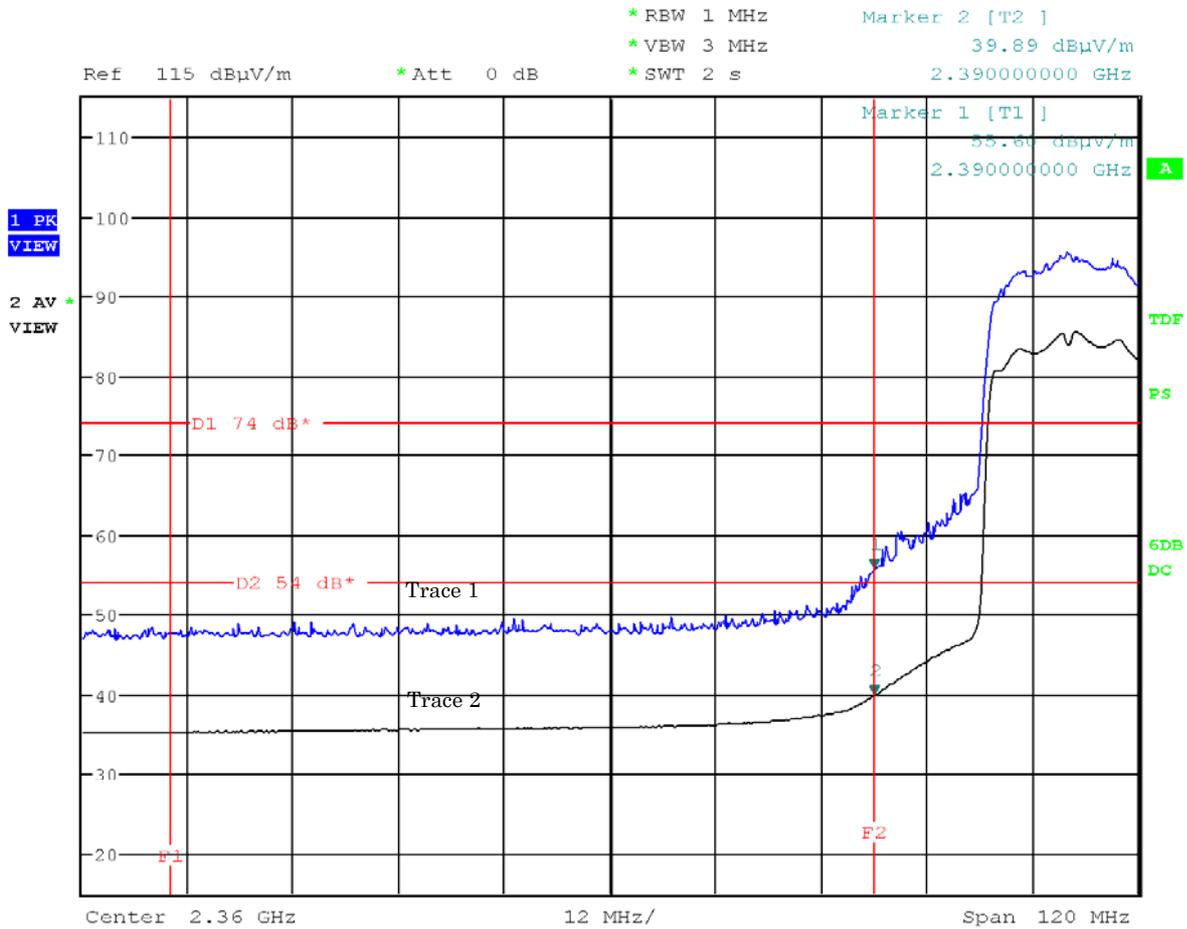

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6.5Mbps(IEEE 802.11n))

Antenna Polarization : Horizontal

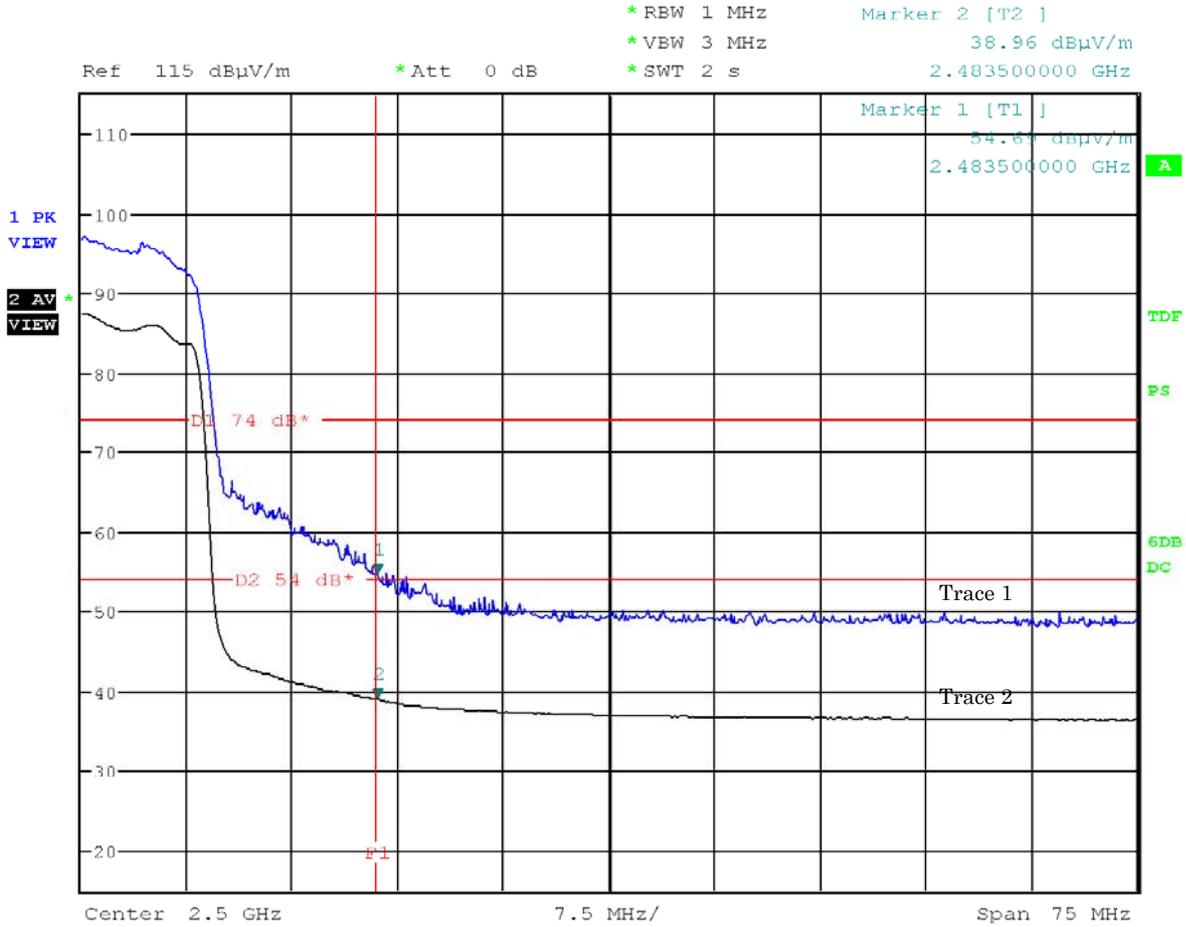


Note: The trace 1 is Peak detection. The trace 2 is Average detection.



Mode of EUT : TX( 1ch: 2412 MHz, data rate : 65Mbps(IEEE 802.11n))


Antenna Polarization : Horizontal

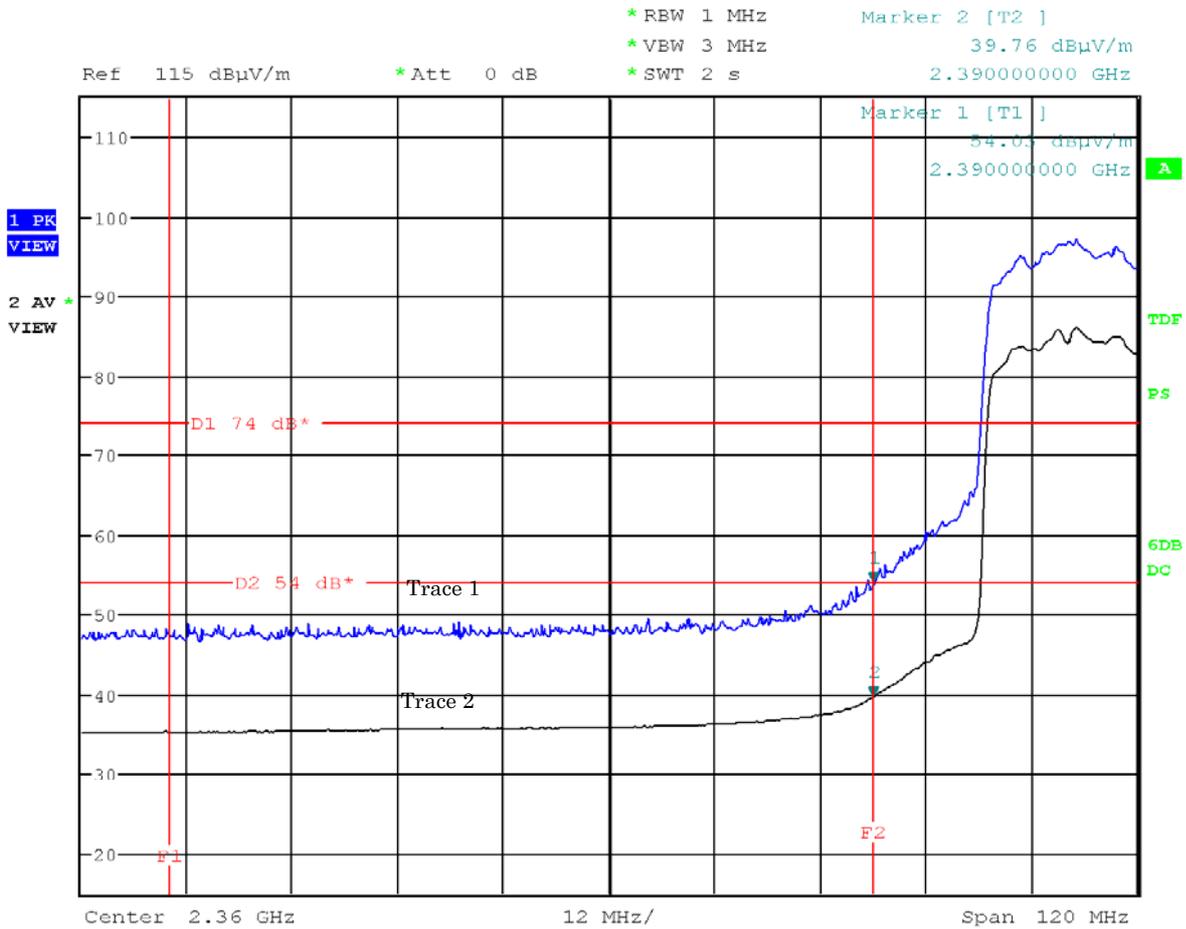

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 65Mbps(IEEE 802.11n))


Antenna Polarization : Vertical

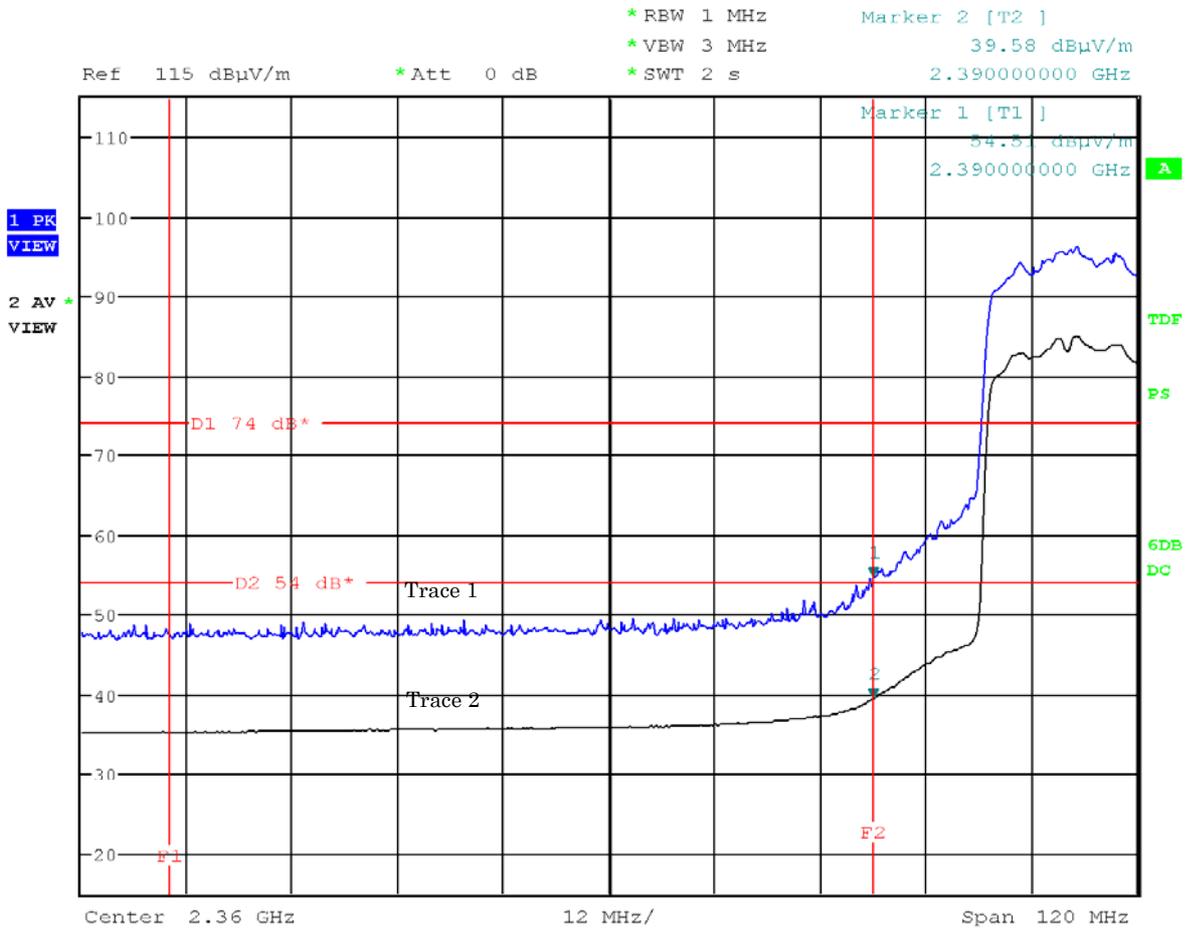

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 65Mbps(IEEE 802.11n))

Antenna Polarization : Horizontal

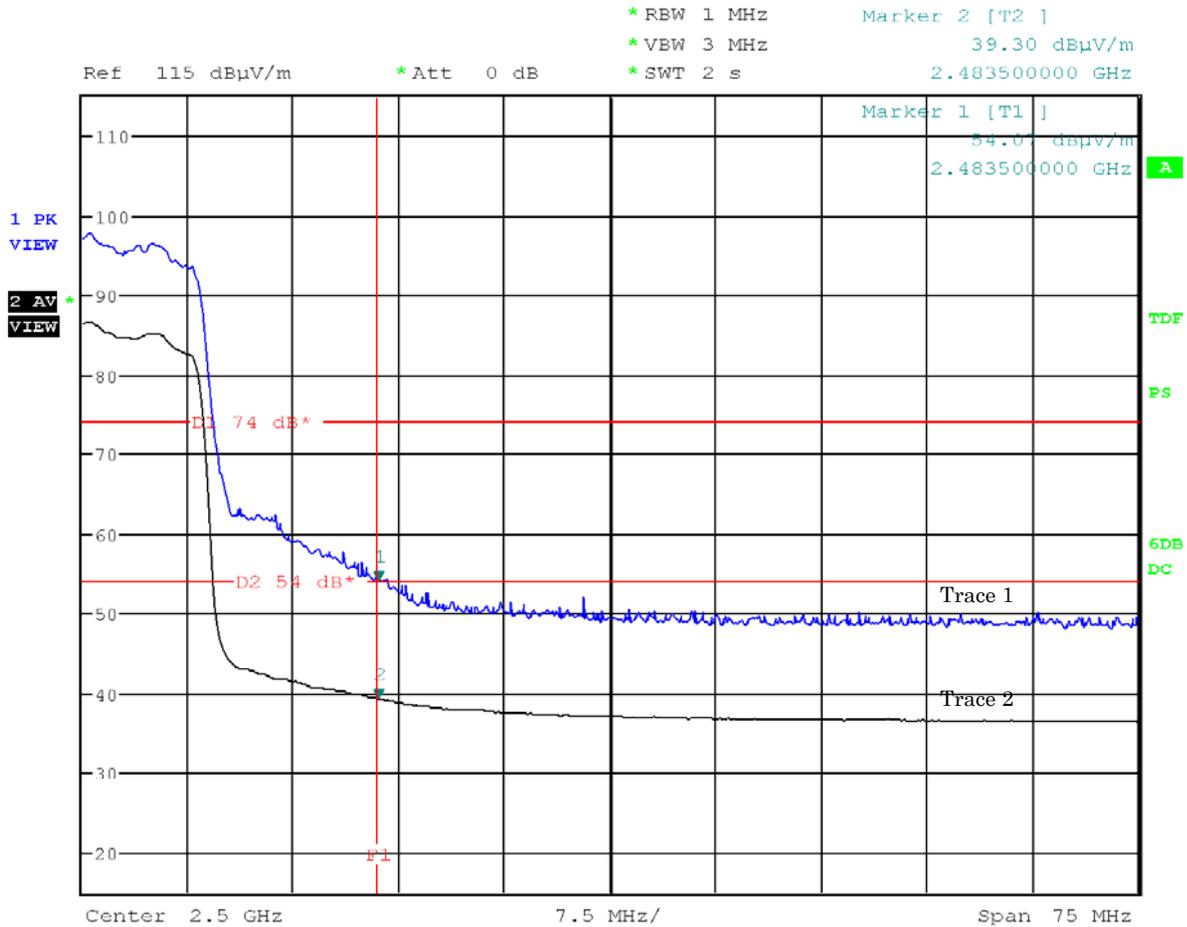

Note: The trace 1 is Peak detection. The trace 2 is Average detection.



**A.9.1.2 Single Unit with Wireless Charger(WPC mode)**

The Band-Edge emission level on WPC mode is less than ones on Single Unit.


The Band-Edge emission of IEEE802.11n(6.5Mbps) is only reported. (worst case)

Test Date : April 16, 2012

Temp.:20°C, Humi:55%


Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6.5Mbps(IEEE 802.11n)) WPC mode

Antenna Polarization : Horizontal

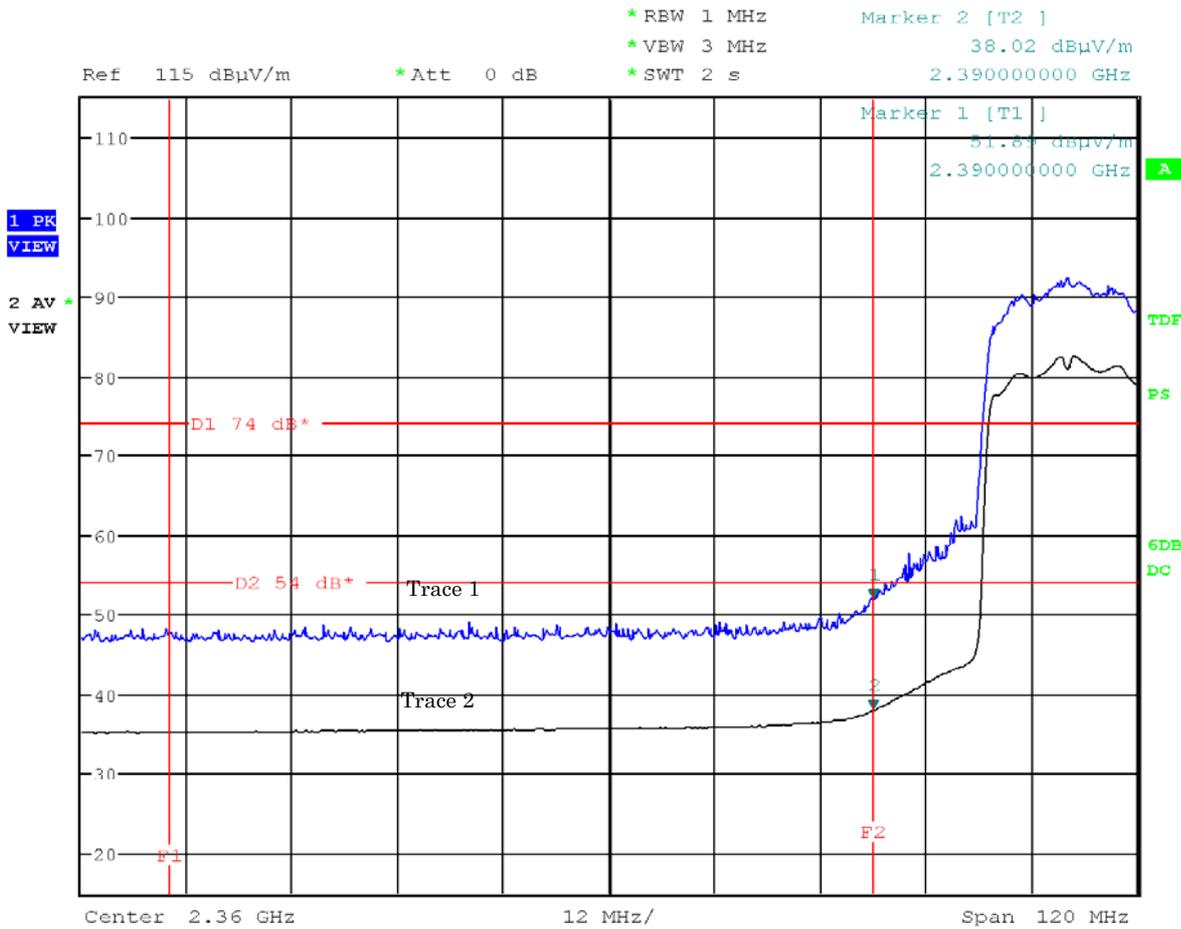


Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 1ch: 2412 MHz, data rate : 6.5Mbps(IEEE 802.11n)) WPC mode  
 Antenna Polarization : Vertical

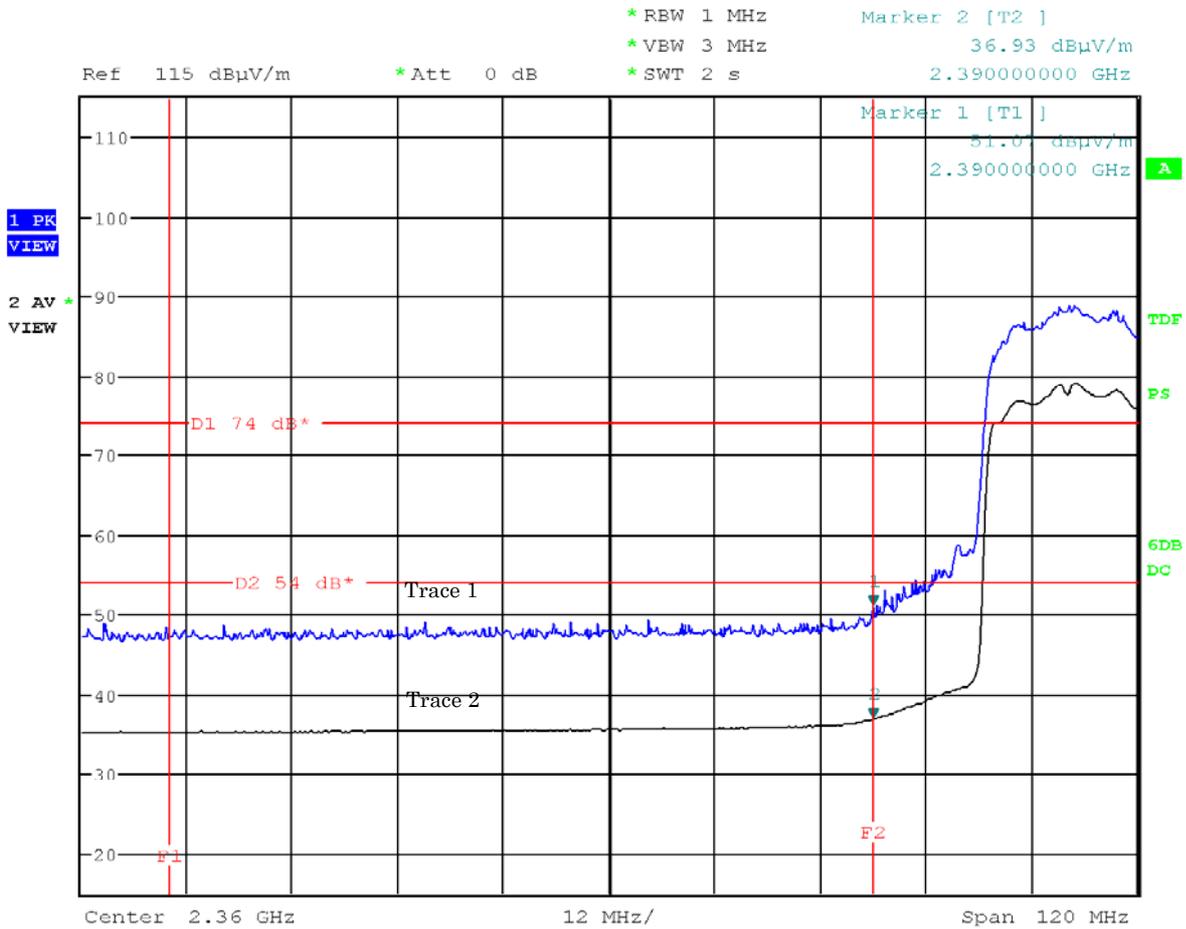

Note: The trace 1 is Peak detection. The trace 2 is Average detection.


Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6.5Mbps(IEEE 802.11n)) WPC mode  
 Antenna Polarization : Horizontal

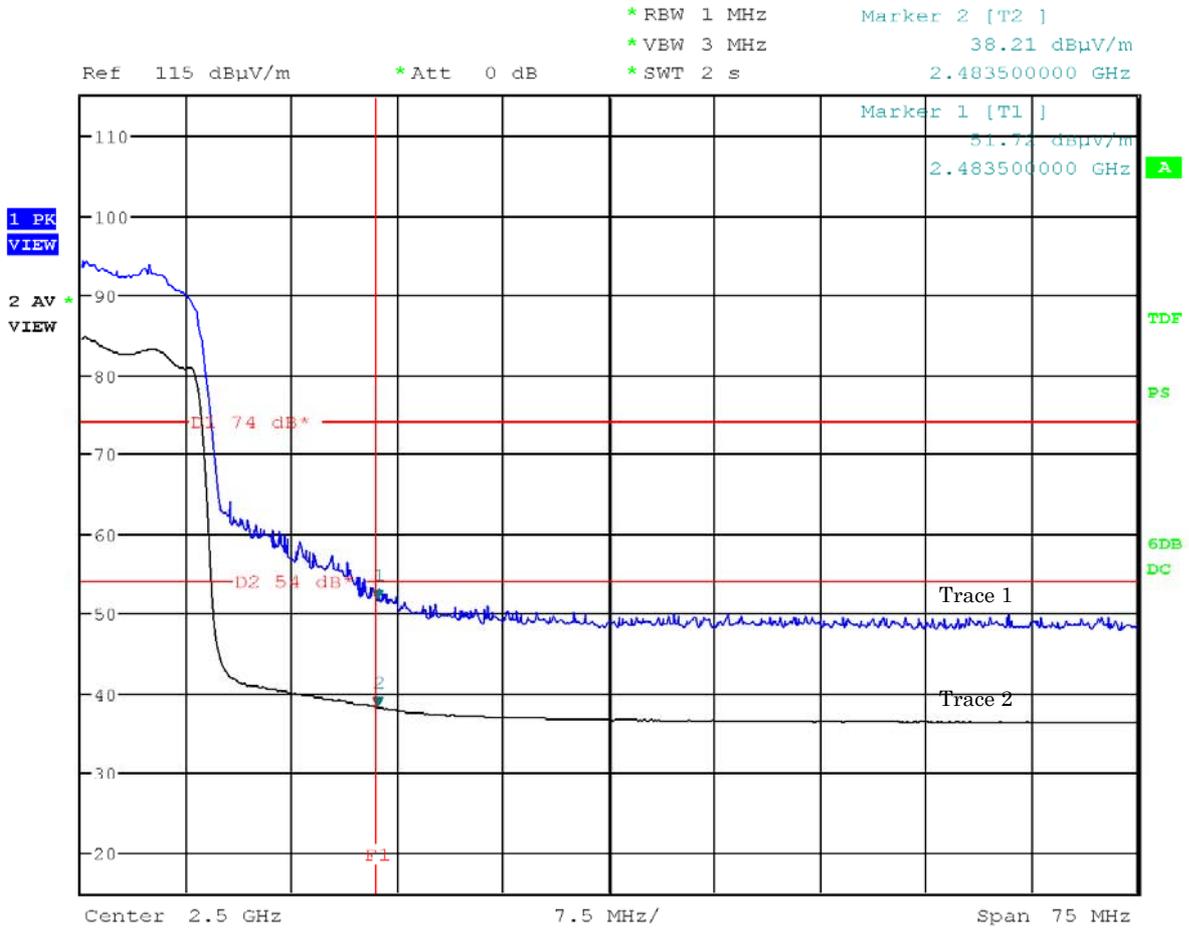

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

Mode of EUT : TX( 11ch: 2462 MHz, data rate : 6.5Mbps(IEEE 802.11n))

Antenna Polarization : Vertical

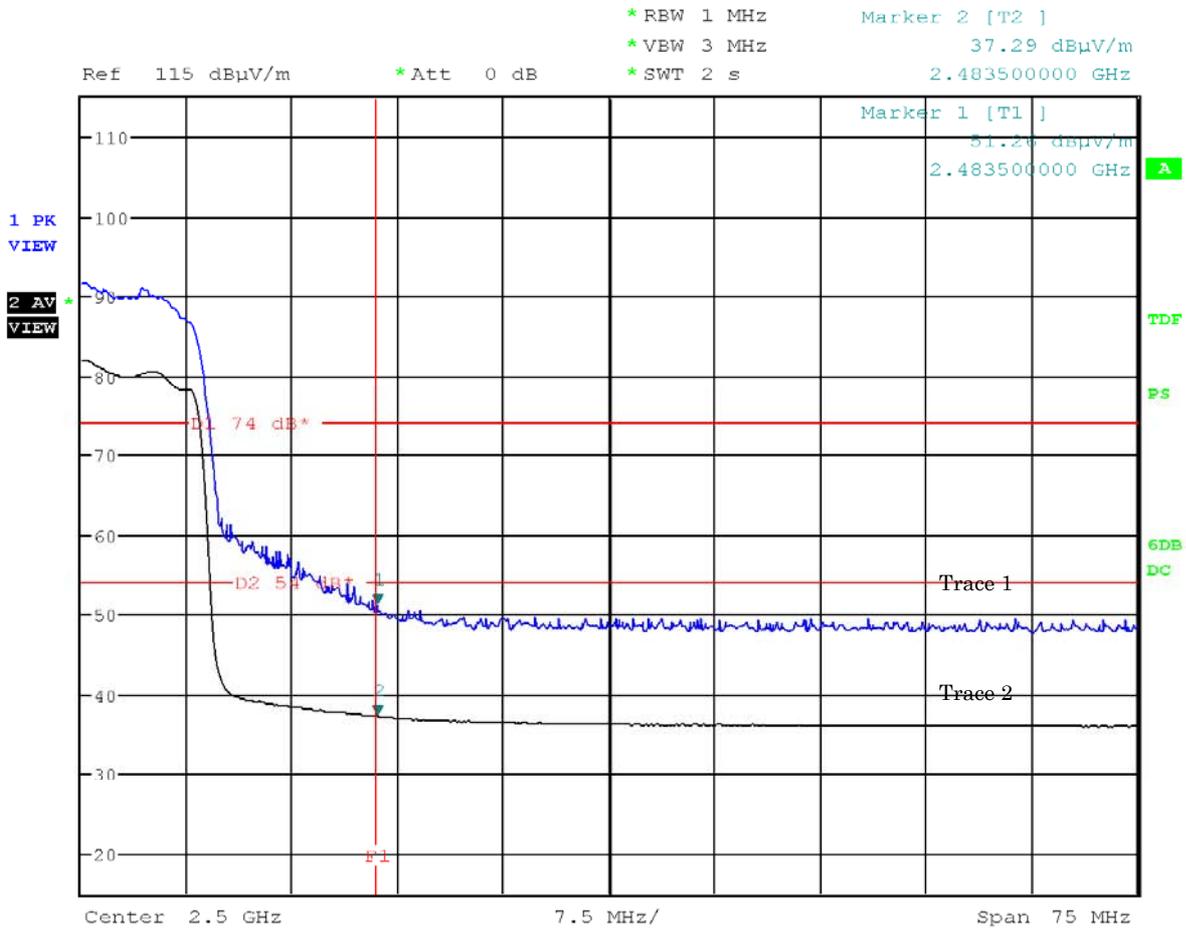

Note: The trace 1 is Peak detection. The trace 2 is Average detection.

**A.9.2 Other Spurious Emission**

**A.9.2.1 Other Spurious Emission(9kHz – 30MHz)**

Test Date : April 10, 2012

Temp.:22°C, Humi:50%

Mode of EUT : All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Results : No spurious emissions in the range 20dB below the limit.

**A.9.2.2 Other Spurious Emission(30MHz – 1000MHz)**


**A.9.2.2.1 AC Adapter used**

Mode of EUT : All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Test Date: April 10, 2012

Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
47.0	12.2	1.0	< 0.0	< 0.0	40.0	< 13.2	< 13.2	> +26.8	-
62.6	7.7	1.2	< 0.0	< 0.0	40.0	< 8.9	< 8.9	> +31.1	-
73.4	6.6	1.3	< 0.0	2.9	40.0	< 7.9	10.8	+29.2	-
150.0	14.8	2.0	< 0.0	< 0.0	43.5	< 16.8	< 16.8	> +26.7	-
200.0	16.4	2.3	< 0.0	< 0.0	43.5	< 18.7	< 18.7	> +24.8	-
500.0	17.6	3.8	< 0.0	< 0.0	46.0	< 21.4	< 21.4	> +24.6	-
1000.0	23.1	5.5	< 0.0	< 0.0	54.0	< 28.6	< 28.6	> +25.4	-

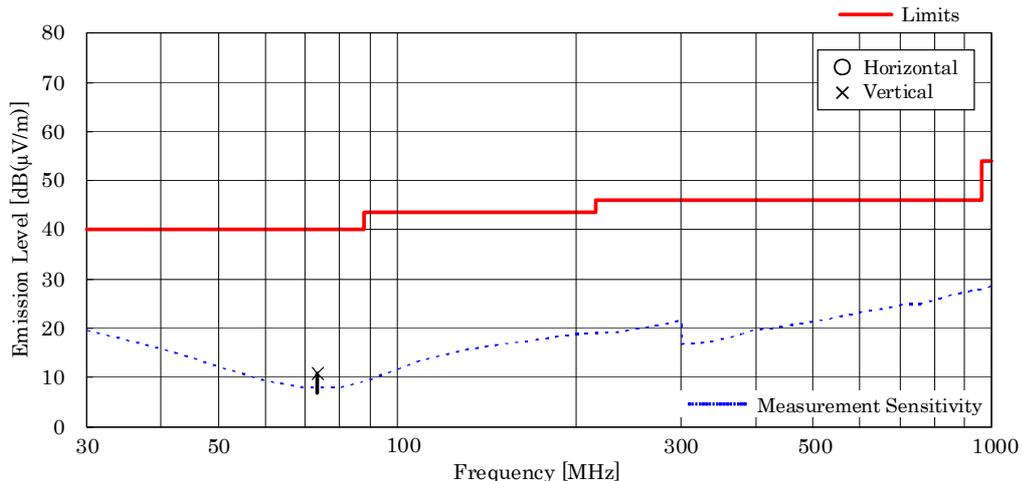

NOTES


1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 500.0 MHz, as the worst point shown on underline:  
Antenna Factor + Cable Loss + Meter Reading = 17.6 + 3.8 + <0.0 = <21.4 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

**A.9.2.2.2 Wireless Charger used**

Mode of EUT : All modes have been investigated and the worst case mode for channel (06ch: 2437MHz / IEEE802.11b, IEEE802.11g and IEEE802.11n) has been listed.

Test Date: April 10, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
36.4	16.2	0.9	8.9	18.6	40.0	26.0	35.7	+ 4.3	-
43.7	13.5	1.0	5.0	8.5	40.0	19.5	23.0	+17.0	-
79.3	6.5	1.4	19.0	16.9	40.0	26.9	24.8	+13.1	-
112.4	12.1	1.7	5.4	11.4	43.5	19.2	25.2	+18.3	-
147.2	14.7	1.9	7.1	4.1	43.5	23.7	20.7	+19.8	-
200.0	16.4	2.3	< 0.0	< 0.0	43.5	< 18.7	< 18.7	> +24.8	-
500.0	17.6	3.8	< 0.0	< 0.0	46.0	< 21.4	< 21.4	> +24.6	-
1000.0	23.1	5.5	< 0.0	< 0.0	54.0	< 28.6	< 28.6	> +25.4	-

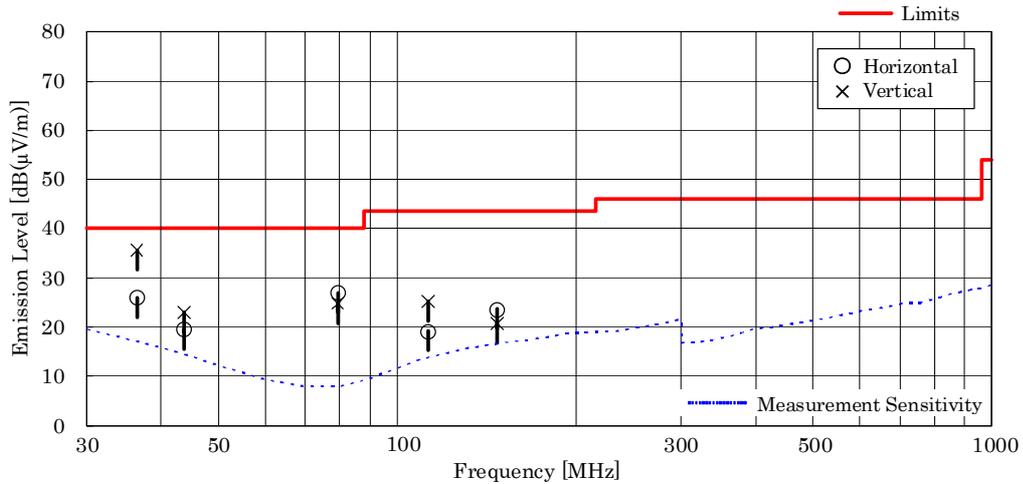

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 36.4 MHz, as the worst point shown on underline:  
Antenna Factor + Cable Loss + Meter Reading = 16.2 + 0.9 + 18.6 = 35.7 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

**A.9.2.3 Other Spurious Emission(Above 1000MHz)**

**A.9.2.3.1 Mode of TX**

**A.9.2.3.1.1 Single Unit**

**A.9.2.3.1.1.1 IEEE802.11b**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12060.0	33.6	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
19296.0	40.3	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.8	< 47.8	> + 6.2	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
7311.0	29.9	-19.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.3	< 40.3	> +13.7	A/B
12185.0	33.5	-27.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19496.0	40.2	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7386.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12310.0	33.5	-26.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.7	< 36.7	> +17.3	A/B
19696.0	40.3	-22.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
22158.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B

Calculated result at 22158.0 MHz, as the worst point shown on underline:

Antenna Factor	=	40.3 dB(1/m)
Corr. Factor	=	-21.6 dB
+) Meter Reading	=	<30.0 dB(μV)
Result	=	<48.7 dB(μV/m)

Minimum Margin: 54.0 - <48.7 = >5.3 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.1.1.2 IEEE802.11g**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12060.0	33.6	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
19296.0	40.3	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.8	< 47.8	> + 6.2	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
7311.0	29.9	-19.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.3	< 40.3	> +13.7	A/B
12185.0	33.5	-27.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19496.0	40.2	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7386.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12310.0	33.5	-26.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.7	< 36.7	> +17.3	A/B
19696.0	40.3	-22.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
22158.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B

Calculated result at 22158.0 MHz, as the worst point shown on underline:

Antenna Factor	=	40.3 dB(1/m)
Corr. Factor	=	-21.6 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<48.7 dB(μV/m)

Minimum Margin: 54.0 - <48.7 = >5.3 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.1.1.3 IEEE802.11n**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12060.0	33.6	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
19296.0	40.3	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.8	< 47.8	> + 6.2	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
7311.0	29.9	-19.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.3	< 40.3	> +13.7	A/B
12185.0	33.5	-27.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19496.0	40.2	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7386.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12310.0	33.5	-26.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.7	< 36.7	> +17.3	A/B
19696.0	40.3	-22.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
22158.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B

Calculated result at 22158.0 MHz, as the worst point shown on underline:  
 Antenna Factor = 40.3 dB(1/m)  
 Corr. Factor = -21.6 dB  
 +) Meter Reading = <30.0 dB(μV)  
 Result = <48.7 dB(μV/m)  
 Minimum Margin: 54.0 - <48.7 = >5.3 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of “<” means “or less”.
5. The symbol of “>” means “more than”.
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.1.2 Single Unit with Wireless Charger (WPC Mode)**

**A.9.2.3.1.2.1 IEEE802.11b**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12060.0	33.6	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
19296.0	40.3	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.8	< 47.8	> + 6.2	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
7311.0	29.9	-19.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.3	< 40.3	> +13.7	A/B
12185.0	33.5	-27.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19496.0	40.2	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7386.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12310.0	33.5	-26.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.7	< 36.7	> +17.3	A/B
19696.0	40.3	-22.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
22158.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B

Calculated result at 22158.0 MHz, as the worst point shown on underline:  
 Antenna Factor = 40.3 dB(1/m)  
 Corr. Factor = -21.6 dB  
 +) Meter Reading = <30.0 dB(μV)  
 Result = <48.7 dB(μV/m)  
 Minimum Margin: 54.0 - <48.7 = >5.3 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.1.2.2 IEEE802.11g**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12060.0	33.6	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
19296.0	40.3	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.8	< 47.8	> + 6.2	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
7311.0	29.9	-19.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.3	< 40.3	> +13.7	A/B
12185.0	33.5	-27.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19496.0	40.2	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7386.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12310.0	33.5	-26.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.7	< 36.7	> +17.3	A/B
19696.0	40.3	-22.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
22158.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B

Calculated result at 22158.0 MHz, as the worst point shown on underline:  
 Antenna Factor = 40.3 dB(1/m)  
 Corr. Factor = -21.6 dB  
 +) Meter Reading = <30.0 dB(μV)  
Result = <48.7 dB(μV/m)  
 Minimum Margin: 54.0 - <48.7 = >5.3 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of “<” means “or less”.
5. The symbol of “>” means “more than”.
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.1.2.3 IEEE802.11n**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
<b>Test condition : Tx Low Ch</b>												
4824.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12060.0	33.6	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.4	< 36.4	> +17.6	A/B
19296.0	40.3	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.8	< 47.8	> + 6.2	A/B
<b>Test condition : TX Middle Ch</b>												
4874.0	27.3	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
7311.0	29.9	-19.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.3	< 40.3	> +13.7	A/B
12185.0	33.5	-27.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19496.0	40.2	-22.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
<b>Test condition : TX High Ch</b>												
4924.0	27.3	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7386.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12310.0	33.5	-26.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.7	< 36.7	> +17.3	A/B
19696.0	40.3	-22.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.7	< 47.7	> + 6.3	A/B
22158.0	40.3	-21.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B

Calculated result at 22158.0 MHz, as the worst point shown on underline:

Antenna Factor	=	40.3 dB(1/m)
Corr. Factor	=	-21.6 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<48.7 dB(μV/m)

Minimum Margin: 54.0 - <48.7 = >5.3 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.2 Mode of RX**

**A.9.2.3.2.1 Single Unit**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
<b>Test condition : RX Middle Ch</b>												
2437.0	21.4	-21.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 39.5	< 29.5	> +24.5	A/B
4874.0	27.3	-21.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.8	< 35.8	> +18.2	A/B
7311.0	29.9	-19.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.0	< 40.0	> +14.0	A/B

Calculated result at 4874.0 MHz, as the worst point shown on underline:

Antenna Factor	=	27.3 dB(1/m)
Corr. Factor	=	-21.5 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<35.8 dB(μV/m)

Minimum Margin: 54.0 - <35.8 =>14.0 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**A.9.2.3.2.2 Single Unit with Wireless Charger (WPC mode)**

Test Date: April 16, 2012  
Temp.: 20 °C, Humi: 55 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
<b>Test condition : RX Middle Ch</b>												
2437.0	21.4	-21.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 39.5	< 29.5	> +24.5	A/B
4874.0	27.3	-21.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.8	< 35.8	> +18.2	A/B
7311.0	29.9	-19.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.0	< 40.0	> +14.0	A/B

Calculated result at 4874.0 MHz, as the worst point shown on underline:

Antenna Factor = 27.3 dB(1/m)

Corr. Factor = -21.5 dB

+ ) Meter Reading = <30.0 dB(μV)

Result = <35.8 dB(μV/m)

Minimum Margin: 54.0 - <35.8 = >14.0 (dB)

**NOTES**

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	1 MHz	AUTO
B	Peak	1 MHz	10 Hz	AUTO

**Appendix C: Test Instruments**

**C.1 Channel Separation**

Not Applicable

**C.2 Minimum Hopping Channel**

Not Applicable

**C.3 Occupied Bandwidth**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.4 Dwell Time**

Not Applicable

**C.5.1 Peak Output Power (Conduction)**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.5.2 Peak Output Power Density (Conduction)**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.6 Spurious Emission (Conduction)**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2011/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2011/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year

**C.7 AC Power Conducted Emission**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESCI	Rohde & Schwarz	A-42	2011/12	1 Year
AMN (main)	ESH3-Z5	Rohde & Schwarz	D-12	2011/8	1 Year
RF Cable	RG223/U	SUHNER	H-35	2011/6	1 Year

**C.8 Radiated Emission**

**C.8.1 Radiated Emission 9 kHz – 30 MHz**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2012/4	1 Year
Loop Antenna	HFH2-Z2	Rohde & Schwarz	C-2	2011/8	1 Year
RF Cable	RG213/U	SUHNER	H-28	2011/8	1 Year

**C.8.2 Radiated Emission 30MHz – 1000 MHz**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2012/4	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2011/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2011/5	1 Year
RF Cable	S 10162 B-11 etc.	SUHNER	H-4	2012/3	1 Year
Site Attenuation	--	----	H-15	2012/2	1 Year

**C.8.3 Radiated Emission Above 1000 MHz**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2012/4	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2012/1	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2012/1	1 Year
Pre-Amplifier	BZ1840LD1	B&Z	A-29	2012/1	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2012/1	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2011/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2011/6	1 Year
Horn Antenna	3160-04	EMCO	C-55	2011/6	2 Years
Horn Antenna	3160-05	EMCO	C-56	2011/6	2 Years
Horn Antenna	3160-06	EMCO	C-57	2011/6	2 Years
Horn Antenna	3160-07	EMCO	C-58	2011/6	2 Years
Horn Antenna	3160-08	EMCO	C-59	2011/6	2 Years
Horn Antenna	3160-09	EMCO	C-48	2011/6	2 Years
Attenuator	54A-10	Weinschel	D-29	2011/9	1 Year
Attenuator	2-10	Weinschel	D-79	2011/11	1 Year
Band Rejection Filter	BRM50701	MICRO-TRONICS	D-93	2012/2	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2011/6	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-66	2012/1	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-67	2012/1	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2012/1	1 Year
SVSWR	--	----	H-19	2012/2	1 Year