



Product Service

**Choose certainty.
Add value.**

Report On

Limited FCC Testing of the
Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band
GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with
Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00171

Document 75917027 Report 07 Issue 1

June 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North, Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

Limited FCC Testing of the
Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band
GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with
Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)

Document 75917027 Report 07 Issue 1

June 2012

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY



Natalie Bennett
Senior Administrator (Technical)

APPROVED BY



Mark Jenkins
Authorised Signatory

DATED

21 June 2012


ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);



G Lawler



B Airs





CONTENTS

| Section | Page No |
|----------|--|
| 1 | REPORT SUMMARY 3 |
| 1.1 | Introduction 4 |
| 1.2 | Brief Summary of Results 5 |
| 1.3 | Application Form 6 |
| 1.4 | Product Information 11 |
| 1.5 | Test Conditions 11 |
| 1.6 | Deviations from the Standard 11 |
| 1.7 | Modification Record 11 |
| 2 | TEST DETAILS 12 |
| 2.1 | AC Line Conducted Emissions 13 |
| 2.2 | Frequency Hopping Systems - 20dB Bandwidth and Channel Separation 16 |
| 2.3 | Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels 24 |
| 2.4 | Maximum Peak Conducted Output Power 31 |
| 2.5 | EIRP Peak Power 33 |
| 2.6 | Spurious and Band Edge Emissions 37 |
| 3 | TEST EQUIPMENT USED 50 |
| 3.1 | Test Equipment Used 51 |
| 3.2 | Measurement Uncertainty 54 |
| 4 | ACCREDITATION, DISCLAIMERS AND COPYRIGHT 55 |
| 4.1 | Accreditation, Disclaimers and Copyright 56 |



Product Service

SECTION 1

REPORT SUMMARY

Limited FCC Testing of the
Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900
MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Limited FCC Testing of the Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS to the requirements of FCC CFR 47 Part 15C.

| | |
|--------------------------------|---|
| Objective | To perform Limited FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out. |
| Manufacturer | Sharp Corporation |
| Model Number(s) | CDMA SHI15 |
| Serial Number(s) | IMEI 004401114000157 IMEI 004401114000314 |
| Number of Samples Tested | 2 |
| Test Specification/Issue/Date | FCC CFR 47 Part 15C (2011) |
| Incoming Release Date | Application Form 02 May 2012 |
| Disposal Reference Number Date | Held Pending Disposal Not Applicable Not Applicable |
| Order Number Date | 9100 02 April 2012 |
| Start of Test | 20 May 2012 |
| Finish of Test | 31 May 2012 |
| Name of Engineer(s) | G Lawler B Airs |
| Related Document(s) | ANSI C63.10: 2009 |



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15C is shown below.

| Section | Spec Clause | Test Description | Result | Comments/Base Standard |
|-----------|--------------------|---|--------|------------------------|
| Bluetooth | | | | |
| 2.1 | 15.207 | AC Line Conducted Emissions | Pass | |
| 2.2 | 15.247 (a)(1) | Frequency Hopping Systems - 20dB Bandwidth and Channel Separation | Pass | |
| 2.3 | 15.247 (a)(1)(iii) | Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels | Pass | |
| 2.4 | 15.247 (b)(3) | Maximum Peak Conducted Output Power | Pass | |
| 2.5 | 15.247 (b)(4) | EIRP Peak Power | Pass | |
| 2.6 | 15.247 (d) | Spurious and Band Edge Emissions | Pass | |



Product Service

1.3 APPLICATION FORM

| EQUIPMENT DESCRIPTION | |
|---|---|
| Model Name/Number | CDMA SHI15 |
| Part Number | |
| FCC ID (if applicable) | APYHRO00171 |
| Industry Canada ID (if applicable) | |
| Technical Description (Please provide a brief description of the intended use of the equipment) | Dual-Band CDMA(800MHz_BC0, 1900MHz_BC6) and Tri-Band GSM (GSM900MHz, DCS1800MHz, PCS1900MHz) Dual- Mode Cellular Phone with Bluetooth, W-LAN, SRD(FeliCa) and GPS receiver enabled. |

| EXTREME TEMPERATURE RANGE over which the equipment is to be type tested | |
|---|--|
| <input type="checkbox"/> | -20°C to +55°C |
| <input checked="" type="checkbox"/> | Other (2) |
| <input type="checkbox"/> | Not applicable (no extreme temperature testing required) |
| Extreme temperature range for the host(s): -20C to +60C | |

(2) The equipment shall be tested over the following temperature ranges :

- a) 0°C to +35°C for equipment for indoor use only, or intended for used in areas where the temperature is controlled within this range.
- b) Over the extremes of the temperature range(s) of the declared host equipment(s) in case of plug-in radio devices.

| TYPE OF ANTENNA | |
|--|---|
| <input checked="" type="checkbox"/> | Integral |
| Temporary RF connector provided: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | |
| <input type="checkbox"/> | Antenna connector |
| <input type="checkbox"/> | Number of antenna assembly(ies) submitted |
| Gain of the antenna intended for normal use: | |
| 0 | dBi for assembly identified as Bluetooth |
| 0 | dBi for assembly identified as WLAN |
| | dBi for assembly identified as |
| | dBi for assembly identified as |
| | dBi for assembly identified as |

| TRANSMITTER TECHNICAL CHARACTERISTICS | | |
|---|----------------------------|------------------|
| TRANSMITTER OPERATING FREQUENCY RANGE(S) | | |
| | FCC and/or Industry Canada | EU |
| Bluetooth | 2402 to 2480 MHz | 2402 to 2480 MHz |
| WLAN | 2412 to 2462 MHz | 2412 to 2472 MHz |
| FCC and/or Industry Canada (only) | | |
| Highest Internally Generated Frequency 1401.6 MHz | | |



| SPREAD SPECTRUM PARAMETERS | | |
|--|---|-------------------------|
| <input checked="" type="checkbox"/> Bluetooth | | |
| FHSS: Channel <input checked="" type="checkbox"/> 79 Other <input type="checkbox"/> | EDR <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No | |
| Medium Access Protocol (Customer Declaration) | | |
| "We have implemented Bluetooth protocol which satisfies the medium access protocol requirement of EN 300 328". | | |
| <input checked="" type="checkbox"/> WLAN | | |
| IEEE 802.11(b) – DSSS <input checked="" type="checkbox"/> | | |
| IEEE 802.11(g) – OFDM <input checked="" type="checkbox"/> | | |
| IEEE 802.11(n) – OFDM <input checked="" type="checkbox"/> | | |
| Supported Spatial Streams | 2.4 GHz | 5GHz |
| Transmitter (Tx) | Yes | (No: Japan only) |
| Receiver (Rx) | Yes | (No: Japan only) |
| GI (Guard Interval) <input checked="" type="checkbox"/> 800 ns <input type="checkbox"/> 400 ns | | |
| Band Width <input checked="" type="checkbox"/> 20 MHz <input type="checkbox"/> 40 MHz | | |
| <input type="checkbox"/> Other Technology | | |
| Direct Sequence <input type="checkbox"/> Frequency Hopping <input type="checkbox"/> Combined <input type="checkbox"/> Other <input type="checkbox"/> | | |
| DSSS | Chip Sequence Length | 48 bit |
| | Spectrum Width | MHz |
| FHSS | Total Number of Hops | |
| | Dwell Time | ms |
| | Bandwidth Per Hop | MHz |
| | Maximum Separation of Hops | MHz for ETSI EN 300 328 |
| Other | | |
| Medium Access Protocol (Customer Declaration) | | |
| "We have implemented IEEE 802.11 (b/g/n) protocol which satisfies the medium access protocol requirement of EN 300 328". | | |



| TRANSMITTER POWER CHARACTERISTICS | | | | |
|---|-------------------------------------|-----------------------|-------------------------------------|---------|
| Bluetooth | | | | |
| Maximum Rated Transmitter Output | | | | |
| Effective radiated power (for equipment with antenna connector) | 0.004 | W | | |
| Effective radiated power (for equipment with integral antenna) | 0.004 | W | | |
| Minimum Rated Transmitter Output | | | | |
| Effective radiated power (for equipment with antenna connector) | 0.0004 | W | | |
| Effective radiated power (for equipment with integral antenna) | 0.0004 | W | | |
| Is transmitter intended for : | | | | |
| Continuous duty | <input checked="" type="checkbox"/> | Yes | <input type="checkbox"/> | No |
| Intermittent duty | <input type="checkbox"/> | Yes | <input checked="" type="checkbox"/> | No |
| If intermittent state DUTY CYCLE | | | | |
| Transmitter ON | seconds | Transmitter OFF | minutes | |
| Is continuous operation possible for testing purposes? | | | | |
| | <input checked="" type="checkbox"/> | Yes | <input type="checkbox"/> | No |
| Is transmitter output power variable: | | | | |
| | <input type="checkbox"/> | Yes | <input checked="" type="checkbox"/> | No |
| State during the test: | | | | |
| Transmitter duty cycle | Tx on | Seconds | Tx Off | Seconds |
| Duty cycle (Tx on / (Tx on + Tx off)) | | | | |
| | <input type="checkbox"/> | Continuously variable | <input type="checkbox"/> | Stepped |
| | dB per step | | | |
| WLAN | | | | |
| Maximum Rated Transmitter Output | | | | |
| Effective radiated power (for equipment with antenna connector) | 0.08 (b/0.04(g.n)) | W | | |
| Effective radiated power (for equipment with integral antenna) | 0.08 (b/0.04(g/n)) | W | | |
| Minimum Rated Transmitter Output | | | | |
| Effective radiated power (for equipment with antenna connector) | | W | | |
| Effective radiated power (for equipment with integral antenna) | | W | | |
| Is transmitter intended for : | | | | |
| Continuous duty | <input checked="" type="checkbox"/> | Yes | <input type="checkbox"/> | No |
| Intermittent duty | <input type="checkbox"/> | Yes | <input type="checkbox"/> | No |
| If intermittent state DUTY CYCLE | | | | |
| Transmitter ON | seconds | Transmitter OFF | minutes | |
| Is continuous operation possible for testing purposes? | | | | |
| | <input checked="" type="checkbox"/> | Yes | <input type="checkbox"/> | No |
| Is transmitter output power variable: | | | | |
| | <input type="checkbox"/> | Yes | <input checked="" type="checkbox"/> | No |
| State during the test: | | | | |
| Transmitter duty cycle | Tx on | Seconds | Tx Off | Seconds |
| Duty cycle (Tx on / (Tx on + Tx off)) | | | | |
| | <input type="checkbox"/> | Continuously variable | <input type="checkbox"/> | Stepped |
| | dB per step | | | |



| TRANSMITTER POWER SOURCE (3) | | | |
|--|------|--------------------------------------|-------------------|
| <input checked="" type="checkbox"/> Common power source for transmitter and receiver | | | |
| <input type="checkbox"/> AC mains | | | |
| AC supply frequency | (Hz) | State voltage VAC | Max Current Hz |
| <input type="checkbox"/> Single phase | | <input type="checkbox"/> Three phase | |
| And / Or | | | |
| <input type="checkbox"/> External DC supply | | | |
| Nominal voltage | | Max Current A | |
| Extreme upper voltage | | Extreme lower voltage | |
| Battery | | | |
| <input type="checkbox"/> Nickel Cadmium | | | |
| <input type="checkbox"/> Lead acid (Vehicle regulated) | | | |
| <input type="checkbox"/> Alkaline | | | |
| <input checked="" type="checkbox"/> Lithium | | | |
| <input type="checkbox"/> Other Details : | | | |
| 4.0 Volts nominal. | | | |
| End point voltage as quoted by equipment manufacturer | | 3.7 V | |

(3) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

| AUTOMATIC EQUIPMENT SWITCH OFF | |
|--|-----------------------|
| If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated. | |
| <input checked="" type="checkbox"/> Applies | 3.4 V cut-off voltage |
| <input type="checkbox"/> Does not apply | |



Product Service

| RECEIVER POWER SOURCE (4) | | | | |
|--|----------------|--------------------------------------|-------------|----|
| <input type="checkbox"/> AC mains | State voltage | | | |
| AC supply frequency | (Hz) | VAC | Max Current | Hz |
| <input type="checkbox"/> Single phase | | <input type="checkbox"/> Three phase | | |
| And / Or | | | | |
| <input type="checkbox"/> External DC supply | | | | |
| Nominal voltage | | Max Current | | A |
| Extreme upper voltage | | Extreme lower voltage | | |
| Battery | | | | |
| <input type="checkbox"/> Nickel Cadmium | | | | |
| <input type="checkbox"/> Lead acid (Vehicle regulated) | | | | |
| <input type="checkbox"/> Alkaline | | | | |
| <input type="checkbox"/> Lithium | | | | |
| <input type="checkbox"/> Other Details : | | | | |
| | Volts nominal. | | | |
| End point voltage as quoted by equipment manufacturer | | | | V |

(4) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

| AUTOMATIC EQUIPMENT SWITCH OFF | |
|--|-------------------|
| If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated. | |
| <input type="checkbox"/> Applies | V cut-off voltage |
| <input type="checkbox"/> Does not apply | |

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature: *Satomi Amaki* Name: Satomi Amaki
 Position held: Manager Date: 2nd May,2012



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

Limited FCC Testing of the
Sharp CDMA SH115 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900
MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)



2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.207

2.1.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000157 - Modification State 0

2.1.3 Date of Test

22 May 2012

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.


2.1.6 Environmental Conditions

| | |
|---------------------|--------|
| Ambient Temperature | 18.9°C |
| Relative Humidity | 47.0% |



2.1.7 Test Results


Live Line

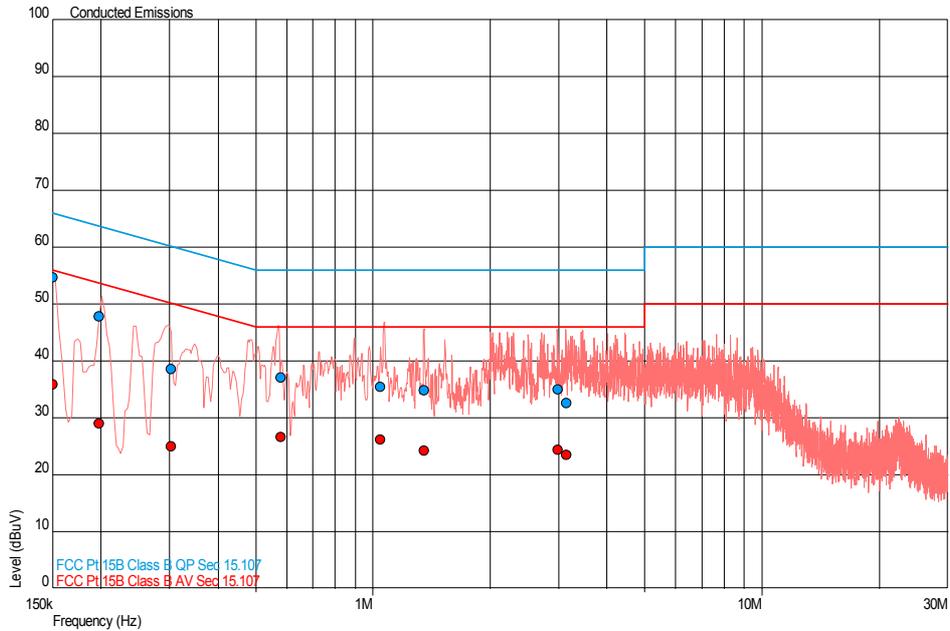

| Frequency (MHz) | QP Level (dBµV) | QP Limit (dBµV) | QP Margin (dBµV) | AV Level (dBµV) | AV Limit (dBµV) | AV Margin (dBµV) |
|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|
| 0.150 | 54.8 | 66.0 | -11.2 | 35.9 | 56.0 | -20.1 |
| 0.198 | 47.9 | 63.7 | -15.8 | 29.1 | 53.7 | -24.6 |
| 0.303 | 38.6 | 60.2 | -21.6 | 25.0 | 50.2 | -25.2 |
| 0.581 | 37.1 | 56.0 | -18.9 | 26.6 | 46.0 | -19.4 |
| 1.047 | 35.5 | 56.0 | -20.5 | 26.1 | 46.0 | -19.9 |
| 1.351 | 34.8 | 56.0 | -21.2 | 24.3 | 46.0 | -21.7 |
| 2.991 | 35.1 | 56.0 | -20.9 | 24.3 | 46.0 | -21.7 |
| 3.150 | 32.6 | 56.0 | -23.4 | 23.5 | 46.0 | -22.5 |



Neutral Line

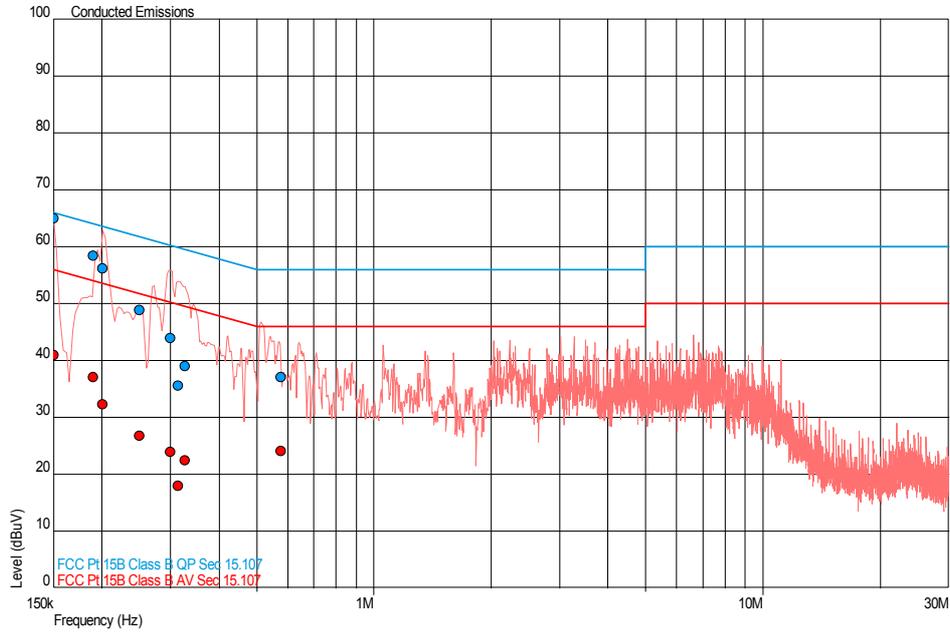

| Frequency (MHz) | QP Level (dBμV) | QP Limit (dBμV) | QP Margin (dBμV) | AV Level (dBμV) | AV Limit (dBμV) | AV Margin (dBμV) |
|-----------------|-----------------|-----------------|------------------|-----------------|-----------------|------------------|
| 0.150 | 64.9 | 66.0 | -1.1 | 40.9 | 56.0 | -15.1 |
| 0.190 | 58.5 | 64.0 | -5.6 | 37.1 | 54.0 | -17.0 |
| 0.201 | 56.2 | 63.6 | -7.4 | 32.3 | 53.6 | -21.3 |
| 0.250 | 48.9 | 61.8 | -12.8 | 26.8 | 51.8 | -25.0 |
| 0.299 | 44.0 | 60.3 | -16.3 | 24.0 | 50.3 | -26.3 |
| 0.314 | 35.5 | 59.9 | -24.3 | 18.0 | 49.9 | -31.9 |
| 0.328 | 39.0 | 59.5 | -20.5 | 22.4 | 49.5 | -27.1 |
| 0.577 | 37.1 | 56.0 | -18.9 | 24.1 | 46.0 | -21.9 |



Product Service

2.2 FREQUENCY HOPPING SYSTEMS - 20DB BANDWIDTH AND CHANNEL SEPARATION

2.2.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)

2.2.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000314 - Modification State 0

2.2.3 Date of Test

31 May 2012

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen. The peak point of the trace was measured and the markers positioned to give the -20dBc points of the displayed spectrum.

The EUT was transmitted at maximum power into a Spectrum Analyser. The trace was set to Max Hold to store several adjacent channels on screen. Using the marker delta function, the markers were positioned to show the separation between adjacent channels.

2.2.6 Environmental Conditions

| | |
|---------------------|--------|
| Ambient Temperature | 22.6°C |
| Relative Humidity | 43.0% |



Product Service

2.2.7 Test Results


4.0 V DC Supply

20dB Bandwidth

2402 MHz

| Data Rate (Mbps) | 20dB Bandwidth (kHz) |
|------------------|----------------------|
| DH1 | 1020 |
| DH3 | 930 |
| DH5 (worst) | 930 |


DH1

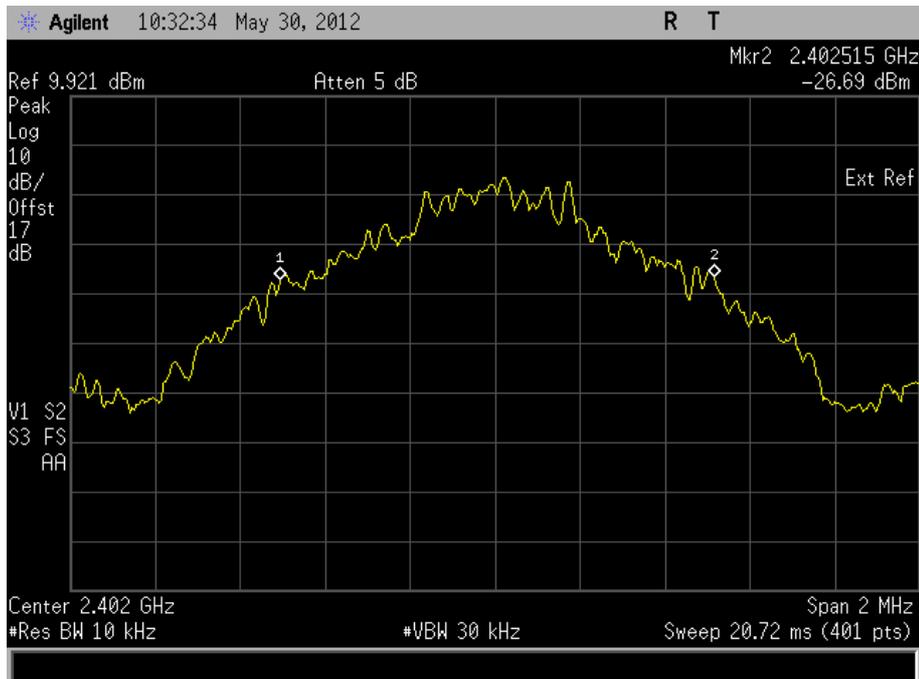




Product Service

DH3

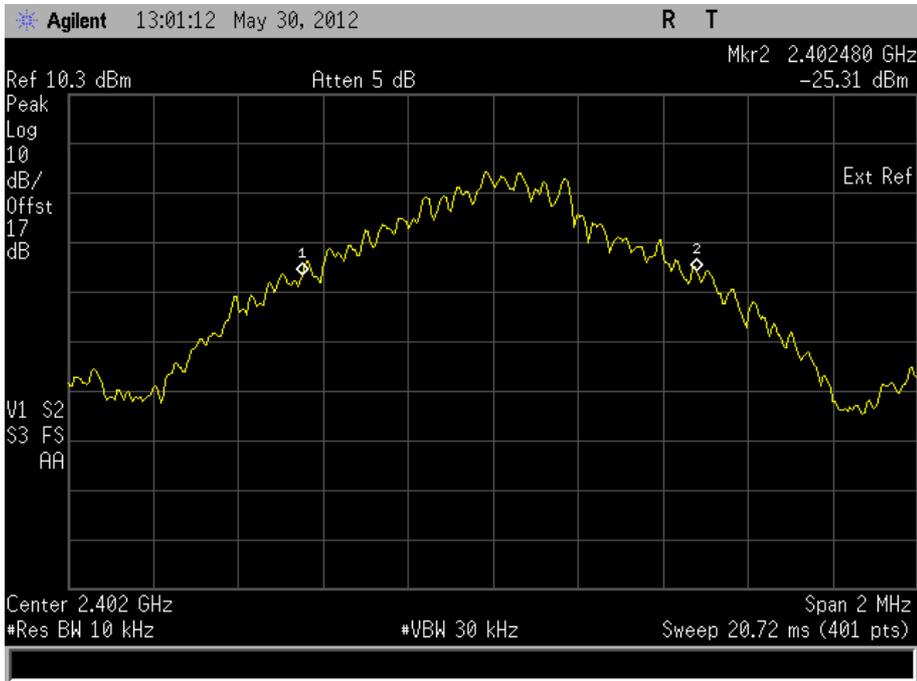

DH5 (worst)

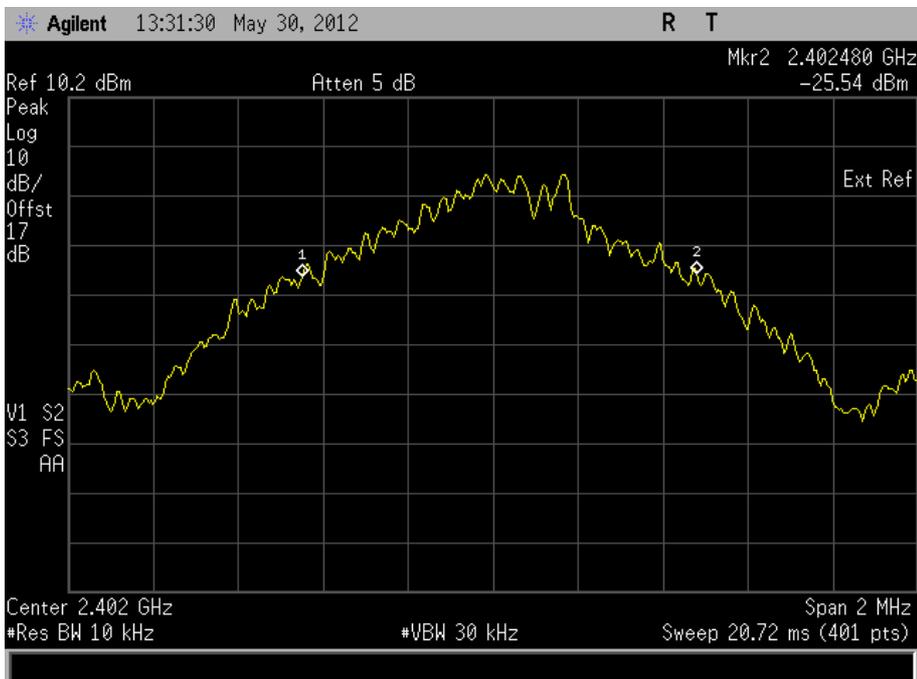




Product Service

2441 MHz

| Data Rate (Mbps) | 20dB Bandwidth (kHz) |
|------------------|----------------------|
| DH1 | 1020 |
| DH3 | 930 |
| DH5 (worst) | 930 |


DH1

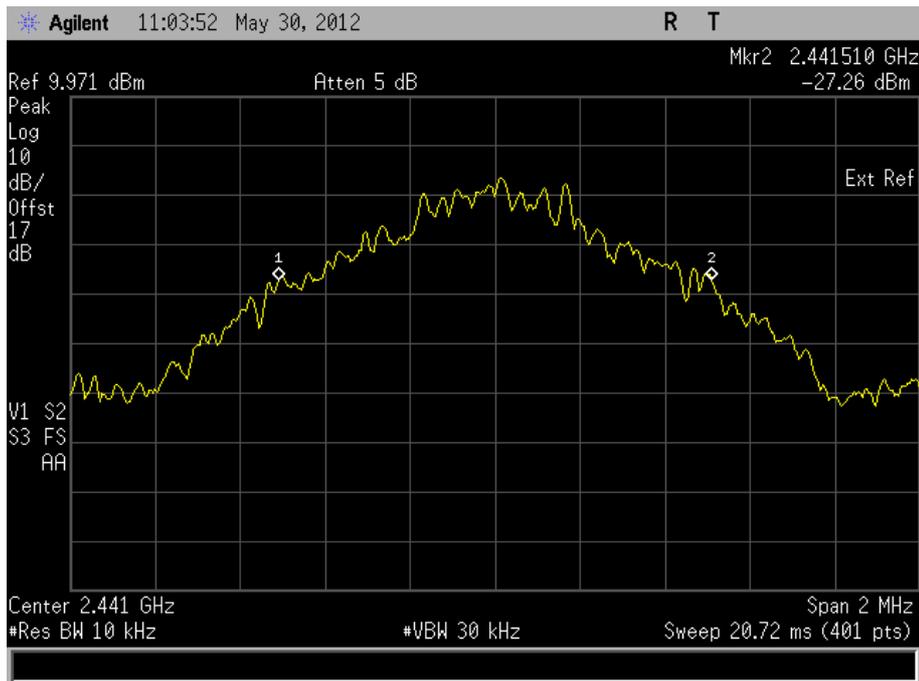




Product Service

DH3

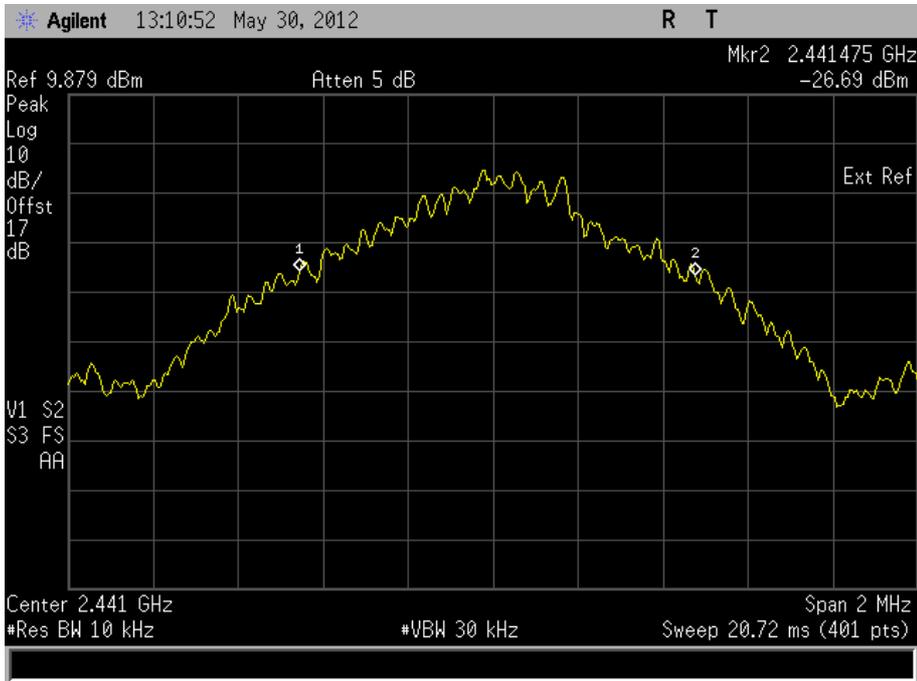

DH5 (worst)

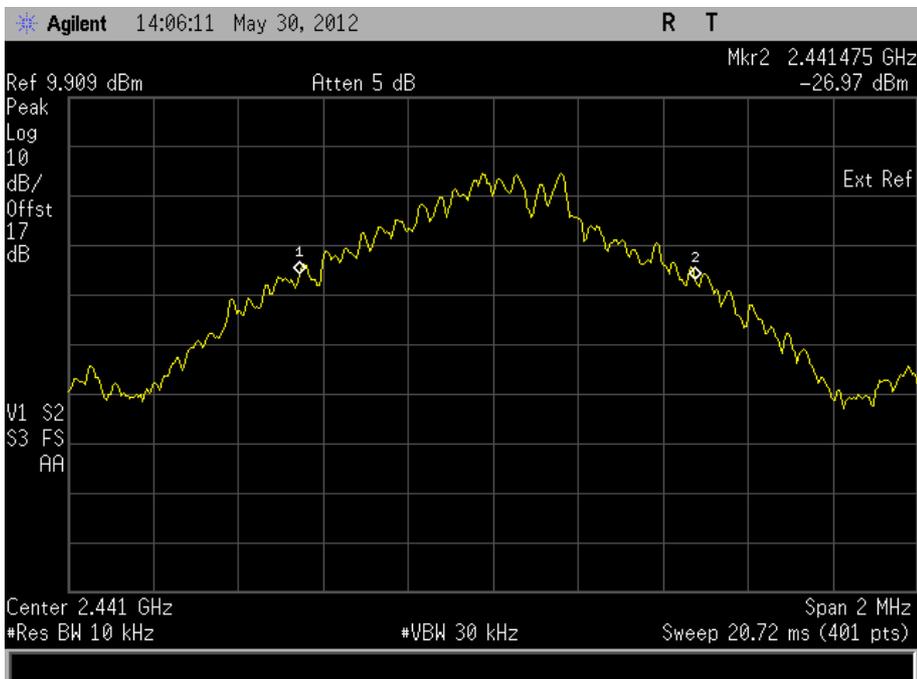




Product Service

2480 MHz

| Data Rate (Mbps) | 20dB Bandwidth (kHz) |
|------------------|----------------------|
| DH1 | 1025 |
| DH3 | 935 |
| DH5 (worst) | 935 |


DH1

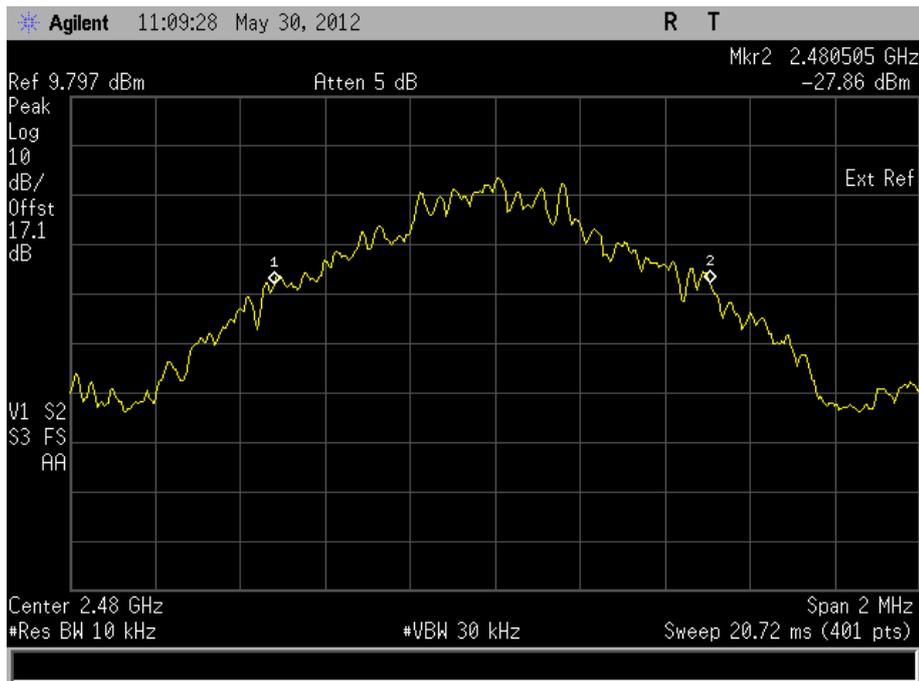




Product Service

DH3

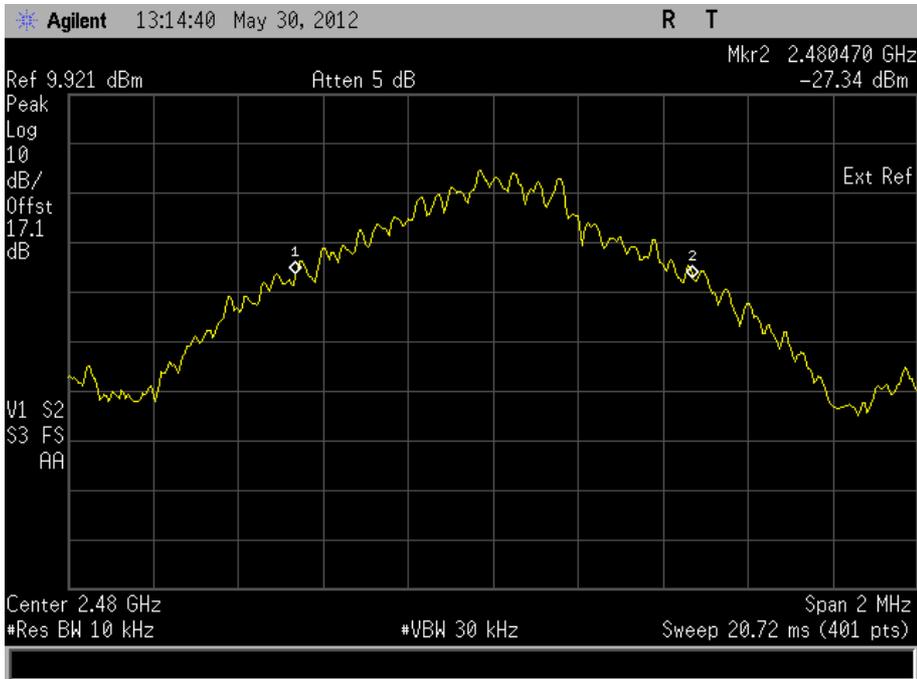

DH5 (worst)

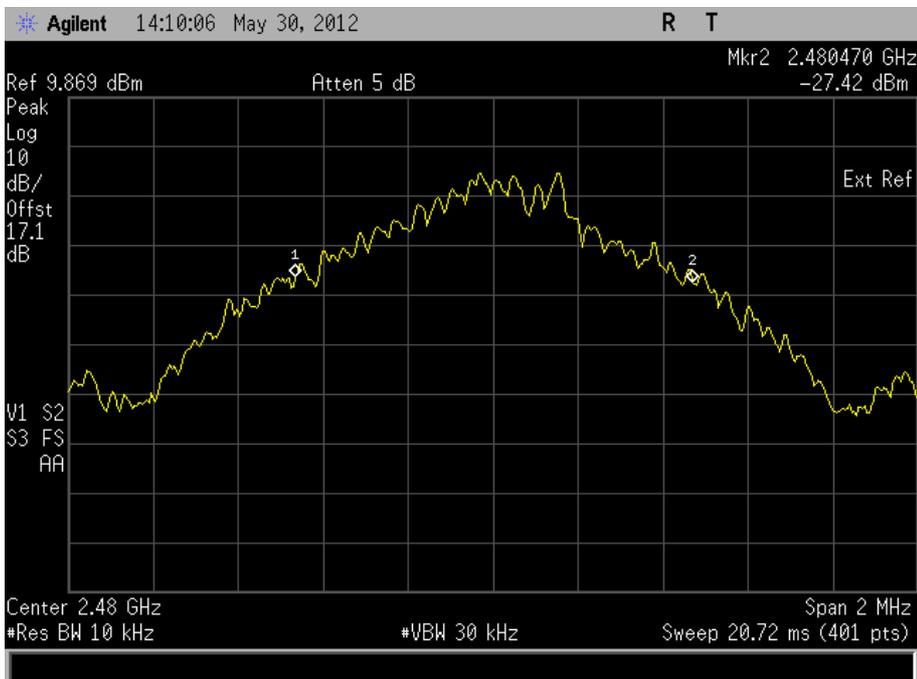


Limit Clause

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.



Product Service

Channel Separation

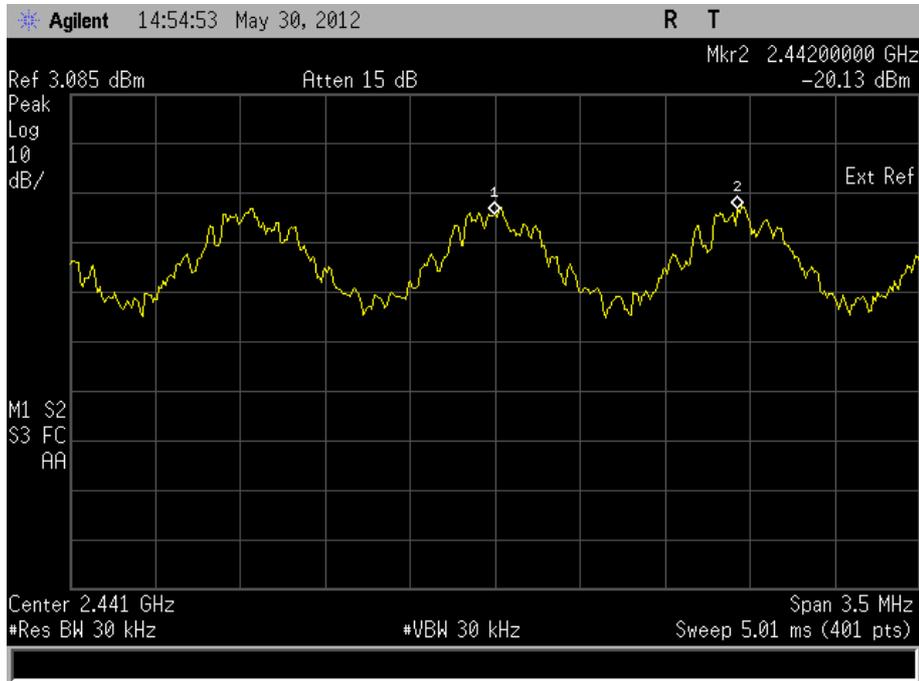

Limit Clause

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



Product Service

2.3 FREQUENCY HOPPING SYSTEMS - CHANNEL DWELL TIME AND NUMBER OF HOPPING CHANNELS

2.3.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)(iii)

2.3.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000314 - Modification State 0

2.3.3 Date of Test

31 May 2012

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

DH1


The Bluetooth system hops at a rate of 1600 times per second. Thus, this equates to 1600 timeslots in 1 second.

The DH1 data rate operates on a Transmit on 1 timeslot and Receive on 1 timeslot basis. Thus, in 1 second, there are 800 Transmit timeslots and 800 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

In 1 transmit timeslot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

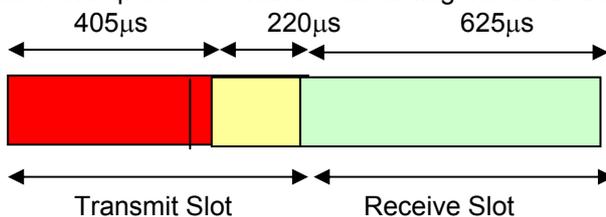



Product Service

DH1 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle

So, with 800 Tx and 800 Rx timeslots, the transmitter is on for $800 \times 405\mu\text{s} = 0.324$ seconds.

$$\therefore \frac{\text{Total Tx Time On}}{\text{No of Channels}} = \frac{0.324}{80} = 4.05\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 4.05\text{ms} = 0.1296 \text{ seconds}$$

DH3


With data rate DH3, the data payload is higher and can use up to 3 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 3 slots, (ie. no receive slot in-between the 3 transmit slots). The $220\mu\text{s}$ off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 3 transmit timeslots. 2 are $625\mu\text{s}$ long and the final slot is transmitting for $405\mu\text{s}$.

The DH3 data rate operates on a Transmit on 3 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1200 Transmit timeslots and 400 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

The first 2 Transmit timeslots are transmitting for the complete $625\mu\text{s}$. In the third transmit slot, the transmit on time is only $405\mu\text{s}$. $220\mu\text{s}$ is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

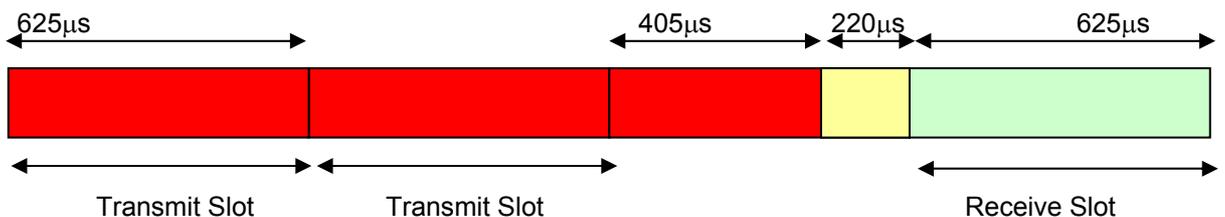



Product Service

DH3 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) = 1.655\text{ms}$$

So:

$$\begin{aligned} 800 \times 625\mu\text{s} &= 0.5 \text{ seconds} \\ 400 \times 405\mu\text{s} &= 0.162 \text{ seconds} \end{aligned}$$

Thus: $0.5 + 0.162 = 0.662 \text{ seconds}$

$$\therefore \frac{\text{Total Tx Time On}}{\text{No Of Channels}} = \frac{0.662}{80} = 8.275\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 8.275\text{ms} = 0.2648 \text{ seconds}$$

DH5


With data rate DH5, the data payload is higher and can use up to 5 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 5 slots, (ie. no receive slot in-between the 5 transmit slots). The 220µs off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 5 transmit timeslots. 4 are 625µs long and the final slot is transmitting for 405µs.

The DH5 data rate operates on a Transmit on 5 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1333.3 Transmit timeslots and 266.7 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

The first 4 Transmit timeslots are transmitting for the complete 625µs. In the fifth transmit slot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

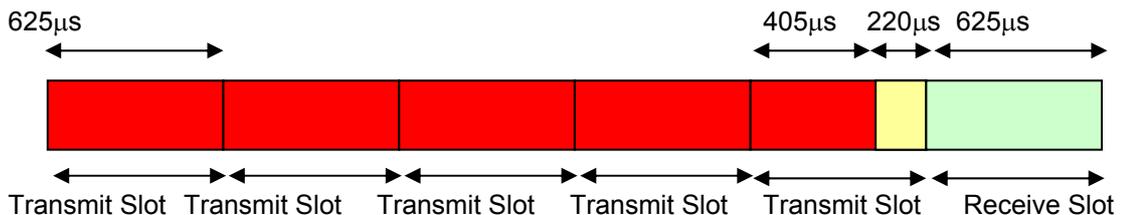



Product Service

DH5 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) \quad = \quad 2.905\text{ms}$$

So:

$$1066.7 \times 625\mu\text{s} \quad = \quad 0.666 \text{ seconds}$$

$$266.7 \times 405\mu\text{s} \quad = \quad 0.108 \text{ seconds}$$

$$\text{Thus:} \quad 0.666 + 0.108 = 0.774 \text{ seconds}$$

$$\therefore \quad \frac{\text{Total Tx Time On}}{\text{No Of Channels}} \quad = \quad \frac{0.774}{80} \quad = \quad 9.675\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 9.675\text{ms} = \quad 0.31 \text{ seconds}$$

2.3.6 Environmental Conditions

Ambient Temperature 22.6°C

Relative Humidity 43.0%



Product Service


2.3.7 Test Results

4.0 V DC Supply

Channel Dwell Time

DH1

0.387 ms

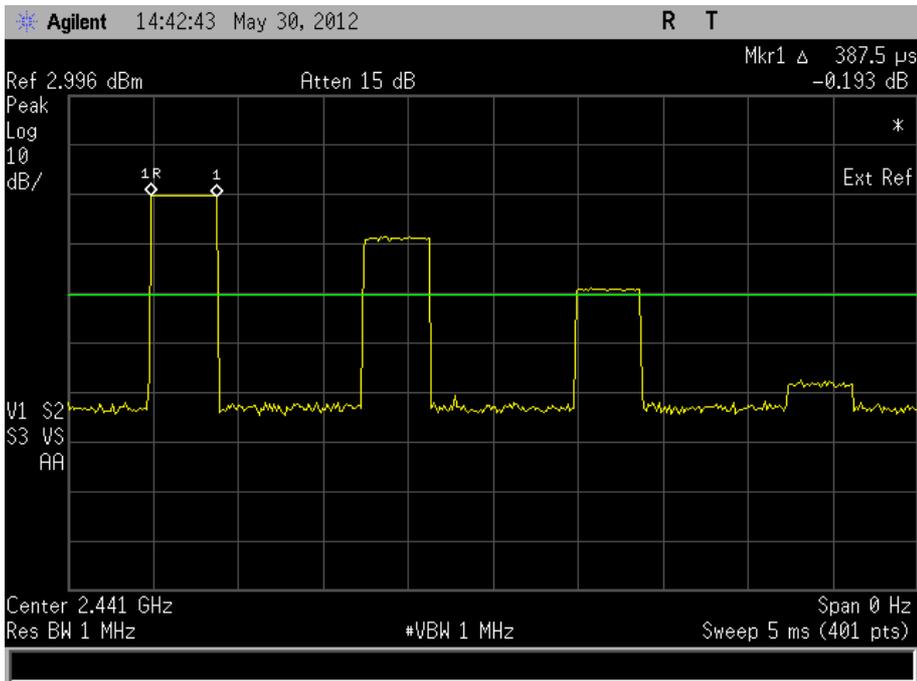




Product Service


DH3

0.387 ms

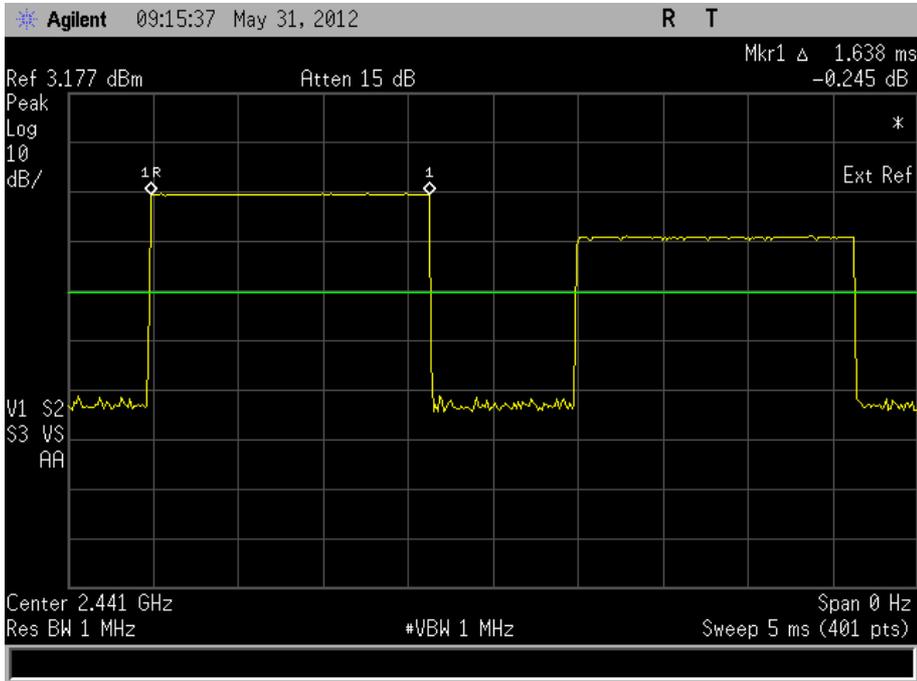

DH5

2.9 ms

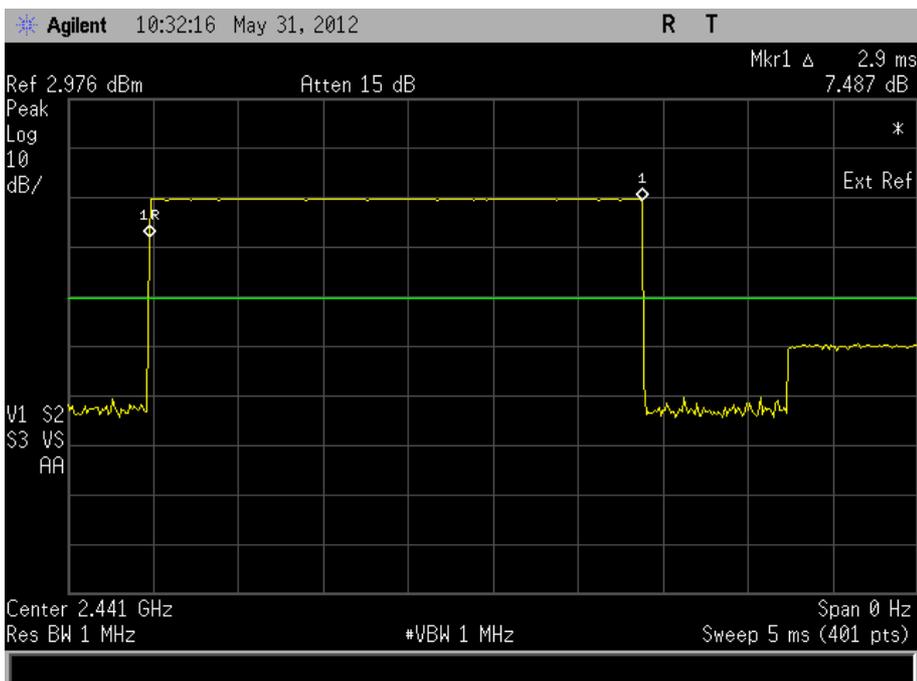




Product Service

Limit

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Number of Hopping Channels

79

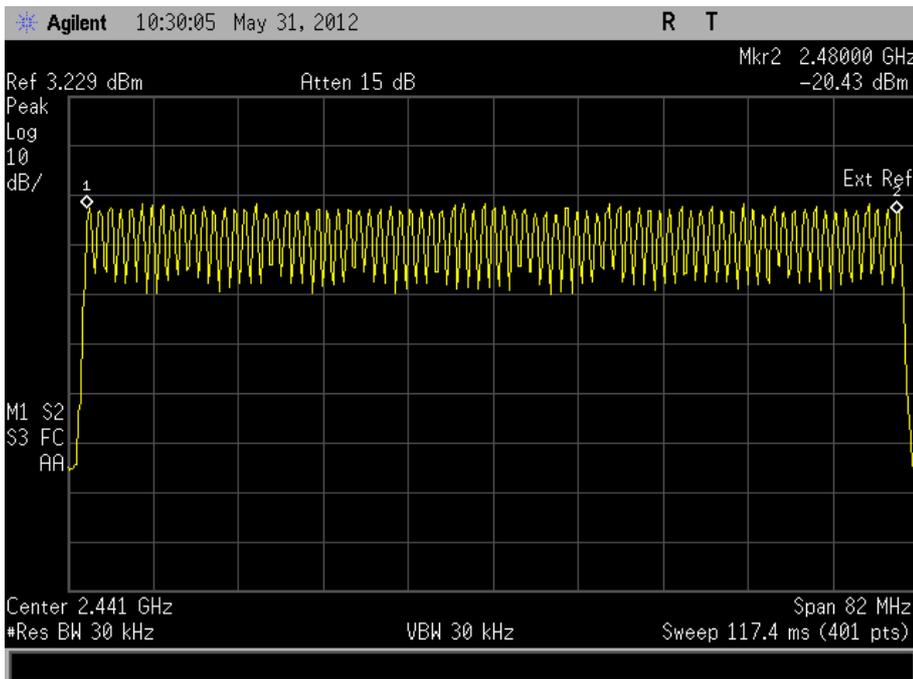

Limit

≥ 15 channels



Product Service

2.4 MAXIMUM PEAK CONDUCTED OUTPUT POWER

2.4.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(3)

2.4.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000314 - Modification State 0

2.4.3 Date of Test

31 May 2012

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Peak Power Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a reference level offset was entered to account for the measurement path loss. The measurement bandwidth was set according to the signal being measured and the peak and average levels were recorded.

2.4.6 Environmental Conditions

| | |
|---------------------|--------|
| Ambient Temperature | 22.6°C |
| Relative Humidity | 43.0% |



Product Service

2.4.7 Test Results

4.0 V DC Supply

| Packet Type | Maximum Peak Conducted Output Power | | | | | |
|-------------|-------------------------------------|----------|----------|----------|----------|----------|
| | dBm | | | mW | | |
| | 2402 MHz | 2441 MHz | 2480 MHz | 2402 MHz | 2441 MHz | 2480 MHz |
| DH1 | 1.02 | 0.73 | 0.92 | 1.265 | 1.183 | 1.236 |
| DH3 | 0.98 | 0.71 | 0.86 | 1.253 | 1.178 | 1.219 |
| DH5 (worst) | 0.94 | 0.67 | 0.61 | 1.242 | 1.167 | 1.151 |

Limit Clause

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



2.5 EIRP PEAK POWER

2.5.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(4)

2.5.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000157 - Modification State 0

2.5.3 Date of Test

20 May 2012

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a resolution bandwidth and video bandwidth of 1 MHz were used to perform the measurement. The level on the spectrum analyser was maximised by rotating the EUT 360° and a height search of the measuring antenna. A substitution was then performed using a substitution antenna and signal generator.

This level was maximised by adjusting the height of the measuring antenna once more. The level from the signal generator was then adjusted to achieve the same raw result as with the EUT. This level was then corrected to account for cable loss and antenna factor. If applicable, a peak power analyser was also used to obtain a correction factor for wideband signals such as WLAN.

A calculation was then performed to obtain the final figure.

2.5.6 Environmental Conditions

| | |
|---------------------|--------|
| Ambient Temperature | 20.0°C |
| Relative Humidity | 39.0% |




Product Service

2.5.7 Test Results

2402 MHz

| | |
|------------|-----------|
| EIRP (dBm) | EIRP (mW) |
| -1.21 | 0.76 |

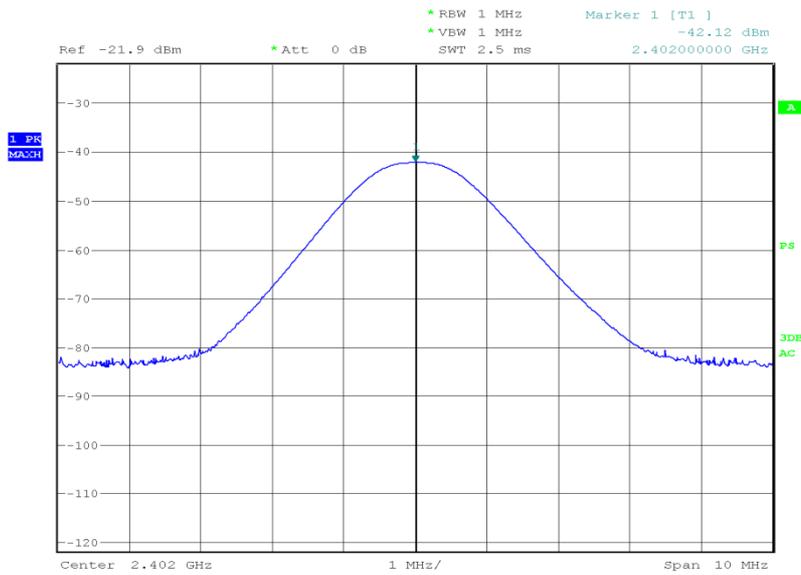


Date: 20.MAY.2012 15:59:06



Product Service

2441 MHz

| EIRP (dBm) | EIRP (mW) |
|------------|-----------|
| -0.35 | 0.92 |

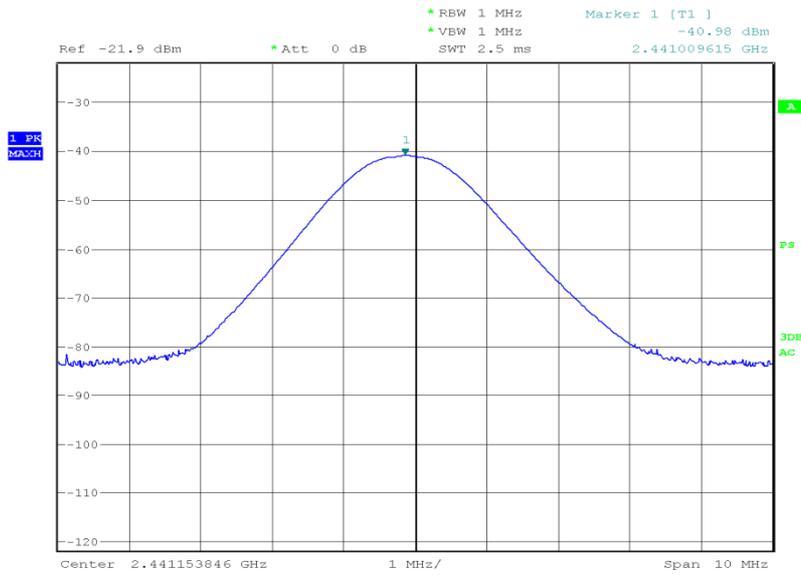


Date: 20.MAY.2012 16:47:18



Product Service

2480 MHz

| EIRP (dBm) | EIRP (mW) |
|------------|-----------|
| -1.82 | 0.66 |

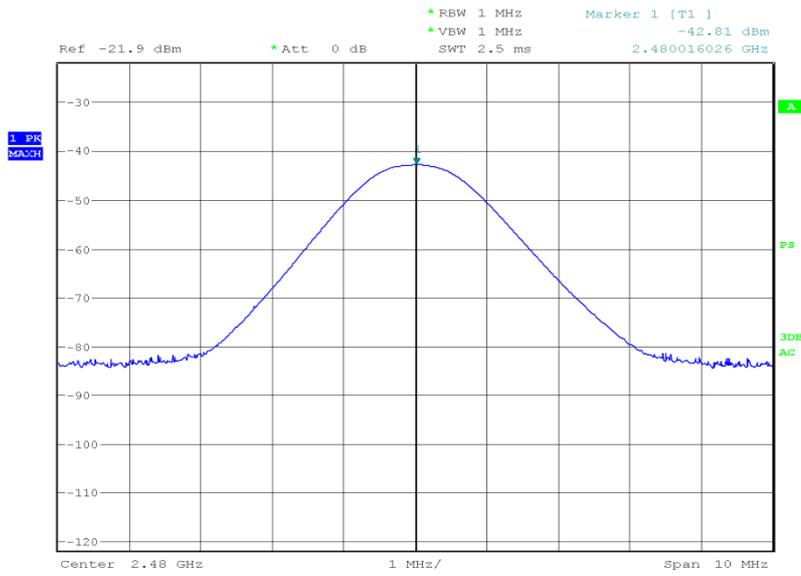

Date: 20.MAY.2012 17:17:22

Limit

| EIRP (dBm) | EIRP (mW) |
|------------|-----------|
| 36.0 | 4000 |



2.6 SPURIOUS AND BAND EDGE EMISSIONS

2.6.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (d)

2.6.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000157 - Modification State 0

2.6.3 Date of Test

20 May 2012, 21 May 2012 & 30 May 2012

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Procedure

For conducted emissions, the EUT was set to operate at maximum power on the worst case data rate. The test was performed on the bottom, middle and top channels. The test was performed from 9 kHz to 25 GHz. Firstly, the power of each fundamental frequency was measured in 100 kHz bandwidth and this was used to show a -20 dBc limit line on the trace. The measurement path loss in each relevant frequency band was measured and entered as a reference level offset.

For radiated emissions, the test method described above was also used. However, the measurement was performed from 30 MHz to 25 GHz and the path loss is incorporated as a transducer factor and entered into the spectrum analyser.

The band edge measurements were performed in accordance with ANSI C63.10, Clause 6.9.3. The results were analysed to ensure compliance with restricted bands. The EUT was set to the lowest and highest operating frequencies.

2.6.6 Environmental Conditions

| | |
|---------------------|---------------|
| Ambient Temperature | 20.0 - 23.0°C |
| Relative Humidity | 30.0 - 46.0% |



Product Service

2.6.7 Test Results


4.0 V DC Supply

Spurious Conducted Emissions

DH5

2402 MHz


9 kHz to 4 GHz

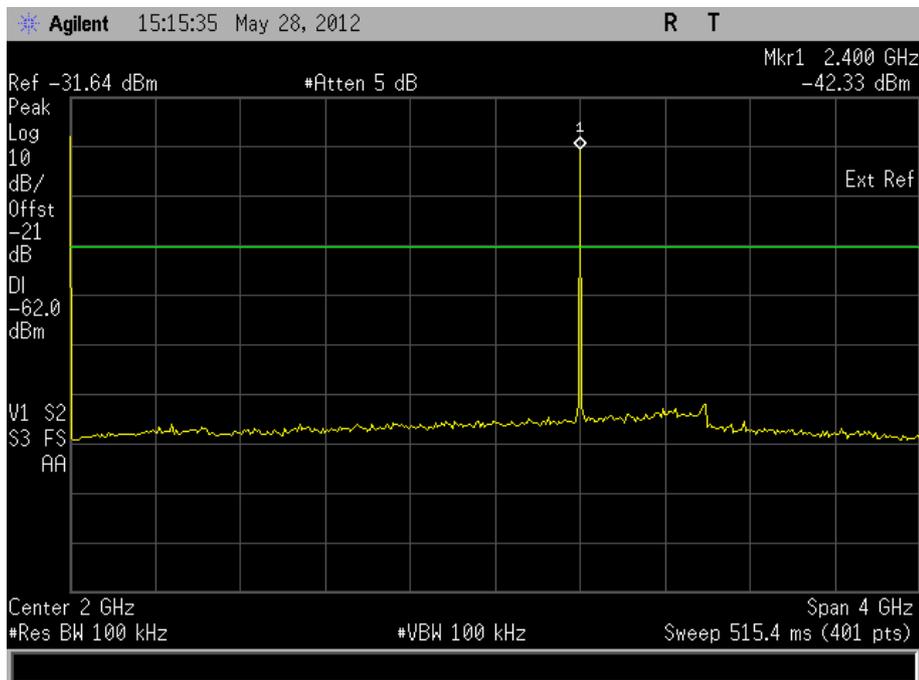




Product Service

4 GHz to 12 GHz

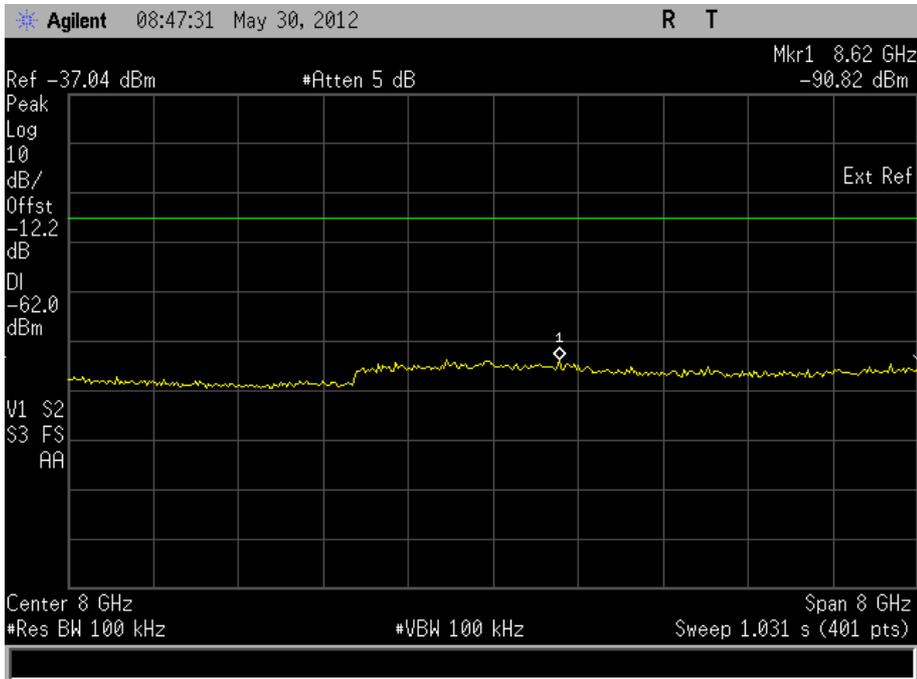


12 GHz to 18 GHz

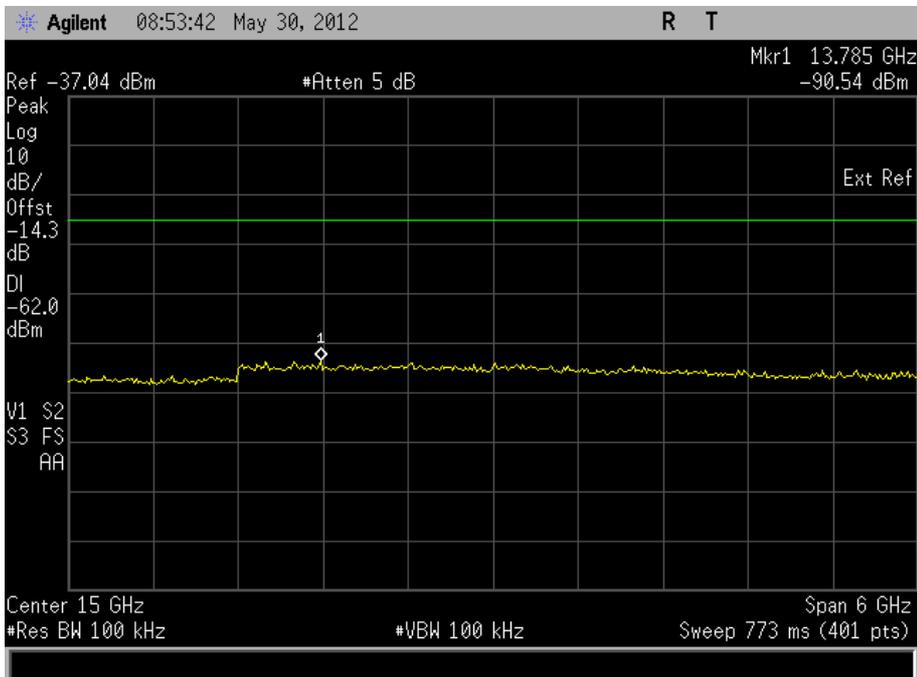




Product Service

18 GHz to 25 GHz

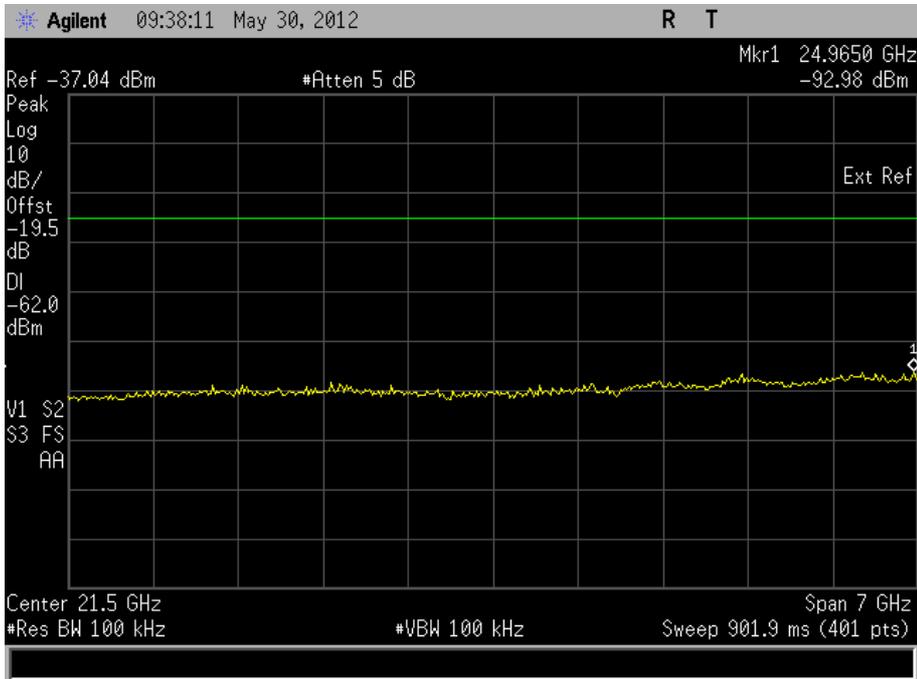

2441 MHz


9 kHz to 4 GHz

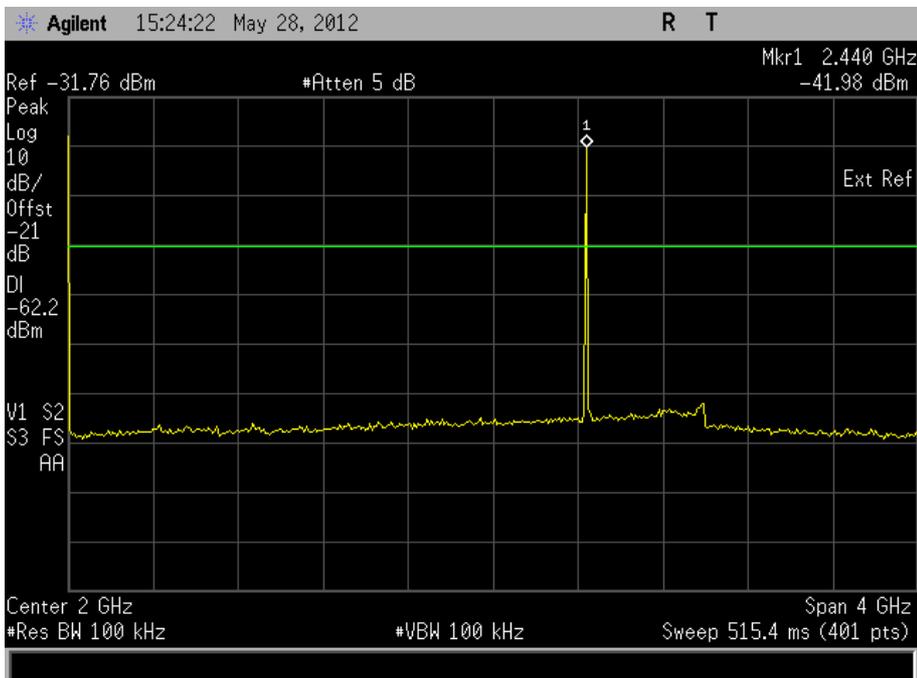




Product Service

4 GHz to 12 GHz

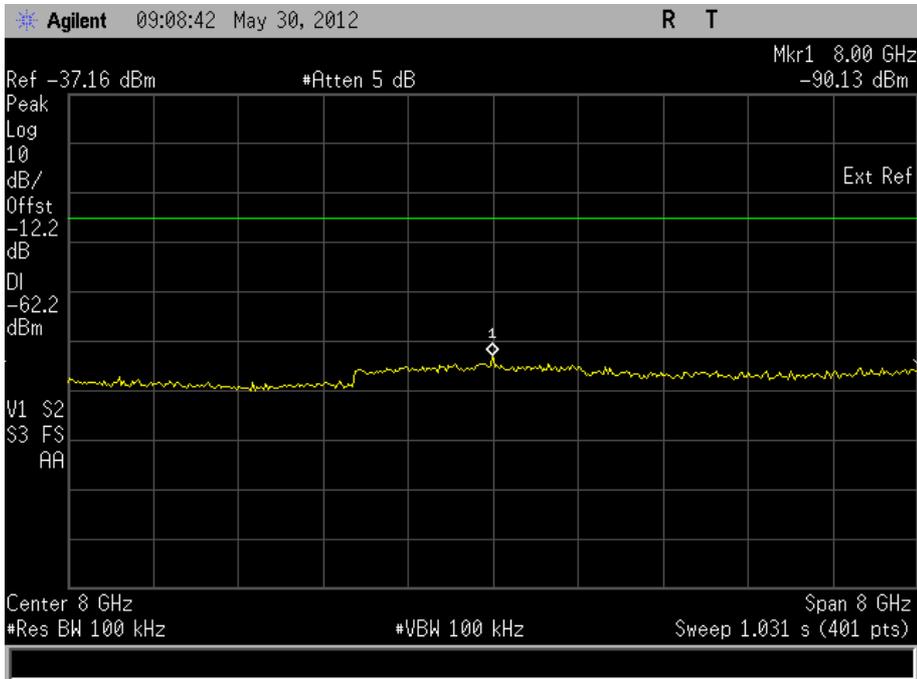


12 GHz to 18 GHz

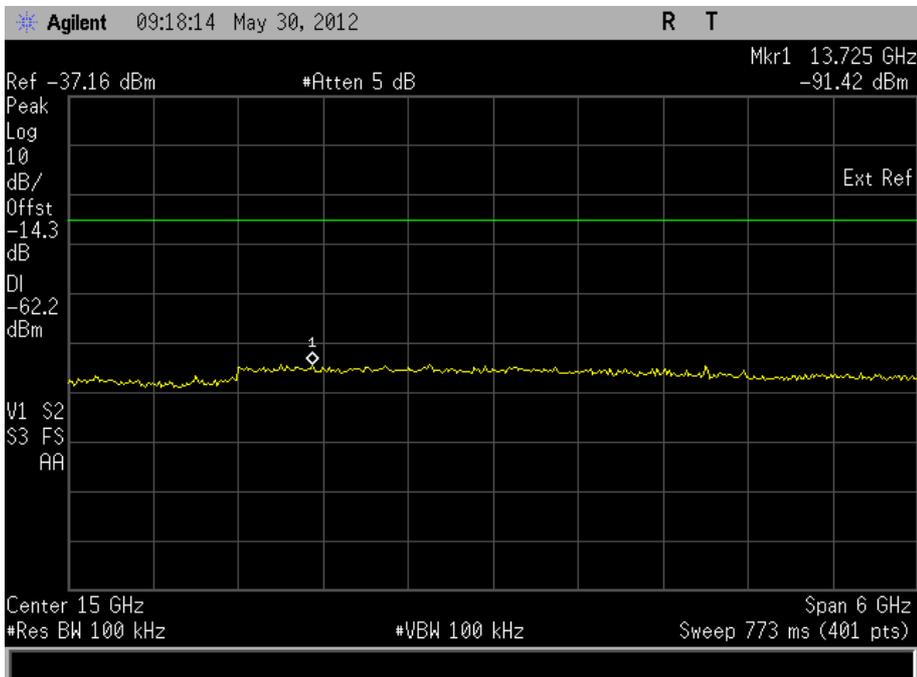




Product Service

18 GHz to 25 GHz

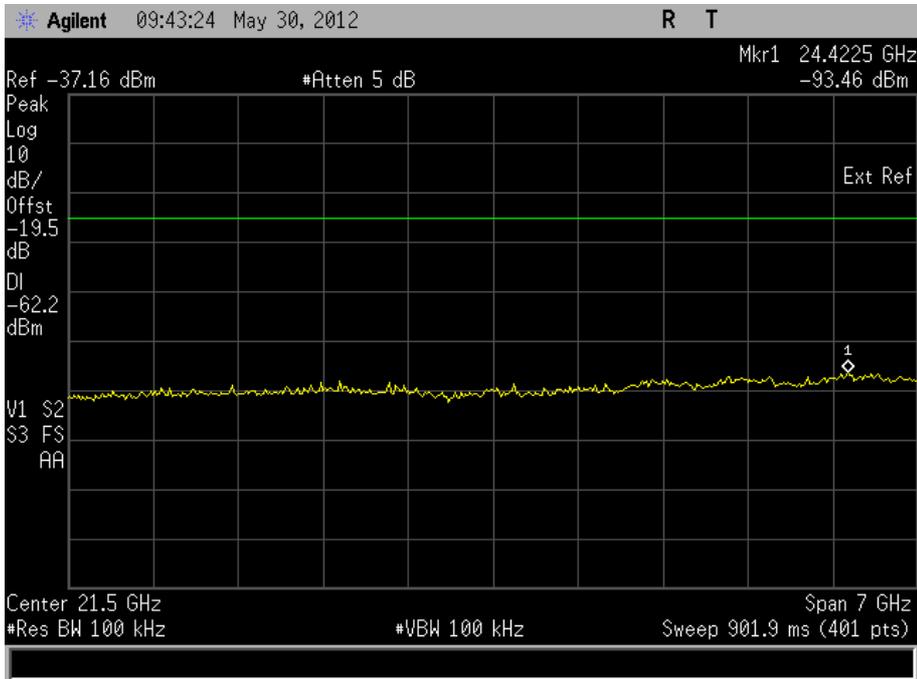

2480 MHz


9 kHz to 4 GHz

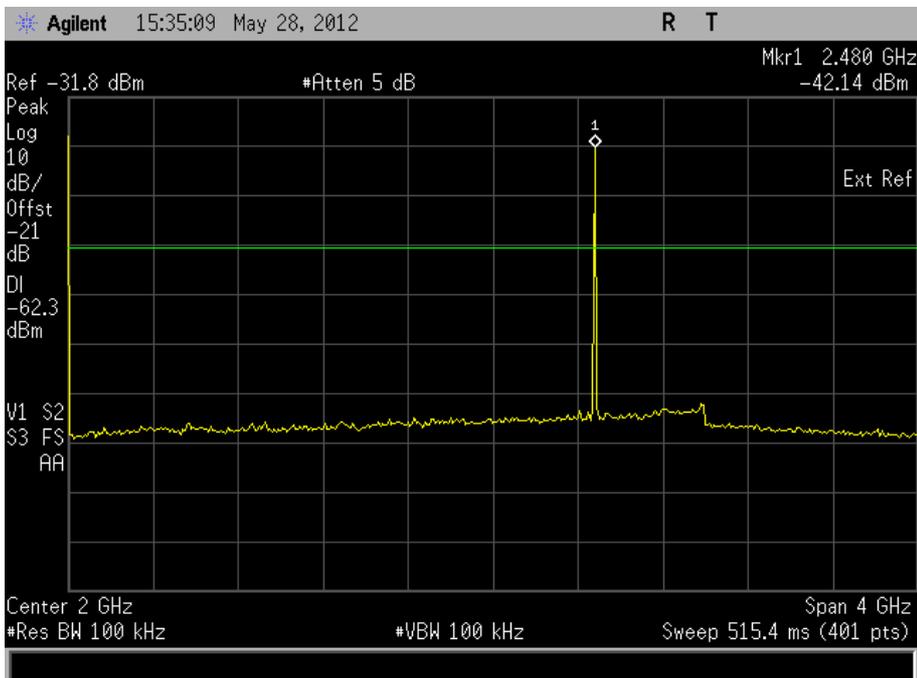




Product Service

4 GHz to 12 GHz

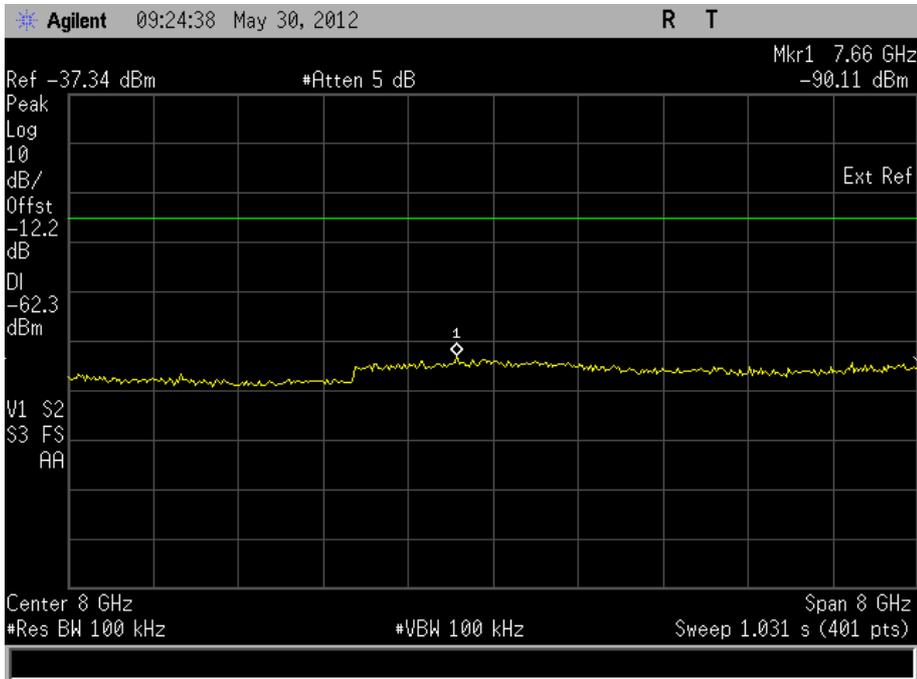


12 GHz to 18 GHz

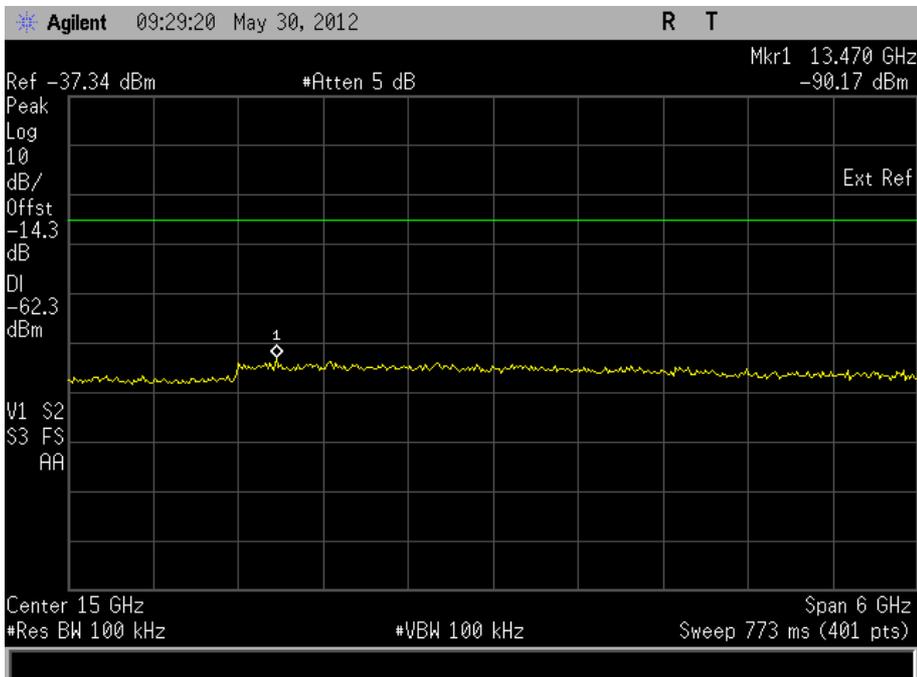



Product Service

18 GHz to 25 GHz

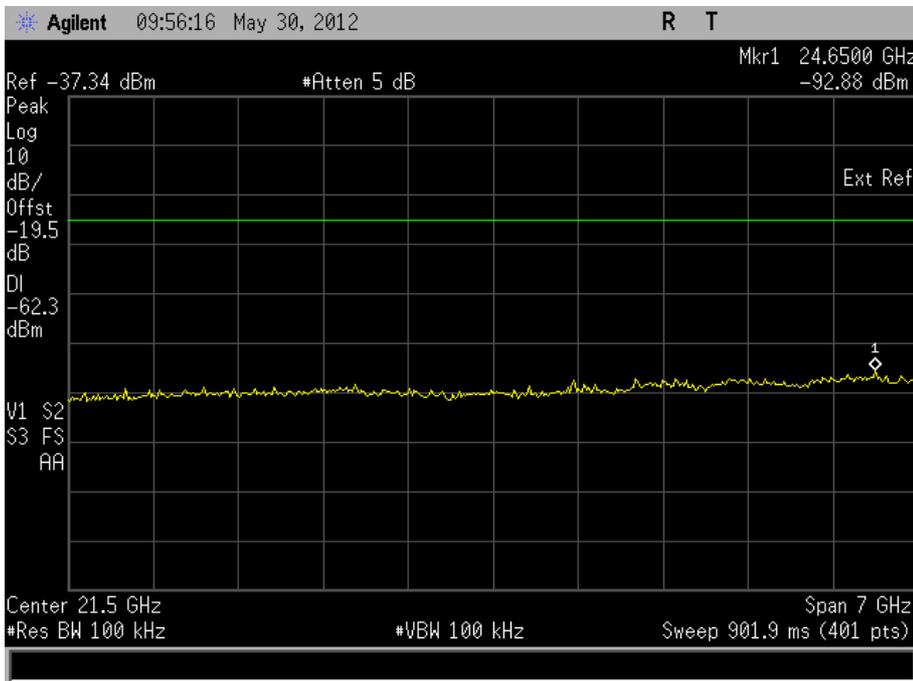

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.



Spurious Radiated Emissions

2402 MHz

30 MHz to 1 GHz

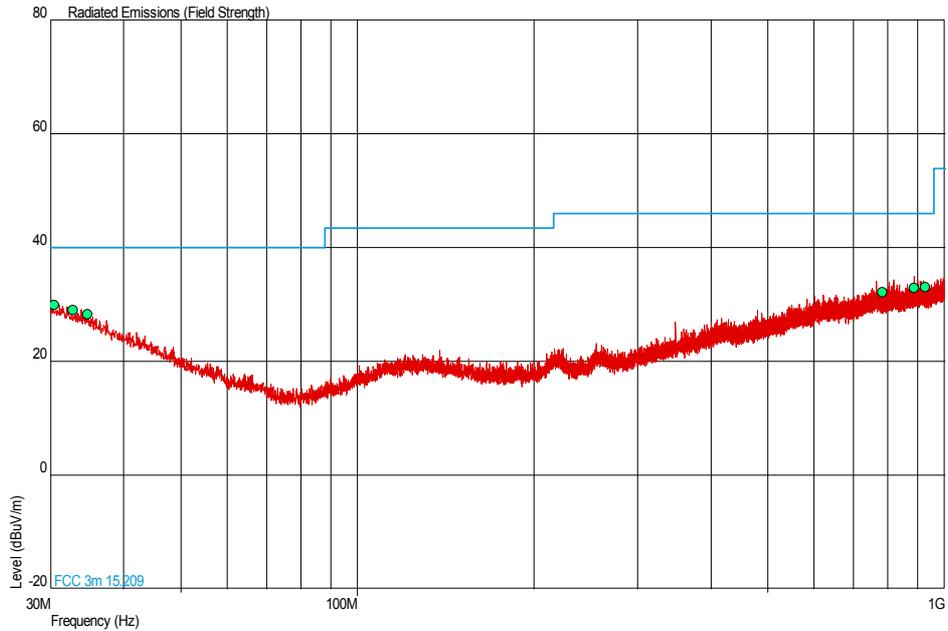


| Frequency (MHz) | QP Level (dBµV/m) | QP Level (µV/m) | QP Limit (dBµV/m) | QP Limit (µV/m) | QP Margin (dBµV/m) | QP Margin (µV/m) | Angle (Deg) | Height (m) | Polarity |
|-----------------|-------------------|-----------------|-------------------|-----------------|--------------------|------------------|-------------|------------|------------|
| 30.437 | 29.9 | 31.3 | 40.0 | 100 | -10.1 | 68.7 | 180 | 1.00 | Horizontal |
| 32.813 | 29.0 | 28.2 | 40.0 | 100 | -11.0 | 71.8 | 90 | 1.00 | Horizontal |
| 34.753 | 28.2 | 25.7 | 40.0 | 100 | -11.8 | 74.3 | 90 | 1.00 | Vertical |
| 784.903 | 32.1 | 40.3 | 46.0 | 200 | -13.9 | 159.7 | 180 | 1.00 | Horizontal |
| 886.316 | 33.0 | 44.7 | 46.0 | 200 | -13.0 | 155.3 | 180 | 1.00 | Horizontal |
| 928.026 | 33.1 | 45.2 | 46.0 | 200 | -12.9 | 154.8 | 180 | 1.00 | Vertical |




Product Service

1 GHz to 3 GHz

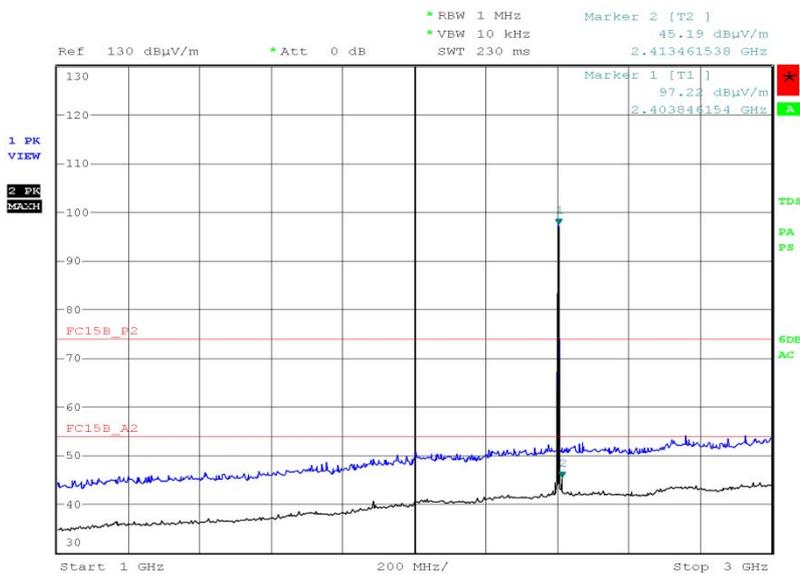

Date: 20.MAY.2012 16:07:57

3 GHz to 8 GHz

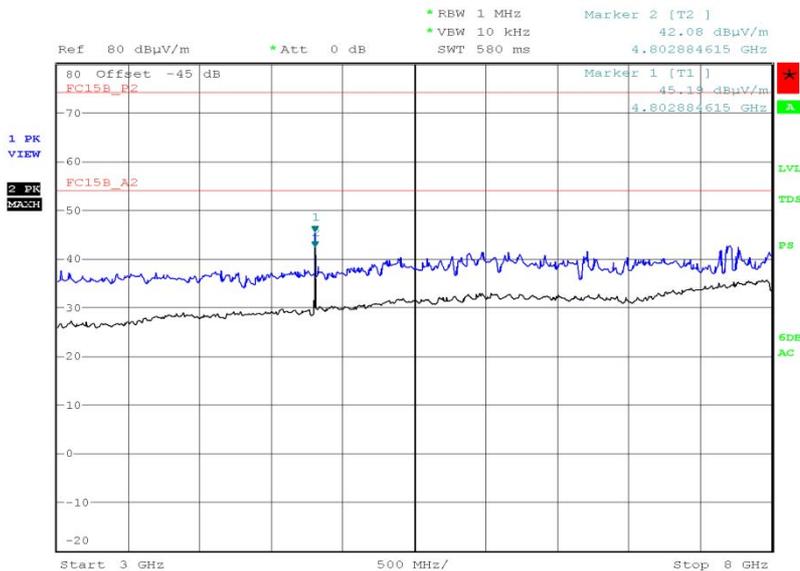


Date: 20.MAY.2012 18:20:43




Product Service

8 GHz to 18 GHz

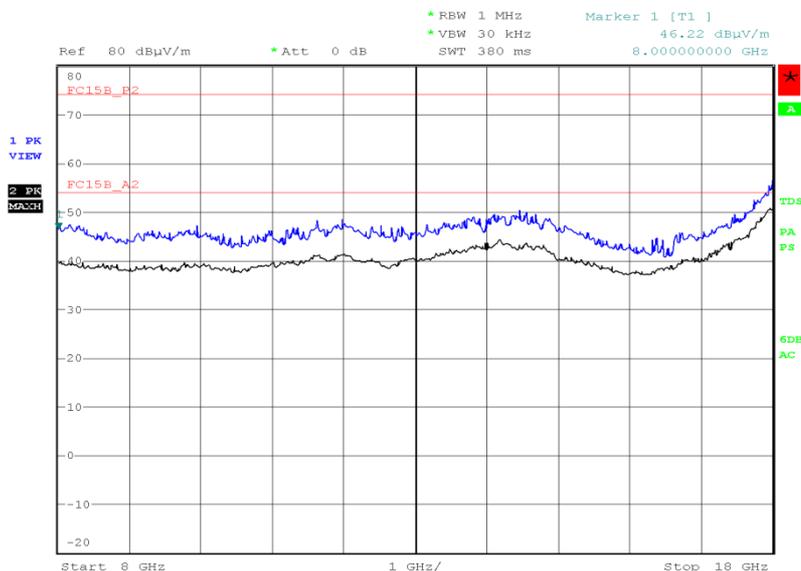

Date: 20.MAY.2012 22:26:59

18 GHz to 25 GHz

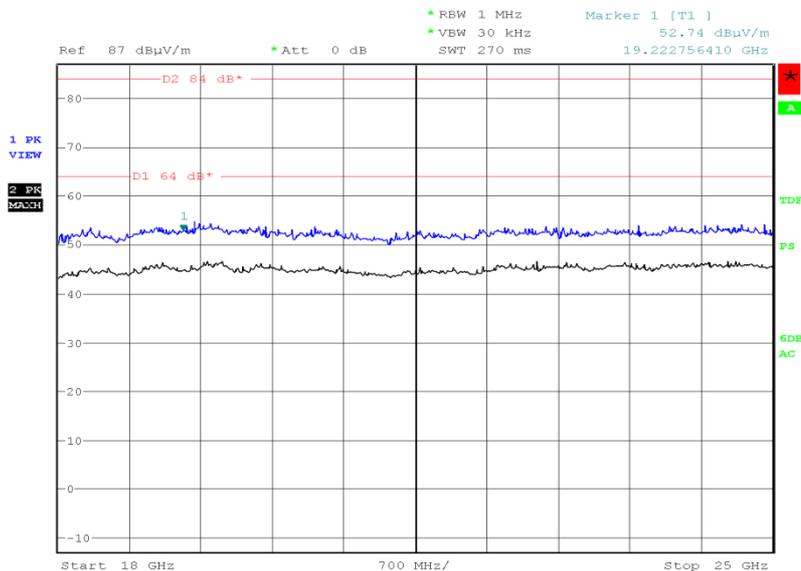

Date: 21.MAY.2012 22:16:57

Limit

| Peak (dBμV/m) | Average (dBμV/m) |
|---------------|------------------|
| 74.0 | 54.0 |




Product Service

Band Edge Emissions

2402 MHz

| Polarisation | Final Peak (dBµV/m) | Final Average (dBµV/m) |
|--------------|---------------------|------------------------|
| Horizontal | 47.77 | 37.67 |

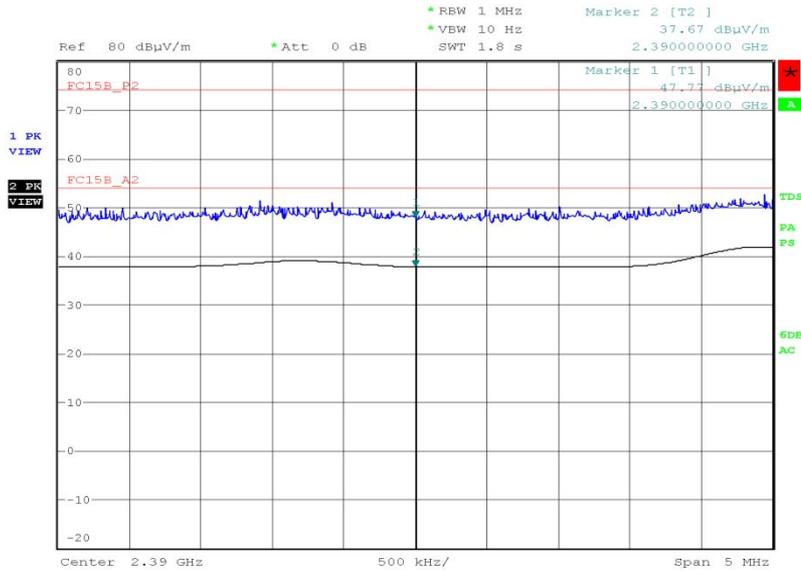


Date: 20.MAY.2012 16:01:08



2480 MHz

| Polarisation | Final Peak (dBµV/m) | Final Average (dBµV/m) |
|--------------|---------------------|------------------------|
| Horizontal | 49.86 | 39.20 |

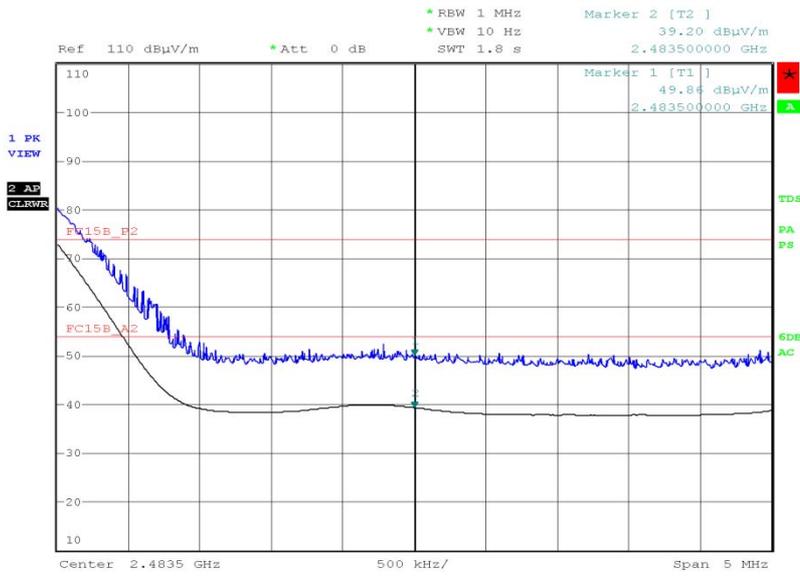

Date: 20.MAY.2012 17:23:56

Limit

| Peak (dBµV/m) | Average (dBµV/m) |
|---------------|------------------|
| 74.0 | 54.0 |



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

| Instrument | Manufacturer | Type No. | TE No. | Calibration Period (months) | Calibration Due |
|--|-----------------|---------------------|--------|-----------------------------|-----------------|
| Section 2.1 – AC Line Conducted Emissions | | | | | |
| LISN (1 Phase) | Chase | MN 2050 | 336 | 12 | 23-Mar-2013 |
| Transient Limiter | Hewlett Packard | 11947A | 1032 | 12 | 22-Jun-2012 |
| Screened Room (5) | Rainford | Rainford | 1545 | 36 | 3-Feb-2014 |
| EMI Test Receiver | Rohde & Schwarz | ESU40 | 3506 | 12 | 29-Sep-2012 |
| 7m Armoured RF Cable | SSI Cable Corp. | 1501-13-13-7m WA(-) | 3600 | - | TU |
| Section 2.2 - Frequency Hopping Systems - 20dB Bandwidth and Channel Separation | | | | | |
| Dual programable power supply | Thurlby | T-1000 | 418 | - | TU |
| Power Splitter | Weinschel | 1506A | 606 | 12 | 19-Dec-2012 |
| Spectrum Analyser | Hewlett Packard | E4407B | 1154 | 12 | 28-Jun-2012 |
| GPS Frequency Standard | Rapco | GPS-804/3 | 1312 | 12 | 13-Sep-2012 |
| Hygromer | Rotronic | A1 | 2677 | 12 | 7-Feb-2013 |
| '3.5mm' - '3.5mm' RF Cable (1m) | Rhophase | 3PS-1803-1000-3PS | 3696 | 12 | 27-Jan-2013 |
| DC - 12.4 GHz 10 dB Attenuator | Suhner | 6810.17.A | 3965 | 12 | 24-Jun-2012 |
| True RMS Multimeter | Fluke | 179 | 4007 | 12 | 16-Feb-2013 |
| Section 2.3 - Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels | | | | | |
| Dual programable power supply | Thurlby | T-1000 | 418 | - | TU |
| Power Splitter | Weinschel | 1506A | 606 | 12 | 19-Dec-2012 |
| GPS Frequency Standard | Rapco | GPS-804/3 | 1312 | 12 | 13-Sep-2012 |
| Hygromer | Rotronic | A1 | 2677 | 12 | 7-Feb-2013 |
| '3.5mm' - '3.5mm' RF Cable (1m) | Rhophase | 3PS-1803-1000-3PS | 3696 | 12 | 27-Jan-2013 |
| DC - 12.4 GHz 10 dB Attenuator | Suhner | 6810.17.A | 3965 | 12 | 24-Jun-2012 |
| P-Series Power Meter | Agilent | N1911A | 3981 | 12 | 12-Sep-2012 |
| 50 MHz-18 GHz Wideband Power Sensor | Agilent | N1921A | 3983 | 12 | 12-Sep-2012 |
| True RMS Multimeter | Fluke | 179 | 4007 | 12 | 16-Feb-2013 |
| Section 2.4- Maximum Peak Conducted Output Power | | | | | |
| Dual programable power supply | Thurlby | T-1000 | 418 | - | TU |
| Power Splitter | Weinschel | 1506A | 606 | 12 | 19-Dec-2012 |
| Rubidium Standard | Rohde & Schwarz | XRSM | 1316 | 12 | 13-Sep-2012 |
| Hygromer | Rotronic | A1 | 2677 | 12 | 7-Feb-2013 |
| '3.5mm' - '3.5mm' RF Cable (1m) | Rhophase | 3PS-1803-1000-3PS | 3696 | 12 | 27-Jan-2013 |
| DC - 12.4 GHz 10 dB Attenuator | Suhner | 6810.17.A | 3965 | 12 | 24-Jun-2012 |
| P-Series Power Meter | Agilent | N1911A | 3981 | 12 | 12-Sep-2012 |
| 50 MHz-18 GHz Wideband Power Sensor | Agilent | N1921A | 3983 | 12 | 12-Sep-2012 |
| True RMS Multimeter | Fluke | 179 | 4007 | 12 | 16-Feb-2013 |



Product Service

| Instrument | Manufacturer | Type No. | TE No. | Calibration Period (months) | Calibration Due |
|--|-----------------|------------------------|--------|-----------------------------|-----------------|
| Section 2.5 –EIRP Peak Power | | | | | |
| Peak Power Analyser | Hewlett Packard | 8990A | 107 | 12 | 10-Feb-2013 |
| Antenna (Double Ridge Guide, 1GHz-18GHz) | EMCO | 3115 | 234 | 12 | 8-Dec-2012 |
| Antenna (Double Ridge Guide, 1GHz-18GHz) | EMCO | 3115 | 235 | 12 | 14-Nov-2012 |
| Screened Room (5) | Rainford | Rainford | 1545 | 36 | 3-Feb-2014 |
| Mast Controller | Inn-Co GmbH | CO 1000 | 1606 | - | TU |
| Power Sensor | Hewlett Packard | 84812A | 2743 | - | TU |
| Signal Generator: 10MHz to 20GHz | Rohde & Schwarz | SMR20 | 3475 | 12 | 20-Dec-2012 |
| EMI Test Receiver | Rohde & Schwarz | ESU40 | 3506 | 12 | 29-Sep-2012 |
| 7m Armoured RF Cable | SSI Cable Corp. | 1501-13-13-7m WA(-) | 3600 | - | TU |
| '3.5mm' - '3.5mm' RF Cable (2m) | Rhophase | 3PS-1803-2000-3PS | 3702 | 12 | 27-Jan-2013 |
| '3.5mm' - '3.5mm' RF Cable (2m) | Rhophase | 3PS-1803-2000-3PS | 3703 | - | TU |
| 9m RF Cable (N Type) | Rhophase | NPS-2303-9000-NPS | 3791 | 12 | 26-Aug-2012 |
| Tilt Antenna Mast | maturo GmbH | TAM 4.0-P | 3916 | - | TU |
| Mast Controller | maturo GmbH | NCD | 3917 | - | TU |



Product Service

| Instrument | Manufacturer | Type No. | TE No. | Calibration Period (months) | Calibration Due |
|--|---------------------|------------------------|--------|-----------------------------|-----------------|
| Section 2.6- Spurious and Band Edge Emissions | | | | | |
| Antenna (Double Ridge Guide) | Link Microtek Ltd | AM180HA-K-TU2 | 230 | 24 | 13-Sep-2013 |
| Antenna (Double Ridge Guide, 1GHz-18GHz) | EMCO | 3115 | 234 | 12 | 8-Dec-2012 |
| Antenna (Double Ridge Guide, 1GHz-18GHz) | EMCO | 3115 | 235 | 12 | 14-Nov-2012 |
| Dual programable power supply | Thurlby | T-1000 | 418 | - | TU |
| Spectrum Analyser | Hewlett Packard | E4407B | 1154 | 12 | 28-Jun-2012 |
| GPS Frequency Standard | Rapco | GPS-804/3 | 1312 | 12 | 13-Sep-2012 |
| Antenna (Double Ridge Guide) | Q-Par Angus Ltd | QSH 180K | 1511 | 24 | 2-Aug-2012 |
| Pre-Amplifier | Phase One | PS04-0086 | 1533 | 12 | 20-Sep-2012 |
| Pre-Amplifier | Phase One | PSO4-0087 | 1534 | 12 | 26-Sep-2012 |
| Screened Room (5) | Rainford | Rainford | 1545 | 36 | 3-Feb-2014 |
| Mast Controller | Inn-Co GmbH | CO 1000 | 1606 | - | TU |
| Hygrometer | Rotronic | A1 | 2677 | 12 | 7-Feb-2013 |
| High Pass Filter (4GHz) | RLC Electronics | F-100-4000-5-R | 2773 | 12 | 20-Sep-2012 |
| Antenna (Bilog) | Chase | CBL6143 | 2904 | 24 | 12-May-2013 |
| Attenuator (20dB, 20W) | Weinschel | 1 | 3032 | 12 | TU |
| Signal Generator (10MHz to 40GHz) | Rohde & Schwarz | SMR40 | 3171 | 12 | 22-Aug-2012 |
| Signal Generator: 10MHz to 20GHz | Rohde & Schwarz | SMR20 | 3475 | 12 | 20-Dec-2012 |
| EMI Test Receiver | Rohde & Schwarz | ESU40 | 3506 | 12 | 29-Sep-2012 |
| 3 GHz High Pass Filter | K&L Microwave | 11SH10-3000/X18000-O/O | 3552 | 12 | 16-Apr-2013 |
| 7m Armoured RF Cable | SSI Cable Corp. | 1501-13-13-7m WA(-) | 3600 | - | TU |
| '2.92mm' - '2.92mm' RF Cable (2m) | Rhophase | KPS-1503-2000-KPS | 3694 | 12 | TU |
| '2.92mm' - '2.92mm' RF Cable (2m) | Rhophase | KPS-1503-2000-KPS | 3695 | 12 | TU |
| '3.5mm' - '3.5mm' RF Cable (1m) | Rhophase | 3PS-1803-1000-3PS | 3696 | 12 | 27-Jan-2013 |
| '3.5mm' - '3.5mm' RF Cable (2m) | Rhophase | 3PS-1803-2000-3PS | 3702 | 12 | 27-Jan-2013 |
| '3.5mm' - '3.5mm' RF Cable (2m) | Rhophase | 3PS-1803-2000-3PS | 3703 | - | TU |
| 9m RF Cable (N Type) | Rhophase | NPS-2303-9000-NPS | 3791 | 12 | 26-Aug-2012 |
| Tilt Antenna Mast | maturo GmbH | TAM 4.0-P | 3916 | - | TU |
| Mast Controller | maturo GmbH | NCD | 3917 | - | TU |
| Low Noise Amplifier | Wright Technologies | APS04-0085 | 3969 | 12 | 8-Jul-2012 |
| True RMS Multimeter | Fluke | 179 | 4007 | 12 | 16-Feb-2013 |

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

| Test Discipline | MU |
|---|--|
| Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels | - |
| Frequency Hopping Systems - 20dB Bandwidth and Channel Separation | ± 16.74 kHz |
| EIRP Peak Power | 30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB |
| Maximum Peak Conducted Output Power | ± 0.70 dB |
| Spurious and Band Edge Emissions | 30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB |
| AC Line Conducted Emissions | ± 3.2 dB |



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited