



Product Service

---

**Choose certainty.  
Add value.**

# Report On

FCC Testing of the  
Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band  
GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with  
Bluetooth, FeliCa, WLAN and GPS  
In accordance with FCC CFR 47 Part 15B

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00171

Document 75917027 Report 05 Issue 1

June 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuvps.co.uk](http://www.tuvps.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC Testing of the  
Sharp CDMA SH15 Dual Band CDMA (BC0 and BC6) and Tri Band  
GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with  
Bluetooth, FeliCa, WLAN and GPS  
In accordance with FCC CFR 47 Part 15B

Document 75917027 Report 05 Issue 1

June 2012

**PREPARED FOR**

Sharp Communication Compliance Ltd  
Azure House  
Bagshot Road  
Bracknell  
Berkshire  
RG12 7QY

**PREPARED BY**

  
\_\_\_\_\_  
**Maggie Whiting**  
Senior Engineer

**APPROVED BY**

  
\_\_\_\_\_  
**Mark Jenkins**  
Authorised Signatory

**DATED**

21 June 2012

---

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

  
\_\_\_\_\_  
G Lawler





Product Service

**CONTENTS**

<b>Section</b>	<b>Page No</b>
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Application Form ..... 6
1.4	Product Information ..... 11
1.5	Test Conditions ..... 11
1.6	Deviations from the Standard ..... 11
1.7	Modification Record ..... 11
<b>2</b>	<b>TEST DETAILS ..... 12</b>
2.1	AC Line Conducted Emissions ..... 13
2.2	Radiated Emissions ..... 16
<b>3</b>	<b>TEST EQUIPMENT USED ..... 19</b>
3.1	Test Equipment Used ..... 20
3.2	Measurement Uncertainty ..... 21
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 22</b>
4.1	Accreditation, Disclaimers and Copyright ..... 23



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC Testing of the  
Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900  
MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS  
In accordance with FCC CFR 47 Part 15B



Product Service

## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS to the requirements of FCC CFR 47 Part 15B.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	CDMA SHI15
Serial Number(s)	IMEI 004401114000223
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 15B (2011)
Incoming Release Date	Application Form 02 May 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9100 2 April 2012
Start of Test	22 May 2012
Finish of Test	22 May 2012
Name of Engineer(s)	G Lawler



Product Service

**1.2 BRIEF SUMMARY OF RESULTS**

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15B is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
2.1	15.107	AC Line Conducted Emissions	Pass	
2.2	15.109	Radiated Emissions	Pass	



Product Service

**1.3 APPLICATION FORM**

EQUIPMENT DESCRIPTION	
Model Name/Number	CDMA SHI15
Part Number	
FCC ID (if applicable)	APYHRO00171
Industry Canada ID (if applicable)	
Technical Description (Please provide a brief description of the intended use of the equipment)	Dual-Band CDMA(800MHz_BC0, 1900MHz_BC6) and Tri-Band GSM (GSM900MHz, DCS1800MHz, PCS1900MHz) Dual- Mode Cellular Phone with Bluetooth, W-LAN, SRD(FeliCa) and GPS receiver enabled.

EXTREME TEMPERATURE RANGE over which the equipment is to be type tested	
<input type="checkbox"/> -20°C to +55°C	
<input checked="" type="checkbox"/> Other (2)	
<input type="checkbox"/> Not applicable (no extreme temperature testing required)	
Extreme temperature range for the host(s):	-20C to +60C

(2) The equipment shall be tested over the following temperature ranges :

- a) 0°C to +35°C for equipment for indoor use only, or intended for used in areas where the temperature is controlled within this range.
- b) Over the extremes of the temperature range(s) of the declared host equipment(s) in case of plug-in radio devices.

TYPE OF ANTENNA	
<input checked="" type="checkbox"/> Integral	
Temporary RF connector provided:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<input type="checkbox"/> Antenna connector	
<input type="checkbox"/> Number of antenna assembly(ies) submitted	
Gain of the antenna intended for normal use:	
0 dBi for assembly identified as Bluetooth	
0 dBi for assembly identified as WLAN	
dBi for assembly identified as	
dBi for assembly identified as	
dBi for assembly identified as	

TRANSMITTER TECHNICAL CHARACTERISTICS		
TRANSMITTER OPERATING FREQUENCY RANGE(S)		
	FCC and/or Industry Canada	EU
<b>Bluetooth</b>	2402 to 2480 MHz	2402 to 2480 MHz
<b>WLAN</b>	2412 to 2462 MHz	2412 to 2472 MHz
FCC and/or Industry Canada (only)		
Highest Internally Generated Frequency 1401.6 MHz		



SPREAD SPECTRUM PARAMETERS		
<input checked="" type="checkbox"/> <b>Bluetooth</b>		
FHSS: Channel <input checked="" type="checkbox"/> 79 Other	EDR <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
<b>Medium Access Protocol (Customer Declaration)</b>		
"We have implemented Bluetooth protocol which satisfies the medium access protocol requirement of EN 300 328".		
<input checked="" type="checkbox"/> <b>WLAN</b>		
IEEE 802.11(b) – DSSS <input checked="" type="checkbox"/>		
IEEE 802.11(g) – OFDM <input checked="" type="checkbox"/>		
IEEE 802.11(n) – OFDM <input checked="" type="checkbox"/>		
Supported Spatial Streams	2.4 GHz	5GHz
Transmitter (Tx)	Yes	(No: Japan only)
Receiver (Rx)	Yes	(No: Japan only)
GI (Guard Interval) <input checked="" type="checkbox"/> 800 ns <input type="checkbox"/> 400 ns		
Band Width <input checked="" type="checkbox"/> 20 MHz <input type="checkbox"/> 40 MHz		
<input type="checkbox"/> <b>Other Technology</b>		
Direct Sequence <input type="checkbox"/> Frequency Hopping <input type="checkbox"/> Combined <input type="checkbox"/> Other		
DSSS	Chip Sequence Length	48 bit
	Spectrum Width	MHz
FHSS	Total Number of Hops	
	Dwell Time	ms
	Bandwidth Per Hop	MHz
	Maximum Separation of Hops	MHz for ETSI EN 300 328
Other		
<b>Medium Access Protocol (Customer Declaration)</b>		
"We have implemented IEEE 802.11 (b/g/n) protocol which satisfies the medium access protocol requirement of EN 300 328".		



<b>TRANSMITTER POWER CHARACTERISTICS</b>				
<b>Bluetooth</b>				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)	0.004		W	
Effective radiated power (for equipment with integral antenna)	0.004		W	
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)	0.0004		W	
Effective radiated power (for equipment with integral antenna)	0.0004		W	
Is transmitter intended for :				
Continuous duty	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Intermittent duty	<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF	minutes	
Is continuous operation possible for testing purposes?				
	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Is transmitter output power variable:				
	<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on + Tx off))				
	%			
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
	dB per step			
<b>WLAN</b>				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)	0.08 (b/0.04(g.n))		W	
Effective radiated power (for equipment with integral antenna)	0.08 (b/0.04(g/n))		W	
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)			W	
Effective radiated power (for equipment with integral antenna)			W	
Is transmitter intended for :				
Continuous duty	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Intermittent duty	<input type="checkbox"/>	Yes	<input type="checkbox"/>	No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF	minutes	
Is continuous operation possible for testing purposes?				
	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Is transmitter output power variable:				
	<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on + Tx off))				
	%			
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
	dB per step			



Product Service

<b>TRANSMITTER POWER SOURCE (3)</b>				
<input checked="" type="checkbox"/> Common power source for transmitter and receiver				
<input type="checkbox"/> AC mains				
AC supply frequency	(Hz)	VAC	Max Current	Hz
<input type="checkbox"/> Single phase		<input type="checkbox"/> Three phase		
And / Or				
<input type="checkbox"/> External DC supply				
Nominal voltage		Max Current A		
Extreme upper voltage		Extreme lower voltage		
Battery				
<input type="checkbox"/> Nickel Cadmium				
<input type="checkbox"/> Lead acid (Vehicle regulated)				
<input type="checkbox"/> Alkaline				
<input checked="" type="checkbox"/> Lithium				
<input type="checkbox"/> Other Details :				
4.0 Volts nominal.				
End point voltage as quoted by equipment manufacturer		3.7 V		

(3) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

<b>AUTOMATIC EQUIPMENT SWITCH OFF</b>	
If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated.	
<input checked="" type="checkbox"/> Applies	3.4 V cut-off voltage
<input type="checkbox"/> Does not apply	



Product Service

RECEIVER POWER SOURCE (4)				
<input type="checkbox"/> AC mains		State voltage		
AC supply frequency	(Hz)	VAC	Max Current	Hz
<input type="checkbox"/> Single phase		<input type="checkbox"/> Three phase		
And / Or				
<input type="checkbox"/> External DC supply				
Nominal voltage		Max Current		A
Extreme upper voltage		Extreme lower voltage		
Battery				
<input type="checkbox"/> Nickel Cadmium				
<input type="checkbox"/> Lead acid (Vehicle regulated)				
<input type="checkbox"/> Alkaline				
<input type="checkbox"/> Lithium				
<input type="checkbox"/> Other Details :				
	Volts nominal.			
End point voltage as quoted by equipment manufacturer				V

(4) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

AUTOMATIC EQUIPMENT SWITCH OFF	
If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated.	
<input type="checkbox"/> Applies	V cut-off voltage
<input type="checkbox"/> Does not apply	

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature: *Satomi Amaki*      Name: Satomi Amaki  
 Position held: Manager      Date: 2<sup>nd</sup> May, 2012



Product Service

## **1.4 PRODUCT INFORMATION**

### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS. A full technical description can be found in the manufacturer's documentation.

## **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

## **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard were made during the testing

## **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC Testing of the  
Sharp CDMA SHI15 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900  
MHz) Dual Mode Cellular Phone with Bluetooth, FeliCa, WLAN and GPS  
In accordance with FCC CFR 47 Part 15B



## 2.1 AC LINE CONDUCTED EMISSIONS

### 2.1.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.107

### 2.1.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000223 - Modification State 0

### 2.1.3 Date of Test

22 May 2012

### 2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.1.5 Test Procedure

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.


### 2.1.6 Environmental Conditions

Ambient Temperature	18.9°C
Relative Humidity	47.0%



2.1.7 Test Results


Live Line

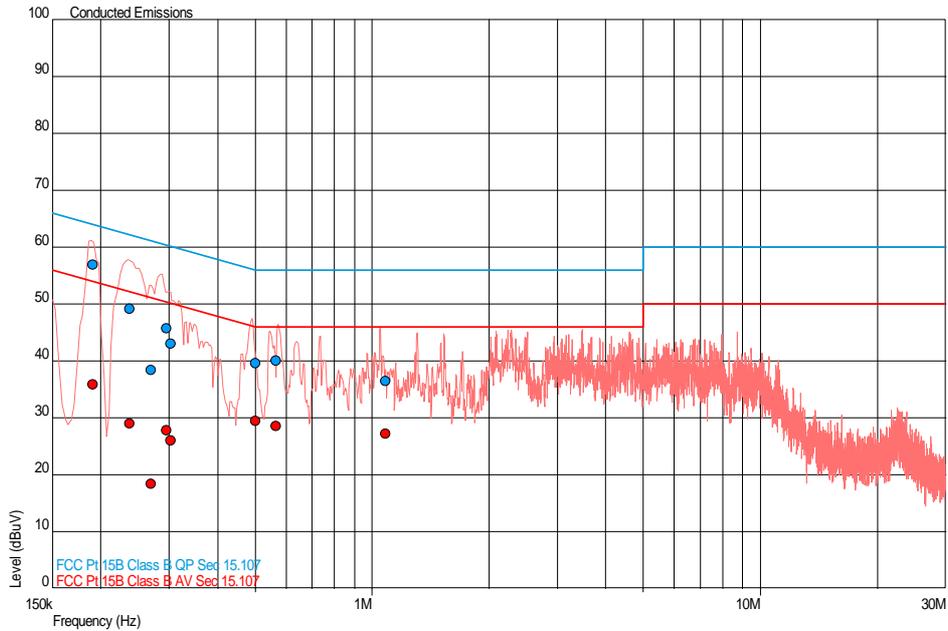

Frequency (MHz)	QP Level (dBµV)	QP Limit (dBµV)	QP Margin (dBµV)	AV Level (dBµV)	AV Limit (dBµV)	AV Margin (dBµV)
0.191	57.0	64.0	-7.0	35.9	54.0	-18.1
0.237	49.1	62.2	-13.1	29.0	52.2	-23.2
0.269	38.4	61.1	-22.7	18.4	51.1	-32.7
0.296	45.8	60.4	-14.5	27.8	50.4	-22.6
0.303	43.1	60.2	-17.0	26.1	50.2	-24.1
0.501	39.7	56.0	-16.3	29.4	46.0	-16.6
0.567	40.1	56.0	-15.9	28.6	46.0	-17.4
1.084	36.6	56.0	-19.4	27.2	46.0	-18.8



Neutral Line

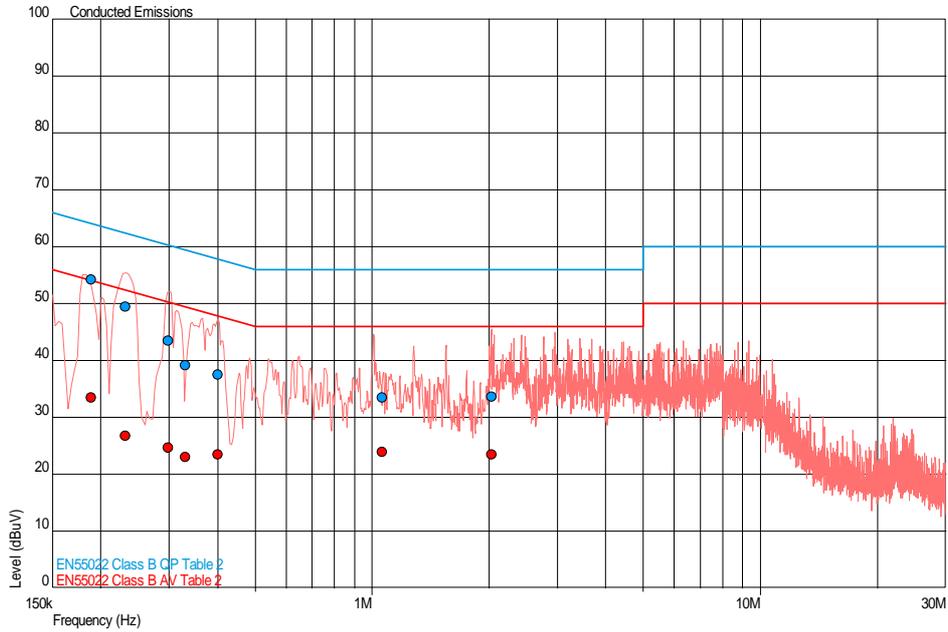

Frequency (MHz)	QP Level (dBµV)	QP Limit (dBµV)	QP Margin (dBµV)	AV Level (dBµV)	AV Limit (dBµV)	AV Margin (dBµV)
0.189	54.3	64.1	-9.8	33.5	54.1	-20.6
0.231	49.5	62.4	-12.9	26.8	52.4	-25.6
0.298	43.5	60.3	-16.8	24.7	50.3	-25.6
0.330	39.1	59.5	-20.3	23.1	49.5	-26.3
0.400	37.5	57.9	-20.3	23.6	47.9	-24.3
1.059	33.5	56.0	-22.5	24.0	46.0	-22.0
2.028	33.7	56.0	-22.3	23.5	46.0	-22.5



## 2.2 RADIATED EMISSIONS

### 2.2.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.109

### 2.2.2 Equipment Under Test and Modification State

CDMA SHI15 S/N: IMEI 004401114000223 - Modification State 0

### 2.2.3 Date of Test

22 May 2012

### 2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.2.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions is obtained up to the 5th harmonic of the EUT's highest internally generated fundamental frequency. For frequencies from 30MHz to 18GHz the EUT is placed on a test table 800mm above the ground plane. For frequencies above 18GHz, the EUT height is increased by 200mm to a height of 1000mm. This is to ensure the beam width of the measuring antenna gives sufficient vertical coverage of the EUT.

During characterisation the turntable azimuth is adjusted from 0 to 360 degrees with the measuring antenna in one polarity. It is then repeated for the other polarity. Any frequencies of interest are noted for formal measuring later. The distance from the measuring antenna to the boundary of the EUT is 3m. Above 18GHz this distance may be reduced to 1m.

During formal measurement the spectrum analyser is tuned to the frequency of the emission. The turntable azimuth is adjusted from 0 to 360 degrees to determine the point at which the maximum emission level occurs. Then the height of the measuring antenna is adjusted from a height of 1m to 4m to determine the height at which the maximum emission level occurs. Once the point of maximum emission has been determined the emission is measured. Emissions in the 30MHz to 1GHz range are measured using a CISPR Quasi – Peak detector function in a 120kHz bandwidth. Emissions in the range 1GHz to 40GHz require Peak and Average measurements. The Peak measurements are made using a peak detector with 1MHz Resolution and Video bandwidths. The average measurements employ a peak detector with a Resolution bandwidth of 1MHz and a Video bandwidth of 10Hz. If measurements are made at a 1m measuring distance, then 10dB is added to the specification limit.


### 2.2.6 Environmental Conditions

Ambient Temperature	18.9°C
Relative Humidity	47.0%



2.2.7 Test Results


30 MHz to 1 GHz

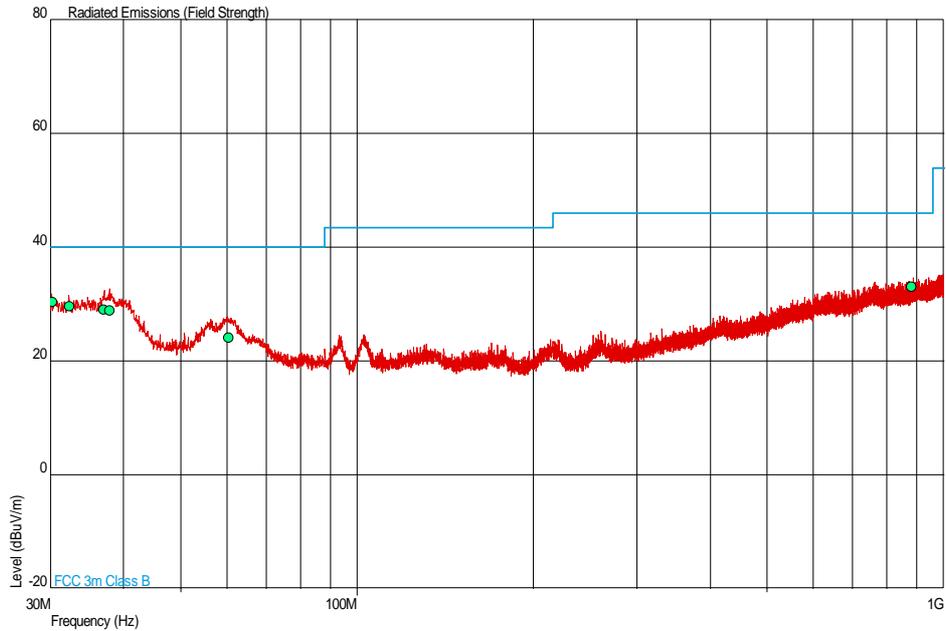

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.218	30.4	33.1	40.0	100	-9.6	66.9	195	1.00	Vertical
32.306	29.7	30.5	40.0	100	-10.3	69.5	0	1.00	Vertical
36.992	29.0	28.2	40.0	100	-11.0	71.8	212	1.00	Vertical
37.884	28.9	27.9	40.0	100	-11.1	72.1	207	1.00	Vertical
60.373	24.1	16.0	40.0	100	-15.9	84.0	258	1.37	Vertical
881.461	33.1	45.2	46.0	200	-12.9	154.8	14	1.00	Horizontal




1 GHz to 8 GHz

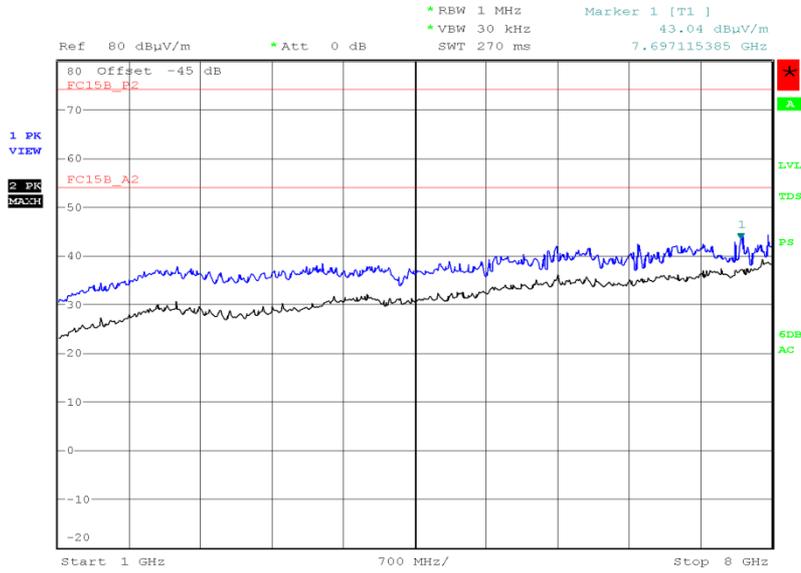

Date: 22.MAY.2012 19:03:12

8 GHz to 13 GHz

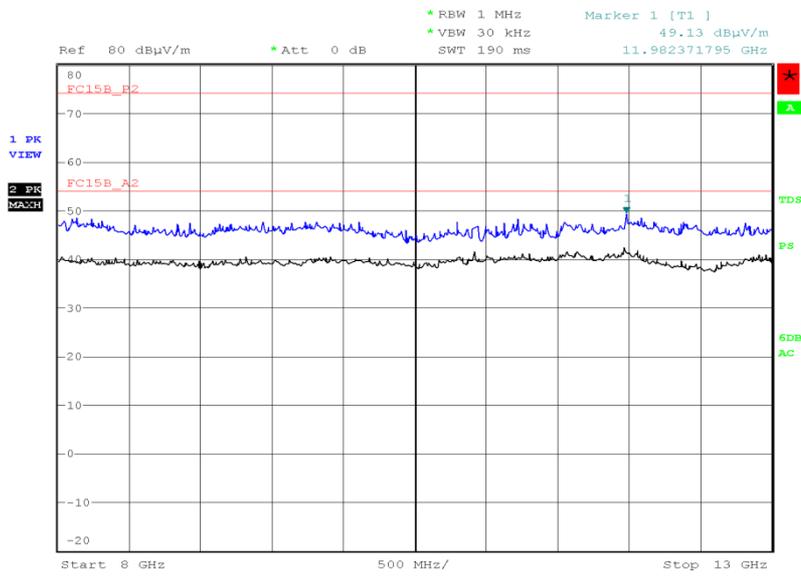

Date: 22.MAY.2012 19:11:20



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 – AC Line Conducted Emissions</b>					
LISN (1 Phase)	Chase	MN 2050	336	12	23-Mar-2013
Transient Limiter	Hewlett Packard	11947A	1032	12	22-Jun-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
<b>Section 2.2 - Radiated Emissions</b>					
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	13-Sep-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	8-Dec-2012
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Antenna (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	2-Aug-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	20-Sep-2012
Pre-Amplifier	Phase One	PSO4-0087	1534	12	26-Sep-2012
Screened Room (5)	Rainford	Rainford	1545	36	3-Feb-2014
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	16-Apr-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
'2.92mm' - '2.92mm' RF Cable (2m)	Rhophase	KPS-1503-2000-KPS	3694	12	TU
'2.92mm' - '2.92mm' RF Cable (2m)	Rhophase	KPS-1503-2000-KPS	3695	12	TU
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3702	12	27-Jan-2013
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3703	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	26-Aug-2012
Tilt Antenna Mast	mature GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	mature GmbH	NCD	3917	-	TU
Low Noise Amplifier	Wright Technologies	APS04-0085	3969	12	8-Jul-2012

TU – Traceability Unscheduled



Product Service

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Radiated Emissions	30MHz to 1GHz: $\pm 5.1$ dB 1GHz to 40GHz: $\pm 6.3$ dB
AC Line Conducted Emissions	$\pm 3.2$ dB



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited