



Product Service

**Choose certainty.
Add value.**

Report On

FCC DFS Testing of the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS
In accordance with FCC CFR 47 Part 15E and FCC 06-96

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00178

Document 75918726 Report 15 Issue 1

October 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC DFS Testing of the
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band
GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V)
and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with
Bluetooth, WLAN, NFC (FeliCa) and GPS
In accordance with FCC CFR 47 Part 15E and FCC 06-96

Document 75918726 Report 15 Issue 1

October 2012

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY

Natalie Bennett
Senior Administrator (Technical)

APPROVED BY

Mark Jenkins
Authorised Signatory

DATED

04 October 2012

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15E and FCC 06-96. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

S Bennett

Document 75918726 Report 15 Issue 1



Page 1 of 31

COMMERCIAL-IN-CONFIDENCE



CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Test Requirements 5
1.3	Brief Summary of Results 6
1.4	Application Form 7
1.5	Product Information 10
1.6	Test Conditions 10
1.7	Deviations from the Standard 10
1.8	Modification Record 10
1.9	DFS Test System 11
2	TEST DETAILS 13
2.1	Calibration of Test Setup 14
2.2	In-Service Monitoring 18
3	TEST EQUIPMENT USED 21
3.1	Test Equipment Used 22
3.2	Support Test Equipment 23
3.3	Measurement Uncertainty 24
4	PHOTOGRAPHS 25
4.1	Photographs of Equipment Under Test (EUT) 26
4.2	Test Set-Up Photographs 28
4.3	DFS Test Equipment 29
5	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 30
5.1	Accreditation, Disclaimers and Copyright 31



Product Service

SECTION 1

REPORT SUMMARY

FCC DFS Testing of the
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900
MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode
Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS
In accordance with FCC CFR 47 Part 15E and FCC 06-96



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC DFS Testing of the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS to the requirements of FCC CFR 47 Part 15E and FCC 06-96.

Objective	To perform FCC DFS Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	SHL21
Serial Number(s)	IMEI 004401114094804
Hardware Version	2PP
Software Version	A8200
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 15E (2011) FCC 06-96 (2006)
Incoming Release Date	Application Form 25 September 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9290 03 August 2012
Start of Test	21 September 2012
Finish of Test	24 September 2012
Name of Engineer(s)	S Bennett
Related Document(s)	FCC Public Notice DA 02-2138 (2002); UKAS M3003: Edition 2 (2007); ETSI TR 100 028 (2001)



Product Service

1.2 TEST REQUIREMENTS

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	Master	Client Without DFS	Client With DFS
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client Without DFS	Client With DFS
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required	Yes



Product Service

1.3 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15E and FCC 06-96 is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
802.11(a)				
2.1	NA	Calibration of Test Setup	Pass	
2.2	15.407 (h)(2)(iii)	In-Service Monitoring	Pass	



Product Service

1.4 APPLICATION FORM

EQUIPMENT DESCRIPTION	
Model Name/Number	CDMA SHL21
Part Number	CA228_B
Hardware Version	PP2
Software Version	F7096
FCC ID	APYHRO00178
Technical Description (Please provide a brief description of the intended use of the equipment)	Dual-band CDMA (BC0, BC6) & Tri-band GSM (GSM900/DCS1800/PCS1900) & Dual-band UMTS (FDDI, FDDV) & Dual-band LTE (B11, B18) multi mode cellular phone with Bluetooth, WLAN, NFC (FeliCa) and GPS

TYPE OF EQUIPMENT
<input type="checkbox"/> Master
<input type="checkbox"/> Client with Radar Detection
<input checked="" type="checkbox"/> Client without Radar Detection

TRANSMITTER TECHNICAL CHARACTERISTICS
FREQUENCY CHARACTERISTICS
<input checked="" type="checkbox"/> 5.150 GHz to 5.250 GHz
<input checked="" type="checkbox"/> 5.250 GHz to 5.350 GHz
<input checked="" type="checkbox"/> 5.470 GHz to 5.725 GHz
<input type="checkbox"/> 5.725 GHz to 5.825 GHz
<input checked="" type="checkbox"/> EUT operates in the frequency band 5600 – 5650 MHz?
<input type="checkbox"/> Off Channel CAC Implemented Off Channel CAC within 5600 – 5650 MHz band hours, (1 – 24) Off Channel CAC outside 5600 – 5650 MHz band minutes, (6 – 240)
Note: DFS is not required in the ranges 5.15 – 5.25 GHz and 5.725 – 5.825 GHz

TRANSMITTER RF POWER CHARACTERISTICS
Maximum rated transmitter output power as stated by manufacturer (if applicable)
Conducted Power 13 dBm
Maximum Antenna Gain 2 dBi
EIRP 15 dBm
Minimum rated transmitter output power as stated by manufacturer (if applicable)
Conducted Power 10 dBm
Maximum Antenna Gain 2 dBi
EIRP 12 dBm
Is TPC supported? <input type="checkbox"/> Yes <input type="checkbox"/> No
If Yes, provide a description of operation.
N/A - less than 500mW



Product Service

POWER SOURCE	
<input type="checkbox"/> AC mains supply	State voltage
AC supply frequency (Hz)	VAC
<input checked="" type="checkbox"/> DC supply	
Nominal voltage	4

SYSTEM ARCHITECTURE			
<input checked="" type="checkbox"/>	Frame Based		
<input type="checkbox"/>	IP Based		
<input type="checkbox"/>	Other	If other please state	
<input checked="" type="checkbox"/>	802.11(a)	Receiver Bandwidth:	N/A MHz
<input checked="" type="checkbox"/>	802.11(n) – 20 MHz	Receiver Bandwidth:	N/A MHz
<input checked="" type="checkbox"/>	802.11(n) – 40 MHz	Receiver Bandwidth:	N/A MHz

DECLARATION	
No parameter or information relating to the detected radar waveforms is available or accessible to the end user.	
<input checked="" type="checkbox"/> True	<input type="checkbox"/> False

MISCELLANEOUS	
Power-on cycle time*	N/A
* Time from switching on the UUT to the point at which Channel Availability Check (CAC) commences	

UNIFORM SPREADING
Describe how the meter provides, on aggregate, uniform channel loading of the spectrum across all channels.
N/A



Product Service

ANTENNA OPTIONS	
Antenna 1	
Antenna Description:	Integral BT / WLAN strip line antenna
Antenna Model:	GCABBA452AFS*
Antenna Maximum Gain:	2dBi
Antenna Frequency Range:	Dual band: 2400MHz -2500MHz, 5100MHz- 5750MHz
Antenna 2	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	
Antenna 3	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	
Antenna 4	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	
Antenna 5	
Antenna Description:	
Antenna Model:	
Antenna Maximum Gain:	
Antenna Frequency Range:	

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature: *M. Kishino* Name: Masahiko Kishino

Position held: Manager Date: 25th September, 2012



Product Service

1.5 PRODUCT INFORMATION

1.5.1 Technical Description

The Equipment Under Test (EUT) was a Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.6 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. See individual test clauses.

The EUT was powered from a 4.0 V DC supply.

1.7 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.8 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



1.9 DFS TEST SYSTEM

The DFS system consists of hardware and software. The Hardware uses a PXI chassis with PXI instruments populating the chassis. The instruments used are a Vector Signal Generator, a Digitiser, Frequency References and a Dual Core PC. The measurement and analysis software runs on the PC and controls the instruments within the mainframe via commands on the PXI bus. Various markers are contained within the generated waveforms. The markers are used to trigger the measurement system at the appropriate points. An external trigger is also provided at the SMB output on the Vector Signal Generator which is employed where a Spectrum Analyser is used in place of the Aeroflex Digitiser. These are described within the test procedure for the applicable test.

The Aeroflex DFS software generates the pulses in accordance with FCC 06-96.

Short Pulse Radar Test Waveform (Types 1-4)

The short pulse radar simulation is a conventional amplitude pulse with varying pulse widths, pulse rate intervals (PRI) and number of pulses. General characteristics for these types and number of repetitions required by the standard are as follows:

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses
1	1	1428	18
2	1-5	150-230	23-29
3	6-10	200-500	16-18
4	11-20	200-500	12-16

FCC 06-96 - Table 5 – Short Pulse Radar Test Waveforms

Long Pulse Radar Test Waveform (Type 5)

The long pulse radar simulation is a 12 second concatenated series of chirps, chosen randomly. The general characteristics for type 5 and number of repetitions required by the standard are as follows:

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per Burst	Number of Bursts
5	50-100	5-20	1000-2000	1-3	8-20



FCC 06-96 - Table 6 – Long Pulse Radar Test Waveform

A Type 5 Radar sequence is constructed in the following way:

- 1) The user provides the required level based on the calibration and the test frequency.
- 2) The Burst_Count, (a number between 8 and 20 inclusive), is chosen representing the number of "bursts" (or waveform segments). Type 5 waveform length is 12 seconds, thus each "burst" length will be $BL = 12 / \text{Burst_Count}$.
- 3) Pulse_Count, a number between 1 and 3 inclusive is chosen for each burst segment (1 through Burst_Count) representing the number of chirped pulses for each burst segment.
- 4) For each burst segment, the following chirp parameters are randomly chosen (all chirped pulses within a given burst segment are the same, whether 1, 2, or 3 chirped pulses are chosen):
 - a) Frequency width (5 MHz to 20 MHz, a linear and symmetrical ramp)
 - b) Pulse period (50 μs to 100 μs)
 - c) Pulse Rate Interval (1 ms to 2 ms, in 1 μs increments)
 - d) The start of the first pulse in a given burst segment is randomly chosen (in 1 μs increments) between 1 μs and [(the total burst length - (total of all pulse periods within a burst) + (the total space between pulses within a burst)]. Or stated otherwise, 1 μs to [(BL - (Pulse_Count * pulse period) + (Pulse_Count - 1)* randomly chosen PRI Interval)].

Frequency Hopping Test Waveform (Type 6)

The frequency hopping radar simulation emits 9 1 μs wide amplitude pulses with a 333 μs PRI spacing on a randomly chosen frequency, hops to another randomly chosen frequency, emits another 9 pulses and then continues this sequence for 100 different frequencies chosen using a pseudo random sequence. General characteristics for type 6 and number of repetitions required by the standard are as follows:

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)
6	1	333	9	0.333	300

FCC 06-96 - Table 7 – Frequency Hopping Radar Test Waveform

The frequency hopping Radar is generated in the following way:

- a) The user inputs the required level based on the calibration and a frequency within the EUT detection bandwidth.
- b) A sequence of 100 numbers, (n = 1 to 100), are randomly chosen from between 1 to 475 and then removed from the sequence producing 100 unique random numbers.
- c) Frequency assignments are 5250 MHz + n.
- d) If the list generated from steps (b) and (c) does not include at least one frequency which is between 5250 to 5350 MHz or 5470 to 5725 MHz, the list is regenerated.
- e) Secondly, in order to verify that at least one frequency in the list is at the EUT frequency plus or minus $\frac{1}{2}$ the EUT detection bandwidth (i.e. at least one of the frequencies in the list must conflict with the EUT's operation such that the EUT will attempt to relocate when the sequence is played), the frequency supplied by the user is inserted into the list, replacing one selection.

Using the supplied Aeroflex software, the pulses are automatically generated and the required numbers of trials are created for each Radar Type – except in the case of Radar Type 1 which has no changeable attributes. The pulses are saved as Arbitrary Waveform files which are then selected by the user for use in the scenario being tested.



Product Service

SECTION 2

TEST DETAILS

FCC DFS Testing of the
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900
MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode
Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS
In accordance with FCC CFR 47 Part 15E and FCC 06-96



Product Service

2.1 CALIBRATION OF TEST SETUP

2.1.1 Specification Reference

FCC CFR 47 Part 15E and FCC 06-96, Clause NA

2.1.2 Equipment Under Test and Modification State

CDMA SHL21 S/N: IMEI 004401114094804 - Modification State 0

2.1.3 Date of Test

21 September 2012 & 24 September 2012

2.1.4 Environmental Conditions

Ambient Temperature	23.2 - 23.9°C
Relative Humidity	33.3 - 34.6%



2.1.5 Test Results

In this test equipment configuration, Radar signals are injected at the Master. The configuration ensures that the Radar pulses are received only by the Master device and not the Client. To calibrate the Radar pulses, the UUT was replaced by a Spectrum Analyser. The required Radar Waveform, (Type 1), was loaded into the Arbitrary Waveform Generator. The Spectrum Analyser was set to zero Span and the RBW and VBW set to 3MHz. The sweep time was set to display the entire burst and triggered on the Radar Burst. The output level of the Radar Signal Generator was adjusted to give the correct level as defined in the table below with the 1dB correction accounted for. Trace data showing the used Radar Pulses was recorded.


DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Test Equipment Setup

Setup for Client with injection at the Master

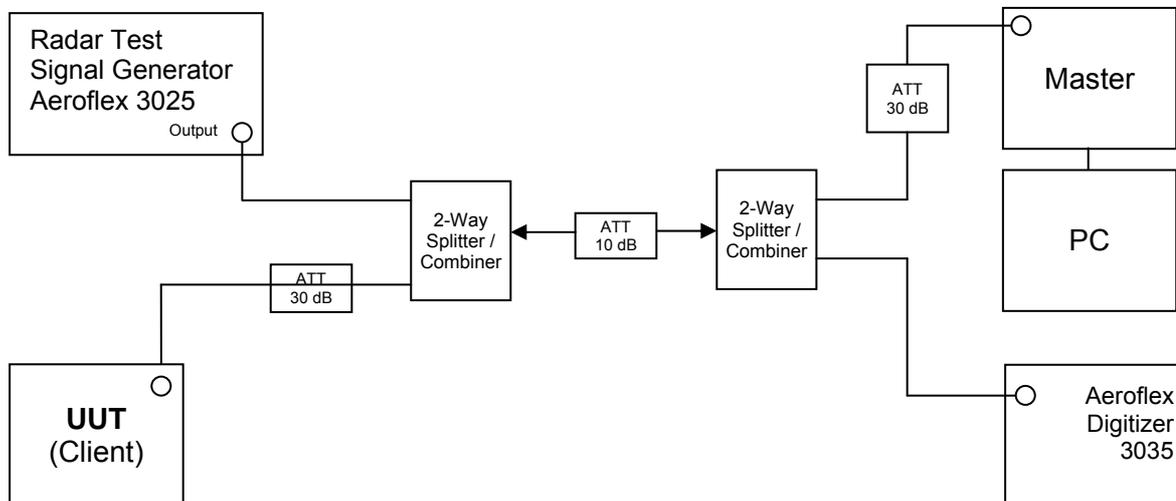



Product Service


Radar Pulse Type 1

Short Radar Pulse Characteristics

Radar Type	Pulse Width (µs)	PRI (µs)	Number Of Pulses
1	1	1428	18

Client without DFS


Radar Type 1 Plot

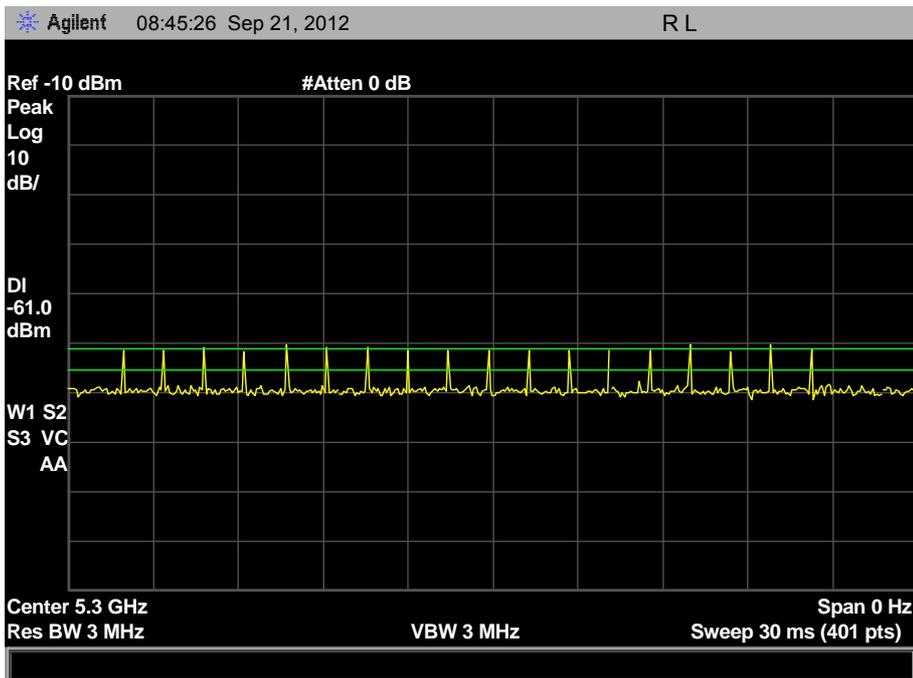



Product Service

Channel Loading Plot

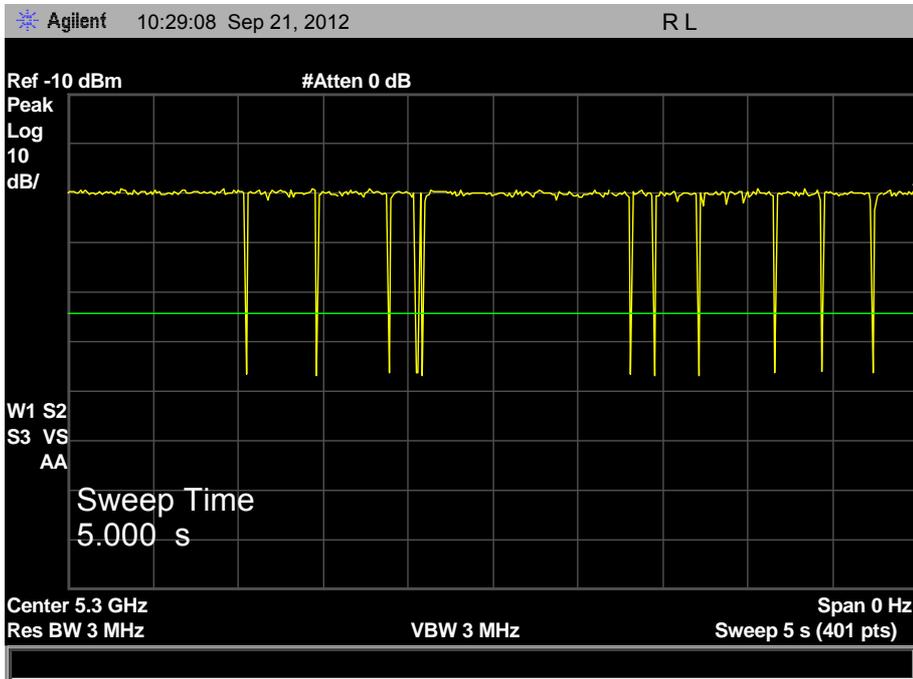



2.2 IN-SERVICE MONITORING

2.2.1 Specification Reference

FCC CFR 47 Part 15E, Clause 15.407 (h)(2)(iii)

2.2.2 Equipment Under Test and Modification State

CDMA SHL21 S/N: IMEI 004401114094804 - Modification State 0

2.2.3 Date of Test

21 September 2012

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

Initially, the UUT was removed from the test setup and replaced with a Spectrum Analyser. A Type 1 Radar burst was sent from the signal generator and its level adjusted until the required level of -61dBm was achieved. The Spectrum Analyser was then replaced with the UUT.

The UUT was configured to stream the FCC designated MPEG file using Windows Media Player version 12. Using the Aeroflex DFS Software, the Radar burst was injected to the Master. The test software triggered the capture mechanism of the PXI Digitiser and data was collected of the Radar burst, the Master and Client devices. The data was analysed with the Channel Move time being measured at the final point where transmissions ceased. It was checked that all transmissions stopped within the 10 second period defined from the point of the end of the final Radar pulse + 10 seconds. In addition, the aggregate on time during the first 200ms and the following 9.8 seconds of the Channel Move Time was computed by the Aeroflex DFS Software.

The markers on the trace data correspond to the following time periods:

Red	-	End Of Radar Burst, (T1)
Purple	-	End Of 200ms Period, (T1 + 200 ms)
Yellow	-	End Of Channel Move Time, (T1 + 10 seconds)

2.2.6 Environmental Conditions


Ambient Temperature	22.6°C
Relative Humidity	34.5%




Product Service

2.2.7 Test Results

Overall Power vs Time Display, showing channel closing and move time

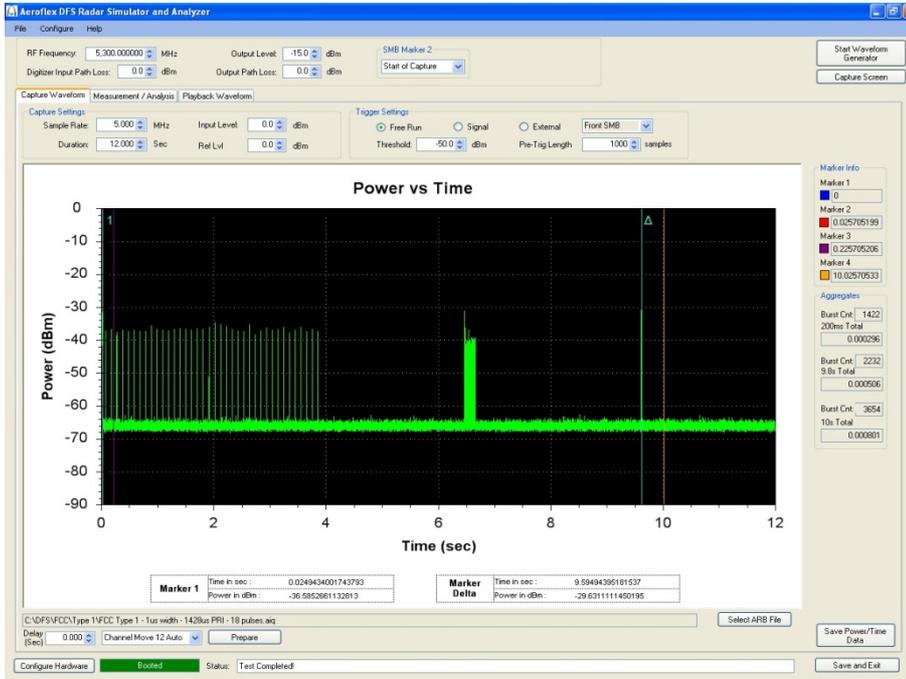

Zoom of Radar Burst, Access Point and Client Signalling

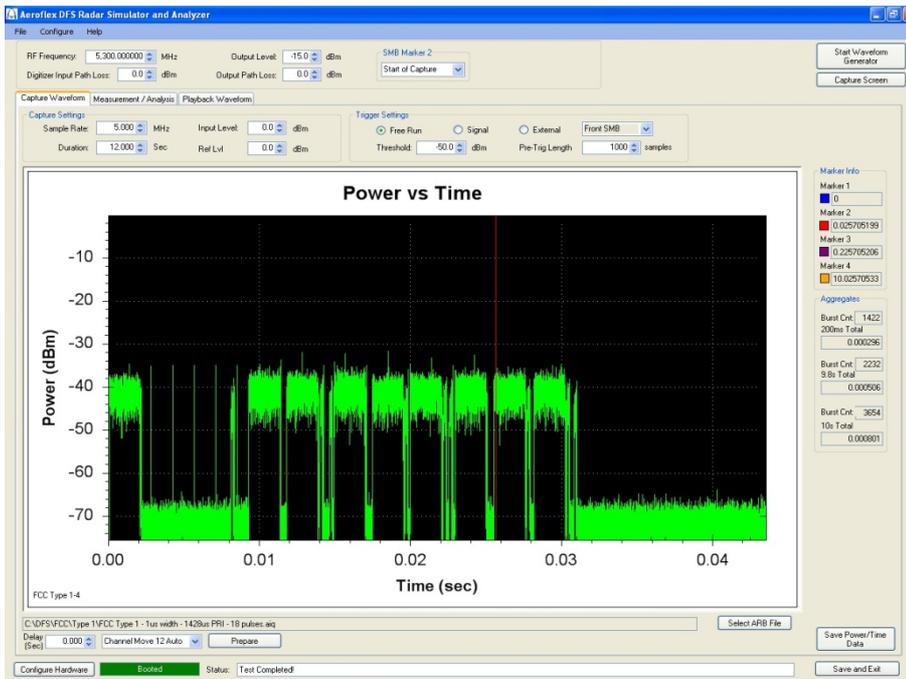



Product Service

Limit Clause 15.407 (h)(2)(iii) and FCC 06-96, Table 4

Channel Move Time	<10s
Channel Closing Time (Aggregate Time During 200ms)	<200ms
Channel Closing Time (Aggregate Time During +200ms to 10s)	<60ms



Product Service

SECTION 3

TEST EQUIPMENT USED



Product Service

3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 and 2.2 - Calibration of Test Set Up and In Service Monitoring					
30dB/2W Attenuator	Narda	4772-30	460	-	TU
30dB Attenuator	Narda	4772-30	463	-	TU
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jul-2013
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
DC - 12.4 GHz 10 dB Attenuator	Suhner	6810.17.A	3965	12	27-Jun-2013
PXI RF Digitizer	Aeroflex	3025	4012	24	6-Dec-2013
PXI RF Synthesizer	Aeroflex	3010	4013	24	6-Dec-2013
PXI RF Synthesizer	Aeroflex	3010	4014	24	6-Dec-2013
PXI Digital RF Signal Generator	Aeroflex	3025	4015	24	6-Dec-2013
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4055	12	6-Mar-2013
1800-6000 MHz Power Splitter	Mini-Circuits	ZN2PD-63-S+	4056	12	6-Mar-2013

TU – Traceability Unscheduled



Product Service

3.2 SUPPORT TEST EQUIPMENT

Instrument	Manufacturer	Type No.	Serial Number
Access Point	Symbol	AP-5131-44000-WW	05357520500184
Power Supply	Symbol	AP-PSBIAS-T-1P-AF	I05496049056326
PC	Dell	Optiplex 745	36DJP2J



Product Service

3.3 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
In-Service Monitoring	Time: $\pm 4\%$ Power: ± 1.5 dB



Product Service

SECTION 4

PHOTOGRAPHS



4.1 PHOTOGRAPHS OF EQUIPMENT UNDER TEST (EUT)



Front View




Rear View




Rear View with Battery Cover Removed



4.2 TEST SET-UP PHOTOGRAPHS

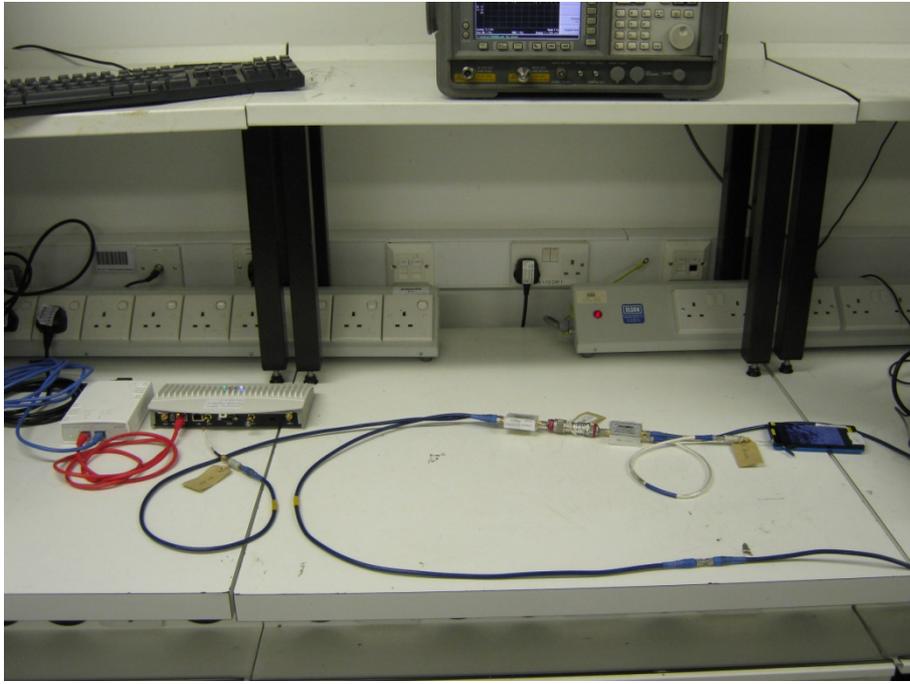


View 1

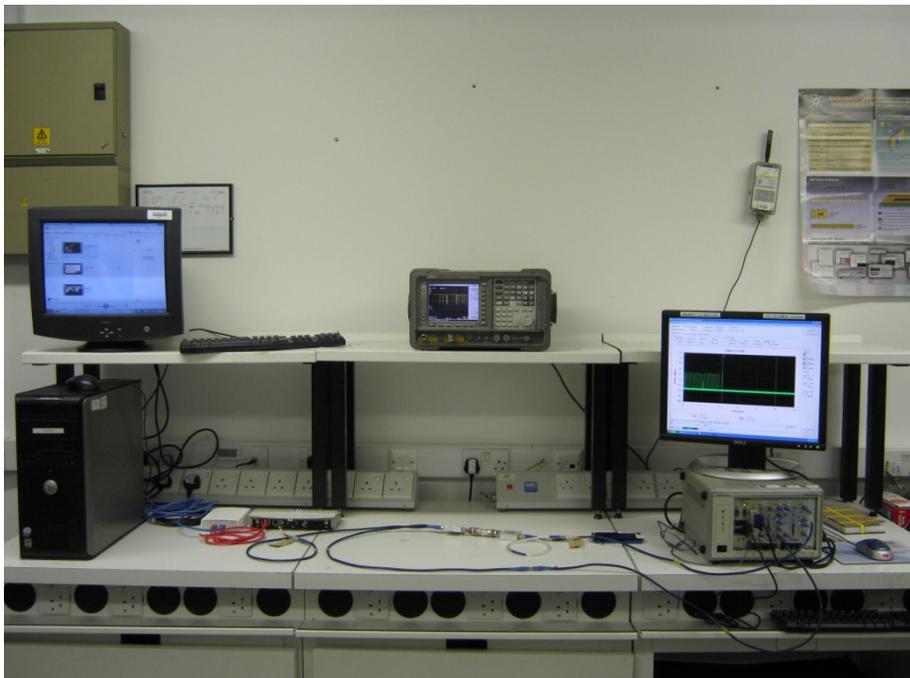

View 2



4.3 DFS TEST EQUIPMENT

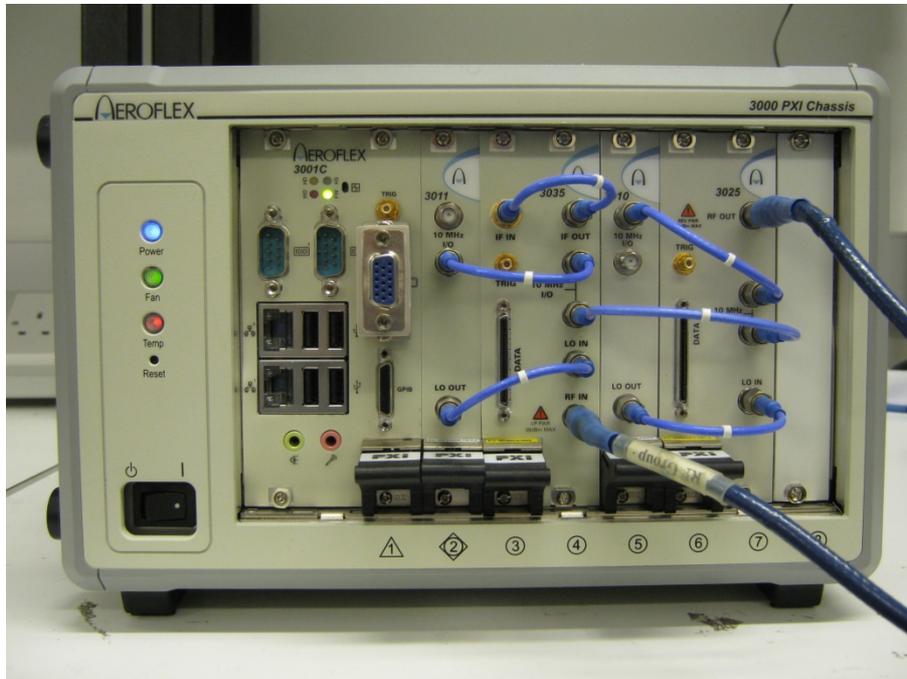

Test Set Up



Product Service

SECTION 5

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited