



Product Service

---

**Choose certainty.  
Add value.**

# Report On

Specific Absorption Rate Testing of the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00178

Document 75918726 Report 19 Issue 4

October 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuvps.co.uk](http://www.tuvps.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

Specific Absorption Rate Testing of the  
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band  
GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V)  
and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with  
Bluetooth, WLAN, NFC (FeliCa) and GPS

Document 75918726 Report 19 Issue 4

October 2012

**PREPARED FOR**

Sharp Communication Compliance Ltd  
Azure House  
Bagshot Road  
Bracknell  
Berkshire  
RG12 7QY

**PREPARED BY**

  
\_\_\_\_\_  
**M Jenkins**  
Business Manager

**APPROVED BY**

  
\_\_\_\_\_  
**N Grigsby**  
Authorised Signatory

**DATED**

08 October 2012  
\_\_\_\_\_

**This report has been up-issued to Issue 4 to correct inclusion of dipole calibration report references, reference to separate 5GHz head SAR report, and to include peak conducted power results.**





**CONTENTS**

<b>Section</b>	<b>Page No</b>
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Test Results Summary ..... 5
1.4	Product Information ..... 10
1.5	FCC Power Measurements ..... 12
<b>2</b>	<b>TEST DETAILS ..... 15</b>
2.1	SARA 2 SAR Measurement System ..... 16
2.2	CDMA2000 800 MHz Head SAR Test Results and Course Area Scans – 2D ..... 22
2.3	CDMA2000 800 MHz Body SAR Test Results and Course Area Scans – 2D ..... 26
2.4	WCDMA FDD V Head SAR Test Results and Course Area Scans – 2D ..... 28
2.5	WCDMA FDD V Body SAR Test Results and Course Area Scans – 2D ..... 32
2.6	PCS 1900 MHz Head SAR Test Results and Course Area Scans – 2D ..... 34
2.7	PCS 1900 MHz Body SAR Test Results and Course Area Scans – 2D ..... 38
2.8	WLAN 2450 MHz Head SAR Test Results and Course Area Scans – 2D ..... 40
2.9	WLAN 2450 MHz Body SAR Test Results and Course Area Scans – 2D ..... 44
2.10	WLAN 5200 MHz Body SAR Test Results and Course Area Scans – 2D ..... 46
2.11	WLAN 5500 MHz Body SAR Test Results and Course Area Scans – 2D ..... 50
2.12	WLAN 5800 MHz Body SAR Test Results and Course Area Scans – 2D ..... 53
<b>3</b>	<b>TEST EQUIPMENT USED ..... 54</b>
3.1	Test Equipment Used ..... 55
3.2	Test Software ..... 57
3.3	Dielectric Properties of Simulant Liquids ..... 58
3.4	Test Conditions ..... 59
3.5	Measurement Uncertainty ..... 60
<b>4</b>	<b>PHOTOGRAPHS ..... 62</b>
4.1	Test Positional Photographs ..... 63
4.2	Photographs of Equipment Under Test (EUT) ..... 66
<b>5</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 70</b>
5.1	Accreditation, Disclaimers and Copyright ..... 71
<b>ANNEX A</b>	<b>Probe Calibration Report ..... A.2</b>



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

Specific Absorption Rate Testing of the  
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900  
MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode  
Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Specific Absorption Rate Testing of the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS Mobile Handset to the requirements of OET Bulletin 65 Supplement C Edition 01-01.

Objective	To perform Specific Absorption Rate Testing to determine the Equipment Under Test's (EUT's) compliance with the requirements specified of OET Bulletin 65 Supplement C Edition 01-01, for the series of tests carried out.
Applicant	Sharp Communication Compliance Ltd
Manufacturer	Sharp Corporation
Manufacturing Description	Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) Multi Mode Cellular Phone with Bluetooth, WLAN, WiMAX, NFC (FeliCa) and GPS
Model Number	CDMA SHL21
Power Class	GSM 850 MHz Class 4 PCS 1900 MHz Class 1 WCDMA FDD V Class 3
GPRS Class	B
GPRS Multi-slot Class	12
Serial/IMEI Number(s)	004401114094473 004401114094606 004401114094556 004401114094770
Hardware Version	PP1.5 (PCS, WCDMA and CDMA2000 Sample) and 2PP (WLAN Sample)
Software Version	D7171 / F7096
Battery Cell Manufacturer	Sharp Corporation
Battery Model Number	UBATIA210AF03
Test Specification/Issue/Date	OET Bulletin 65 Supplement C Edition 01-01
Start of Test	30 August 2012
Finish of Test	04 September 2012
Related Document(s)	FCC 47CFR 2.1093 KDB 248227 – v01r02 (Rev 1.2) KDB 450824 – D01 v01r01(Rev 1.1) KDB 450824 – D02 v01r01 KDB 648474 – D01 v01r05 KDB 941225 – D01 v02 KDB 941225 – D03 v01 IEEE 1528-2003
Name of Engineer(s)	Mark Jenkins



Product Service

## 1.2 BRIEF SUMMARY OF RESULTS

The measurements shown in this report were made in accordance with the procedures specified OET 65(C) – 2001.

The maximum 1g volume averaged SAR found during this Assessment

Max 1g SAR (W/kg)	0.646
The maximum 1g volume averaged SAR level measured for all the tests performed did not exceed the limits for General Population/Uncontrolled Exposure (W/kg) Partial Body of 1.6 W/kg. Level defined in Supplement C (Edition 01-01) to OET Bulletin 65 (97-01).	

## 1.3 TEST RESULTS SUMMARY

### 1.3.1 System Performance / Validation Check Results

Prior to formal testing being performed a System Check was performed in accordance with OET 65(C) – 2001 and the results were compared against published data in Standard IEEE 1528-2003. The following results were obtained: -

System performance / Validation results

Date	Dipole Used	Frequency (MHz)	Max 1g SAR (W/kg)*	Percentage Drift on Reference	Max 10g SAR (W/kg)*	Percentage Drift on Reference
3/09/2012	835	835	9.32	-2.47%	6.25	0.42%
3/09/2012	1900	1900	42.16	6.19%	22.48	9.68%
31/08/2012	2450	2450	52.12	-0.53%	24.53	2.21%
30/08/2012	5200	5200	76.93	0.56%	22.27	3.08%
30/08/2012	5500	5500	80.57	-3.28%	22.46	-4.01%
30/08/2012	5800	5800	77.14	-1.10%	21.12	-3.58%

\*Normalised to a forward power of 1W



**1.3.2 Results Summary Tables**

CDMA2000 Head Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Ear	Head							
Left	Cheek	384	836.52	0.370	0.349	0.295	-5.630	Figure 8
Left	15°	384	836.52	0.390	0.321	0.190	0.090	Figure 9
Right	Cheek	384	836.52	0.530	0.512	0.394	-4.740	Figure 10
Right	15°	384	836.52	0.330	0.322	0.250	-5.740	Figure 11
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)								

CDMA2000 Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Ear	Head							
15mm	Front Facing	384	836.52	0.250	0.292	0.218	0.000	Figure 12
15mm	Rear Facing	384	836.52	0.280	0.319	0.236	-1.760	Figure 13
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)								

WCDMA FDD V Head Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Ear	Head							
Left	Cheek	4232	846.4	0.270	0.262	0.219	-1.210	Figure 14
Left	15°	4232	846.4	0.230	0.192	0.129	-1.650	Figure 15
Right	Cheek	4232	846.4	0.390	0.376	0.287	0.600	Figure 16
Right	15°	4232	846.4	0.270	0.258	0.198	0.480	Figure 17
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)								



Product Service

WCDMA FDD V Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
15mm	Front Facing	4232	846.4	0.220	0.252	0.191	4.530	Figure 18
15mm	Rear Facing	4232	846.4	0.240	0.269	0.207	-1.940	Figure 19

Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)

PCS 1900MHz Head Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
Left	Cheek	512	1850.2	0.280	0.250	0.168	0.940	Figure 20
Left	15°	512	1850.2	0.100	0.078	0.053	-3.410	Figure 21
Right	Cheek	512	1850.2	0.220	0.209	0.139	-6.710	Figure 22
Right	15°	512	1850.2	0.070	0.067	0.044	0.170	Figure 23

Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)

PCS 1900MHz Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
15mm	Front Facing	512	1850.2	0.190	0.234	0.154	-1.490	Figure 24
15mm	Rear Facing	512	1850.2	0.170	0.220	0.135	-3.430	Figure 25

Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)



Product Service

WLAN 2450MHz Head Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Ear	Head							
Left	Cheek	6	2437	0.210	0.191	0.114	-4.170	Figure 26
Left	15°	6	2437	0.180	0.166	0.097	1.920	Figure 27
Right	Cheek	6	2437	0.750	0.646	0.308	2.830	Figure 28
Right	15°	6	2437	0.680	0.530	0.249	0.840	Figure 29
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)								

WLAN 2450MHz Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS.

Position		Channel Number	Frequency (MHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
15mm	Front Facing	6	2437	0.050	0.063	0.039	0.000	Figure 30
15mm	Rear Facing	6	2437	0.090	0.117	0.064	0.000	Figure 31
Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)								



Product Service

WLAN 5000MHz Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS. (NUA).

Position		Channel Number	Frequency (GHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
15mm	Rear Facing	36	5.18	0.159	0.163	0.064	-7.700	Figure 32
15mm	Rear Facing	48	5.24	0.171	0.178	0.070	4.600	Figure 33
15mm	Rear Facing	52	5.26	0.169	0.186	0.074	-7.000	Figure 34
15mm	Rear Facing	64	5.32	0.140	0.148	0.058	-7.500	Figure 35

Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)

WLAN 5000MHz Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS. (NUA).

Position		Channel Number	Frequency (GHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
15mm	Rear Facing	104	5.52	0.247	0.163	0.061	3.800	Figure 36
15mm	Rear Facing	116	5.58	0.224	0.144	0.053	-2.600	Figure 37
15mm	Rear Facing	124	5.62	0.247	0.158	0.058	7.200	Figure 38

Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)

WLAN 5000MHz Body Specific Absorption Rate (Maximum SAR) 1g & 10g Results for the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS. (NUA).

Position		Channel Number	Frequency (GHz)	Max Spot SAR (W/kg)	Max 1g SAR (W/kg)	Max 10g SAR (W/kg)	SAR Drift (%)	Area scan (Figure number)
Spacing	Direction							
15mm	Rear Facing	136	5.68	0.291	0.198	0.075	-0.800	Figure 39

Limit for General Population (Uncontrolled Exposure) 1.6 W/kg (1g) & 2.0 W/kg (10g)



## 1.4 PRODUCT INFORMATION

### 1.4.1 Technical Description

The equipment under test (EUT) was a Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

### 1.4.2 Test Configuration and Modes of Operation

The testing was performed with standard batteries supplied and manufactured by Sharp Corporation. Each battery was fully charged before each measurement and there were no external connections.

For head SAR assessment, testing was performed with the device in the declared normal position of operation for CDMA2000 800MHz, PCS 1900MHz, WCDMA FDDV and WLAN 2.4GHz frequency bands at maximum power. The device was placed against a Specific Anthropomorphic Mannequin (SAM) phantom as specified in OET 65(C) – 2001. The phantom was filled with simulant liquid appropriate to the frequency band. The dielectric properties were measured and found to be in accordance with the requirements for the dielectric properties specified OET 65(C) – 2001. Testing was performed at both the left and right ear of the phantom at both handset positions stated in the applied specification.

For body SAR assessment, testing was performed for CDMA2000 800MHz, PCS 1900MHz, WCDMA FDDV, 2.4GHz WLAN and 5GHz WLAN frequency bands at maximum power. For PCS 1900MHz the handset was operating in GPRS mode. For WCDMA the handset was operating in RMC mode. SAR assessment was performed with a Headset accessory attached during testing on the Body. The device was tested for typical body-worn operation in accordance with the requirements of OET65(c) Flat phantom dimensions are 210mmx210mmx210mm and with a sidewall thickness of 2.0mm. The phantom was filled to a depth of 150mm with the appropriate body simulant liquid. The dielectric properties were in accordance with the requirements specified in Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01). SAR testing was performed with the body of the device placed at 15mm separation from the phantom.

Testing was performed in each position at the frequency that gave the highest output power for each band. No SAR level was found to be within -3dB of the applicable limit (-3dB equates to  $\leq 0.802$  W/kg in this instance) therefore no additional testing was required at the remaining frequencies / channels of the bands. WLAN testing was achieved using the devices internal software, customer supplied software and settings supplied by the customer.. The worst case data rate for WLAN testing was obtain from data provided by TUV Product Service determined by the testing of the handset. The worst case was deemed as the data rate which produced the highest level of conducted average power. This was 1Mbps for 802.11b 2.4GHz WLAN and 12Mbps for 802.11a 5GHz WLAN.

Simultaneous transmission SAR testing for Head/Body for CDMA2000 800MHz and WLAN was not required because the antenna separation distance is greater than 5cm and the maximum SAR levels obtained for both transmitters is less than 0.8W/kg.

Simultaneous transmission SAR testing for Head/Body for CDMA2000 800MHz and BT was not required because the antenna separation distance is greater than 5cm and the Bluetooth conducted output power is less than 24mW.



Product Service

Simultaneous transmission SAR testing for Head/Body for WLAN and BT was not required because the antenna separation distance is less than 2.5cm and the Bluetooth conducted output power is less than 24mW.

Stand alone SAR testing for Bluetooth was not required due to the output power being less than the threshold.

The following configurations and procedures for CDMA 2000 SAR testing were used:

#### HEAD SAR:

SAR for the head exposure configurations is measured in RC3 with the EUT configured to transmit at full rate using Loopback Service Option SO55.

SAR for RC1 is not required when the maximum average output of each channel is less than 0.25dB higher than that measured in RC3.

#### BODY SAR:

SAR for the body exposure configuration is measured in RC3 with the EUT configured using TDSO32, to transmit at full rate on FCH with all other code channels disabled.

SAR for multiple code channels (FCH + SCH) is not required when the maximum average output of each RF channel is less than 0.25dB higher than that measured with FCH only.

Body SAR in RC1 is not required when the maximum average output of each channel is less than 0.25dB higher than that measured in RC3.

Included in this report are descriptions of the test method; the equipment used and an analysis of the test uncertainties applicable and diagrams indicating the locations of maximum SAR for each test position along with photographs indicating the positioning of the handset against the body as appropriate

#### DIPOLE CALIBRATION REPORTS

For dipole calibration reports please refer to separate documents as listed below:

835MHz refer to document D835V2.pdf

1900MHz refer to document D1900V2.pdf

2400MHz refer to document D2450V2.pdf

5000MHz refer to document D5GHzV2.pdf

#### SEPARATE REPORT FOR 5GHz HEAD TEST RESULTS

For 5GHz Head test results please refer to the following separate test report:

RFI-SAR-RP90033JD01A V2.0.pdf



Product Service

**1.5 FCC POWER MEASUREMENTS**

**1.5.1 Method**

Conducted power measurements were made using a power meter.

**1.5.2 Conducted Power Measurements**

**CDMA2000 800MHz**

**Head**

TUV Sample No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm) Peak	Conducted Carrier Power (dBm) Average
38	S055, RC1	64-RAY Orthogonal	824.70	27.06	22.34
			836.52	27.48	22.80
			848.31	26.44	22.03

TUV Sample No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm) Peak	Conducted Carrier Power (dBm) Average
38	S055, RC3	64-RAY Orthogonal	824.70	26.60	22.29
			836.52	27.16	<b>22.77</b>
			848.31	26.31	22.24

**Body**

TUV Sample No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm) Peak	Conducted Carrier Power (dBm) Average
38	TDS032, FCH+SCH RC3	BPSK	824.70	27.46	22.49
			836.52	27.18	22.84
			848.31	26.14	22.16

TUV Sample No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm) Peak	Conducted Carrier Power (dBm) Average
38	TDS032, FCH RC3	BPSK	824.70	26.68	22.30
			836.52	27.13	<b>22.74</b>
			848.31	26.11	21.88



**WLAN**

Mode	Modulation	Frequency	Conducted Carrier Power (dBm) IMEI 004401114094770	Radiated Carrier Power(dBm)	Peak to Average Ratio (dB)	Corrected Radiated Carrier Power for SAR Report (dBm)
802.11b 1 Mbps	DSSS	2412	17.32 Pk	15.57 Pk	3.42	12.15
		2437	17.87 Pk	15.92 Pk	3.42	<b>12.50</b>
		2462	17.80 Pk	14.29 Pk	3.42	10.87

Mode	Modulation	Frequency	Radiated Carrier Power(dBm) IMEI 004401114094770	Corrected Radiated Carrier Power for SAR Report (dBm)
802.11a 12 Mbps	DSSS	5180	18.03 Av	18.03
		5240	17.78 Av	17.78
		5260	16.87 Av	16.87
		5320	18.26 Av	18.26
		5520	18.85 Av	18.85
		5580	18.50 Av	18.50
		5620	17.97 Av	17.97
		5680	16.52 Av	16.52



Product Service

**PCS**

**Head**

TUV Sample No.	Mode	Modulation	Frequency (MHz)	Conducted Carrier Power (dBm) Peak	Conducted Carrier Power (dBm) Average
53	Voice	GMSK	1850.2	28.69	<b>19.07</b>
			1880.0	28.47	18.90
			1909.8	28.40	18.77

**Body**

TUV Sample No.	Mode	Modulation	Frequency (MHz)	Conducted Carrier Power (dBm) Peak	Conducted Carrier Power (dBm) Average
53	GPRS	GMSK	1850.2	23.38	<b>19.72</b>
			1880.0	23.36	19.65
			1909.8	23.18	19.51

**WCDMA FDDV**

**Head**

TUV Sample No.	Mode	Modulation	Frequency	Conducted Carrier Power (dBm) Peak	Conducted Carrier Power (dBm) Average
50	RMC	QPSK	826.6	25.15	21.22
			835.0	25.53	21.60
			846.4	25.82	<b>22.06</b>



Product Service

## **SECTION 2**

### **TEST DETAILS**

Specific Absorption Rate Testing of the  
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900  
MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode  
Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS



## 2.1 SARA 2 SAR MEASUREMENT SYSTEM

### 2.1.1 Robot System Specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

Schematic diagram of the SAR measurement system

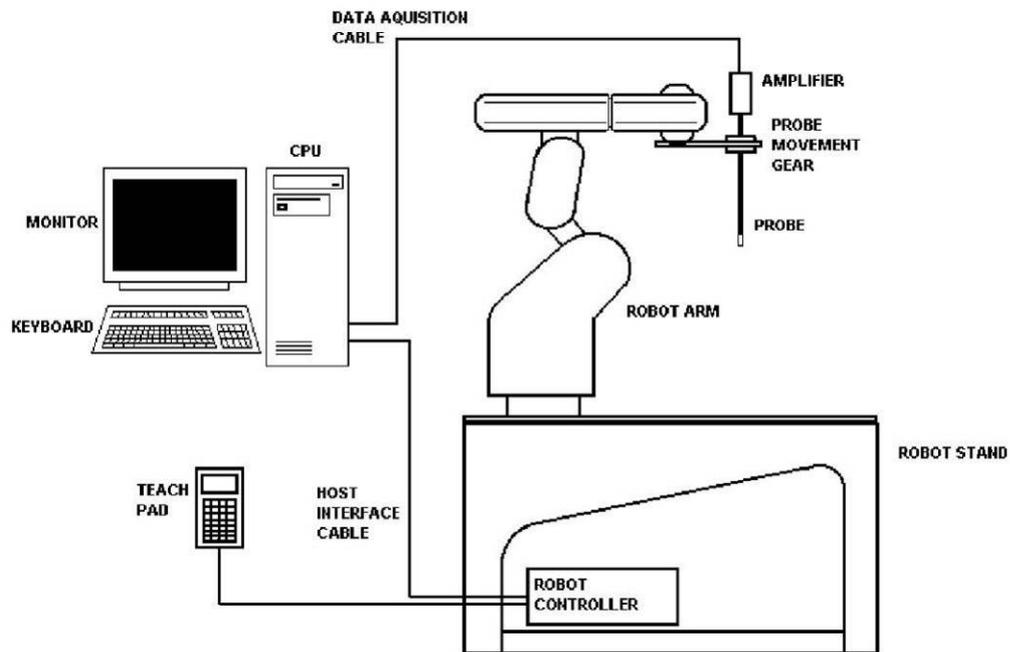


Figure 1

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.001mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.



**2.1.2 Probe and Amplifier Specification**

IXP-050 IndexSAR isotropic immersible SAR probe

The probes are constructed using three orthogonal dipole sensors arranged on an interlocking, triangular prism core. The probes have built-in shielding against static charges and are contained within a PEEK cylindrical enclosure material at the tip. Probe calibration is described in the following section.

IFA-010 Fast Amplifier

Technical description of IndexSAR IFA-010 Fast probe amplifier  
 A block diagram of the fast probe amplifier electronics is shown below.

Block diagram of the fast probe amplifier electronic

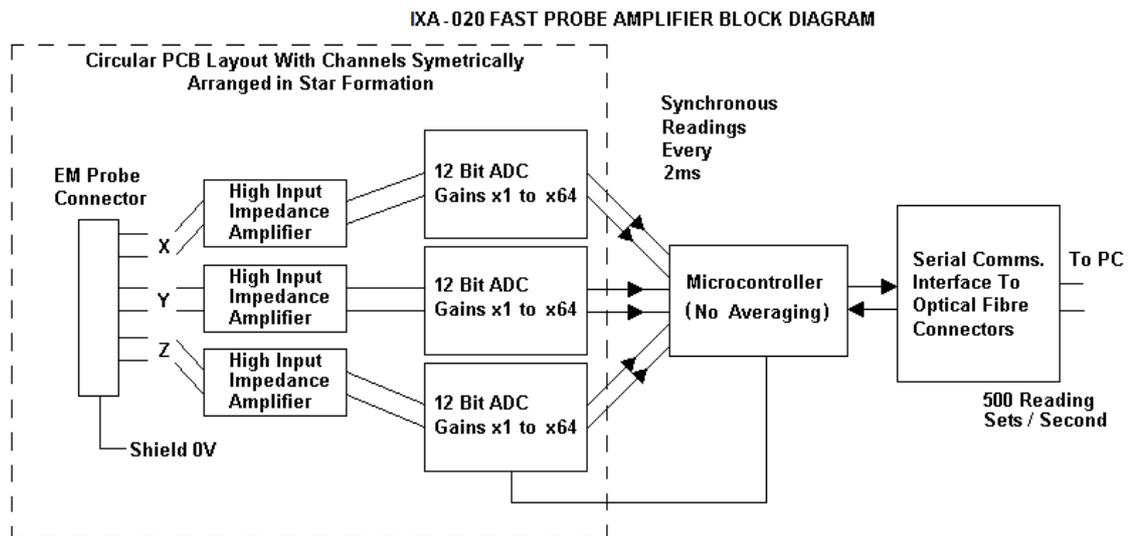


Figure 2

This amplifier has a time constant of approx. 50µs, which is much faster than the SAR probe response time. The overall system time constant is therefore that of the probe (<1ms) and reading sets for all three channels (simultaneously) are returned every 2ms to the PC. The conversion period is approx. 1 µs at the start of each 2ms period. This enables the probe to follow pulse modulated signals of periods >>2ms. The PC software applies the linearisation procedure separately to each reading, so no linearisation corrections for the averaging of modulated signals are needed in this case. It is important to ensure that the probe reading frequency and the pulse period are not synchronised and the behaviour with pulses of short duration in comparison with the measurement interval need additional consideration.

Phantoms

The Flat phantom used is a rectangular Perspex Box IndexSAR item IXB-070. Dimensions 210w 210d 210h (mm). This phantom is used with IndexSAR side bench IXM-030.

The Specific Anthropomorphic Mannequin (SAM) Upright Phantom is fabricated using moulds generated from the CAD files as specified by CENELEC EN 62209-1: 2006. It is mounted via a rotation base to a supporting table, which also holds the robotic positioner. The phantom and robot alignment is assured by both mechanical and laser registration systems.



### 2.1.3 SAR Measurement Procedure

Principal components of the SAR measurement test bench



Figure 3

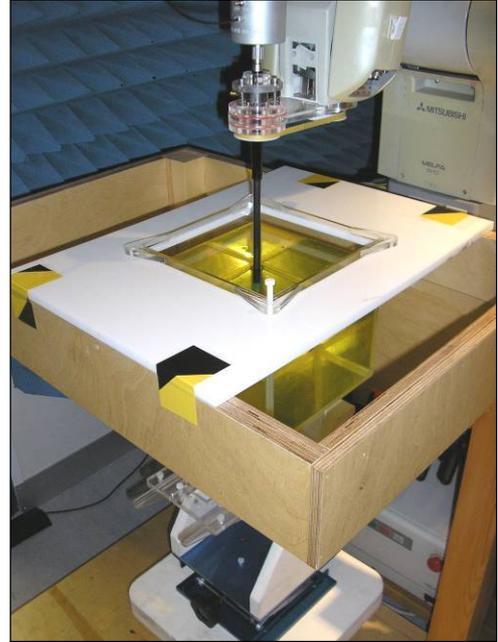


Figure 4

The major components of the test bench are shown in the pictures above. A test set and dipole antenna control the handset via an air link and a low-mass phone holder can position the phone at either ear. Graduated scales are provided to set the phone in the 15 degree position. The upright phantom head holds approx. 7 litres of simulant liquid. The phantom is filled and emptied through a 45mm diameter penetration hole in the top of the head.

After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between these start and end readings enables the power drift during measurement to be assessed.

#### SARA2 Interpolation and Extrapolation schemes

SARA2 software contains support for both 2D cubic B-spline interpolation as well as 3D cubic B-spline interpolation. In addition, for extrapolation purposes, a general  $n^{\text{th}}$  order polynomial fitting routine is implemented following a singular value decomposition algorithm presented in [4]. A 4<sup>th</sup> order polynomial fit is used by default for data extrapolation, but a linear-logarithmic fitting function can be selected as an option. The polynomial fitting procedures have been tested by comparing the fitting coefficients generated by the SARA2 procedures with those obtained using the polynomial fit functions of Microsoft Excel when applied to the same test input data.



### Interpolation of 2D area scan

The 2D cubic B-spline interpolation is used after the initial area scan at fixed distance from the phantom shell wall. The initial scan data are collected with approx. 115mm spatial resolution and spline interpolation is used to find the location of the local maximum to within a 1mm resolution for positioning the subsequent 3D scanning.

### Extrapolation of 3D scan

For the 3D scan, data are collected on a spatially regular 3D grid having (by default) 6.4 mm steps in the lateral dimensions and 3.5 mm steps in the depth direction (away from the source). SARA2 enables full control over the selection of alternative step sizes in all directions.

The digitised shape of the head is available to the SARA2 software, which decides which points in the 3D array are sufficiently well within the shell wall to be 'visited' by the SAR probe. After the data collection, the data are extrapolated in the depth direction to assign values to points in the 3D array closer to the shell wall. A notional extrapolation value is also assigned to the first point outside the shell wall so that subsequent interpolation schemes will be applicable right up to the shell wall boundary.

### Interpolation of 3D scan and volume averaging

The procedure used for defining the shape of the volumes used for SAR averaging in the SARA2 software follow the method of adapting the surface of the 'cube' to conform with the curved inner surface of the phantom (see Appendix C.2.2.1 in EN 62209-1: 2006). This is called, here, the conformal scheme.

For each row of data in the depth direction, the data are extrapolated and interpolated to less than 1mm spacing and average values are calculated from the phantom surface for the row of data over distances corresponding to the requisite depth for 10g and 1g cubes. This results in two 2D arrays of data, which are then cubic B-spline interpolated to sub mm lateral resolution. A search routine then moves an averaging square around through the 2D array and records the maximum value of the corresponding 1g and 10g volume averages. For the definition of the surface in this procedure, the digitised position of the headshell surface is used for measurement in head-shaped phantoms. For measurements in rectangular, box phantoms, the distance between the phantom wall and the closest set of gridded data points is entered into the software.

For measurements in box-shaped phantoms, this distance is under the control of the user. The effective distance must be greater than 2.5mm as this is the tip-sensor distance and to avoid interface proximity effects, it should be at least 5mm. A value of 6 or 8mm is recommended. This distance is called **dbe** in EN 62209-1: 2006.

For automated measurements inside the head, the distance cannot be less than 2.5mm, which is the radius of the probe tip and to avoid interface proximity effects, a minimum clearance distance of  $x$  mm is retained. The actual value of **dbe** will vary from point to point depending upon how the spatially-regular 3D grid points fit within the shell. The greatest separation is when a grid point is just not visited due to the probe tip dimensions. In this case the distance could be as large as the step-size plus the minimum clearance distance (i.e with  $x=5$  and a step size of 3.5, **dbe** will be between 3.5 and 8.5mm).

The default step size (**dstep** in EN 62209-1: 2006) used is 3.5mm, but this is under user-control. The compromise is with time of scan, so it is not practical to make it much smaller or scan times become long and power-drop influences become larger.



Product Service

The robot positioning system specification for the repeatability of the positioning (**dss** in EN 62209-1: 2006) is +/- 0.04mm.

The phantom shell is made by an industrial moulding process from the CAD files of the SAM shape, with both internal and external moulds. For the upright phantoms, the external shape is subsequently digitised on a Mitutoyo CMM machine (Euro C574) to a precision of 0.001mm. Wall thickness measurements made non-destructively with an ultrasonic sensor indicate that the shell thickness (**dph**) away from the ear is 2.0 +/- 0.1mm. The ultrasonic measurements were calibrated using additional mechanical measurements on available cut surfaces of the phantom shells.

For the upright phantom, the alignment is based upon registration of the rotation axis of the phantom on its 253mm-diameter baseplate bearing and the position of the probe axis when commanded to go to the axial position. A laser alignment tool is provided (procedure detailed elsewhere). This enables the registration of the phantom tip (**dmis**) to be assured to within approx. 0.2mm. This alignment is done with reference to the actual probe tip after installation and probe alignment. The rotational positioning of the phantom is variable – offering advantages for special studies, but locating pins ensure accurate repositioning at the principal positions (LH and RH ears).



**2.1.4 Head Test Positions**

This recommended practice specifies exactly two test positions for the handset against the head phantom, the “Cheek” position and the “tilted” position. These two test positions are defined in the following sub-clauses. The handset should be tested in both positions on the left and right sides of the SAM phantom. In each test position the centre of the earpiece of the device is placed directly at the entrance of the auditory canal. The angles mentioned in the test positions used are referenced to the line connecting both auditory canal openings. The plane this line is on is known as the reference plane. Testing is performed on the right and left-hand sides of the generic phantom head.

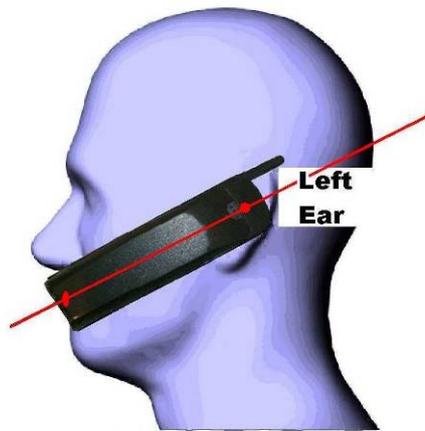


Figure 5. – Side View of Mobile next to head showing alignment.

The Cheek Position

The Cheek Position is where the mobile is in the reference plane and the line between the mobile and the line connecting both auditory canal openings is reduced until any part of the mobile touches any part of the generic twin phantom head.

The 15° Position

The 15° Position is where the mobile is in the reference Cheek position and the phone is kept in contact with the auditory canal at the earpiece; the bottom of the phone is then tilted away from the phantom mouth by 15°.

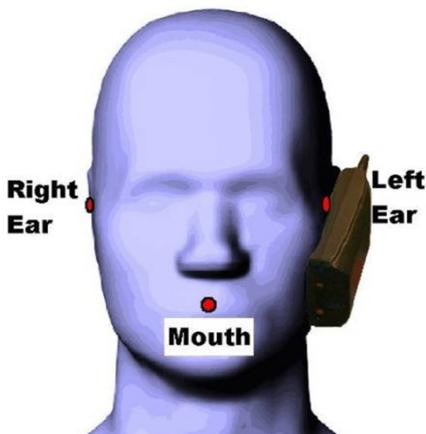


Figure 6. – Cheek Position.

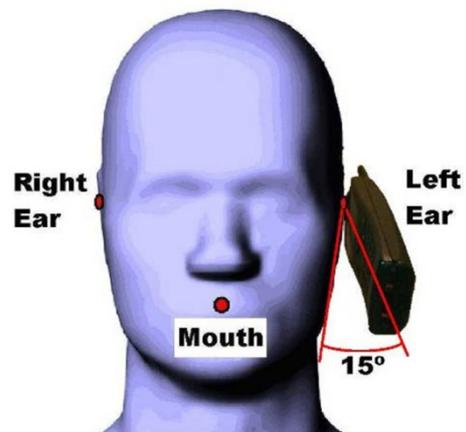


Figure 7. – 15° Tilt Position.



2.2 CDMA2000 800MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 15:09:49	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	01.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-50.80mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-152.85mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	18.420
TEST FREQUENCY:	836.52MHz	SAR 1g:	0.349 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.295 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.217 W/kg
TYPE OF MODULATION:	46-RAY Orthogonal	SAR END:	0.205 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-5.630 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

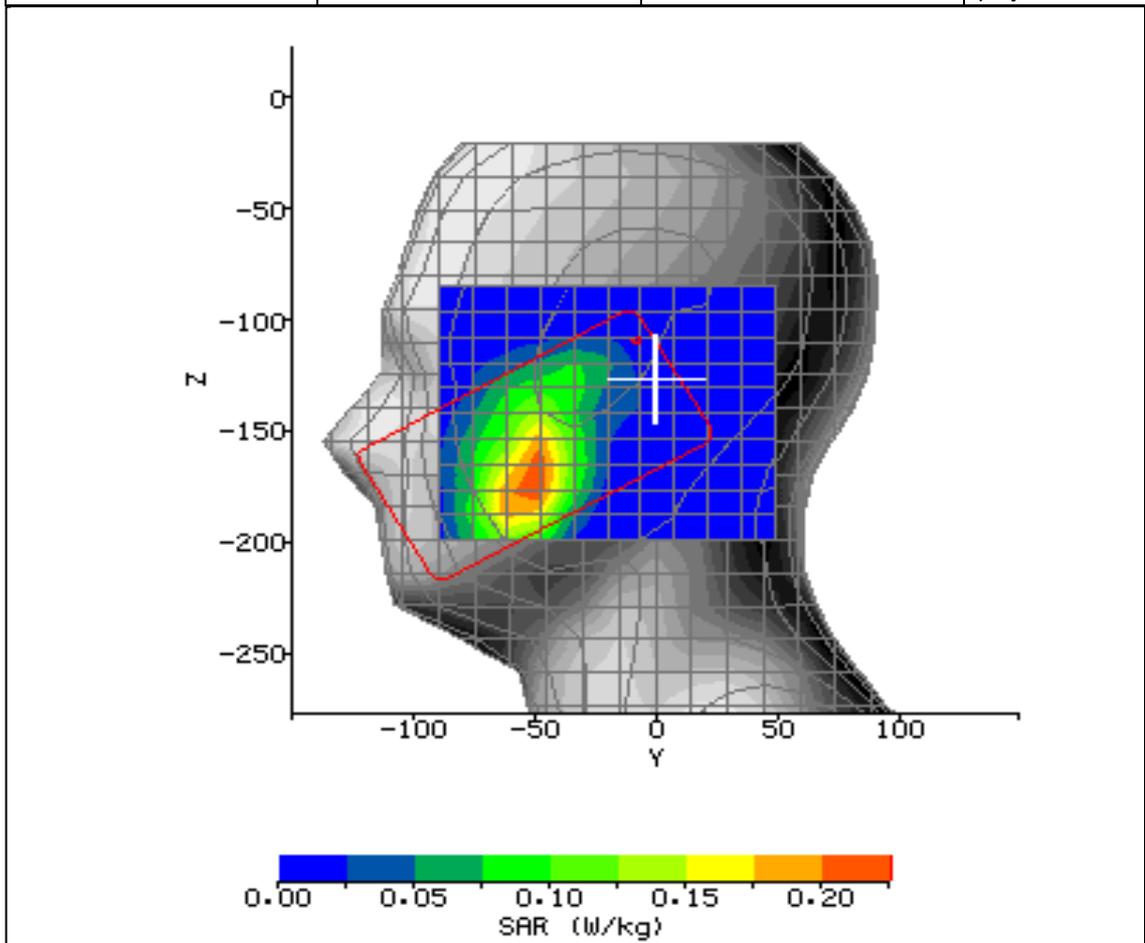


Figure 8: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 836.52MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 15:36:25	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	02.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-35.40mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-139.05mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	15.500
TEST FREQUENCY:	836.52MHz	SAR 1g:	0.321 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.190 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.149 W/kg
TYPE OF MODULATION:	46-RAY Orthogonal	SAR END:	0.149 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.090 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

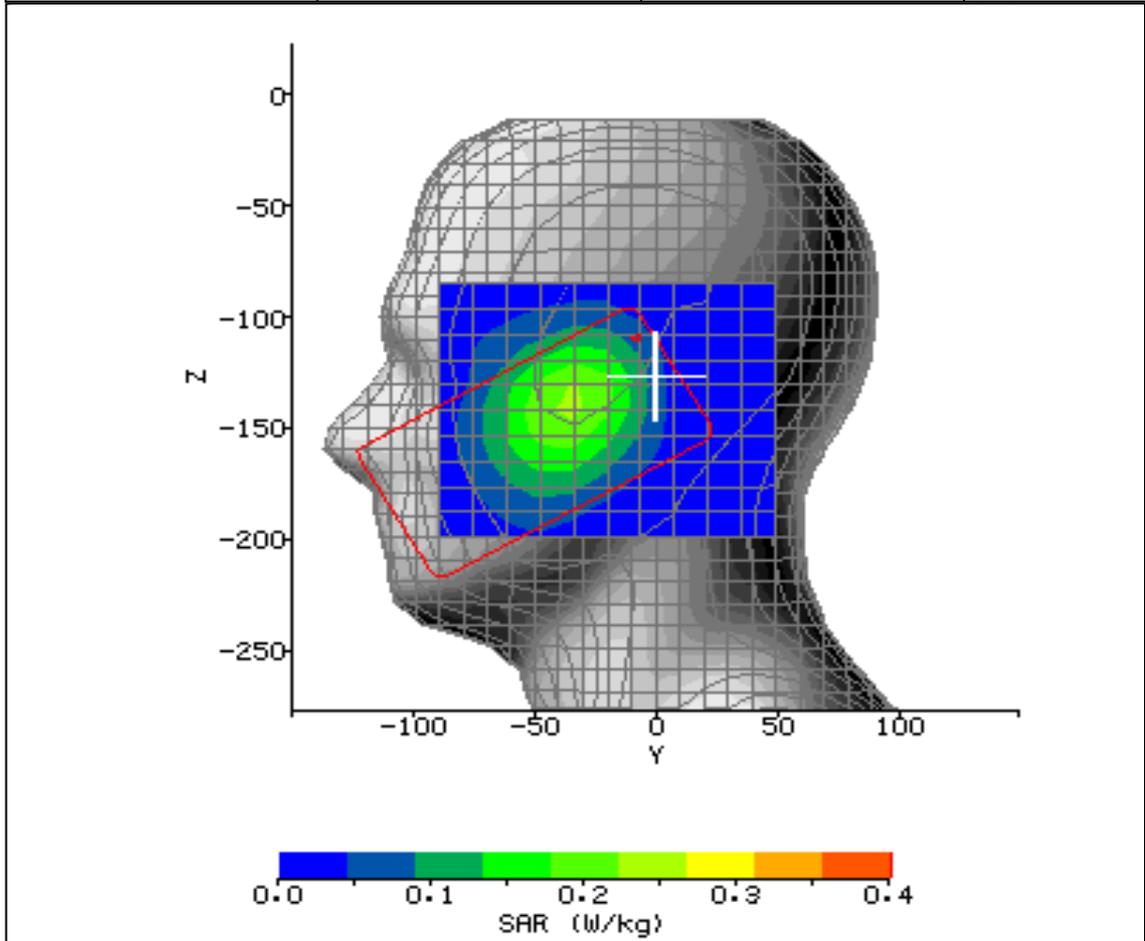


Figure 9: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 836.52MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 16:46:05	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	03.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	180°	MAX SAR Y-AXIS LOCATION:	48.00mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-167.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	23.340
TEST FREQUENCY:	836.52MHz	SAR 1g:	0.512 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.394 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.330 W/kg
TYPE OF MODULATION:	46-RAY Orthogonal	SAR END:	0.329 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-4.740 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

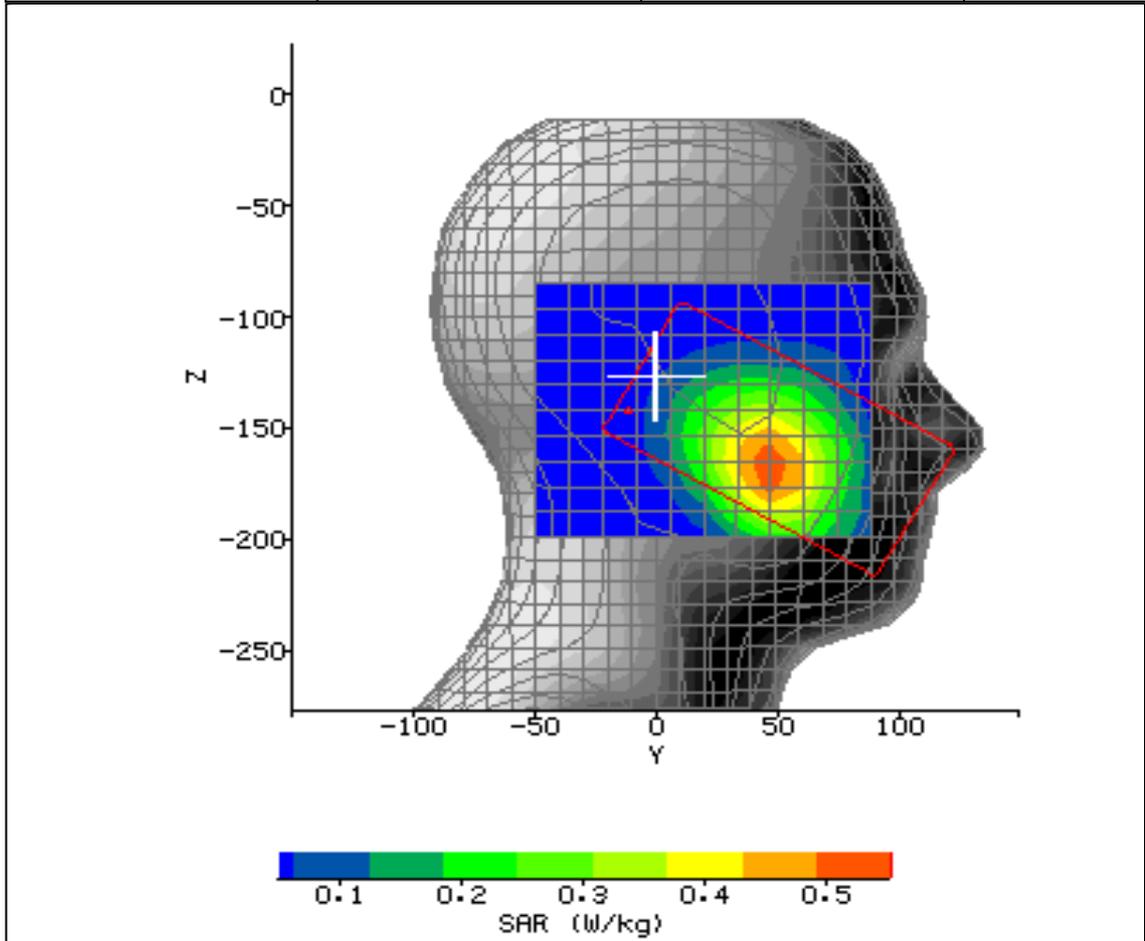


Figure 10: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 836.52MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 17:11:31	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	04.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	180°	MAX SAR Y-AXIS LOCATION:	31.20mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-152.85mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	18.510
TEST FREQUENCY:	836.52MHz	SAR 1g:	0.322 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.250 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.213 W/kg
TYPE OF MODULATION:	46-RAY Orthogonal	SAR END:	0.201 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-5.740 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

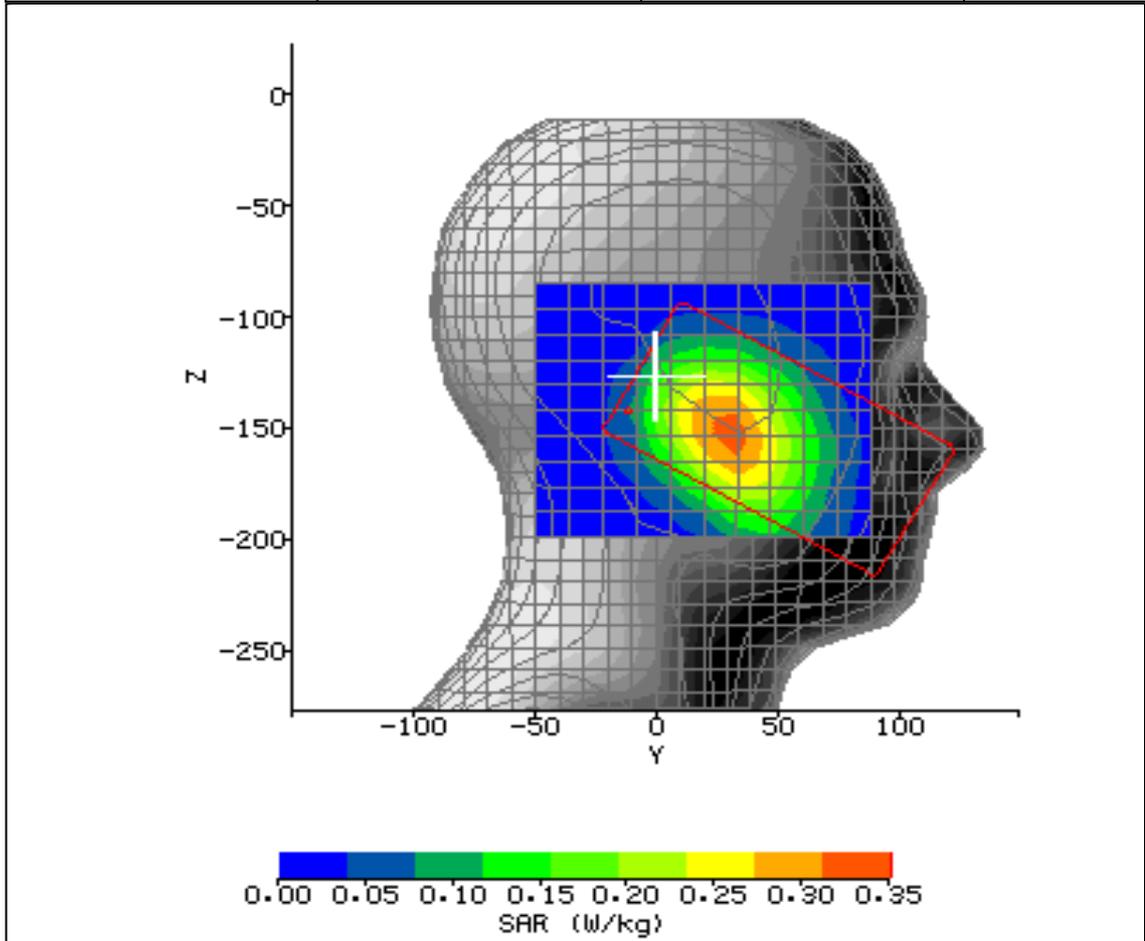


Figure 11: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 836.52MHz.



2.3 CDMA2000 800MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 17:49:24	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	05.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	56.72
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	1.000
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	13.00mm
DUT POSITION:	15mm-Front Facing	MAX SAR Y-AXIS LOCATION:	-2.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	16.060
TEST FREQUENCY:	836.52MHz	SAR 1g:	0.292 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.218 W/kg
CONVERSION FACTORS:	0.206 / 0.195 / 0.199	SAR START:	0.107 W/kg
TYPE OF MODULATION:	46-RAY Orthogonal	SAR END:	0.107 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.000 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

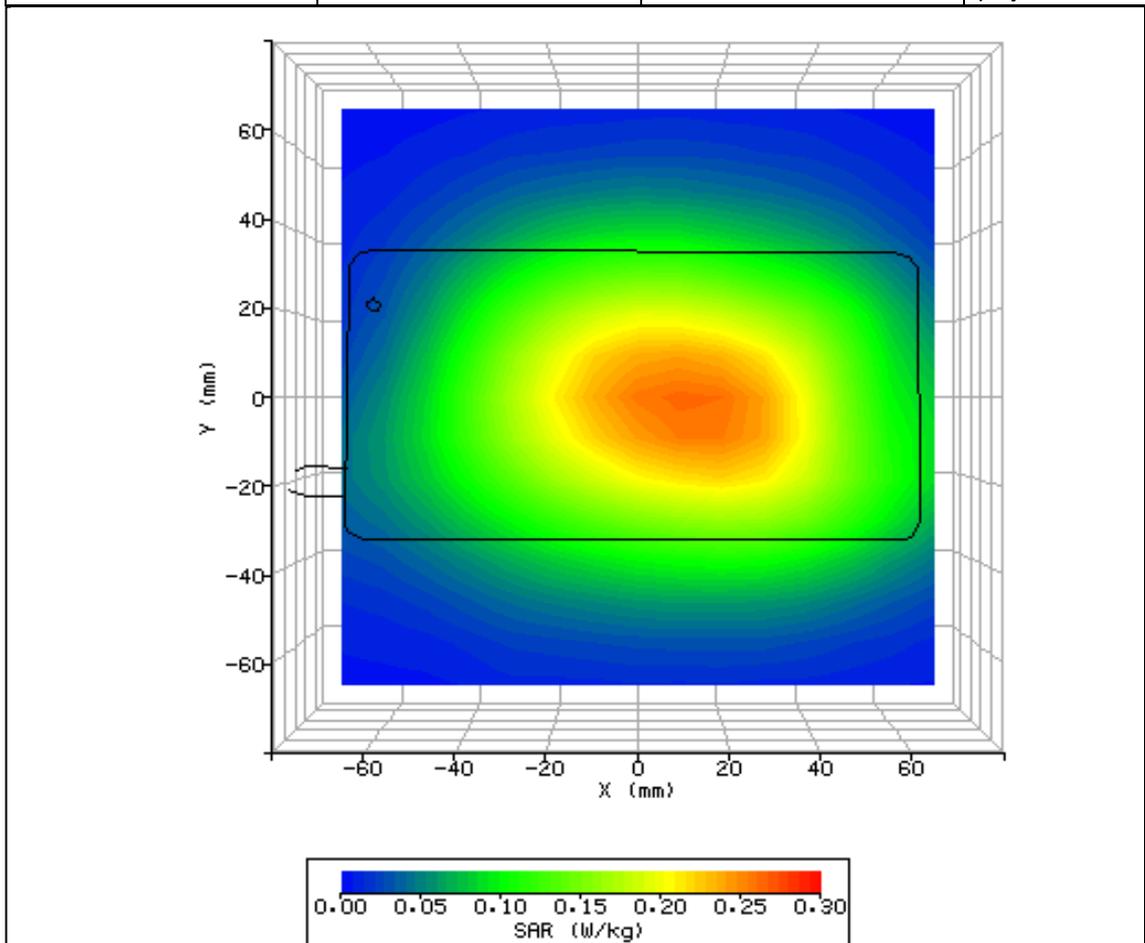


Figure 12: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 836.52MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 18:12:09	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	06.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	56.72
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	1.000
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	22.00mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-2.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	16.470
TEST FREQUENCY:	836.52MHz	SAR 1g:	0.319 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.236 W/kg
CONVERSION FACTORS:	0.206 / 0.195 / 0.199	SAR START:	0.112 W/kg
TYPE OF MODULATION:	46-RAY Orthogonal	SAR END:	0.110 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-1.760 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	23dBm	EXTRAPOLATION:	poly4

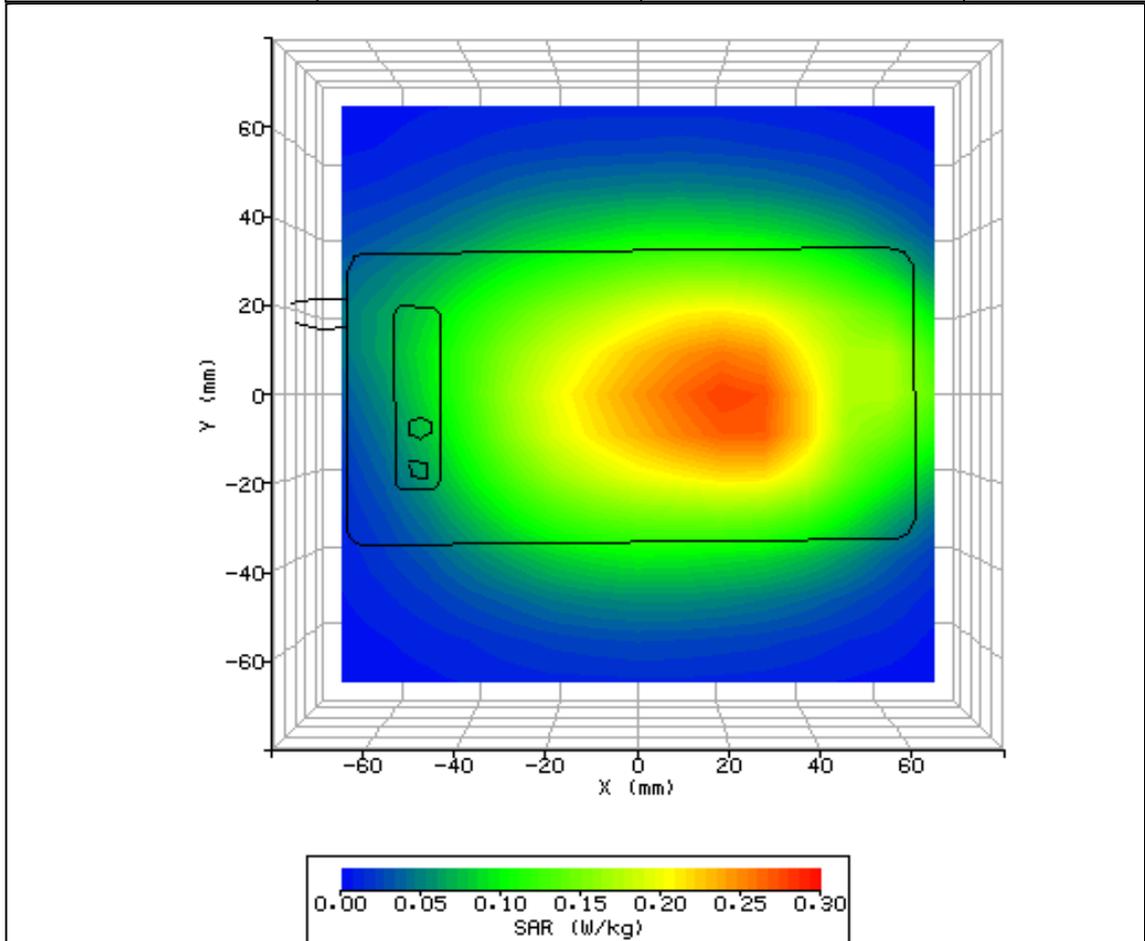


Figure 13: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 836.52MHz.



2.4 WCDMA FDD V HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 17:09:53	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	07.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	20.80°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	74.30%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.00°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-50.80mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-154.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	15.310
TEST FREQUENCY:	846.4MHz	SAR 1g:	0.262 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.219 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.153 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR END:	0.151 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-1.210 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	24dBm	EXTRAPOLATION:	poly4

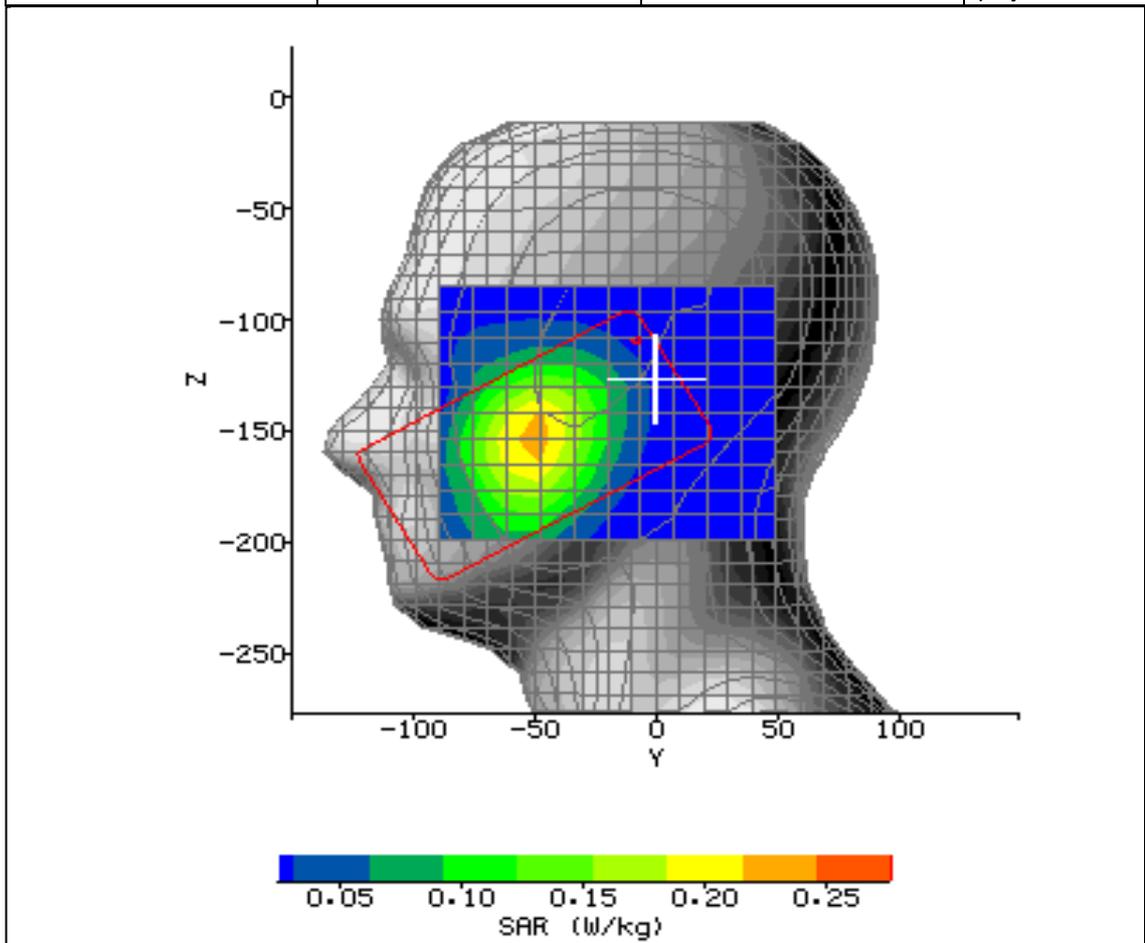


Figure 14: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 846.4MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 17:36:11	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	08.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	20.80°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	74.30%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.00°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-32.60mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-137.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	13.140
TEST FREQUENCY:	846.4MHz	SAR 1g:	0.192 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.129 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.107 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR END:	0.105 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-1.650 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	24dBm	EXTRAPOLATION:	poly4

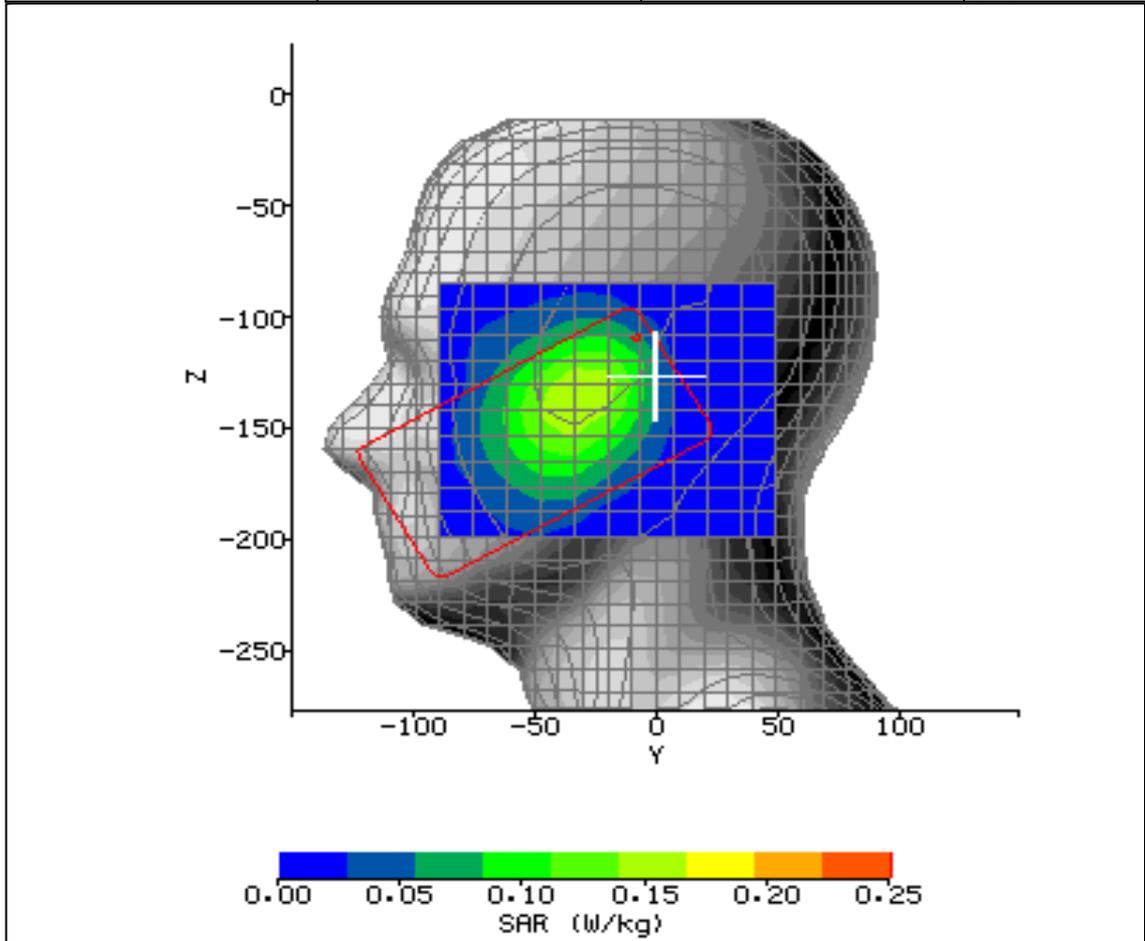


Figure 15: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 846.4MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 18:04:01	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	09.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	20.80°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	74.30%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.00°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	48.00mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-167.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	19.100
TEST FREQUENCY:	846.4MHz	SAR 1g:	0.376 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.287 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.237 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR END:	0.238 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.600 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	24dBm	EXTRAPOLATION:	poly4

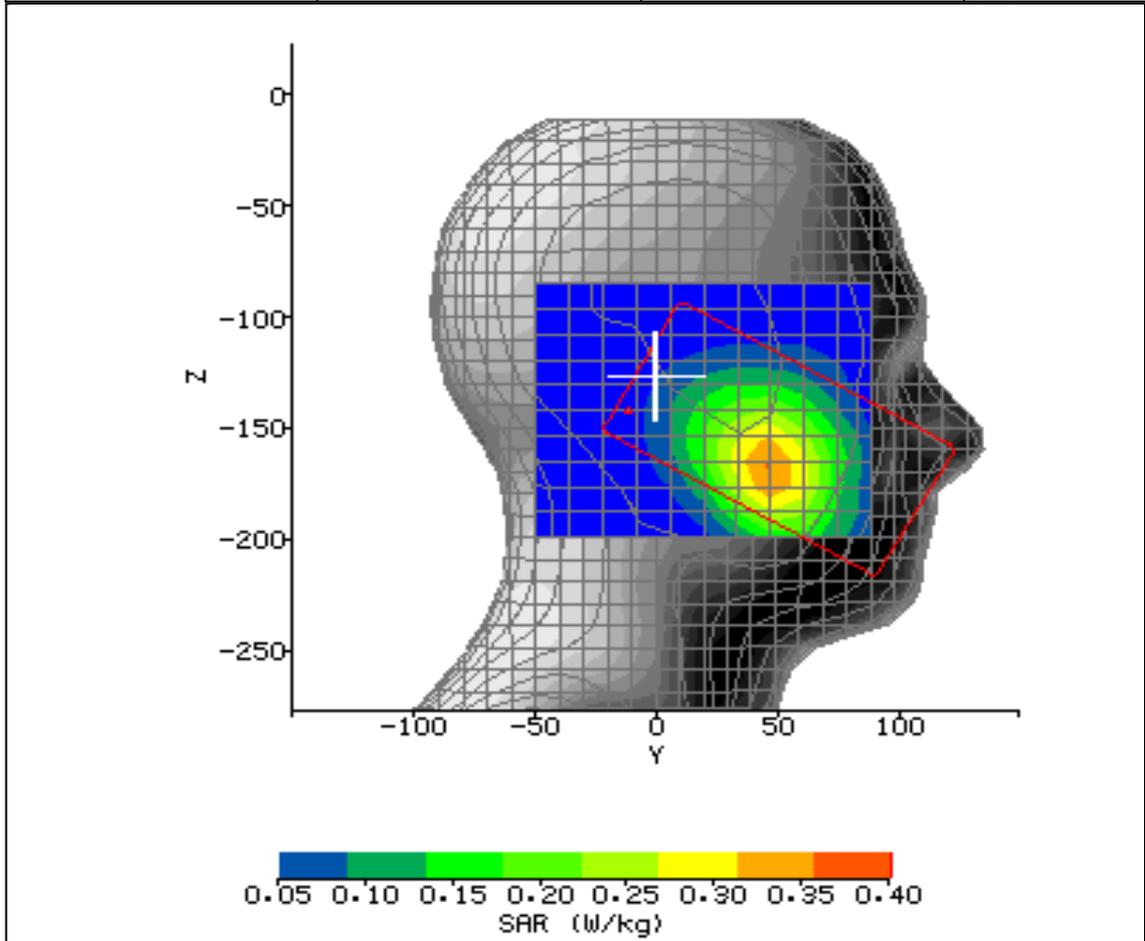


Figure 16: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 846.4MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 18:31:35	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	10.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	20.80°C	LIQUID SIMULANT:	835Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	42.15
RELATIVE HUMIDITY:	74.30%	CONDUCTIVITY:	0.907
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.00°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	28.40mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-150.55mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	15.720
TEST FREQUENCY:	846.4MHz	SAR 1g:	0.258 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.198 W/kg
CONVERSION FACTORS:	0.204 / 0.193 / 0.195	SAR START:	0.155 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR END:	0.156 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.480 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	24dBm	EXTRAPOLATION:	poly4

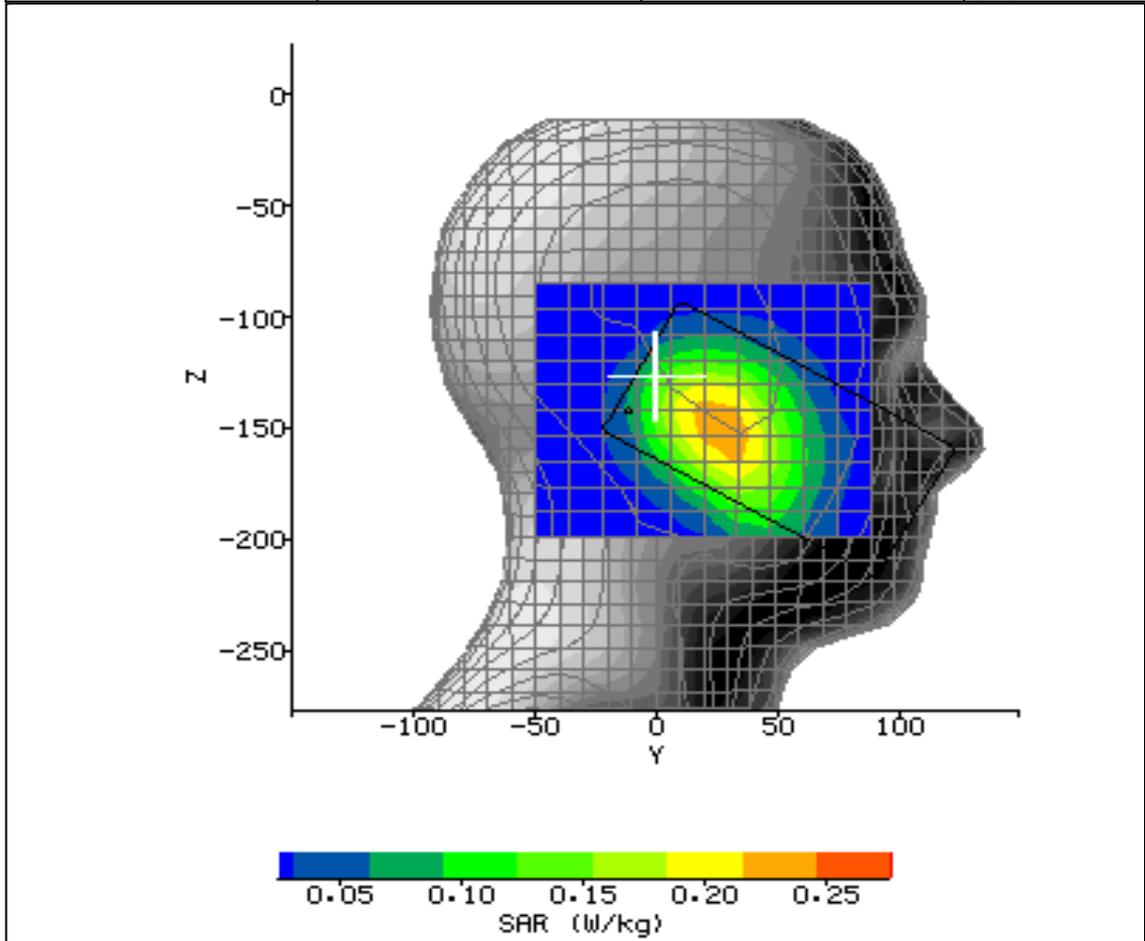


Figure 17: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 846.4MHz.



2.5 WCDMA FDD V BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 10:07:39	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	11.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	56.72
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	1.000
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	9.00mm
DUT POSITION:	15mm-Front Facing	MAX SAR Y-AXIS LOCATION:	2.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	14.490
TEST FREQUENCY:	846.4MHz	SAR 1g:	0.252 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.191 W/kg
CONVERSION FACTORS:	0.206 / 0.195 / 0.199	SAR START:	0.091 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR END:	0.095 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	4.530 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	24dBm	EXTRAPOLATION:	poly4

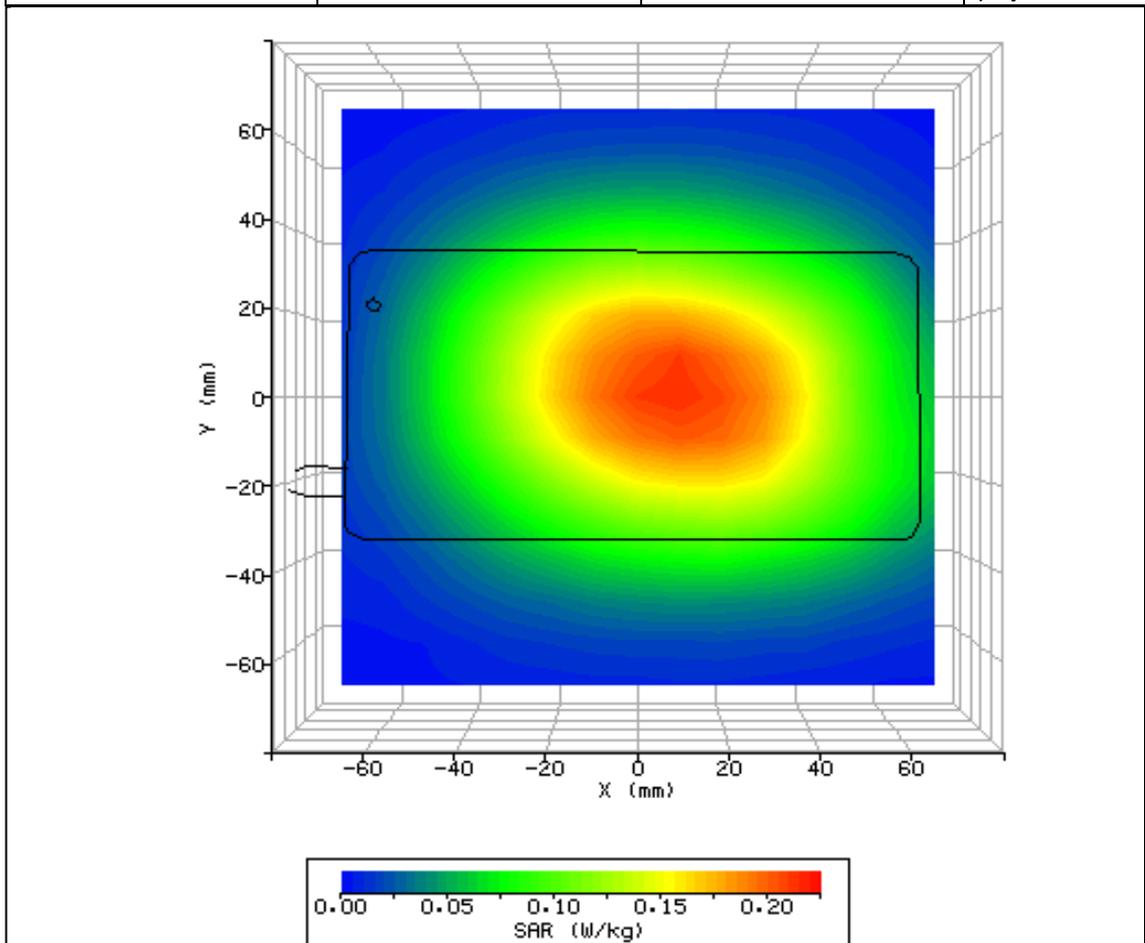


Figure 18: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 846.4MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	04/09/2012 10:36:47	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	12.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.40°C	LIQUID SIMULANT:	835Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	56.72
RELATIVE HUMIDITY:	54.20%	CONDUCTIVITY:	1.000
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	22.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	18.00mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-2.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	15.260
TEST FREQUENCY:	846.4MHz	SAR 1g:	0.269 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.207 W/kg
CONVERSION FACTORS:	0.206 / 0.195 / 0.199	SAR START:	0.097 W/kg
TYPE OF MODULATION:	QPSK (RMC Mode)	SAR END:	0.095 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-1.940 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	04/09/2012
INPUT POWER LEVEL:	24dBm	EXTRAPOLATION:	poly4

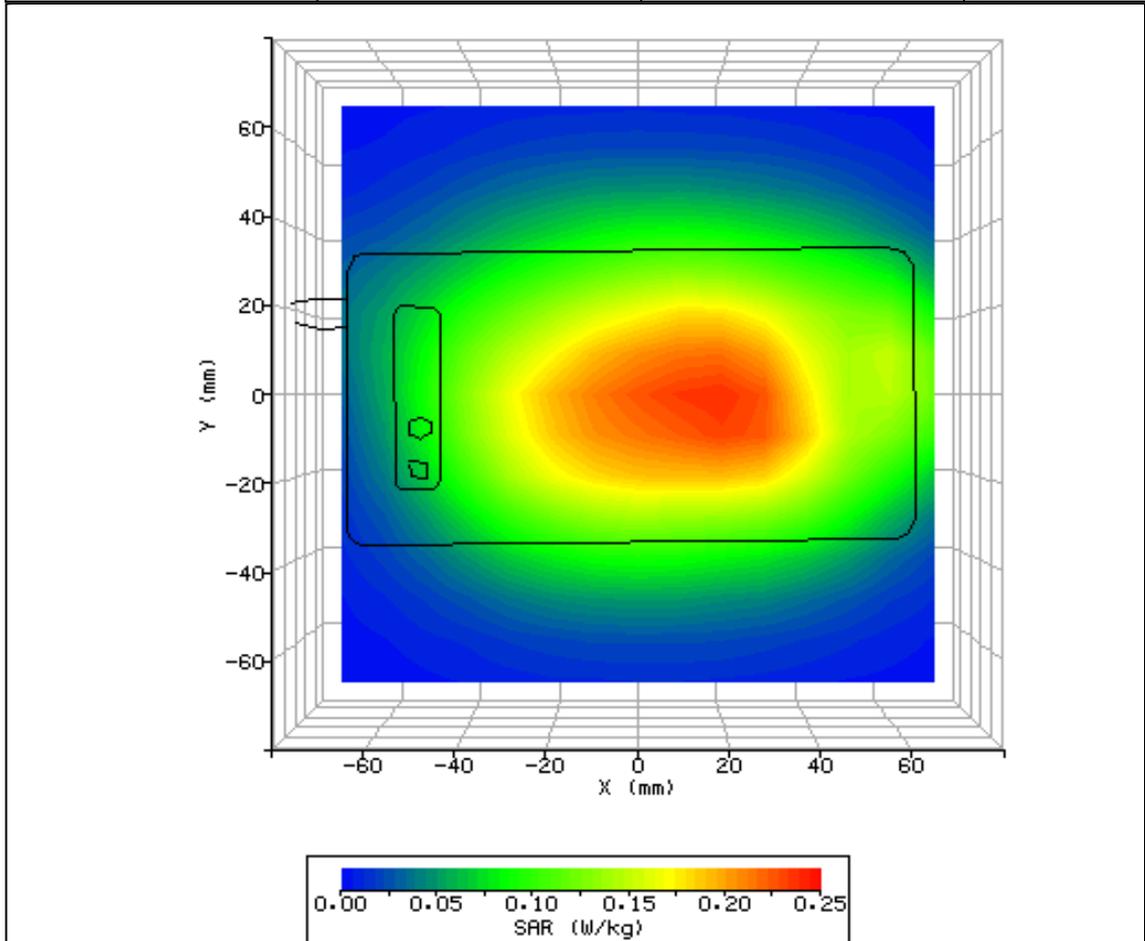


Figure 19: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 846.4MHz.



2.6 PCS 1900MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 12:01:06	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	13.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.95
RELATIVE HUMIDITY:	54.10%	CONDUCTIVITY:	1.453
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-52.20mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-173.55mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	11.590
TEST FREQUENCY:	1850.2MHz	SAR 1g:	0.250 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.168 W/kg
CONVERSION FACTORS:	0.274 / 0.255 / 0.259	SAR START:	0.119 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR END:	0.120 W/kg
MODN. DUTY CYCLE:	12.5%	SAR DRIFT DURING SCAN:	0.940 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	30dBm	EXTRAPOLATION:	poly4

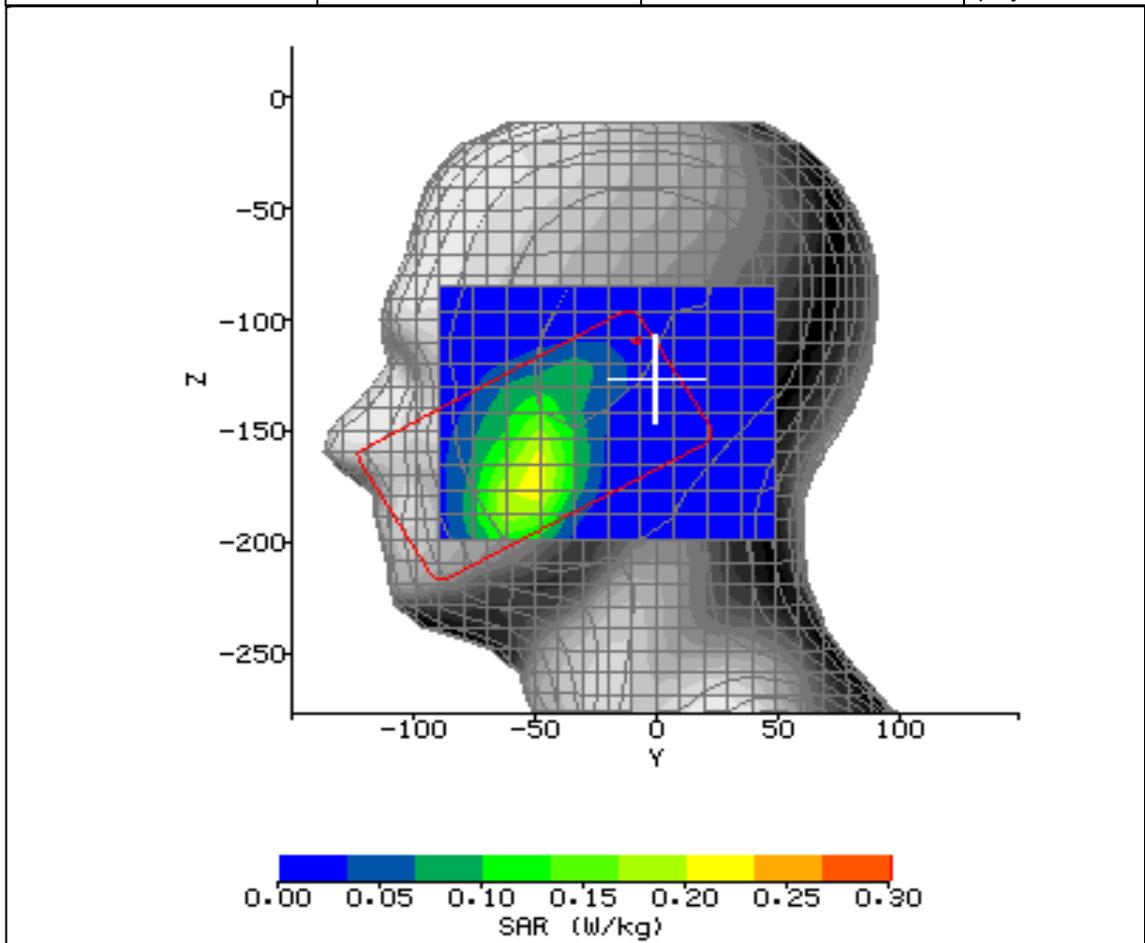


Figure 20: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 1850.2MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 12:27:45	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	14.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.95
RELATIVE HUMIDITY:	54.10%	CONDUCTIVITY:	1.453
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-25.60mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-119.50mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	6.800
TEST FREQUENCY:	1850.2MHz	SAR 1g:	0.078 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.053 W/kg
CONVERSION FACTORS:	0.274 / 0.255 / 0.259	SAR START:	0.040 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR END:	0.039 W/kg
MODN. DUTY CYCLE:	12.5%	SAR DRIFT DURING SCAN:	-3.410 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	30dBm	EXTRAPOLATION:	poly4

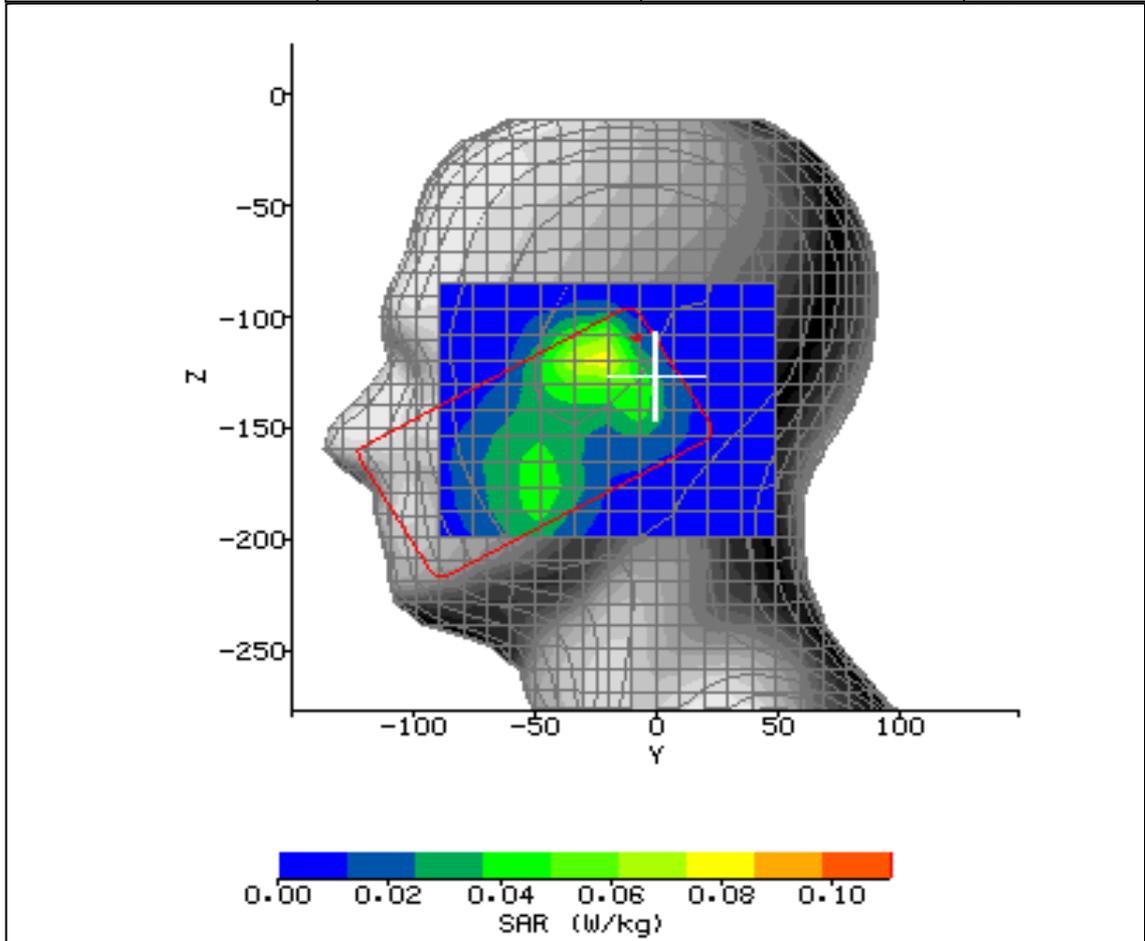


Figure 21: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 1850.2MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 13:02:19	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	15.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.95
RELATIVE HUMIDITY:	54.10%	CONDUCTIVITY:	1.453
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	180°	MAX SAR Y-AXIS LOCATION:	46.60mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-178.15mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	10.610
TEST FREQUENCY:	1850.2MHz	SAR 1g:	0.209 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.139 W/kg
CONVERSION FACTORS:	0.274 / 0.255 / 0.259	SAR START:	0.103 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR END:	0.096 W/kg
MODN. DUTY CYCLE:	12.5%	SAR DRIFT DURING SCAN:	-6.710 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	30dBm	EXTRAPOLATION:	poly4

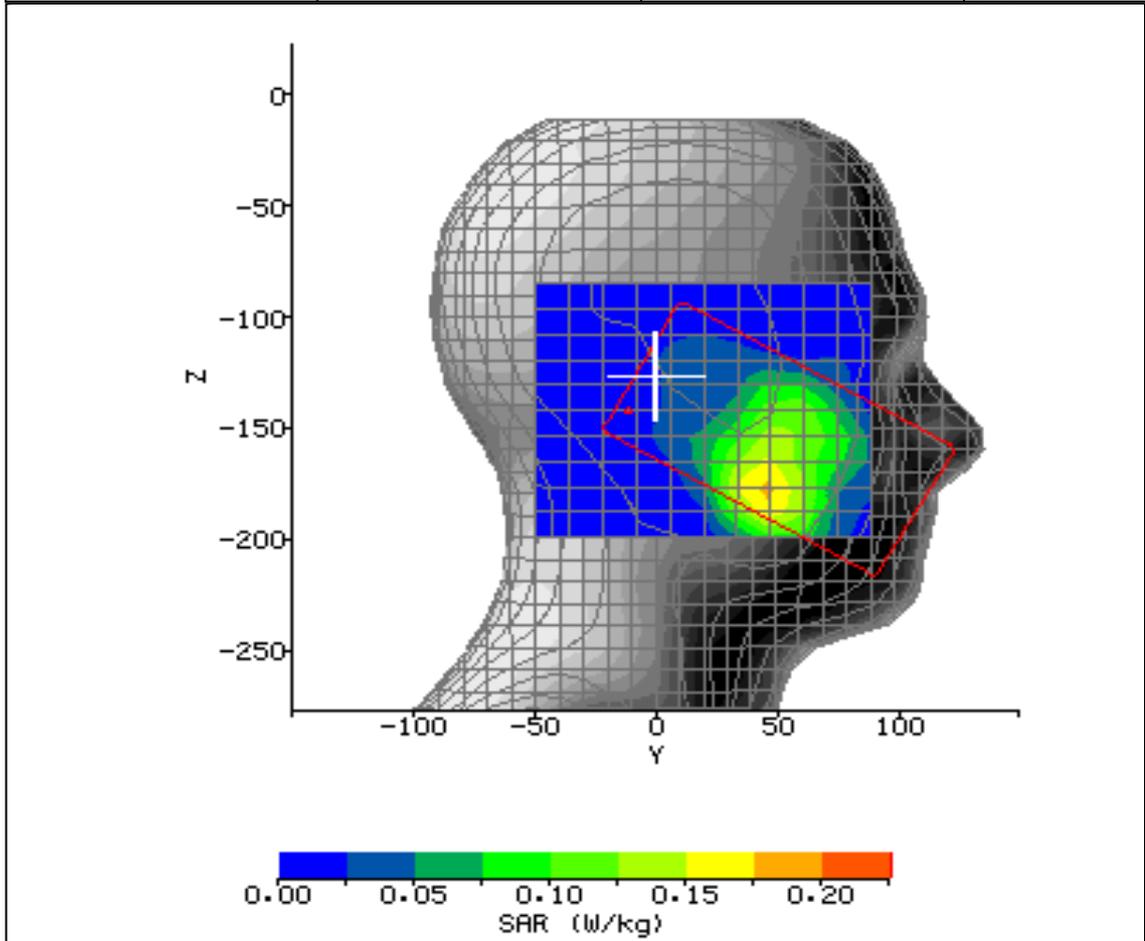


Figure 22: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 1850.2MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 13:30:27	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	16.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	1900Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.95
RELATIVE HUMIDITY:	54.10%	CONDUCTIVITY:	1.453
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	180°	MAX SAR Y-AXIS LOCATION:	8.80mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-154.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	6.030
TEST FREQUENCY:	1850.2MHz	SAR 1g:	0.067 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.044 W/kg
CONVERSION FACTORS:	0.274 / 0.255 / 0.259	SAR START:	0.032 W/kg
TYPE OF MODULATION:	GMSK (Voice Mode)	SAR END:	0.032 W/kg
MODN. DUTY CYCLE:	12.5%	SAR DRIFT DURING SCAN:	0.170 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	30dBm	EXTRAPOLATION:	poly4

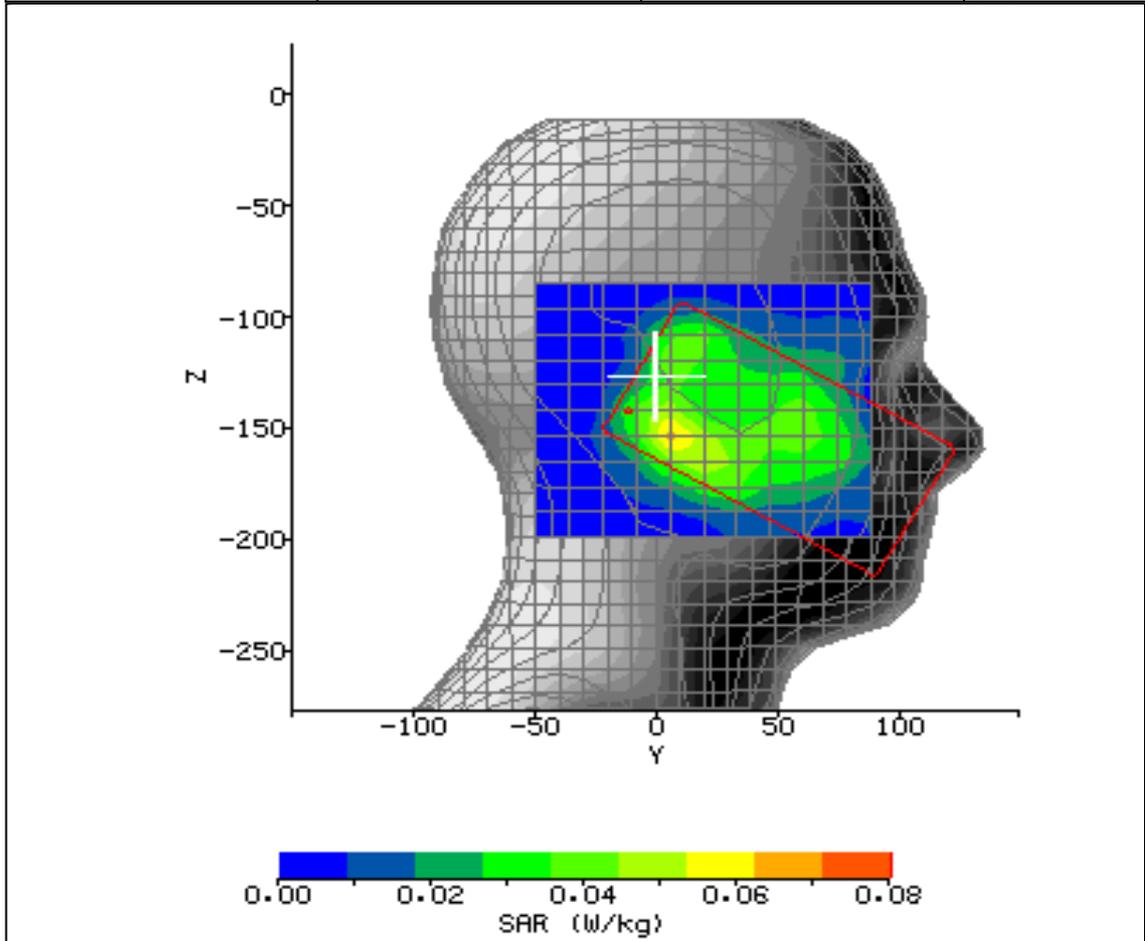


Figure 23: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 1850.2MHz.



2.7 PCS 1900MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 14:25:30	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	17.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	1900Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	52.82
RELATIVE HUMIDITY:	54.10%	CONDUCTIVITY:	1.549
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	41.00mm
DUT POSITION:	15mm-Front Facing	MAX SAR Y-AXIS LOCATION:	-7.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	10.950
TEST FREQUENCY:	1850.2MHz	SAR 1g:	0.234 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.154 W/kg
CONVERSION FACTORS:	0.295 / 0.270 / 0.278	SAR START:	0.046 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR END:	0.045 W/kg
MODN. DUTY CYCLE:	25%	SAR DRIFT DURING SCAN:	-1.490 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	30dBm	EXTRAPOLATION:	poly4

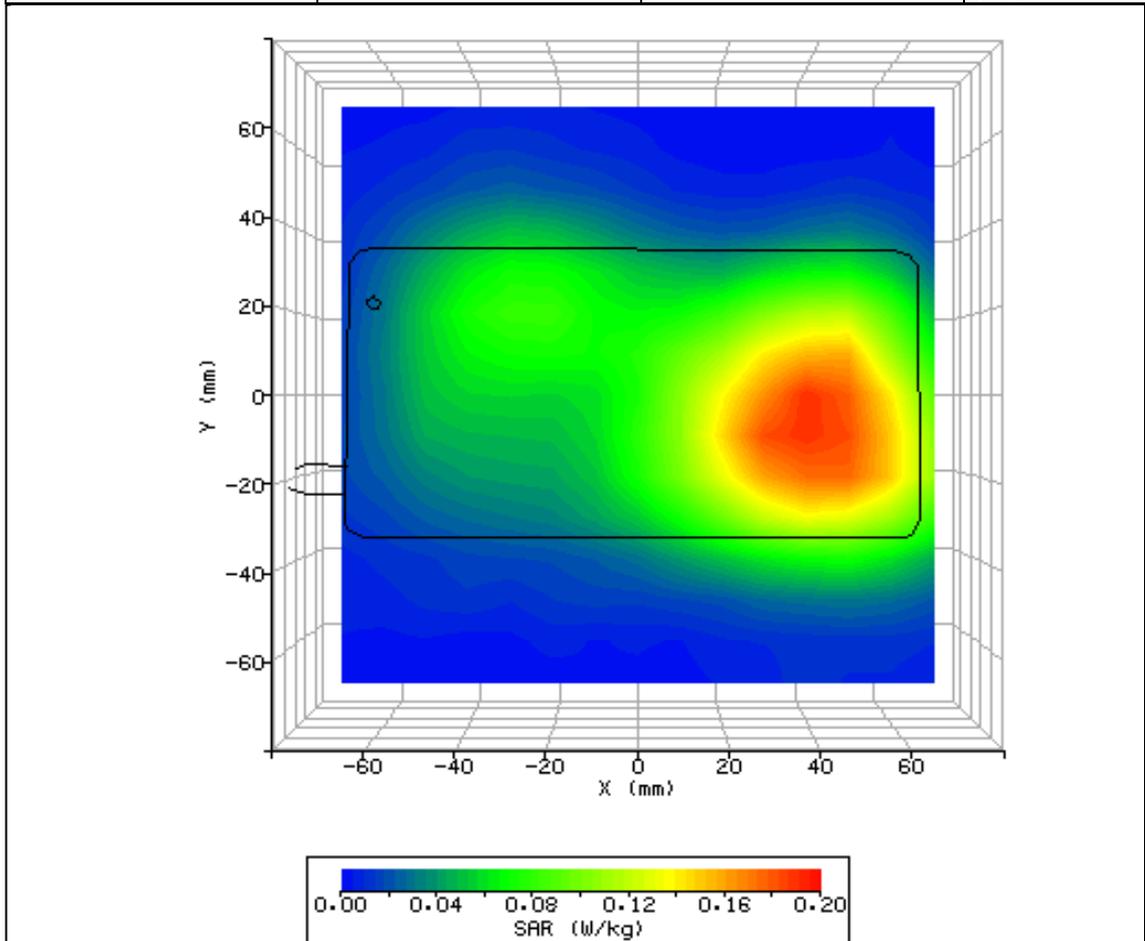


Figure 24: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 1850.2MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	03/09/2012 14:57:06	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	18.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	23.00°C	LIQUID SIMULANT:	1900Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	52.82
RELATIVE HUMIDITY:	54.10%	CONDUCTIVITY:	1.549
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	22.90°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	48.00mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	19.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	9.990
TEST FREQUENCY:	1850.2MHz	SAR 1g:	0.220 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.135 W/kg
CONVERSION FACTORS:	0.295 / 0.270 / 0.278	SAR START:	0.032 W/kg
TYPE OF MODULATION:	GMSK (GPRS Mode)	SAR END:	0.031 W/kg
MODN. DUTY CYCLE:	25%	SAR DRIFT DURING SCAN:	-3.430 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	03/09/2010
INPUT POWER LEVEL:	30dBm	EXTRAPOLATION:	poly4

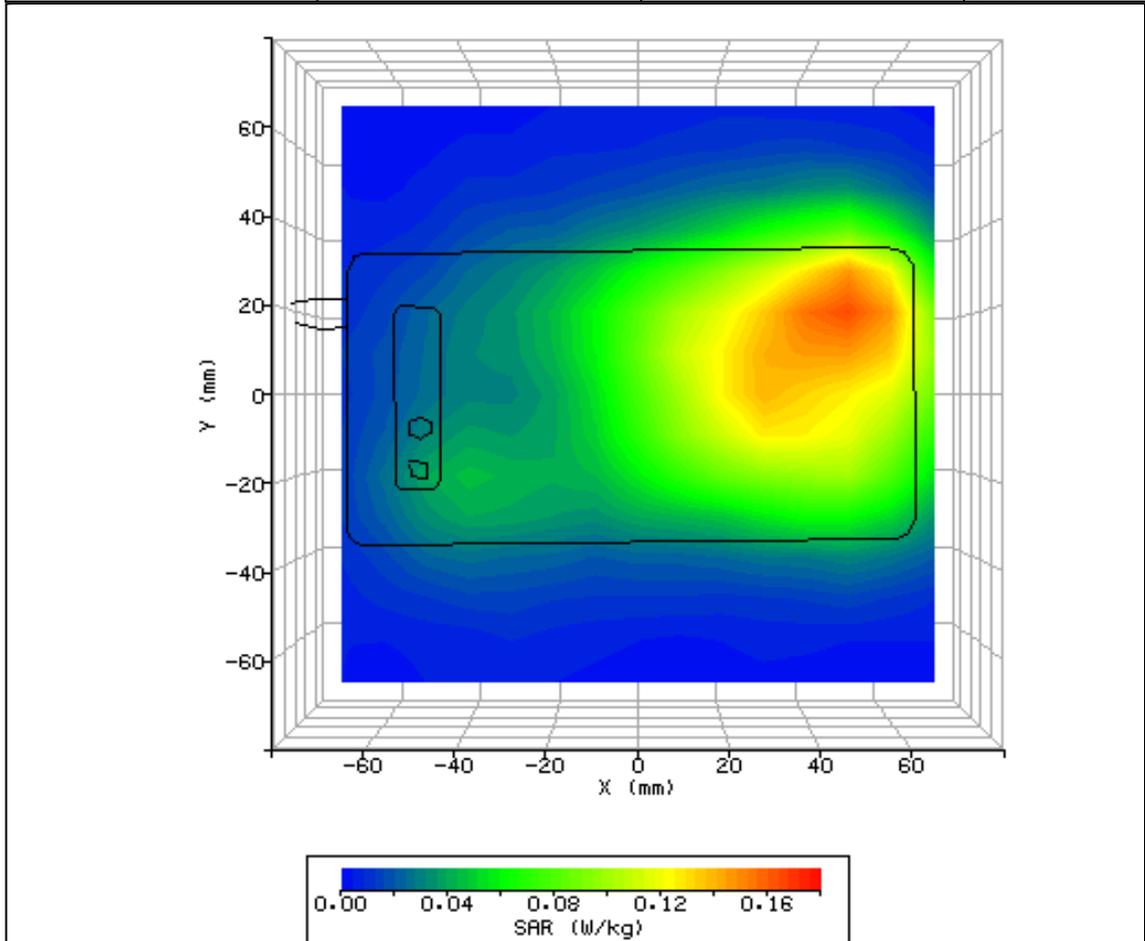


Figure 25: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 1850.2MHz.



2.8 WLAN 2450MHz HEAD SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012 13:17:53	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	19.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.60°C	LIQUID SIMULANT:	2450Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.13
RELATIVE HUMIDITY:	35.00%	CONDUCTIVITY:	1.810
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	21.10°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-7.20mm
DUT POSITION:	Left-Cheek	MAX SAR Z-AXIS LOCATION:	-142.50mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	8.570
TEST FREQUENCY:	2437MHz	SAR 1g:	0.191 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.114 W/kg
CONVERSION FACTORS:	0.293 / 0.268 / 0.274	SAR START:	0.058 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR END:	0.056 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	-4.170 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	31/08/2012
INPUT POWER LEVEL:	20dBm	EXTRAPOLATION:	poly4

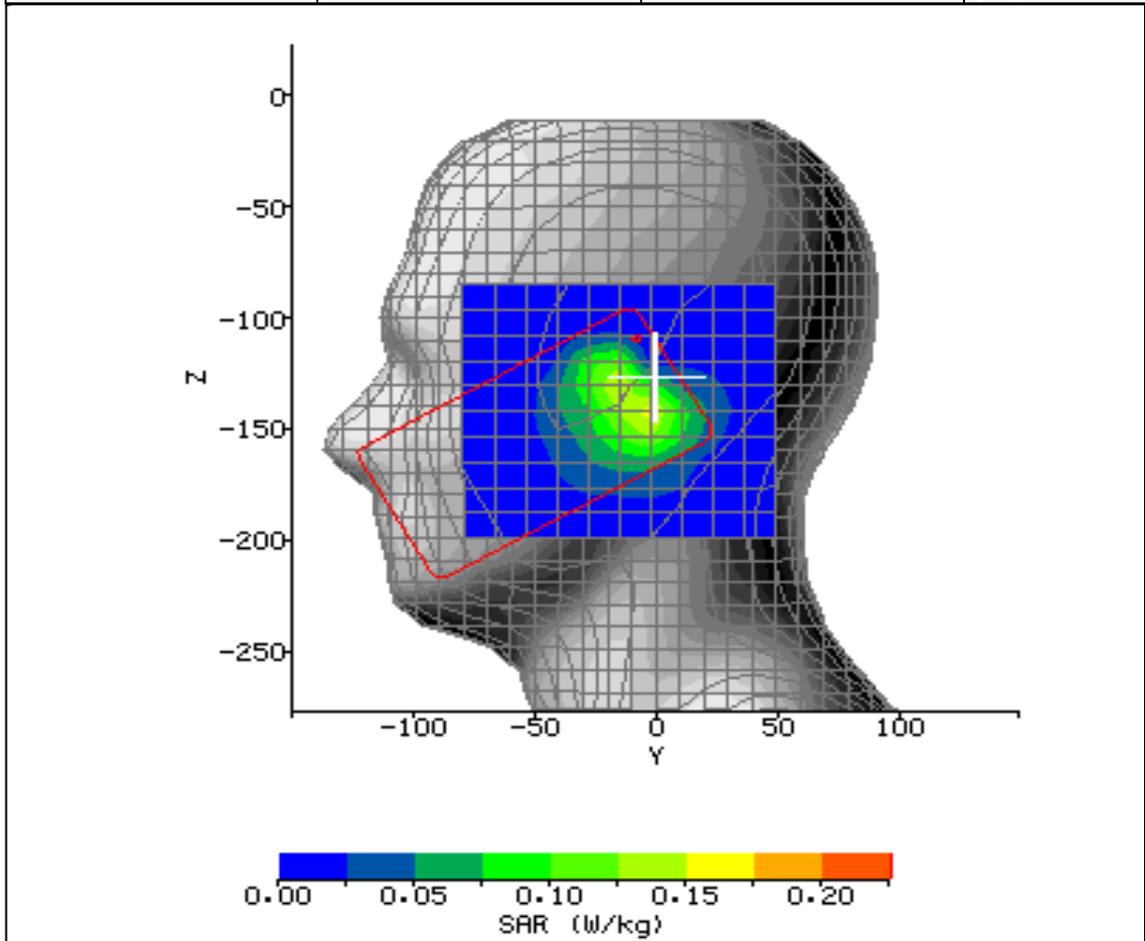


Figure 26: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 2437MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012 14:04:14	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	20.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.60°C	LIQUID SIMULANT:	2450Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.13
RELATIVE HUMIDITY:	35.00%	CONDUCTIVITY:	1.810
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	21.10°C
PHANTOM ROTATION:	0°	MAX SAR Y-AXIS LOCATION:	-0.70mm
DUT POSITION:	Left-15°	MAX SAR Z-AXIS LOCATION:	-143.65mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	7.760
TEST FREQUENCY:	2437MHz	SAR 1g:	0.166 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.097 W/kg
CONVERSION FACTORS:	0.293 / 0.268 / 0.274	SAR START:	0.052 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR END:	0.053 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	1.920 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	31/08/2012
INPUT POWER LEVEL:	20dBm	EXTRAPOLATION:	poly4

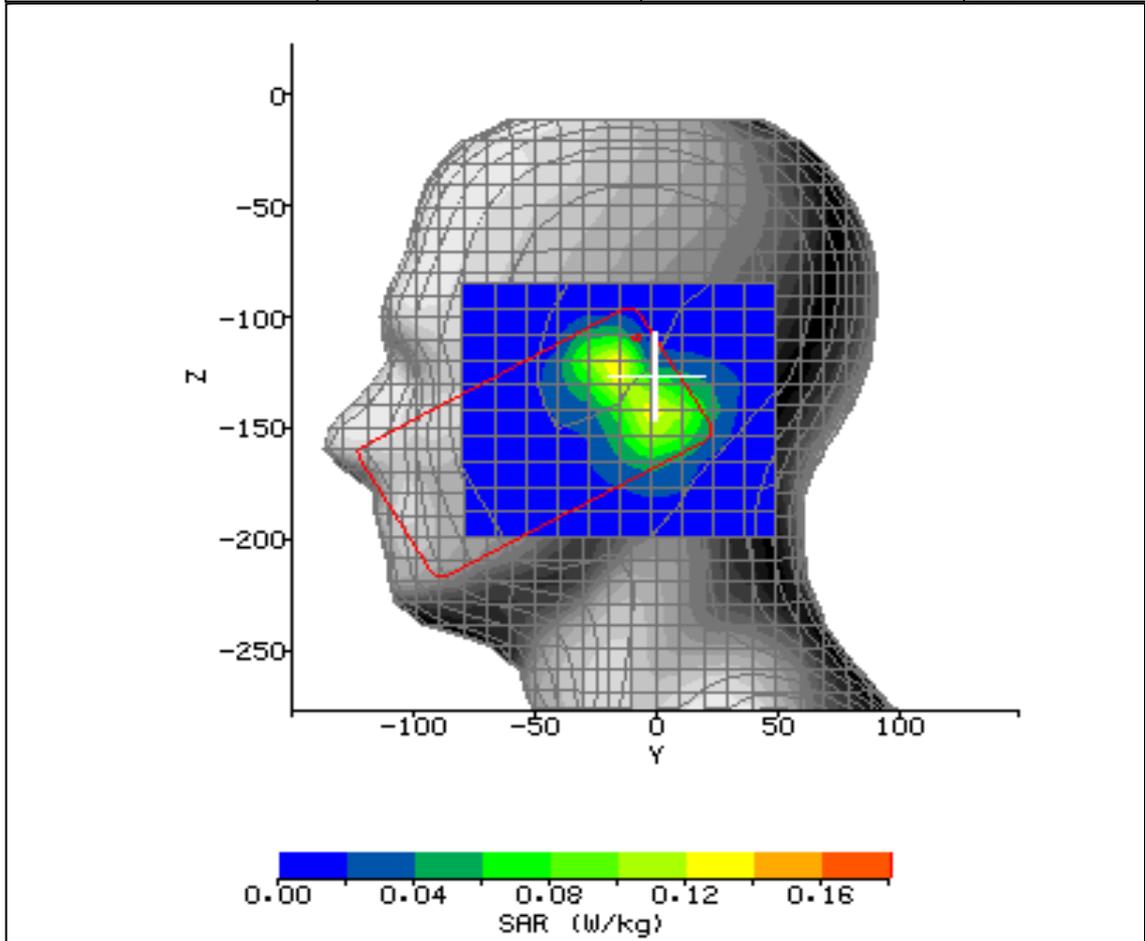


Figure 27: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 2437MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012 14:34:21	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	21.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.60°C	LIQUID SIMULANT:	2450Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.13
RELATIVE HUMIDITY:	35.00%	CONDUCTIVITY:	1.810
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	21.10°C
PHANTOM ROTATION:	180°	MAX SAR Y-AXIS LOCATION:	11.60mm
DUT POSITION:	Right-Cheek	MAX SAR Z-AXIS LOCATION:	-112.60mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	13.260
TEST FREQUENCY:	2437MHz	SAR 1g:	0.646 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.308 W/kg
CONVERSION FACTORS:	0.293 / 0.268 / 0.274	SAR START:	0.118 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR END:	0.121 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	2.830 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	31/08/2012
INPUT POWER LEVEL:	20dBm	EXTRAPOLATION:	poly4

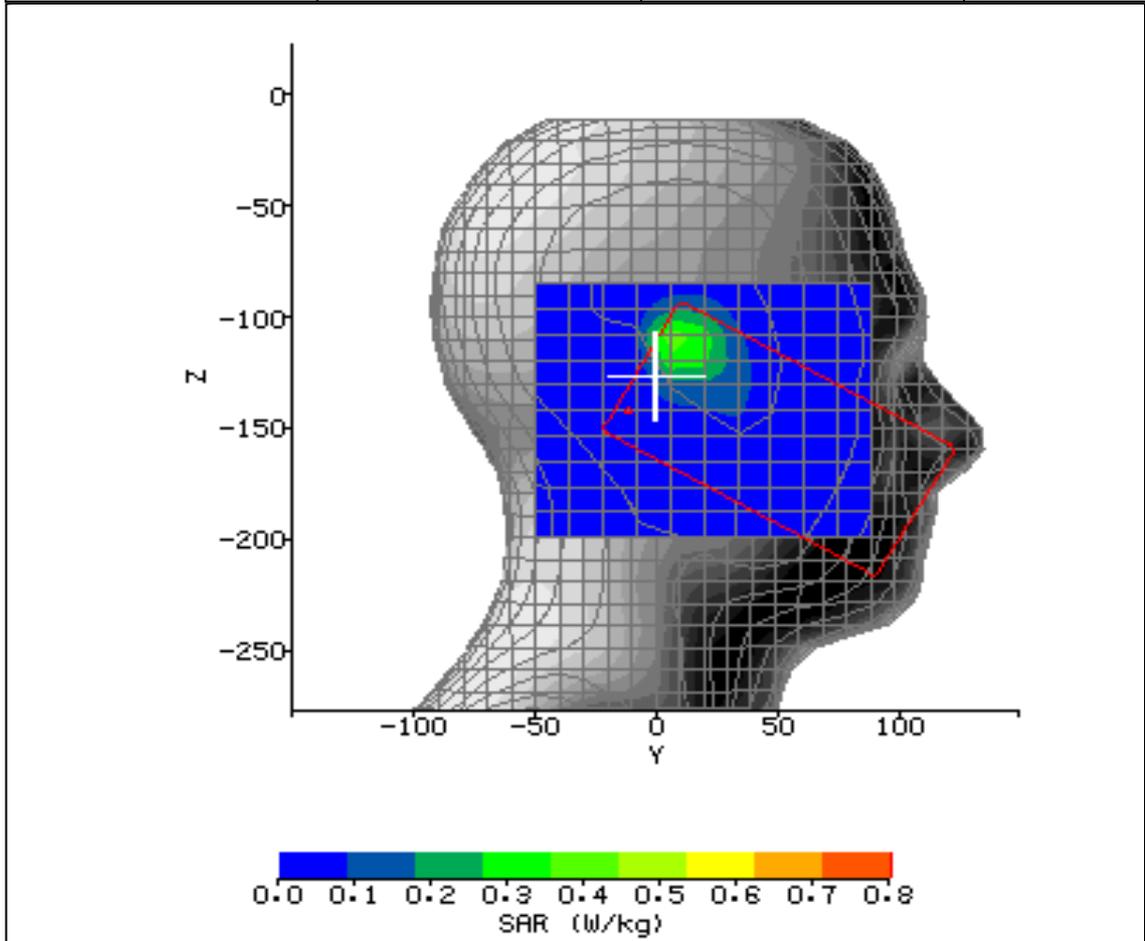


Figure 28: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 2437MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012 15:02:17	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	22.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.60°C	LIQUID SIMULANT:	2450Head
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	39.13
RELATIVE HUMIDITY:	35.00%	CONDUCTIVITY:	1.810
PHANTOM S/NO:	Head_04_35.csv	LIQUID TEMPERATURE:	21.10°C
PHANTOM ROTATION:	180°	MAX SAR Y-AXIS LOCATION:	8.80mm
DUT POSITION:	Right-15°	MAX SAR Z-AXIS LOCATION:	-109.15mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	12.020
TEST FREQUENCY:	2437MHz	SAR 1g:	0.530 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.249 W/kg
CONVERSION FACTORS:	0.293 / 0.268 / 0.274	SAR START:	0.096 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR END:	0.097 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.840 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	31/08/2012
INPUT POWER LEVEL:	20dBm	EXTRAPOLATION:	poly4

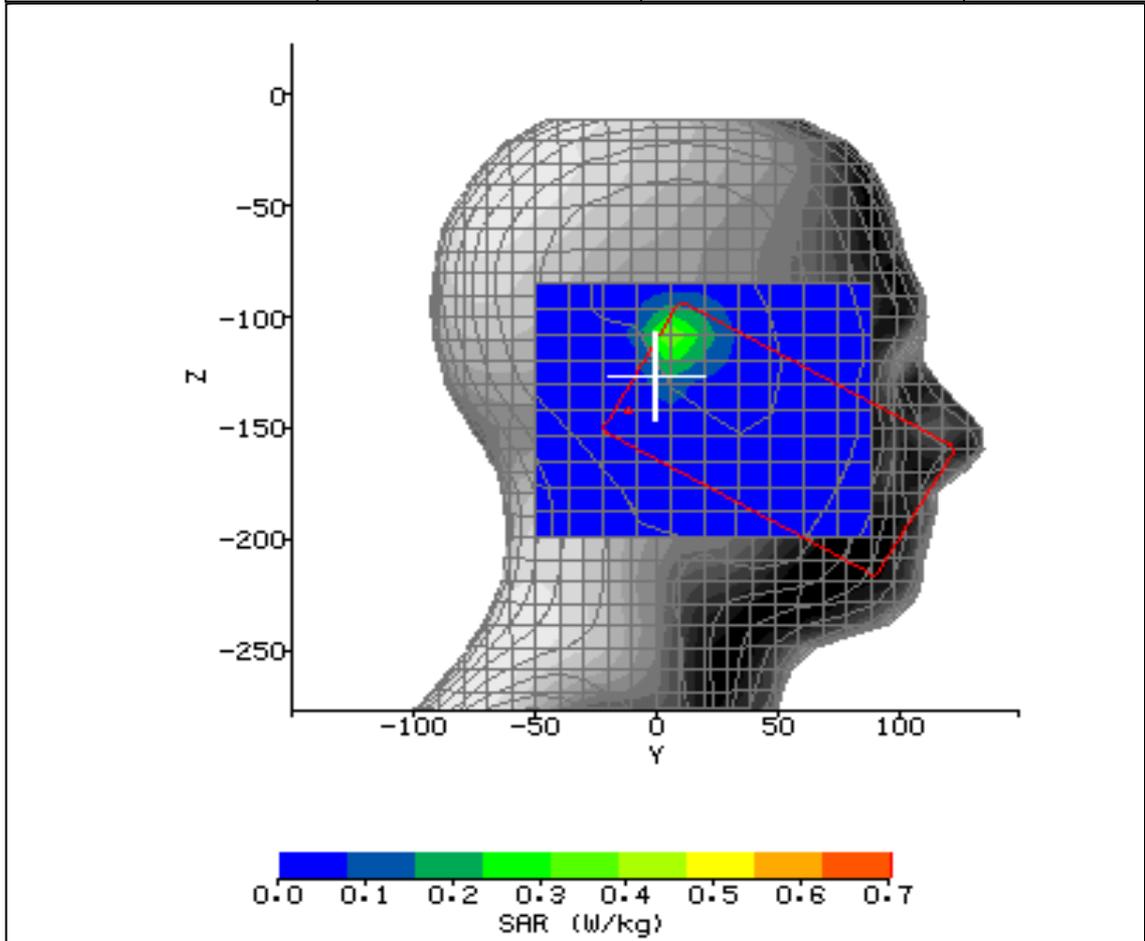


Figure 29: SAR Head Testing Results for the CDMA SHL21 Mobile Handset at 2437MHz.



2.9 WLAN 2450MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012 15:45:57	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	23.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.60°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	35.00%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	21.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-52.00mm
DUT POSITION:	15mm-Front Facing	MAX SAR Y-AXIS LOCATION:	-34.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	4.39
TEST FREQUENCY:	2437MHz	SAR 1g:	0.063 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.039 W/kg
CONVERSION FACTORS:	0.328 / 0.298 / 0.304	SAR START:	0.005 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR END:	0.005 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.000 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	31/08/2012
INPUT POWER LEVEL:	20dBm	EXTRAPOLATION:	poly4

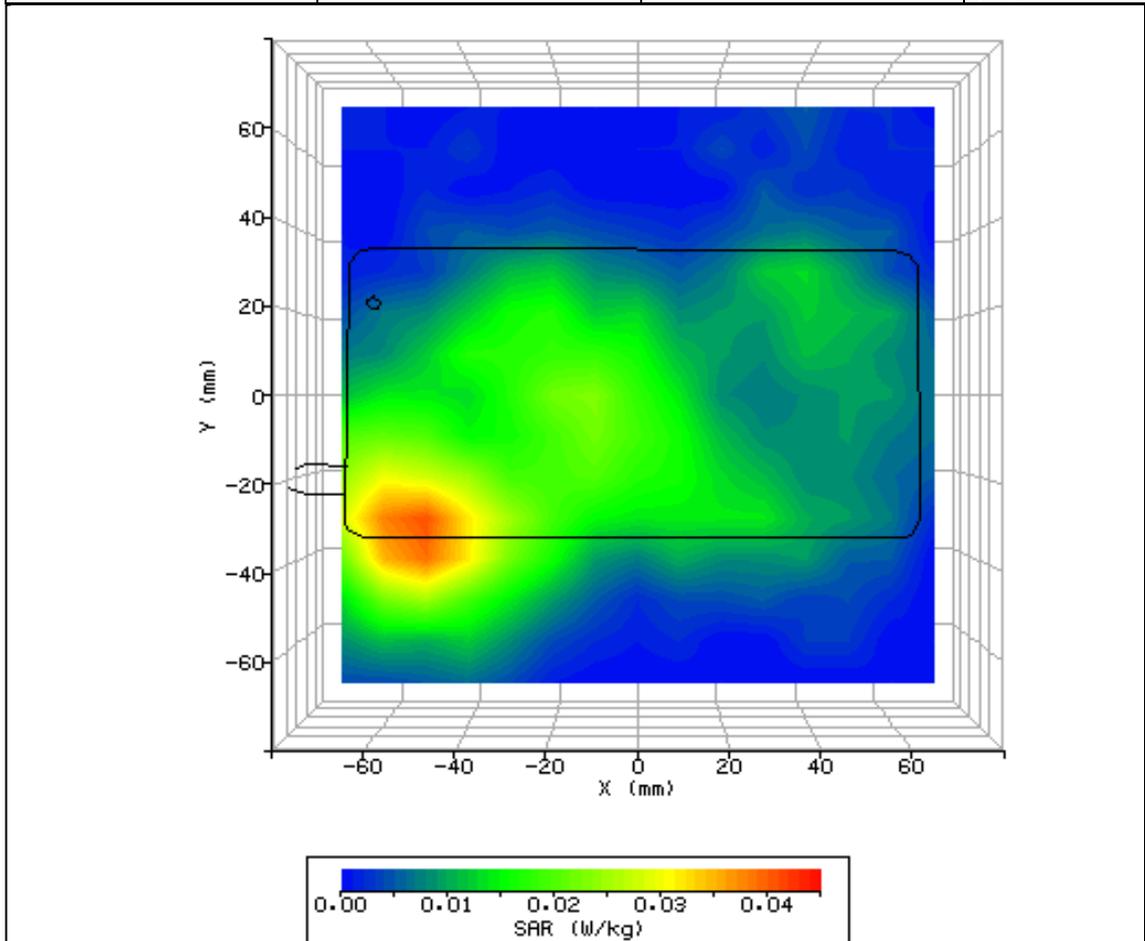


Figure 30: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 2437MHz.



SYSTEM / SOFTWARE:	SARA2 / 2.53 VPM	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012 16:14:22	DUT BATTERY MODEL/NO:	UBATIA210AF03
FILENAME:	24.txt	PROBE SERIAL NUMBER:	187
AMBIENT TEMPERATURE:	22.60°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	CDMA SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	35.00%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	HeadBox1.csv	LIQUID TEMPERATURE:	21.10°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	-53.00mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	29.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	6.01
TEST FREQUENCY:	2437MHz	SAR 1g:	0.117 W/kg
AIR FACTORS:	540.09 / 736.31 / 658.07	SAR 10g:	0.064 W/kg
CONVERSION FACTORS:	0.328 / 0.298 / 0.304	SAR START:	0.011 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR END:	0.011 W/kg
MODN. DUTY CYCLE:	100%	SAR DRIFT DURING SCAN:	0.000 %
DIODE COMPRESSION FACTORS (V*200):	20 / 20 / 20	PROBE BATTERY LAST CHANGED:	31/08/2012
INPUT POWER LEVEL:	20dBm	EXTRAPOLATION:	poly4

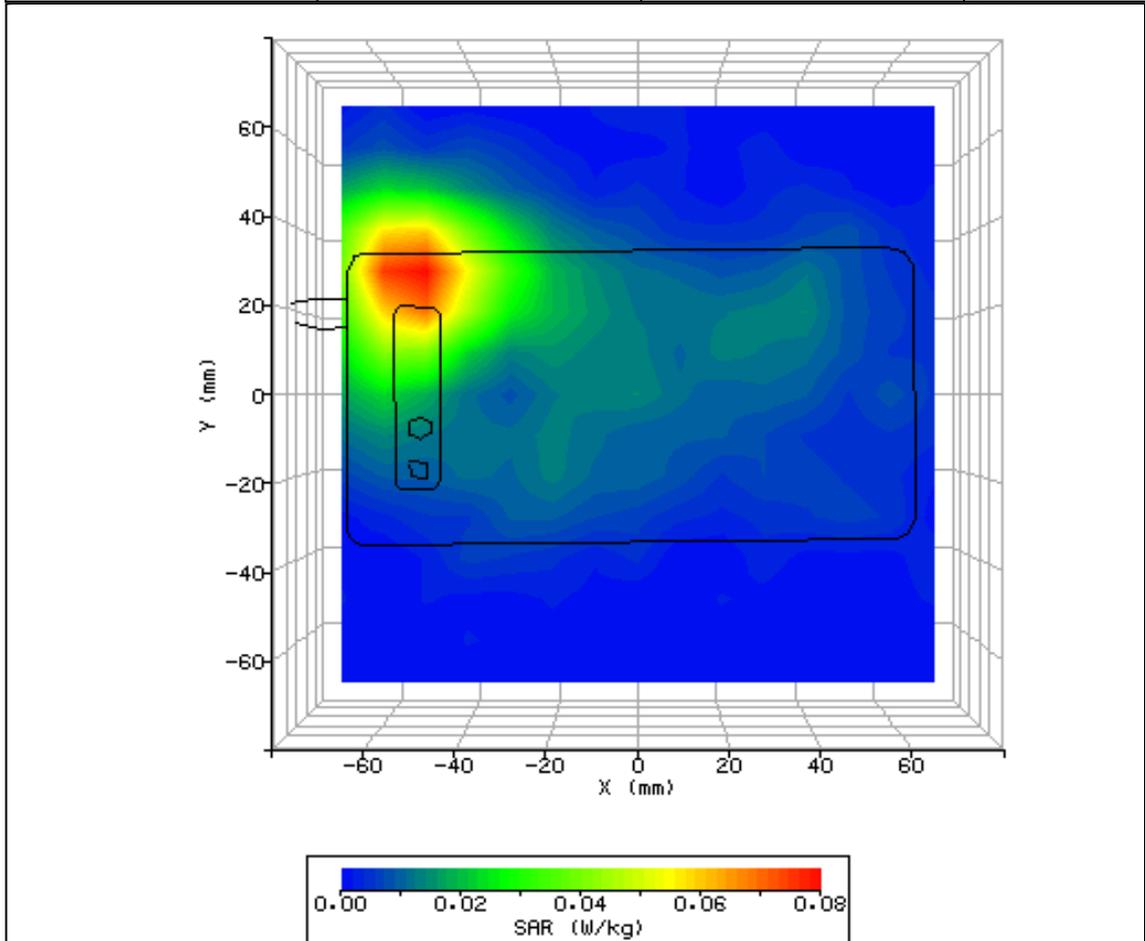


Figure 31: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 2437MHz.



2.10 WLAN 5200MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	30/08/2012-17:20:06	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	22.8°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	41.5%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	23.1°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	31.80mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-56.50mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	4.46
TEST FREQUENCY:	5.18GHz	SAR 1g:	0.163 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.064 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.160 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.147 W/kg
PROBE BATTERY LAST CHANGED:	30/08/2012	SAR DRIFT DURING SCAN:	-7.700 %

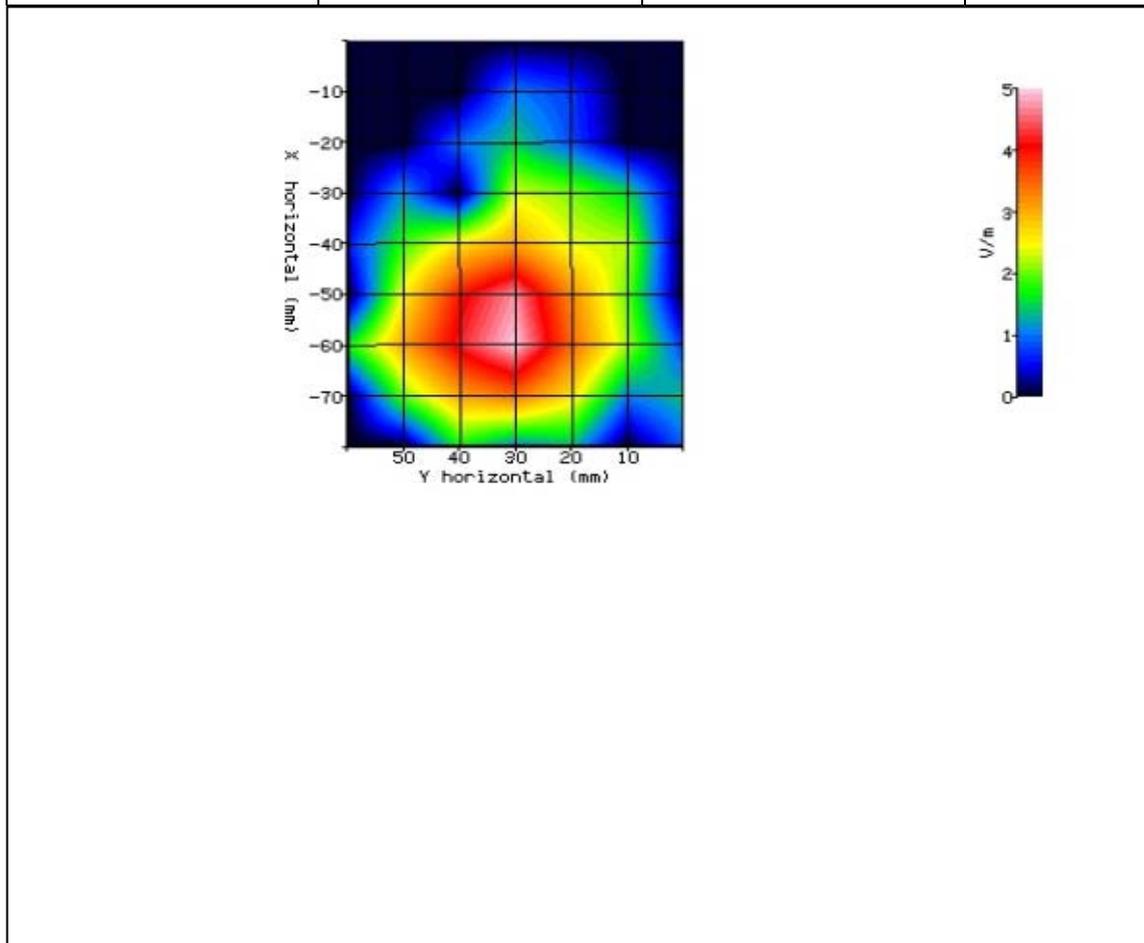


Figure 32: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.18GHz. (NUA)



Product Service

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	30/08/2012-17:45:35	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	22.8°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	41.5%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	23.1°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	30.90mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-59.70mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	4.92
TEST FREQUENCY:	5.24GHz	SAR 1g:	0.178 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.070 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.170 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.178 W/kg
PROBE BATTERY LAST CHANGED:	30/08/2012	SAR DRIFT DURING SCAN:	4.600 %

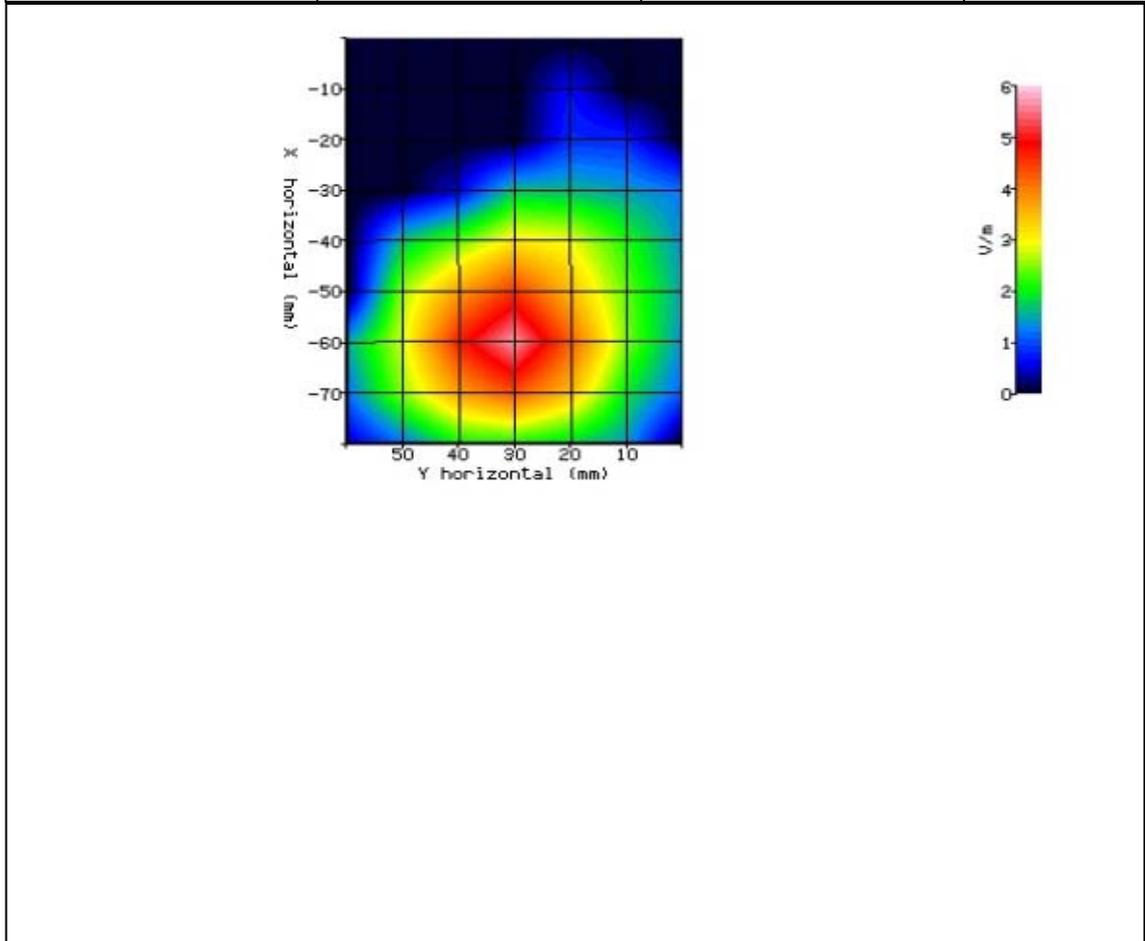


Figure 33: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.24GHz. (NUA)



Product Service

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	30/08/2012-17:58:53	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	22.8°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	41.5%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	23.1°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	31.60mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-58.00mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	4.97
TEST FREQUENCY:	5.26GHz	SAR 1g:	0.186 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.074 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.184 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.171 W/kg
PROBE BATTERY LAST CHANGED:	30/08/2012	SAR DRIFT DURING SCAN:	-7.000 %

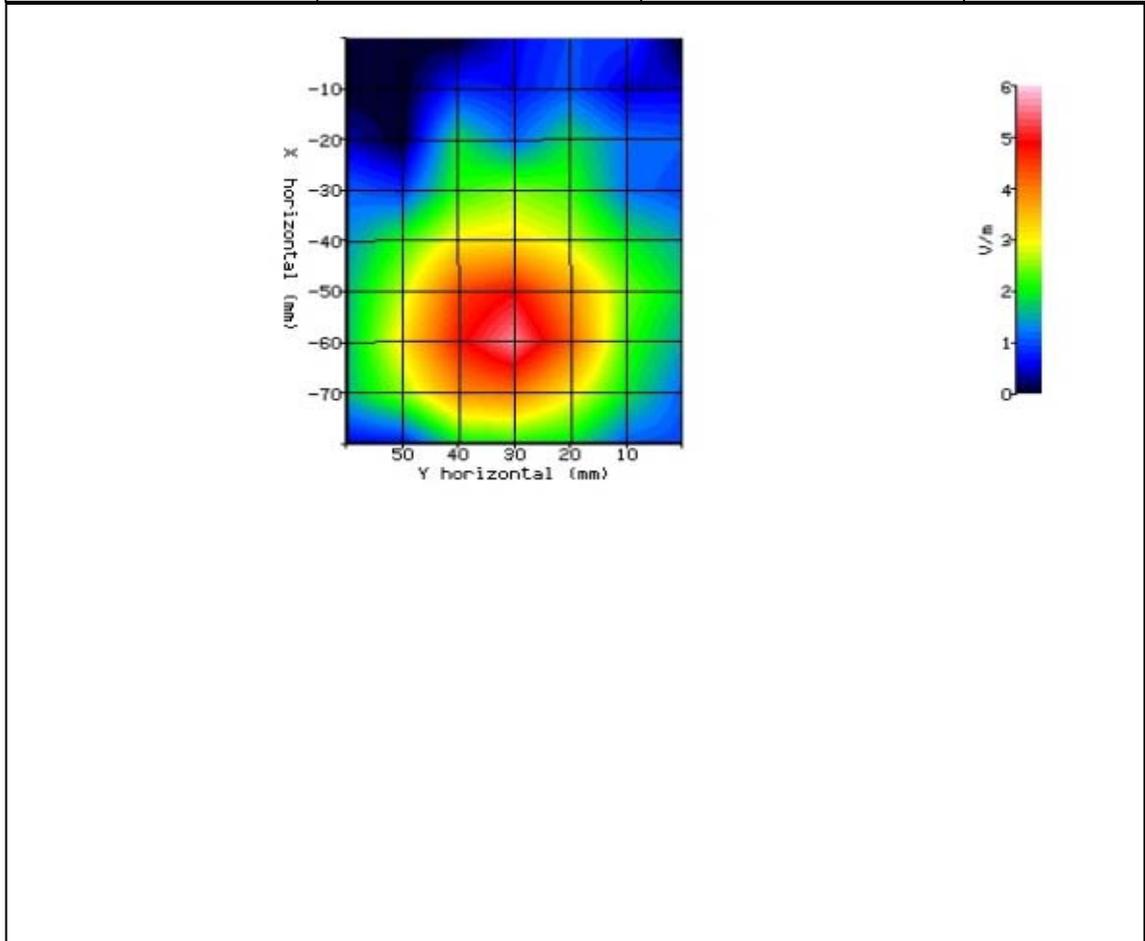


Figure 34: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.26GHz. (NUA)



Product Service

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	30/08/2012-18:10:13	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	22.8°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	41.5%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	23.1°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	29.40mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-61.10mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	4.29
TEST FREQUENCY:	5.32GHz	SAR 1g:	0.148 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.058 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.151 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.144 W/kg
PROBE BATTERY LAST CHANGED:	30/08/2012	SAR DRIFT DURING SCAN:	-7.500 %

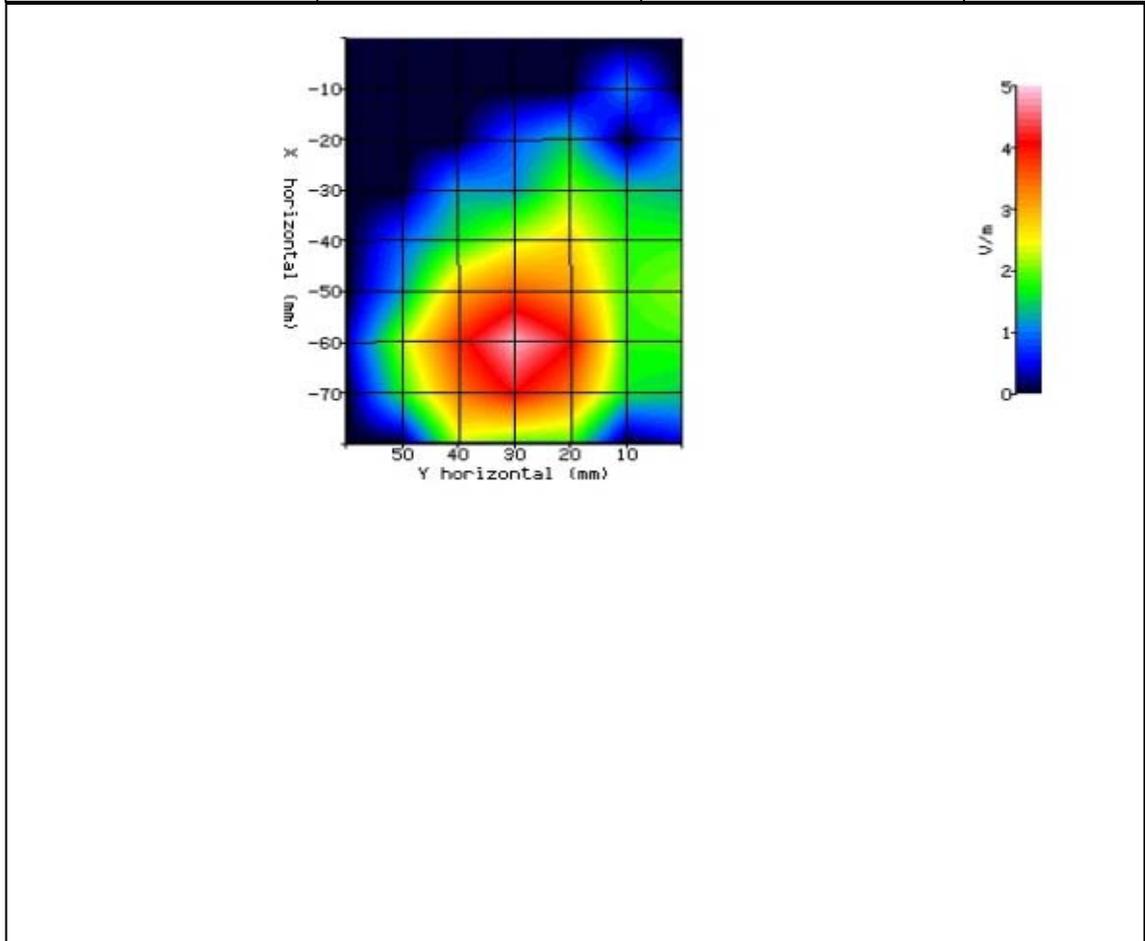


Figure 35: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.32GHz. (NUA)



2.11 WLAN 5500MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012-08:23:51	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	23.30°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	33.60%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	22.70°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	29.70mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-57.90mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	5.74
TEST FREQUENCY:	5.52GHz	SAR 1g:	0.163 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.061 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.251 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.261 W/kg
PROBE BATTERY LAST CHANGED:	31/08/2012	SAR DRIFT DURING SCAN:	3.800 %

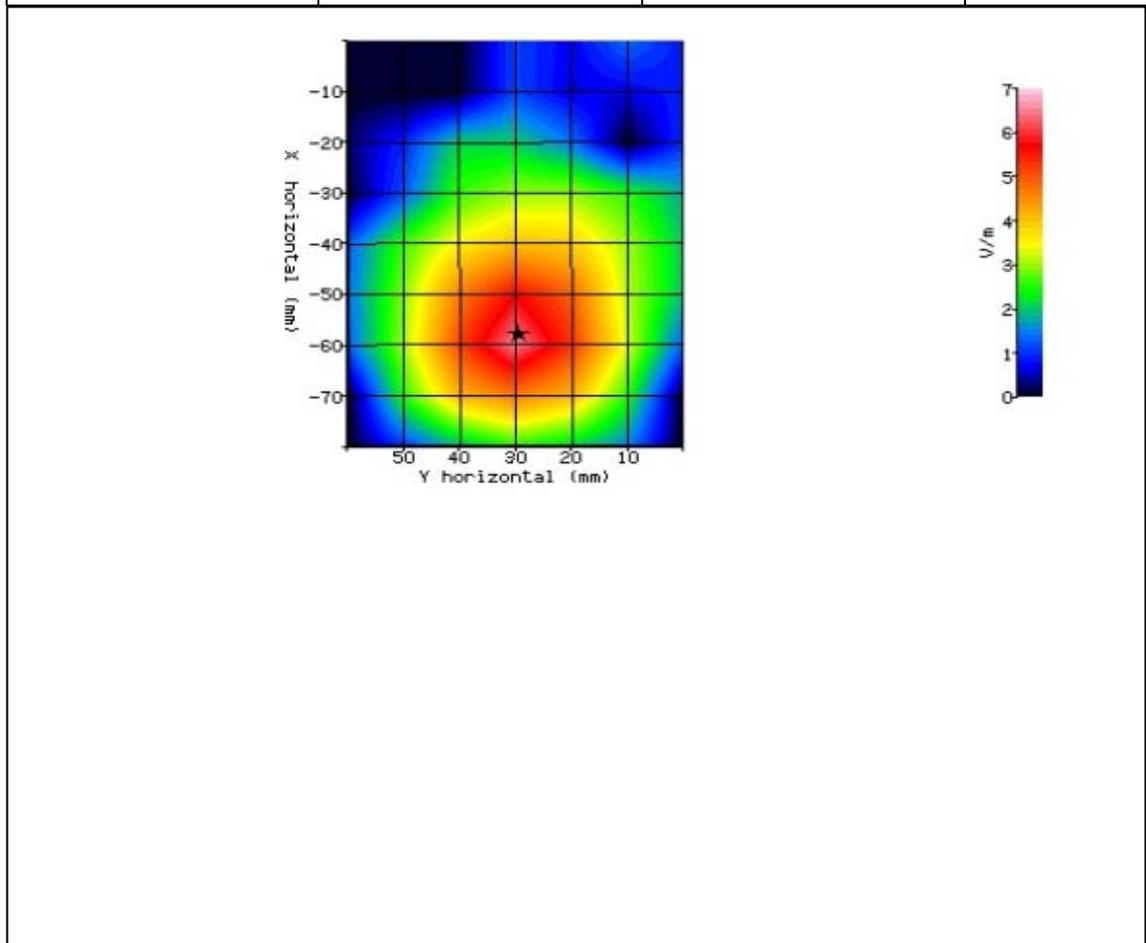


Figure 36: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.52GHz. (NUA)



Product Service

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012-08:37:17	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	23.30°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	33.60%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	22.70°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	30.40mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-60.20mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	5.57
TEST FREQUENCY:	5.58GHz	SAR 1g:	0.144 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.053 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.237 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.231 W/kg
PROBE BATTERY LAST CHANGED:	31/08/2012	SAR DRIFT DURING SCAN:	-2.600 %

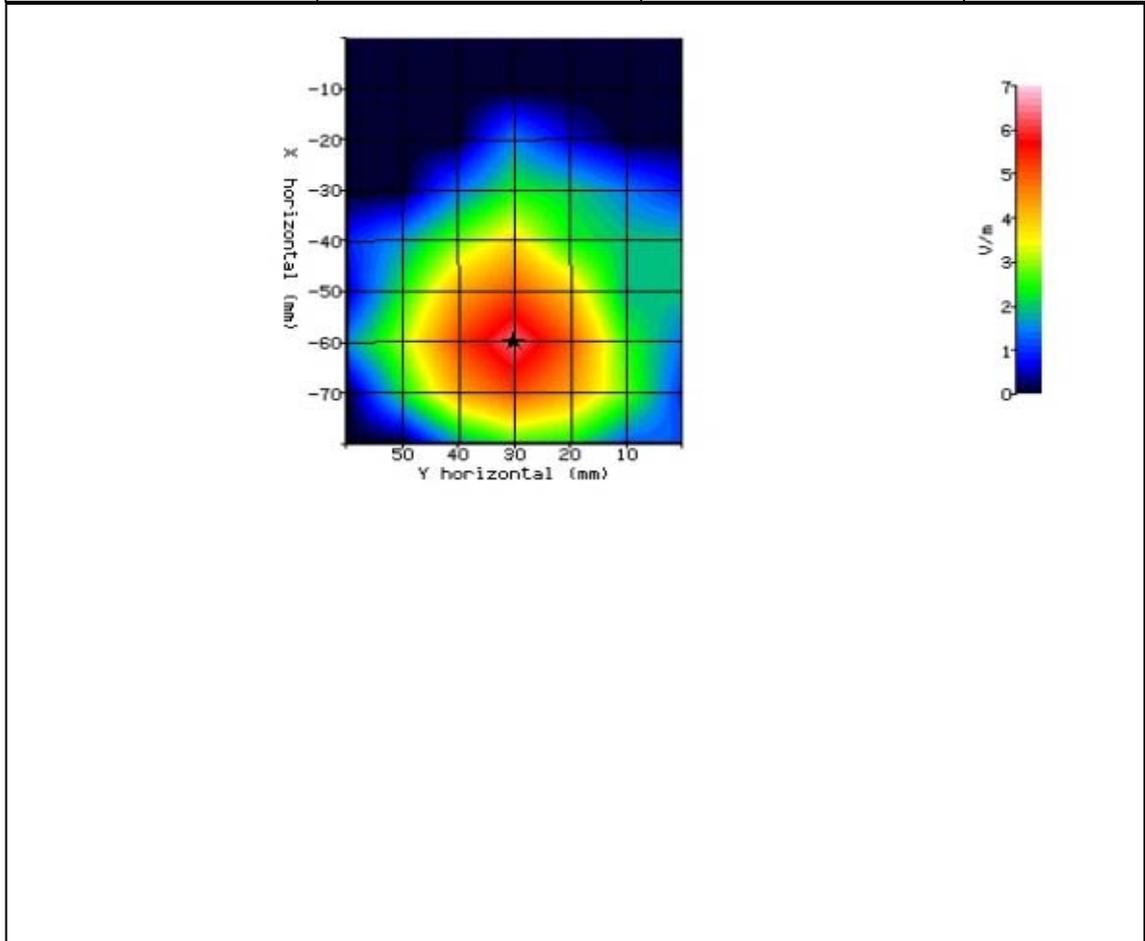


Figure 37: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.58GHz. (NUA)



Product Service

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012-08:48:36	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	23.30°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	33.60%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	22.70°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	27.40mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-59.80mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	5.77
TEST FREQUENCY:	5.62GHz	SAR 1g:	0.158 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.058 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.254 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.272 W/kg
PROBE BATTERY LAST CHANGED:	31/08/2012	SAR DRIFT DURING SCAN:	7.200 %

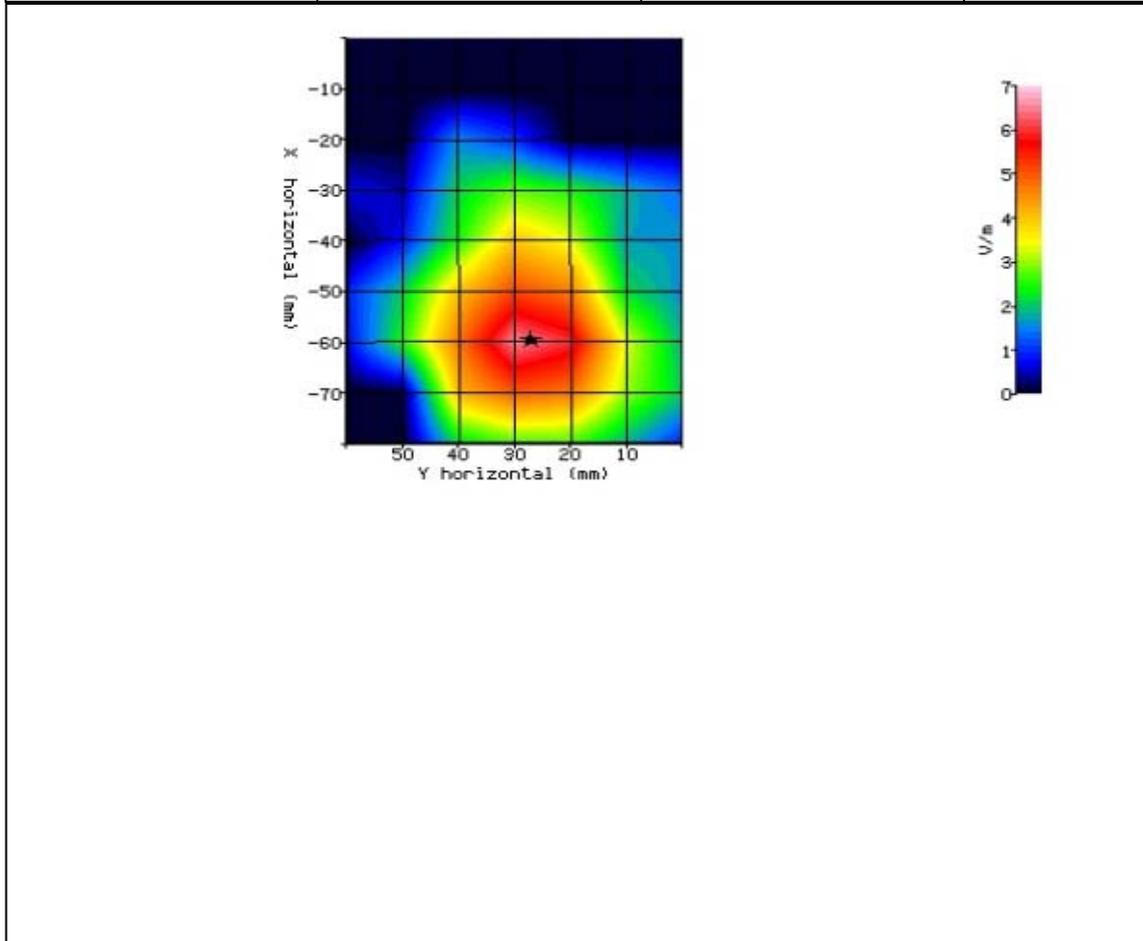


Figure 38: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.62GHz. (NUA)



2.12 WLAN 5800MHz BODY SAR TEST RESULTS AND COURSE AREA SCANS – 2D

SYSTEM / SOFTWARE:	SARA-C / v6.07.10	INPUT POWER DRIFT:	0 dB
DATE / TIME:	31/08/2012-09:07:51	DUT BATTERY MODEL/NO:	UBATIA210AF03
AMBIENT TEMPERATURE:	23.30°C	LIQUID SIMULANT:	2450Body
DEVICE UNDER TEST:	SHL21	RELATIVE PERMITTIVITY:	52.22
RELATIVE HUMIDITY:	33.60%	CONDUCTIVITY:	1.964
PHANTOM S/NO:	N/A	LIQUID TEMPERATURE:	22.70°C
PHANTOM ROTATION:	N/A	MAX SAR X-AXIS LOCATION:	29.80mm
DUT POSITION:	15mm-Rear Facing	MAX SAR Y-AXIS LOCATION:	-59.30mm
ANTENNA CONFIGURATION:	N/A	MAX E FIELD:	5.57
TEST FREQUENCY:	5.68GHz	SAR 1g:	0.198 W/kg
TYPE OF MODULATION:	WLAN (DSSS)	SAR 10g:	0.075 W/kg
MODN. DUTY CYCLE:	100%	SAR START:	0.307 W/kg
INPUT POWER LEVEL:	20dBm	SAR END:	0.305 W/kg
PROBE BATTERY LAST CHANGED:	31/08/2012	SAR DRIFT DURING SCAN:	-0.800 %

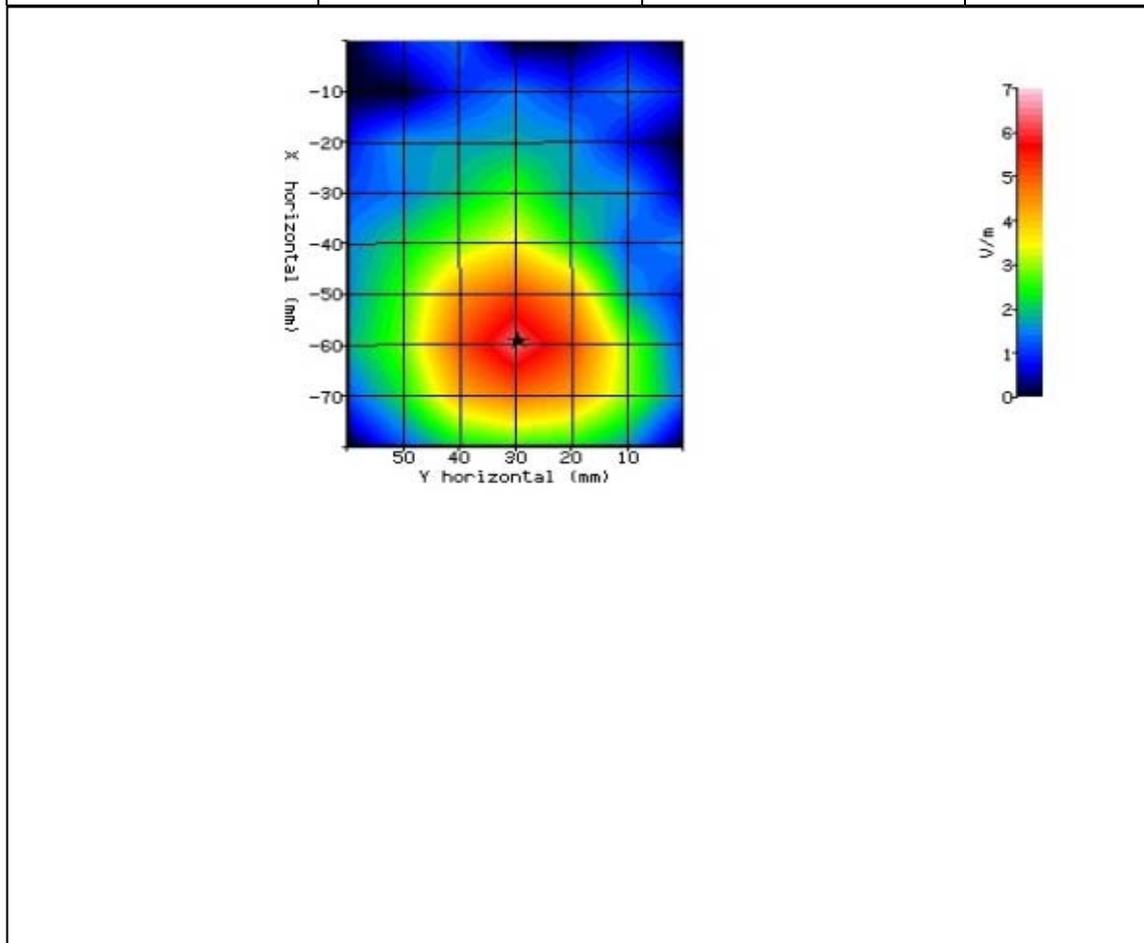


Figure 39: SAR Body Testing Results for the CDMA SHL21 Mobile Handset at 5.68GHz. (NUA)



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

The following test equipment was used at TÜV SÜD Product Service Ltd:

Instrument Description	Manufacturer	Model Type	TE Number	Cal Period (months)	Calibration Due Date
Signal Generator	Hewlett Packard	ESG4000A	38	12	23-May-13
10MHz - 2.5GHz, 3W, Amplifier	Vectawave Technology	VTL5400	51	-	TU
Directional Coupler	Krytar	1850	58	-	TU
Power Sensor	Rohde & Schwarz	NRV-Z1	60	12	12-Jun-13
Signal Generator	Hewlett Packard	ESG4000A	61	12	23-May-13
Antenna (Dipole)	TUV SUD Product Service	D900	70	-	TU
Antenna (Dipole, 1900MHz)	TUV SUD Product Service	D1900	75	-	TU
SAR Robot	Mitsubishi	RV-E2	156	-	TU
Power Sensor	Rohde & Schwarz	NRV-Z1	178	12	24-May-13
Termination 50ohm/50W	Bird	8085	389	12	05-Sep-12
Communications Tester	Rohde & Schwarz	CMU 200	442	12	13-Oct-12
Directional Coupler	Hewlett Packard	11692D	452	-	TU
Attenuator (20dB, 10W)	Weinschel	37-20-34	482	12	11-Oct-12
Attenuator (20dB, 20W)	Narda	766F-20	483	12	13-Jun-13
Fast Probe Amplifier (3 channels)	IndexSar Ltd	IFA-010	1557	-	TU
SAM Head Phantom	Antennessa	Head_04_35.csv	1561	-	TU
Hygromer	Rotronic	Hygropalm	2404	12	07-Feb-13
Bi-directional Coupler	IndexSar Ltd	7401 (VDC0830-20)	2414	-	TU
Validation Amplifier (10MHz - 2.5GHz)	IndexSar Ltd	VBM2500-3	2415	-	TU
Hygromer	Rotronic	I-1000	2784	12	06-Jan-13
Power Sensor	Rohde & Schwarz	NRV- Z5	2878	12	12-Jun-13
Antenna (Omnidirectional)	Katherin Scala Division	OG-890/1990/DC	2905	12	TU
Power Meter	Rohde & Schwarz	NRVD	2979	12	24-May-13
Dual Channel Power Meter	Rohde & Schwarz	NRVD	3259	12	12-Jun-13
Immersible SAR Probe	IndexSar Ltd	IXP-050	3320	12	28-Feb-14
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-12
Power Sensor	Rohde & Schwarz	NRV-Z1	3563	12	24-May-13
Meter & T/C	R.S Components	Meter 615-8206 & Type K T/C	3612	12	13-Mar-13
Flat Phantom	IndexSar Ltd	IXB-2HF 800-6000MHz	4074	-	TU
Head Phantom	IndexSar Ltd	IXB-040 Inverted SAM phantom	4075	-	TU
Part of SARAC System	IndexSar Ltd	Robot Controller	4076	-	TU
Immersible SAR Probe	IndexSar Ltd	IPX-020	4077	12	17-May-13



Product Service

Instrument Description	Manufacturer	Model Type	TE Number	Cal Period (months)	Calibration Due Date
Part of SARAC System	IndexSar Ltd	Cartesian Leg Extension	4078	-	TU
Cartesian 4-axis Robot	IndexSar Ltd	SARAC	4079	-	TU
Part of SARAC System	IndexSar Ltd	White Benchtop	4080	-	TU
Part of SARAC System	IndexSar Ltd	Wooden Bench	4081	-	TU
Immersible SAR Probe	IndexSar Ltd	IPX-025	4145	24	06-Dec-13
850 MHz Head Fluid	TUV Product Service	Batch 19	-	1	02-Oct-12
850 MHz Body Fluid	TUV Product Service	Batch 12	-	1	02-Oct-12
1900 MHz Head Fluid	TUV Product Service	Batch 7	-	1	02-Oct-12
1900 MHz Body Fluid	TUV Product Service	Batch 4	-	1	02-Oct-12
2450 MHz Head Fluid	TUV Product Service	Batch 10	-	1	02-Oct-12
2450 MHz Body Fluid	TUV Product Service	Batch 7	-	1	02-Oct-12
5200 MHz Body Fluid	TUV Product Service	Batch 1	-	1	02-Oct-12
5500 MHz Body Fluid	TUV Product Service	Batch 1	-	1	02-Oct-12
5800 MHz Body Fluid	TUV Product Service	Batch 1	-	1	02-Oct-12

TU – Traceability Unscheduled



Product Service

### 3.2 TEST SOFTWARE

The following software was used to control the TÜV SÜD Product Service Ltd SARA2 System.

Instrument	Version Number	Date
SARA2 system	v.2.5.3 VPM	28 November 2006
Mitsubishi robot controller firmware revision	RV-E2 Version C9a	-
IFA-10 Probe amplifier	Version 2	-



**3.3 DIELECTRIC PROPERTIES OF SIMULANT LIQUIDS**

The fluid properties of the simulant fluids used during routine SAR evaluation meet the dielectric properties required by OET 65(C) – 2001.

OET 65(c) Recipes

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

IEEE 1528 Recipes

Frequency (MHz)	300	450	835	900			1450	1800				1900	1950	2000	2100	2450			3000		
Recipe#	1	1	3	1	1	2	3	1	1	2	2	3	1	2	4	1	1	2	2	3	2
Ingredients (% by weight)																					
1, 2-Propanediol						64.81															
Bactericide	0.19	0.19	0.50	0.10	0.10		0.50														0.50
Diacetin			48.90				49.20														49.45
DGBE								45.41	47.00	13.84	44.92		44.94	13.84	45.00	50.00	50.00	7.99	7.99		7.99
HEC	0.98	0.96		1.00	1.00																
NaCl	5.95	3.95	1.70	1.45	1.48	0.79	1.10	0.67	0.36	0.35	0.18	0.64	0.18	0.35					0.16	0.16	0.16
Sucrose	55.32	56.32		57.00	56.50																
Triton X-100										30.45				30.45					19.97	19.97	19.97
Water	37.56	38.56	48.90	40.45	40.92	34.40	49.20	53.80	52.64	55.36	54.90	49.43	54.90	55.36	55.00	50.00	50.00	50.00	71.88	71.88	49.75
Measured dielectric parameters																					
$\epsilon_r$	46.00	43.40	44.30	41.60	41.20	41.80	42.70	40.9	39.3	41.00	40.40	39.20	39.90	41.00	40.10	37.00	36.80	41.10	40.30	39.20	37.90
$\sigma$ (S/m)	0.86	0.85	0.90	0.90	0.98	0.97	0.99	1.21	1.39	1.38	1.40	1.40	1.42	1.38	1.41	1.40	1.51	1.55	1.88	1.82	2.46
Temp (°C)	22	22	20	22	22	22	20	22	22	21	22	20	21	21	20	22	22	20	20	20	20
Target dielectric parameters (Table 2)																					
$\epsilon_r$	45.30	43.50		41.5		41.50	40.50			40.00							39.80		39.20		38.50
$\sigma$ (S/m)	0.87	0.87		0.9		0.97	1.20			1.40							1.49		1.80		2.40

NOTE – Multiple columns for any single frequency are optional recipe #, reference: 1 (Kanda et al. [B185]), 2 (Vigneras [B143]), 3 (Peyman and Gabriel [B119]), 4 (Fukunaga et al [B50])



Product Service

The dielectric properties of the tissue simulant liquids used for the SAR testing at TÜV SÜD Product Service Ltd are as follows:-

Fluid Type and Frequency	Relative Permittivity $\epsilon_R$ ( $\epsilon'$ ) Target	Relative Permittivity $\epsilon_R$ ( $\epsilon'$ ) Measured	Conductivity $\sigma$ Target	Conductivity $\sigma$ Measured
850 MHz Head	41.5	42.15	0.90	0.907
850 MHz Body	55.0	56.72	0.97	1.000
1900 MHz Head	40.0	39.95	1.40	1.453
1900 MHz Body	53.3	52.82	1.52	1.549
2450 MHz Head	39.2	39.13	1.8	1.810
2450 MHz Body	52.7	52.22	1.95	1.964
5200 MHz Body	49.0	48.02	5.3	5.310
5500 MHz Body	48.6	47.44	5.65	5.730
5800 MHz Body	48.2	46.91	6	6.191

### 3.4 TEST CONDITIONS

#### 3.4.1 Test Laboratory Conditions

Ambient temperature: Within +15°C to +35°C.

The actual temperature during the testing ranged from 20.8°C to 23.3°C.

The actual humidity during the testing ranged from 33.6% to 74.3% RH.

#### 3.4.2 Test Fluid Temperature Range

Frequency	Body / Head Fluid	Min Temperature °C	Max Temperature °C
850 MHz	Head	22	22
850 MHz	Body	22.1	22.9
1900 MHz	Head	22.9	22.9
1900 MHz	Body	22.9	22.9
2450 MHz	Head	21.1	21.1
2450 MHz	Body	21.1	21.1
5200 MHz	Body	23.1	23.1
5500 MHz	Body	22.7	22.7
5800 MHz	Body	22.7	22.7

#### 3.4.3 SAR Drift

The SAR Drift was within acceptable limits during scans. The maximum SAR Drift, drift due to the handset electronics, was recorded as -6.710% (0.3 dB) for all of the testing. The measurement uncertainty budget for this assessment includes the maximum SAR Drift figures for Head and/or Body as applicable.



### 3.5 MEASUREMENT UNCERTAINTY

#### Head SAR Measurements.

Source of Uncertainty	Description	Tolerance / Uncertainty $\pm$ %	Probability distribution	Div	$c_i$ (1g)	Standard Uncertainty $\pm$ % (1g)	$V_i$ or $V_{eff}$
<i>Measurement System</i>							
Probe calibration	7.2.1	8.73	N	1	1	8.73	$\infty$
Isotropy	7.2.1.2	3.18	R	1.73	1	1.84	$\infty$
Probe angle >30deg	additional	12.00	R	1.73	1	6.93	$\infty$
Boundary effect	7.2.1.5	0.49	R	1.73	1	0.28	$\infty$
Linearity	7.2.1.3	1.00	R	1.73	1	0.58	$\infty$
Detection limits	7.2.1.4	0.00	R	1.73	1	0.00	$\infty$
Readout electronics	7.2.1.6	0.30	N	1	1	0.30	$\infty$
Response time	7.2.1.7	0.00	R	1.73	1	0.00	$\infty$
Integration time (equiv.)	7.2.1.8	1.38	R	1.73	1	0.80	$\infty$
RF ambient conditions	7.2.3.6	3.00	R	1.73	1	1.73	$\infty$
Probe positioner mech. restrictions	7.2.2.1	5.35	R	1.73	1	3.09	$\infty$
Probe positioning with respect to phantom shell	7.2.2.3	5.00	R	1.73	1	2.89	$\infty$
Post-processing	7.2.4	7.00	R	1.73	1	4.04	$\infty$
<i>Test sample related</i>							
Test sample positioning	7.2.2.4	1.50	R	1.73	1	0.87	$\infty$
Device holder uncertainty	7.2.2.4.2	1.73	R	1.73	1	1.00	$\infty$
Drift of output power	7.2.3.4	-6.71	R	1.73	1	3.87	$\infty$
<i>Phantom and set-up</i>							
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	2.01	R	1.73	1	1.16	$\infty$
Liquid conductivity (target)	7.2.3.3	5.00	R	1.73	0.64	1.85	$\infty$
Liquid conductivity (meas.)	7.2.3.3	5.00	N	1	0.64	3.20	$\infty$
Liquid permittivity (target)	7.2.3.4	5.00	R	1.73	0.6	1.73	$\infty$
Liquid permittivity (meas.)	7.2.3.4	3.00	N	1	0.6	1.80	$\infty$
Combined standard uncertainty			RSS			14.14	
Expanded uncertainty (95% confidence interval)			K=2			27.88	



Body SAR Measurements.

Source of Uncertainty	Description	Tolerance / Uncertainty ± %	Probability distribution	Div	$c_i$ (1g)	Standard Uncertainty ± % (1g)	$V_i$ or $V_{eff}$
<i>Measurement System</i>							
Probe calibration	7.2.1	8.73	N	1	1	8.73	∞
Isotropy	7.2.1.2	3.18	R	1.73	1	1.84	∞
Boundary effect	7.2.1.5	0.49	R	1.73	1	0.28	∞
Linearity	7.2.1.3	1.00	R	1.73	1	0.58	∞
Detection limits	7.2.1.4	0.00	R	1.73	1	0.00	∞
Readout electronics	7.2.1.6	0.30	N	1	1	0.30	∞
Response time	7.2.1.7	0.00	R	1.73	1	0.00	∞
Integration time (equiv.)	7.2.1.8	1.38	R	1.73	1	0.80	∞
RF ambient conditions	7.2.3.6	3.00	R	1.73	1	1.73	∞
Probe positioner mech. restrictions	7.2.2.1	0.60	R	1.73	1	0.35	∞
Probe positioning with respect to phantom shell	7.2.2.3	2.00	R	1.73	1	1.15	∞
Post-processing	7.2.4	7.00	R	1.73	1	4.04	∞
<i>Test sample related</i>							
Test sample positioning	7.2.2.4	1.50	R	1.73	1	0.87	∞
Device holder uncertainty	7.2.2.4.2	1.73	R	1.73	1	1.00	∞
Drift of output power	7.2.3.4	4.53	R	1.73	1	2.62	∞
<i>Phantom and set-up</i>							
Phantom uncertainty (shape and thickness tolerances)	7.2.2.2	2.01	R	1.73	1	1.16	∞
Liquid conductivity (target)	7.2.3.3	5.00	R	1.73	0.64	1.85	∞
Liquid conductivity (meas.)	7.2.3.3	5.00	N	1	0.64	3.20	∞
Liquid permittivity (target)	7.2.3.4	5.00	R	1.73	0.6	1.73	∞
Liquid permittivity (meas.)	7.2.3.4	3.00	N	1	0.6	1.80	∞
Combined standard uncertainty			RSS			11.52	
Expanded uncertainty (95% confidence interval)			K=2			22.24	



Product Service

## **SECTION 4**

### **PHOTOGRAPHS**



Product Service

#### 4.1 TEST POSITIONAL PHOTOGRAPHS

Figure 40  
Left Hand Cheek Position

Figure 41  
Left Hand 15° Position



Product Service

Figure 42  
Right Hand Cheek Position

Figure 43  
Right Hand 15° Position



Product Service

Figure 44  
Body Front Facing Position

Figure 45  
Body Rear Facing Position



Product Service

## 4.2 PHOTOGRAPHS OF EQUIPMENT UNDER TEST (EUT)

Figure 46  
Front View

Figure 47  
Rear View



Product Service

Figure 48  
Rear View Battery Removed

Figure 49  
CDMA2000 Sample



Product Service

Figure 50  
WCDMA Sample

Figure 51  
WLAN Sample



Product Service

Figure 52  
PCS1900 Sample

Figure 53  
Headset



Product Service

## **SECTION 5**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

**5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited

**ANNEX A**

**PROBE CALIBRATION REPORT**



# NATIONAL PHYSICAL LABORATORY

Teddington Middlesex UK TW11 0LW Telephone +44 20 8977 3222

## Certificate of Calibration

SAR PROBE

IndexSAR

Model: IXP-050

Serial number: 0187

*This certificate provides traceability of measurement to recognised national standards, and to the units of measurement realised at the National Physical Laboratory or other recognised national standards laboratories. This certificate may not be reproduced other than in full, unless permission for the publication of an approved extract has been obtained in writing from the Managing Director. It does not of itself impute to the subject of calibration any attributes beyond those shown by the data contained herein.*

FOR: Indexsar Ltd.  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey  
RH5 5BG

DESCRIPTION: An IndexSAR isotropic electric field probe for determining specific absorption rates (SAR) in dielectric liquids. The probe has three orthogonal sensors, and the output voltage of the sensors is converted to an optical signal by a meter unit containing an analogue to digital (AD) converter. Probe readings are obtained using software via the RS232 port. The probe was calibrated with IndexSAR amplifier model IXA-010 S/N 036 belonging to NPL.

IDENTIFICATION: The probe is marked with the manufacturer's serial number 0187

MEASUREMENTS COMPLETED ON: 1 March 2012

The reported uncertainty is based on a coverage factor  $k=2$ , providing a level of confidence of approximately 95%

Reference : 2012020074-2

Page 1 of 7

Date of Issue : 1 March 2012

Signed : *B. Loader* (Authorised Signatory)

Checked by : *B. Cel*

Name : Mr B G Loader on behalf of NPLML

NPL/LO 1-06/07

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

## MEASUREMENT PROCEDURE

For frequencies at or above 835 MHz, the calibration method is based on establishing a calculable specific absorption rate (SAR) using a matched waveguide cell [1]. The cell has a feed-section and a liquid-filled section separated by a matching window that is designed to minimise reflections at the interface. A TE<sub>01</sub> mode is launched into the waveguide by means of a N-type-to-waveguide adapter. The power delivered to the liquid is calculated from the forward power and reflection coefficient measured at the input to the cell. At the centre of the cross-section of the waveguide cell, the volume specific absorption rate ( $SAR^V$ ) in the liquid as a function of distance from the window is given by

$$SAR^V = \frac{4(P_w)}{ab\delta} e^{-2Z/\delta} \quad (1)$$

where

- $a$  = the larger cross-sectional dimension of the waveguide.
- $b$  = the smaller cross-sectional dimension of the waveguide.
- $\delta$  = the skin depth for the liquid in the waveguide.
- $Z$  = the distance of the probe's sensors from the liquid to matching window boundary.
- $P_w$  = the power delivered to the liquid.

For frequencies below 835 MHz, the SAR in the liquid is established by measuring the rate of temperature rise in the liquid at the calibration point. In this case the SAR in the liquid is related to the temperature rise by

$$SAR = c \frac{dT}{dt} \quad (2)$$

where  $c$  is the specific heat of the liquid.

Liquids having the properties specified by SAR measurement standards [2, 3, 4] were used for the calibration. The value of  $\delta$  for the liquid was obtained by measuring the electric field ( $E$ ) at a number of distances from the matching window. The calibration was for continuous wave (CW) signals, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The probe was rotated about its axis in 15-degree steps, and the ratio of the calibration factors for the three probe sensors X, Y, & Z were optimized to give the best axial isotropy.

Reference : 2012020074-2

Page 2 of 7

Date of Issue : 1 March 2012

Checked by : *BCA*

NPL/5004/0007

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

The probe was calibrated with the linearisation and air-correction factors enabled. Comparing the measured values of  $E^2$  in the liquid to those calculated for the waveguide cell allows the ratio,  $ConvF$ , of sensitivity for  $(E^2_{LIQUID}) / (E^2_{AIR})$  to be determined, as required by the probe software.

The linear response of the probe to continuous wave signals was tested at 1800 MHz over the range 0.12 W/kg to 100 W/kg in accordance with [3].

The spherical isotropy of the probe was tested in head liquid at 900 MHz, in accordance with [3, 5, 6], for probe axial rotation ( $\theta$ ) through 360° and source polarisation ( $\phi$ ) rotation through 90° in 15° increments.

## ENVIRONMENT

Measurements were made in a temperature-controlled laboratory at  $22 \pm 1^\circ\text{C}$ . The temperature of the liquid used was measured at the beginning and end of each measurement.

## UNCERTAINTIES

The estimated uncertainty in calibration for SAR ( $\text{W kg}^{-1}$ ) is  $\pm 10\%$ . The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k=2$ , providing a level of confidence of approximately 95%.

This uncertainty is valid when the probe is used in a liquid with the same dielectric properties as those used for the calibration. No estimate is made for the long-term stability of the device calibrated or of the fluids used in the calibration.

When using the probe for SAR testing, additional uncertainties should be added to account for the spherical isotropy of the probe, proximity effects, linearity, and response to pulsed fields. There will be additional uncertainty if the probe is used in liquids having significantly different electrical properties to those used for the calibration. The electrical properties of the liquids will be related to temperature.

## RESULTS

Tables 1 and 2 give the results for calibration in liquid.

**These calibration factors are only correct when the values for sensitivity in free-space, diode compression and sensor offset from the tip of the probe, as set in the probe software, are the same as those given in Table 1 and 2.**

Reference : 2012020074-2

Page 3 of 7

Date of Issue : 1 March 2012

Checked by : *BCL*

NPLCS0048/07

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

Table 3 contains the values of the boundary correction factors  $f(\theta)$  and  $d$ .

Table 4 gives the probe linearity and spherical isotropy.

## REFERENCES:

- [1] Pokovic, KT, T.Schmid and N.Kuster, "Robust set-up for Precise Calibration of E-field probes in Tissue Simulating Liquids at Mobile Phone Frequencies", Proceedings ICECOM 1997, pp 120 – 124, Dubrovnik, Croatia Oct 12-17, 1997.
- [2] British Standard BS EN 503361:2001. "Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)".
- [3] IEEE Standard 1528-2003 "Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".
- [4] Federal Communications Commission, FCC OET Bulletin 65, Supplement C, June 2001, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", David L. Means, Kwok W. Chan.
- [5] IEC Standard 62209-1 Ed 1. (2005), "Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices - Human models, Instrumentation, and Procedures – - Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)".
- [6] IEC Standard 62209-2 Ed 1. (2010), "Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)".

Reference : 2012020074-2

Page 4 of 7

Date of Issue : 1 March 2012

Checked by : *BCEL*

NPLCS0048807

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

Table 1  
Sensitivity in Head Simulating Liquids.  
SAR probe: IXP-050  
S/N 0187

Probe settings for calibration						
Sensitivity in free-space <sup>(1)</sup>		Diode Compression <sup>(2)</sup>		Sensor offset from tip of probe <sup>(2)</sup>		
Lin X = 540.09 (V/m) <sup>2</sup> /(V*200)		DCP <sub>X</sub> = 20 (V*200)		2.7 mm		
Lin Y = 736.31 (V/m) <sup>2</sup> /(V*200)		DCP <sub>Y</sub> = 20 (V*200)				
Lin Z = 658.07 (V/m) <sup>2</sup> /(V*200)		DCP <sub>Z</sub> = 20 (V*200)				
Sensitivity in Head Simulating Liquid.						
Calibration frequency	Liquid Phantom <sup>(3)</sup>		Calibration Factors for $E^2_{\text{Liquid}} / E^2_{\text{Air}}$			Axial Isotropy
(MHz)	$\epsilon'$ <sup>(3)</sup>	$\sigma$ <sup>(3)</sup> (Sm <sup>-1</sup> )	<i>ConvF<sub>X</sub></i>	<i>ConvF<sub>Y</sub></i>	<i>ConvF<sub>Z</sub></i>	(dB)
450	41.8	0.88	<b>0.172</b>	<b>0.166</b>	<b>0.164</b>	±0.01
835	40.2	0.93	<b>0.204</b>	<b>0.193</b>	<b>0.195</b>	±0.01
900	39.8	0.97	<b>0.205</b>	<b>0.193</b>	<b>0.196</b>	±0.01
1800	40.0	1.41	<b>0.259</b>	<b>0.242</b>	<b>0.247</b>	±0.03
1900	39.2	1.39	<b>0.274</b>	<b>0.255</b>	<b>0.259</b>	±0.05
2100	40.5	1.46	<b>0.300</b>	<b>0.277</b>	<b>0.284</b>	±0.02
2450	39.1	1.80	<b>0.293</b>	<b>0.268</b>	<b>0.274</b>	±0.04
2600	38.6	1.95	<b>0.302</b>	<b>0.277</b>	<b>0.283</b>	±0.04

Reference : 2012020074-2

Page 5 of 7

Date of Issue : 1 March 2012

Checked by :

NPLCS00-06807

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

Table 2  
Sensitivity in Body Simulating Liquids.  
SAR probe: IXP-050  
S/N 0187

Probe settings for calibration						
Sensitivity in free-space <sup>(1)</sup>		Diode Compression <sup>(2)</sup>		Sensor offset from tip of probe <sup>(2)</sup>		
Lin X = 540.09 (V/m) <sup>2</sup> /(V*200)		DCP <sub>x</sub> = 20 (V*200)		2.7 mm		
Lin Y = 736.31 (V/m) <sup>2</sup> /(V*200)		DCP <sub>y</sub> = 20 (V*200)				
Lin Z = 658.07 (V/m) <sup>2</sup> /(V*200)		DCP <sub>z</sub> = 20 (V*200)				
Sensitivity in Body Simulating Liquid.						
Calibration frequency (MHz)	Liquid Phantom <sup>(3)</sup>		Calibration Factors for $E^2_{\text{Liquid}} / E^2_{\text{Air}}$			Axial Isotropy
	$\epsilon'$ <sup>(3)</sup>	$\sigma$ <sup>(3)</sup> (Sm <sup>-1</sup> )	<i>ConvF<sub>x</sub></i>	<i>ConvF<sub>y</sub></i>	<i>ConvF<sub>z</sub></i>	(dB)
450	55.6	0.98	<b>0.181</b>	<b>0.175</b>	<b>0.173</b>	±0.03
835	56.1	1.02	<b>0.206</b>	<b>0.195</b>	<b>0.199</b>	±0.01
900	55.8	1.05	<b>0.214</b>	<b>0.202</b>	<b>0.206</b>	±0.01
1800	52.3	1.51	<b>0.281</b>	<b>0.257</b>	<b>0.265</b>	±0.01
1900	52.0	1.59	<b>0.295</b>	<b>0.270</b>	<b>0.278</b>	±0.02
2100	51.5	1.63	<b>0.321</b>	<b>0.294</b>	<b>0.301</b>	±0.02
2450	50.5	1.96	<b>0.328</b>	<b>0.298</b>	<b>0.304</b>	±0.04
2600	50.2	2.12	<b>0.340</b>	<b>0.309</b>	<b>0.316</b>	±0.04

Notes.

- (1) Measured at 900 MHz
- (2) The manufacturer supplied these figures.
- (3) Measured at a temperature of 22 ± 1 °C.

Reference : 2012020074-2

Page 6 of 7

Date of Issue : 1 March 2012

Checked by : *Blal*

NPLCS004807

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

Table 3  
Boundary Correction Factors  
SAR probe: IXP-050  
S/N 0187

Frequency (MHz)	Head Simulating Liquid		Body Simulating Liquid	
	$f(0)$	$d$	$f(0)$	$d$
450	1.66	1.19	1.26	1.27
835	0.60	2.30	3.08	0.92
900	1.49	1.18	1.12	1.41
1800	0.67	1.73	0.65	1.82
1900	0.37	2.69	0.66	1.82
2100	0.65	1.82	0.73	1.71
2450	1.04	1.37	0.95	1.41
2600	0.97	1.35	0.87	1.40

Table 4  
Linearity and Spherical Isotropy  
SAR probe: IXP-050  
S/N 0187

Parameter	Frequency	Range	Maximum deviation
Linearity	1800 MHz	0.12 – 100 W/kg	± 0.11 dB
Spherical isotropy in head liquid	900 MHz	$\theta = 0$ to $360^\circ$ , $\phi = 0$ to $90^\circ$	± 1.3 dB

Reference : 2012020074-2

Page 7 of 7

Date of Issue : 1 March 2012

Checked by : *BCel*

NPLCS00-0607

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

## MEASUREMENT PROCEDURE

For frequencies at or above 835 MHz, the calibration method is based on establishing a calculable specific absorption rate (SAR) using a matched waveguide cell [1]. The cell has a feed-section and a liquid-filled section separated by a matching window that is designed to minimise reflections at the interface. A  $TE_{01}$  mode is launched into the waveguide by means of a N-type-to-waveguide adapter. The power delivered to the liquid is calculated from the forward power and reflection coefficient measured at the input to the cell. At the centre of the cross-section of the waveguide cell, the volume specific absorption rate ( $SAR^V$ ) in the liquid as a function of distance from the window is given by

$$SAR^V = \frac{4(P_w)}{ab\delta} e^{-2Z/\delta} \quad (1)$$

where

$a$  = the larger cross-sectional dimension of the waveguide.

$b$  = the smaller cross-sectional dimension of the waveguide.

$\delta$  = the skin depth for the liquid in the waveguide.

$Z$  = the distance of the probe's sensors from the liquid to matching window boundary.

$P_w$  = the power delivered to the liquid.

For frequencies below 835 MHz, the SAR in the liquid is established by measuring the rate of temperature rise in the liquid at the calibration point. In this case the SAR in the liquid is related to the temperature rise by

$$SAR = c \frac{dT}{dt} \quad (2)$$

where  $c$  is the specific heat of the liquid.

Liquids having the properties specified by SAR measurement standards [2, 3, 4] were used for the calibration. The value of  $\delta$  for the liquid was obtained by measuring the electric field ( $E$ ) at a number of distances from the matching window. The calibration was for continuous wave (CW) signals, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The probe was rotated about its axis in 15-degree steps, and the ratio of the calibration factors for the three probe sensors X, Y, & Z were optimized to give the best axial isotropy.

Reference : 2011110089-3

Page 2 of 6

Date of Issue : 6 December 2011

Checked by : *BCG*

NPFL-2006-00007

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

The probe was calibrated with the linearisation and air-correction factors enabled. Comparing the measured values of  $E^2$  in the liquid to those calculated for the waveguide cell allows the ratio,  $ConvF$ , of sensitivity for  $(E^2_{LIQUID}) / (E^2_{AIR})$  to be determined, as required by the probe software.

## ENVIRONMENT

Measurements were made in a temperature-controlled laboratory at  $22 \pm 1^\circ\text{C}$ . The temperature of the liquid used was measured at the beginning and end of each measurement.

## UNCERTAINTIES

The estimated uncertainty in calibration for SAR ( $\text{W kg}^{-1}$ ) is  $\pm 10\%$ . The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%.

This uncertainty is valid when the probe is used in a liquid with the same dielectric properties as those used for the calibration. No estimate is made for the long-term stability of the device calibrated or of the fluids used in the calibration.

When using the probe for SAR testing, additional uncertainties should be added to account for the spherical isotropy of the probe, proximity effects, linearity, and response to pulsed fields. There will be additional uncertainty if the probe is used in liquids having significantly different electrical properties to those used for the calibration. The electrical properties of the liquids will be related to temperature.

## RESULTS

Tables 1 and 2 give the results for calibration in liquid.

**These calibration factors are only correct when the values for sensitivity in free-space, diode compression and sensor offset from the tip of the probe, as set in the probe software, are the same as those given in Table 1 and 2.**

Table 3 contains the values of the boundary correction factors  $f(0)$  and  $d$ .

Reference : 2011110089-3

Page 3 of 6

Date of Issue : 6 December 2011

Checked by : *1366*

NPFL0089/00/07

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

## REFERENCES:

[1] Pokovic, KT, T.Schmid and N.Kuster, "Robust set-up for Precise Calibration of E-field probes in Tissue Simulating Liquids at Mobile Phone Frequencies", Proceedings ICECOM 1997, pp 120 – 124, Dubrovnik, Croatia Oct 12-17, 1997.

[2] British Standard BS EN 503361:2001. "Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)".

[3] IEEE Standard 1528-2003 "Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

[4] Federal Communications Commission, FCC OET Bulletin 65, Supplement C, June 2001, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", David L. Means, Kwok W. Chan.

Reference : 2011110089-3

Page 4 of 6

Date of Issue : 6 December 2011

Checked by : *Blel*

NPFL-2000-0000/





# NATIONAL PHYSICAL LABORATORY

Teddington Middlesex UK TW11 0LW Telephone +44 20 8977 3222

## Certificate of Calibration

SAR PROBE

IndexSAR

Model: IXP-025

Serial number: G0008

*This certificate provides traceability of measurement to recognised national standards laboratories. Unless permission for the publication of an approved extract has been obtained, no liability is imputed to the subject of calibration any attributes beyond those shown by the data.*

**FOR:** Indexsar Ltd.  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey  
RH5 5BG

**DESCRIPTION:** An IndexSAR isotropic electric absorption rates (SAR) in di-orthogonal sensors, and the output to an optical signal by a meter (AD) converter. Probe readings are obtained using software via the RS232 port. The probe was calibrated with IndexSAR amplifier model IXA-010 S/N 036 belonging to NPL.

Telecoms Ident No. TE4145

External Calibration Certificate Validation

	Yes	No
Results Satisfactory?	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Drift from Previous Results?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Measurement Uncertainties Changed?	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Software Changes?	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Comments:  
New SAR Probe

Signed: *[Signature]* Date 22/08/12

**IDENTIFICATION:** The probe is marked with the manufacturer's serial number G0008

**MEASUREMENTS COMPLETED ON:** 28 November 2011

The reported uncertainty is based on a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%

Reference : 2011110089-3

Date of Issue : 6 December 2011

Checked by : *BGL*

Signed : *B Loader* (Authorised Signatory)

Name : Mr B G Loader on behalf of NPLML

Page 1 of 6

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

## MEASUREMENT PROCEDURE

For frequencies at or above 835 MHz, the calibration method is based on establishing a calculable specific absorption rate (SAR) using a matched waveguide cell [1]. The cell has a feed-section and a liquid-filled section separated by a matching window that is designed to minimise reflections at the interface. A  $TE_{01}$  mode is launched into the waveguide by means of a N-type-to-waveguide adapter. The power delivered to the liquid is calculated from the forward power and reflection coefficient measured at the input to the cell. At the centre of the cross-section of the waveguide cell, the volume specific absorption rate ( $SAR^V$ ) in the liquid as a function of distance from the window is given by

$$SAR^V = \frac{4(P_w)}{ab\delta} e^{-2Z/\delta} \quad (1)$$

where

- $a$  = the larger cross-sectional dimension of the waveguide.
- $b$  = the smaller cross-sectional dimension of the waveguide.
- $\delta$  = the skin depth for the liquid in the waveguide.
- $Z$  = the distance of the probe's sensors from the liquid to matching window boundary.
- $P_w$  = the power delivered to the liquid.

For frequencies below 835 MHz, the SAR in the liquid is established by measuring the rate of temperature rise in the liquid at the calibration point. In this case the SAR in the liquid is related to the temperature rise by

$$SAR = c \frac{dT}{dt} \quad (2)$$

where  $c$  is the specific heat of the liquid.

Liquids having the properties specified by SAR measurement standards [2, 3, 4] were used for the calibration. The value of  $\delta$  for the liquid was obtained by measuring the electric field ( $E$ ) at a number of distances from the matching window. The calibration was for continuous wave (CW) signals, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The probe was rotated about its axis in 15-degree steps, and the ratio of the calibration factors for the three probe sensors X, Y, & Z were optimized to give the best axial isotropy.

Reference : 2011110089-3

Page 2 of 6

Date of Issue : 6 December 2011

Checked by : *BCG*

NPFL-2009-000007

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

The probe was calibrated with the linearisation and air-correction factors enabled. Comparing the measured values of  $E^2$  in the liquid to those calculated for the waveguide cell allows the ratio,  $ConvF$ , of sensitivity for  $(E^2_{LIQUID}) / (E^2_{AIR})$  to be determined, as required by the probe software.

## ENVIRONMENT

Measurements were made in a temperature-controlled laboratory at  $22 \pm 1^\circ\text{C}$ . The temperature of the liquid used was measured at the beginning and end of each measurement.

## UNCERTAINTIES

The estimated uncertainty in calibration for SAR ( $\text{W kg}^{-1}$ ) is  $\pm 10\%$ . The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor  $k = 2$ , providing a level of confidence of approximately 95%.

This uncertainty is valid when the probe is used in a liquid with the same dielectric properties as those used for the calibration. No estimate is made for the long-term stability of the device calibrated or of the fluids used in the calibration.

When using the probe for SAR testing, additional uncertainties should be added to account for the spherical isotropy of the probe, proximity effects, linearity, and response to pulsed fields. There will be additional uncertainty if the probe is used in liquids having significantly different electrical properties to those used for the calibration. The electrical properties of the liquids will be related to temperature.

## RESULTS

Tables 1 and 2 give the results for calibration in liquid.

**These calibration factors are only correct when the values for sensitivity in free-space, diode compression and sensor offset from the tip of the probe, as set in the probe software, are the same as those given in Table 1 and 2.**

Table 3 contains the values of the boundary correction factors  $f(0)$  and  $d$ .

Reference : 2011110089-3

Page 3 of 6

Date of Issue : 6 December 2011

Checked by : *BCd*

NPL-2009-001

# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

## REFERENCES:

[1] Pokovic, KT, T.Schmid and N.Kuster, "Robust set-up for Precise Calibration of E-field probes in Tissue Simulating Liquids at Mobile Phone Frequencies", Proceedings ICECOM 1997, pp 120 – 124, Dubrovnik, Croatia Oct 12-17, 1997.

[2] British Standard BS EN 503361:2001. "Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz – 3 GHz)".

[3] IEEE Standard 1528-2003 "Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

[4] Federal Communications Commission, FCC OET Bulletin 65, Supplement C, June 2001, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", David L. Means, Kwok W. Chan.

Reference : 2011110089-3

Page 4 of 6

Date of Issue : 6 December 2011

Checked by : *Blel*

NPFL-2011-0089-3



# NATIONAL PHYSICAL LABORATORY

Continuation Sheet

Table 2  
Sensitivity in Body Simulating Liquids.  
SAR probe: IXP-025  
S/N G0008

Probe settings for calibration						
Sensitivity in free-space <sup>(1)</sup>		Diode Compression <sup>(2)</sup>		Sensor offset from tip of probe <sup>(2)</sup>		
Lin X = 4168.08 (V/m) <sup>2</sup> /(V*200)		DCP <sub>X</sub> = 20 (V*200)		1.39 mm		
Lin Y = 4212.58 (V/m) <sup>2</sup> /(V*200)		DCP <sub>Y</sub> = 20 (V*200)				
Lin Z = 3641.31 (V/m) <sup>2</sup> /(V*200)		DCP <sub>Z</sub> = 20 (V*200)				
Sensitivity in Body Simulating Liquid.						
Calibration frequency	Liquid Phantom <sup>(3)</sup>		Calibration Factors for $E^2_{\text{Liquid}} / E^2_{\text{Air}}$			Axial Isotropy
(MHz)	$\epsilon'$ <sup>(3)</sup>	$\sigma$ <sup>(3)</sup> (Sm <sup>-1</sup> )	<i>ConvF<sub>X</sub></i>	<i>ConvF<sub>Y</sub></i>	<i>ConvF<sub>Z</sub></i>	(dB)
5200	50.52	5.38	<b>0.332</b>	<b>0.382</b>	<b>0.384</b>	±0.11
5800	48.91	6.24	<b>0.384</b>	<b>0.432</b>	<b>0.439</b>	±0.08

Notes.

- <sup>(1)</sup> Measured at 900 MHz
- <sup>(2)</sup> The manufacturer supplied these figures.
- <sup>(3)</sup> Measured at a temperature of 22 ± 1 °C.

Table 3  
Boundary Correction Factors  
SAR probe: IXP-025  
S/N G0008

Frequency	Head Simulating Liquid		Body Simulating Liquid	
(MHz)	<i>f(0)</i>	<i>d</i>	<i>f(0)</i>	<i>d</i>
5200	0.546	1.030	0.210	2.282
5800	0.576	0.863	0.382	0.914

Reference : 2011110089-3

Page 6 of 6

Date of Issue : 6 December 2011

Checked by : *BCG*

NPL/G0008/0007




**IMMERSIBLE SAR PROBE**

**CALIBRATION REPORT**

**Part Number: IXP-020**

**S/N L0011**

**October 2011**

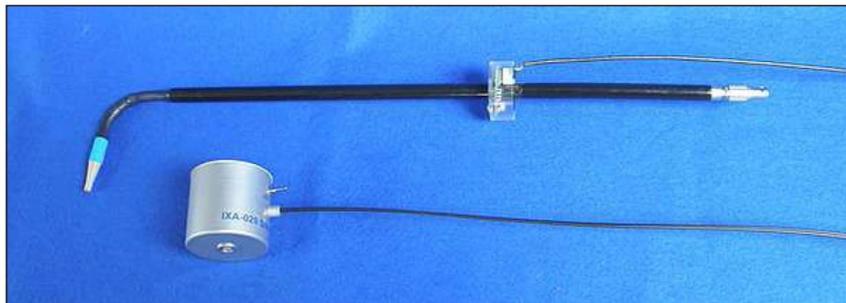

**Indexsar Limited  
Oakfield House  
Cudworth Lane  
Newdigate  
Surrey RH5 5BG**

**Tel: +44 (0) 1306 632 870**

**Fax: +44 (0) 1306 631 834**

**e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)**

Reproduction of this report is authorized by Indexsar Ltd provided the report is reproduced in its entirety



**Indexsar Limited**  
**Oakfield House**  
**Cudworth Lane**  
**Newdigate**  
**Surrey RH5 5BG**  
Tel: +44 (0) 1306 632 870  
Fax: +44 (0) 1306 631 834  
e-mail: [enquiries@indexsar.com](mailto:enquiries@indexsar.com)

**Calibration Certificate 1110/L0011**  
**Date of Issue: 11<sup>th</sup> October 2011**  
**Immersible SAR Probe**

Type:	IXP-020
Manufacturer:	IndexSAR, UK
Serial Number:	L0011
Place of Calibration:	IndexSAR, UK
Date of Receipt of Probe:	N/A
Calibration Dates:	7 <sup>th</sup> April — 18 <sup>th</sup> May 2011
Customer:	TUV

IndexSAR Ltd hereby declares that the IXP-020 Probe named above has been calibrated for conformity to the IEEE 1528 and BSEN 62209-1 standards using the methods described in this calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated by: *A. Brinklow* Technical Manager

Approved by: *[Signature]* Director

Please keep this certificate with the calibration document. When the probe is sent for a calibration check, please include the calibration document.

## INTRODUCTION

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N L0011) only and describes the procedures used for characterisation and calibration.

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of BSEN 622009-1 [Ref 1] & IEEE [Ref 2] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

## CALIBRATION PROCEDURE

### 1. Objectives

The calibration process comprises two stages:-

- 1) Determination of the channel sensitivity factors which optimise the probe's overall spherical isotropy in 900MHz brain fluid
- 2) At each frequency of interest, application of these channel sensitivity factors to model the exponential decay of SAR in a waveguide fluid cell, and hence derive the liquid conversion factors at that frequency

### 2. Probe output

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:

$$U_{lin} = U_{o/p} + U_{o/p}^2 / DCP \quad (1)$$

where  $U_{lin}$  is the linearised signal,  $U_{o/p}$  is the raw output signal in mV and DCP is the diode compression potential, also in mV.

DCP is determined from fitting equation (1) to measurements of  $U_{lin}$  versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the Schottky diodes used as the sensors. For the IXP-020 probes with CW signals the DCP values are typically 100mV.

In turn, measurements of E-field are determined using the following equation:

$$E_{liq}^2 \text{ (V/m)} = U_{linx} * \text{Air Factor}_x * \text{Liq Factor}_x + U_{liny} * \text{Air Factor}_y * \text{Liq Factor}_y + U_{linz} * \text{Air Factor}_z * \text{Liq Factor}_z \quad (3)$$

Here, "Air Factor" represents each channel's sensitivity, while "Liq Factor" represents the enhancement in signal level when the probe is immersed in tissue-simulant liquids at each frequency of interest.

### 3. Selecting channel sensitivity factors to optimise isotropic response

After manufacture, the first stage of the calibration process is to balance the three channels' Air Factor values, thereby optimising the probe's overall response to incoming signals of any polarisation position angle ("spherical isotropy"). The setup for measuring the probe's spherical isotropy is shown in Figure 1.

A box phantom containing 900MHz head fluid is irradiated by a vertically-polarised, tuned dipole, mounted at the side of the phantom on the robot's seventh axis. The dipole is connected to a signal generator and amplifier via a directional coupler and power meter. The absolute power level is not important as long as it is stable, with stability being monitored using the coupler and power meter.

During calibration, the spherical response is generated by changing the orientation of the probe sensors with respect to the dipole, keeping the long shaft of the probe vertical and the probe sensors at the same position in space.

Initially, the short shaft of the probe is positioned parallel to the phantom wall with its sensors at the same vertical height as the centre of the source dipole and the line joining sensors to dipole perpendicular to the phantom wall (see Figure 1). In this position, the probe is said to be at a position angle of -90 degrees. During the scan, the probe is rotated from -90 to +90 degrees in 10 degree steps, and at each position angle, the dipole polarisation changes from 0 to 360 degrees in 20 degree steps. The short shaft of the probe thereby starts moving increasingly end-on to the dipole, and after perpendicularity, it carries on until facing in the opposite direction from its starting position, all the time with the centroid of the sensors occupying the same position in space.

At each position, an Indexsar 'Fast' amplifier samples the probe channels 500 times per second for 0.4 s. The raw  $U_{op}$  data from each sample are packed into 10 bytes and transmitted back to the PC controller via an optical cable.  $U_{linx}$ ,  $U_{liny}$  and  $U_{linz}$  are derived from the raw  $U_{op}$  values and written to an Excel template.

Once a full set of data has been collected, the Air Factors are adjusted using a special Excel Solver routine to equalise the output from each channel and hence minimise the spherical isotropy. This automated approach to optimisation removes the effect of human bias.

#### 4. Determination of Conversion (“Liquid”) Factors at each frequency of interest

A lookup table of conversion factors for a probe allows a SAR value to be derived at the measured frequencies, and for either brain or body fluid-simulant.

The method by which the conversion factors are assessed is based on the comparison between measured and analytical rates of decay of SAR with perpendicular distance from a dielectric window. This way, not only can the conversion factors for that frequency/fluid combination be determined, but an allowance can also be made for the scale and range of boundary layer effects.

The theoretical relationship between the SAR at the cross-sectional centre of the lossy waveguide as a function of the longitudinal distance ( $z$ ) from the dielectric separator is given by Equation 4:

$$SAR(z) = \frac{4(P_f - P_b)}{\rho ab \delta} e^{-2z/\delta} \quad (4)$$

Here, the density  $\rho$  is conventionally assumed to be  $1000 \text{ kg/m}^3$ ,  $ab$  is the cross-sectional area of the waveguide, and  $P_f$  and  $P_b$  are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth  $\delta$  (which is the reciprocal of the waveguide-mode attenuation coefficient) is a property of the lossy liquid and is given by Equation (5).

$$\delta = \left[ \text{Re} \left\{ \sqrt{(\pi/a)^2 + j\omega\mu_o(\sigma + j\omega\epsilon_o\epsilon_r)} \right\} \right]^{-1} \quad (5)$$

where  $\sigma$  is the conductivity of the tissue-simulant liquid in S/m,  $\epsilon_r$  is its relative permittivity, and  $\omega$  is the radial frequency (rad/s). Values for  $\sigma$  and  $\epsilon_r$  are obtained prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2].  $\sigma$  and  $\epsilon_r$  are both temperature- and fluid-dependent, so are best measured using a sample of the tissue-simulant fluid immediately prior to the actual calibration.

Wherever possible, all DiLine and calibration measurements should be made in the open laboratory at  $22 \pm 2.0^\circ\text{C}$ ; if this is not possible, the values of  $\sigma$  and  $\epsilon_r$  should reflect the actual temperature. Values employed for calibration are listed in the tables below.

Dedicated waveguides have been designed to accommodate the geometry of an L-shaped probe as it traces out the decay profile. Traditional straight probes measure the decay rate of a vertical-travelling signal above a horizontal dielectric window; for the L-shaped probes, the geometry has had to be changed, and the waveguide now lies horizontally and instead of being open at the end, is capped with a metal plate (see Figure 4). A slot is cut in

the top ("b") face through which tissue simulant fluid can be poured, and through which the probe can enter the guide and be offered up to the now vertical waveguide window.

During calibration, the probe is moved carefully until the flat face of the tip is just touching the cross-sectional centre of the dielectric window. 200 samples are then taken and written to an Excel template file before moving the probe into the liquid away from the waveguide window. This cycle is repeated 150 times. The spatial separation between readings is determined from practical considerations of the expected SAR decay rate, and range from 0.2mm steps at low frequency, through 0.1mm at 2450MHz, down to 0.05mm at 5GHz.

Once the data collection is complete, a Solver routine is run which optimises the measured-theoretical fit by varying the conversion factor, and the boundary correction size and range.

By ensuring the waveguide cap is at least three penetration depths, reflections are negligible. The power absorbed in the liquid is therefore determined solely from the waveguide forward and reflected power.

Different waveguides are used for 835/900MHz, 1800/1900MHz, 2100/2450/2600MHz and 5200/5800MHz measurements. Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 20 dB at the most important frequencies used for personal wireless communications, and better than 15dB for frequencies greater than 5GHz. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

For 450 MHz calibrations, a slightly different technique must be used — the equatorial response of the probe-under-test is compared with the equivalent response of a probe whose 450MHz characteristics have already been determined by NPL. The conversion factor of the probe-under-test can then be deduced.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency band of 800 to 5800 MHz because of the waveguide size is not severe in the context of compliance testing.

#### **CALIBRATION FACTORS MEASURED FOR PROBE S/N L0011**

The probe was calibrated at 835, 900, 1800, 1900, 2100 and 2450 MHz in liquid samples representing brain liquid at these frequencies.

The calibration was for CW signals only, and the horizontal axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation.

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 mm from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software. The distance of 2.7mm for assembled probes has been confirmed by taking X-ray images of the probe tips (see Figure 9).

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

#### CALIBRATION EQUIPMENT

The Table on page 16 indicates the calibration status of all test equipment used during probe calibration.


#### MEASUREMENT UNCERTAINTIES

A complete measurement uncertainty analysis for the SARA2 measurement system has been published in Reference [3]. Table 10 from that document is re-created below, and lists the uncertainty factors associated just with the calibration of probes.

Source of uncertainty	Uncertainty value $\pm$ %	Probability distribution	Divisor	$c_i$	Standard uncertainty $u_i \pm$ %	$\nu_i$ or $\nu_{eff}$
Incident or forward power	5.743	N	1.00	1	5.743	$\infty$
Reflected power	5.773	N	1.00	1	5.773	$\infty$
Liquid conductivity	1.120	N	1.00	1	1.120	$\infty$
Liquid permittivity	1.085	N	1.00	1	1.085	$\infty$
Field homogeneity	0.002	R	1.73	1	0.001	$\infty$
Probe positioning: $\pm 0.05$ mm	0.55	R	1.73	1	0.318	
Influence on Probe pos: 11%/mm						
Field probe linearity	4.7	R	1.73	1	2.714	$\infty$
<b>Combined standard uncertainty</b>		<b>RSS</b>			<b>8.729</b>	

At the 95% confidence level, therefore, the expanded uncertainty is 17.1%

**SUMMARY OF CAL FACTORS FOR PROBE IXP-020 S/N L0011**

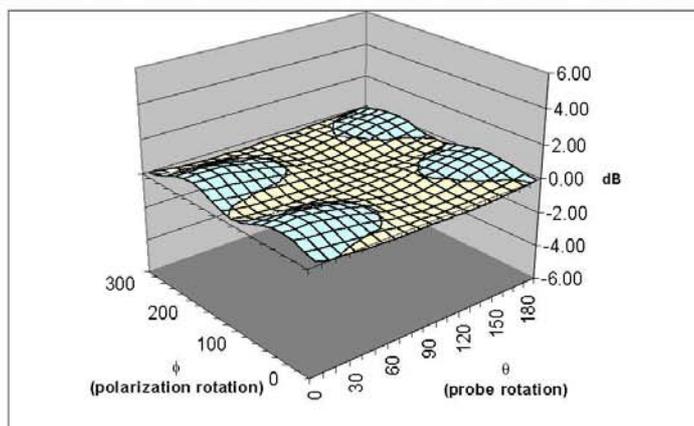

**Surface Isotropy diagram of IXP-020 Probe S/N L0011 at 900MHz** (axial isotropy +/-0.03dB, spherical isotropy +/-0.58dB, other subsets listed below)

Measured Isotropy at 900MHz	Probe orientation range relative to dipole	(+/-) dB
Spherical Isotropy	±90°	0.58
	±60°	0.54
	±30°	0.32
	±20°	0.22
Axial Isotropy	0°	0.03

Channel Sensitivities				
	X	Y	Z	
Air Factors	69.36	84.92	85.72	(V/m) <sup>2</sup> /mV
CW DCPs	100	100	100	mV

SAR Conversion Factors/ Boundary Corrections				
Freq (MHz)	SAR Conv Factor	Boundary Correction f(0)	Boundary Correction d(mm)	Notes
835	0.265	1.9	1.1	1,2
900	0.273	2.0	1.0	1,2
1800	0.327	1.3	1.3	1,2
1900	0.331	0.9	1.5	1,2
2100	0.350	1.0	1.5	1,2
2450	0.359	0.8	1.6	1,2
<b>Notes</b>				
1)	Calibrations done at 22°C +/-2°C			
2)	Waveguide calibration			

Probe tip radius 0 mm  
 X Ch. Angle to red dot 0°

**PROBE SPECIFICATIONS**

Indexsar probe L0011, along with its calibration, is compared with BSEN 62209-1 and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

<b>Dimensions</b>	S/N L0011	BSEN [1]	IEEE [2]
Vertical shaft (mm)	510		
Horizontal shaft (mm)	90		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

<b>Dynamic range</b>	S/N L0011	BSEN [1]	IEEE [2]
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg) N.B. only measured to > 100 W/kg on representative probes	>100	>100	100

<b>Isotropy (measured at 900MHz)</b>		S/N L0011	BSEN [1]	IEEE [2]
Spherical	Probe at ±90°	0.58	1.0	0.50
	Probe at ±60°	0.54		
	Probe at ±30°	0.32		
	Probe at ±20°	0.22		
Axial	Probe at 0°	0.03	0.5	0.25

<b>Construction</b>	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. Outer case materials are PEEK and heat-shrink sleeving.
<b>Chemical resistance</b>	Tested to be resistant to TWEEN and sugar/salt-based simulant liquids but probes should be removed, cleaned and dried when not in use.  NOT recommended for use with glycol or soluble oil-based liquids.

## REFERENCES

[1] BSEN 62209-1:2006. Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices — Human models, instrumentation, and procedures — Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

[2] IEEE 1528, 2003 Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques

[3] Indexsar Report IXS-0300, October 2007. Measurement uncertainties for the SARA2 system assessed against the recommendations of BS EN 62209-1:2006

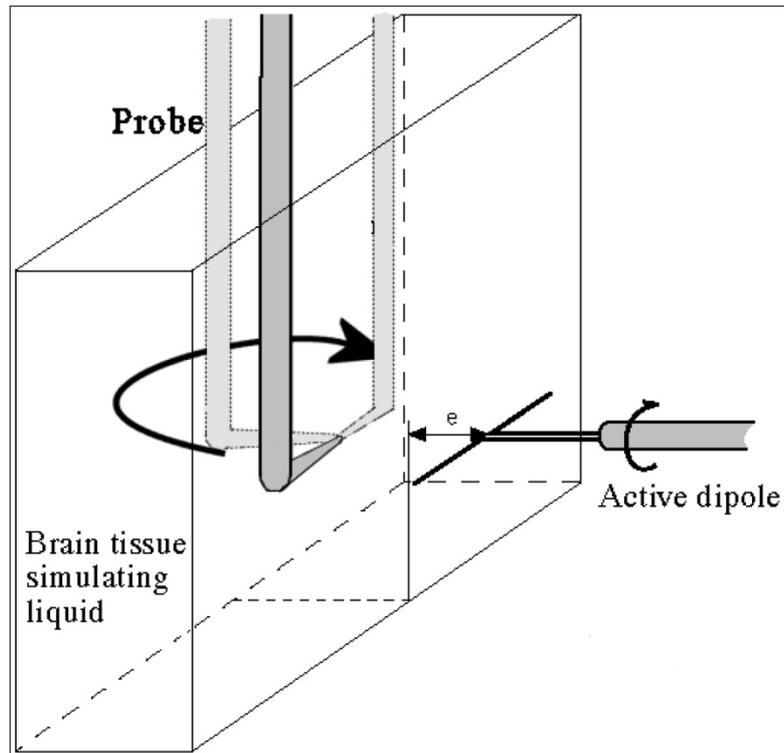


Figure 1. Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

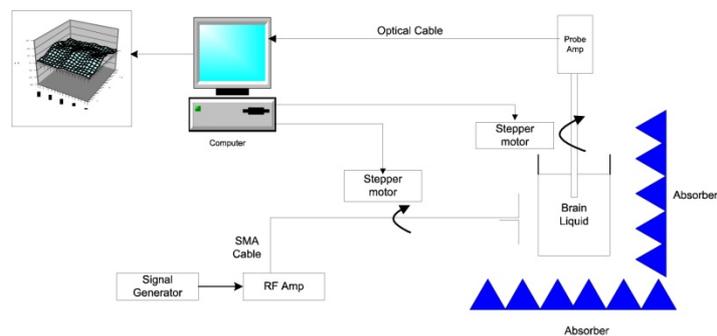
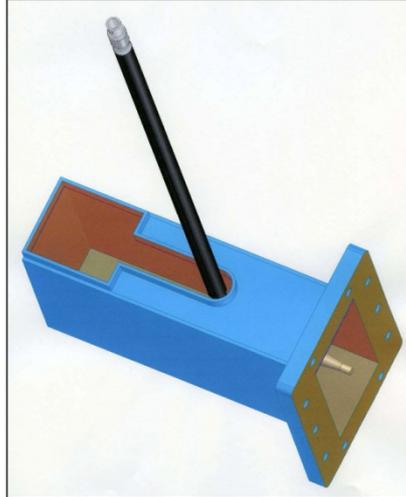


Figure 2. Schematic diagram of the test geometry used for isotropy determination



*Figure 4. Schematic showing the innovative design of slot in the waveguide termination*

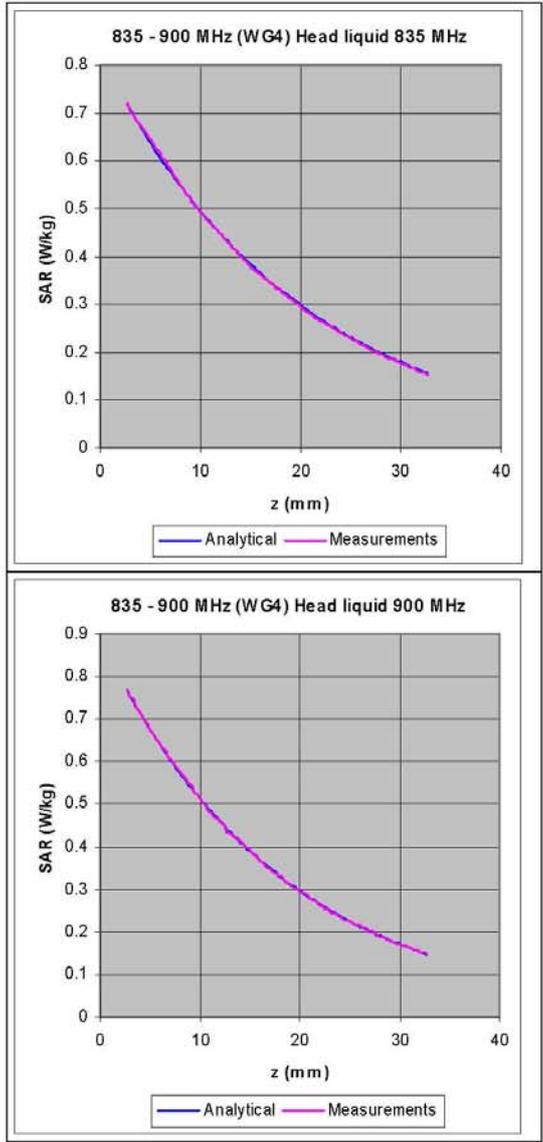
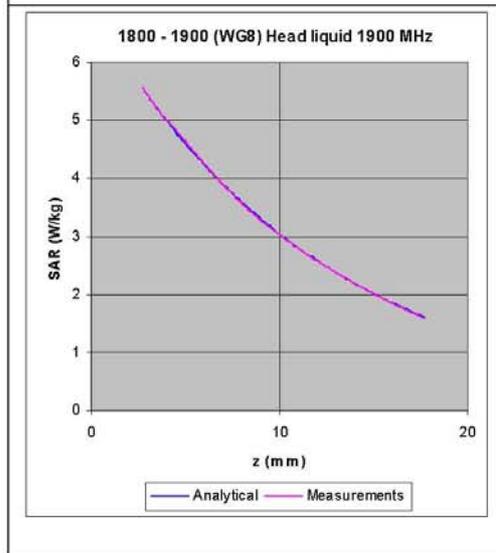
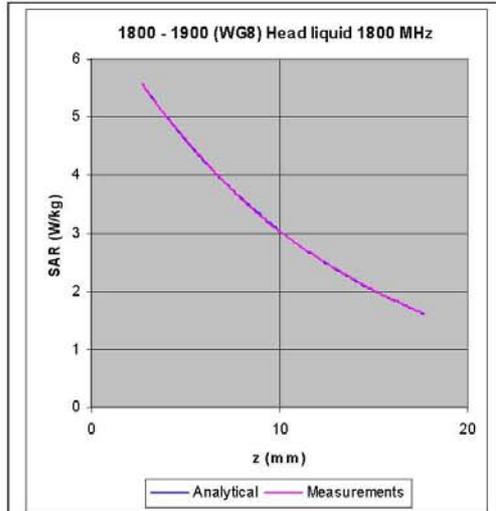


Figure 6. The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.



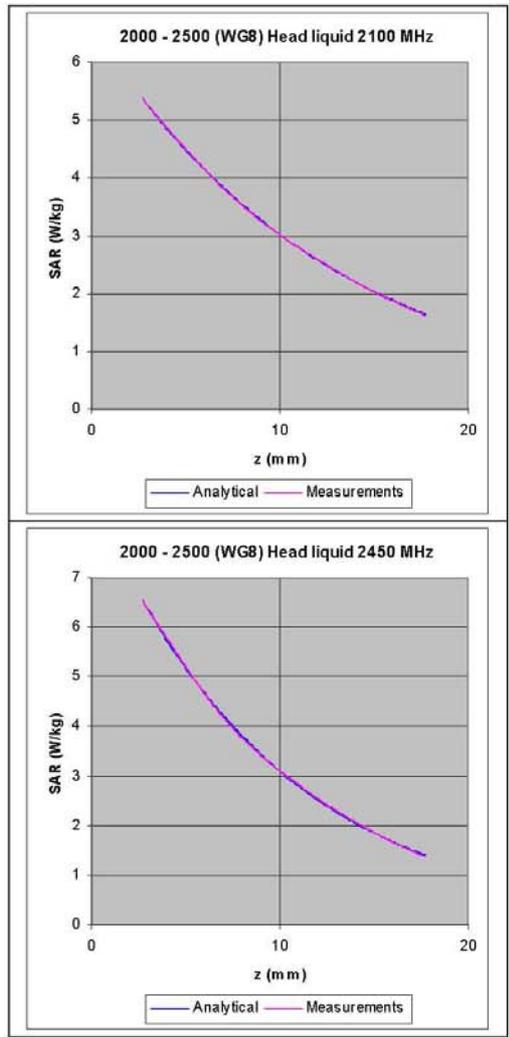


Figure 7. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

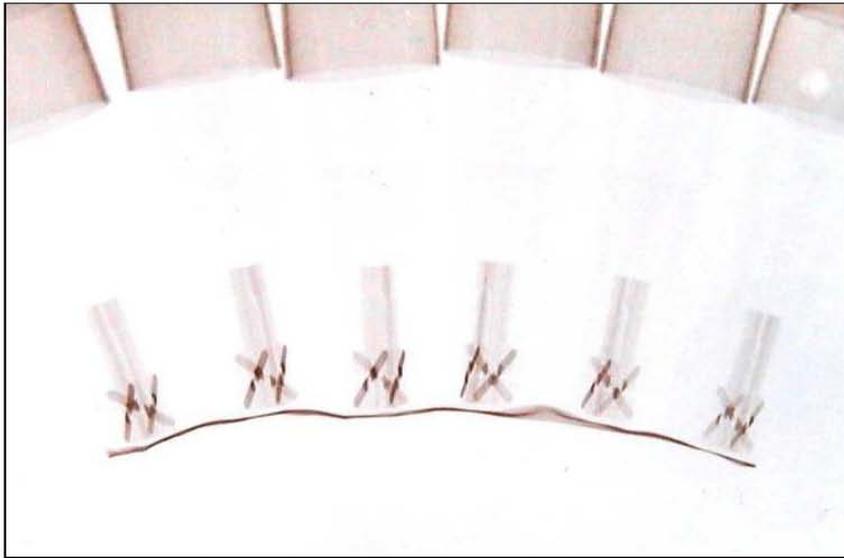


Figure 9: X-ray positive image of 5mm probes

Table indicating the dielectric parameters of the liquids used for calibrations at each frequency

Liquid used	Relative permittivity (measured)	Conductivity (S/m) (measured)
835 MHz BRAIN	42.80	0.91
900 MHz BRAIN	40.47	0.95
1800 MHz BRAIN	40.01	1.42
1900 MHz BRAIN	40.08	1.42
2100 MHz BRAIN	41.98	1.38
2450 MHz BRAIN	40.68	1.77

Table of test equipment calibration status

Instrument description	Supplier / Manufacturer	Model	Serial No.	Last calibration date	Calibration due date
Power sensor	Rohde & Schwarz	NRP-Z23	100169	14/09/2010	14/9/2012
Dielectric property measurement	Indexsar	DiLine (sensor lengths: 160mm, 80mm and 60mm)	N/A	(absolute) – checked against NPL values using reference liquids	N/A
Vector network analyser	Anritsu	MS6423B	003102	17/01/2011	17/01/2012
SMA autocalibration module	Anritsu	36581KKF/1	001902	17/01/2011	17/01/2012