



Product Service

---

**Choose certainty.  
Add value.**

## Report On

FCC Testing of the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS in accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 (CDMA)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00178

Document 75918726 Report 16 Issue 1

September 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuvps.co.uk](http://www.tuvps.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC Testing of the  
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band  
GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V)  
and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with  
Bluetooth, WLAN, NFC (FeliCa) and GPS  
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22  
(CDMA)

Document 75918726 Report 16 Issue 1

September 2012


**PREPARED FOR**

Sharp Communication Compliance Ltd  
Azure House  
Bagshot Road  
Bracknell  
RG12 7QY

**PREPARED BY**

  
\_\_\_\_\_  
**Maggie Whiting**  
Senior Engineer

**APPROVED BY**

  
\_\_\_\_\_  
**Ryan Henley**  
Authorised Signatory


**DATED**

06 September 2012

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);



B Airs



G Lawler

Document 75918726 Report 16 Issue 1





## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Application Form ..... 6
1.4	Product Information ..... 7
1.5	Test Conditions ..... 7
1.6	Deviations from the Standard ..... 7
1.7	Modification Record ..... 7
<b>2</b>	<b>TEST DETAILS ..... 8</b>
2.1	Spurious Emissions at Band Edge ..... 9
2.2	Effective Radiated Power ..... 14
2.3	Maximum Peak Output Power - Conducted ..... 21
2.4	Emission Limitations for Cellular Equipment ..... 24
2.5	Conducted Spurious Emissions ..... 35
2.6	Occupied Bandwidth ..... 44
2.7	Frequency Stability ..... 51
<b>3</b>	<b>TEST EQUIPMENT USED ..... 56</b>
3.1	Test Equipment Used ..... 57
3.2	Measurement Uncertainty ..... 61
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 62</b>
4.1	Accreditation, Disclaimers and Copyright ..... 63



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC Testing of the  
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900  
MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode  
Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS  
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 (CDMA)



Product Service

## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS to the requirements of FCC CFR 47 Part 2 and FCC CFR 47 Part 22.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	CDMA SHL21
Serial Number(s)	IMEI 004401114094473
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 2 (2011) FCC CFR 47 Part 22 (2011)
Incoming Release Date	Application Form 30 July 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9290 03 August 2012
Start of Test	7 August 2012
Finish of Test	16 August 2012
Name of Engineer(s)	B Airs G Lawler
Related Document(s)	ANSI C63.4: 2009



Product Service

**1.2 BRIEF SUMMARY OF RESULTS**

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 (CDMA) is shown below.

Section	Spec Clause		Test Description	Result	Comments/Base Standard
	Pt 2	Pt 22			
CDMA 2000 - Loopback Service					
2.1	2.1051	22.905	Spurious Emissions at Band Edge	Pass	
2.2	-	22.913 (a)	Effective Radiated Power	Pass	
2.3	2.1046	22.913 (a)	Maximum Peak Output Power - Conducted	Pass	
2.4	-	22.917	Emission Limitations for Cellular Equipment	Pass	
2.5	2.1051	22.917 (a)	Conducted Spurious Emissions	Pass	
2.6	2.1049 (h)	22.917 (b)	Occupied Bandwidth	Pass	
2.7	2.1055	22.355	Frequency Stability	Pass	
CDMA 2000 - Test Data Service					
2.1	2.1051	22.905	Spurious Emissions at Band Edge	Pass	
2.2	-	22.913 (a)	Effective Radiated Power	Pass	
2.3	2.1046	22.913 (a)	Maximum Peak Output Power - Conducted	Pass	
2.4	-	22.917	Emission Limitations for Cellular Equipment	Pass	
2.5	2.1051	22.917 (a)	Conducted Spurious Emissions	Pass	
2.6	2.1049 (h)	22.917 (b)	Occupied Bandwidth	Pass	
2.7	2.1055	22.355	Frequency Stability	Pass	



Product Service

1.3 APPLICATION FORM

APPLICANT'S DETAILS			
COMPANY NAME :	Sharp Telecommunications of Europe Ltd		
ADDRESS :	Azure House, Bagshot Road Bracknell, Berkshire RG12 7QY		
NAME FOR CONTACT PURPOSES :	Ken Newman		
TELEPHONE NO: 01344 301 883	FAX NO:	01344 300 293	
	E-MAIL:	ken.newman@sharp.eu	

EQUIPMENT INFORMATION			
<u>Equipment designator:</u>			
Model name/number	CDMA SHL21	Identification number	APYHRO00178
<u>Supply Voltage:</u>			
[ ]	AC mains	State AC voltage ..... V	and AC frequency ..... Hz
[ ]	DC (external)	State DC voltage ..... V	and DC current ..... A
[ X ]	DC (internal)	State DC voltage ...3.7 V	and Battery type...Li-Ion.
<u>Frequency characteristics:</u>			
Frequency range	824.7MHz to 848.31 MHz MHz	Channel spacing .....	(if channelized)
Designated test frequencies:		Bottom: 824.7 MHz	Middle: 836.52 MHz MHz Top: 848.31 MHzMHz
<u>Power characteristics:</u>			
Maximum transmitter power	0.370W(25.7dBm)	Minimum transmitter power	..... W
[ X ]	Continuous transmission	(if variable)	
[ ]	Intermittent transmission	State duty cycle .....	
	If intermittent, can transmitter be set to continuous transmit test mode? Y/N		
<u>Antenna characteristics:</u>			
[ X ]	Antenna connector	State impedance 50 ohm	
[ ]	Temporary antenna connector	State impedance .....	ohm
[ ]	Integral antenna	State gain .....	dBi
<u>Modulation characteristics:</u>			
[ ]	Amplitude	[ ]	Other
[ ]	Frequency	Details: .....	
[ X ]	Phase		
Can the transmitter operate un-modulated?		N	
ITU Class of emission: .....			
<u>Extreme conditions:</u>			
Maximum temperature	55°C	Minimum temperature	-10 °C
Maximum supply voltage	4.0 V	Minimum supply voltage	3.7 V

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature : *M. Kishino*

Name : Masahiko Kishino

Position held : Manager

Date : 30 July 2012



Product Service

## **1.4 PRODUCT INFORMATION**

### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900 MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

## **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

## **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard or test plan were made during testing.

## **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC Testing of the  
Sharp CDMA SHL21 Dual Band CDMA (BC0 and BC6) and Tri Band GSM (900, 1800 and 1900  
MHz) and Dual Band UMTS (FDD I and V) and Dual Band LTE (B11 and B18) Multi Mode  
Cellular Phone with Bluetooth, WLAN, NFC (FeliCa) and GPS  
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 22 (CDMA)



Product Service

## 2.1 SPURIOUS EMISSIONS AT BAND EDGE

### 2.1.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 22, Clause 22.905

### 2.1.2 Equipment Under Test and Modification State

CDMA SHL21 S/N: IMEI 004401114094473 - Modification State 0

### 2.1.3 Date of Test

15 August 2012

### 2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.1.5 Test Procedure

In accordance with 22.917(e), any emissions outside of the block edges shall be attenuated by at least  $43 + 10 \log (P)$ . The measurements are shown to  $\pm 1$  MHz from the block edges. The plots shown under the Spurious Emissions sections covers the required range of 9 kHz to 9 GHz.

The reference power and path losses of all channels used for testing in each frequency block were measured. Having entered the reference level offset, a limit line was displayed, showing the  $-13 \text{ dBm} (43 + 10 \log (P))$ , limit. The EUT was operated at maximum power WCDMA modulation schemes.

### 2.1.6 Environmental Conditions

Ambient Temperature	26.1°C
Relative Humidity	51.5%



Product Service


**2.1.7 Test Results**

CDMA 2000 - Loopback Service

4.0 V DC Supply

Frequency Block (MHz)	Mode	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A : (824.0 – 835.0)	SO55, RC1	Channel : 1015 Frequency : 824.76 MHz	N/A
B : (846.5 – 849.0)	SO55, RC1	N/A	Channel : 775 Frequency : 848.25MHz


Frequency Block A

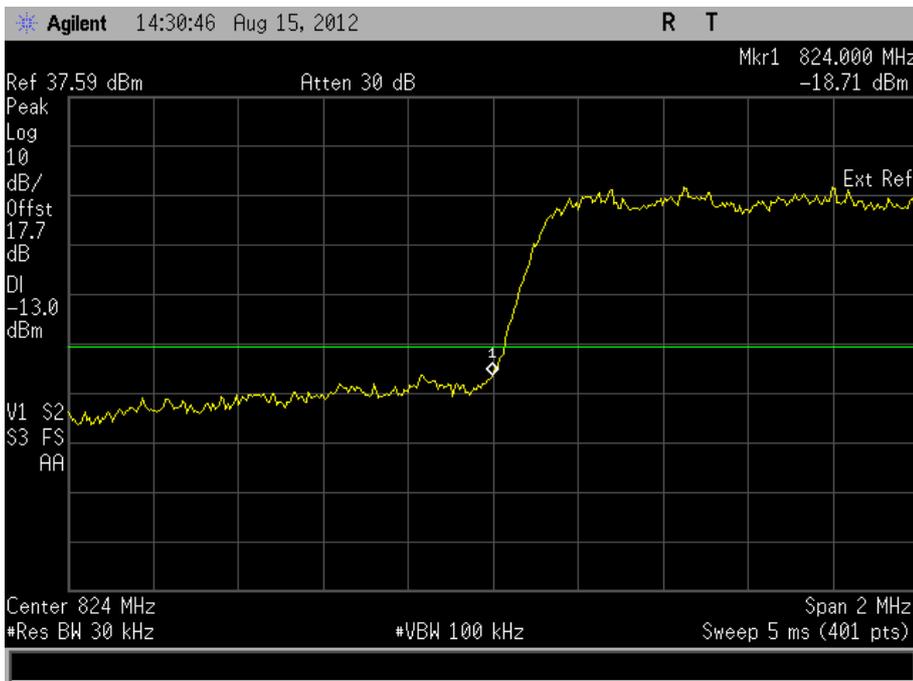



Product Service

Frequency Block B

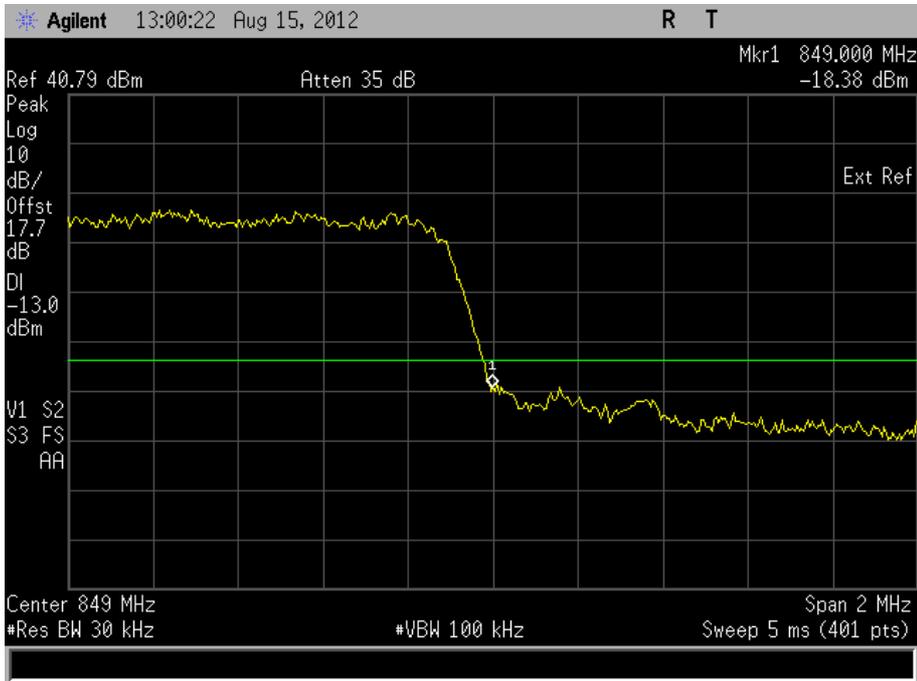

Please note that channels 1013 and 777 do not meet the specification requirements. Therefore, the operating frequency range of the equipment must be reduced to between channel 1015 and 775. This is 824.76 MHz to 848.25 MHz.

Limit Clause

-13 dBm at block edge.




Product Service

CDMA 2000 - Test Data Service

4.0 V DC Supply

Frequency Block (MHz)	Mode	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A : (824.0 – 835.0)	SO55, RC1	Channel : 1015 Frequency : 824.76 MHz	N/A
B : (846.5 – 849.0)	SO55, RC1	N/A	Channel : 775 Frequency : 848.25MHz


Frequency Block A

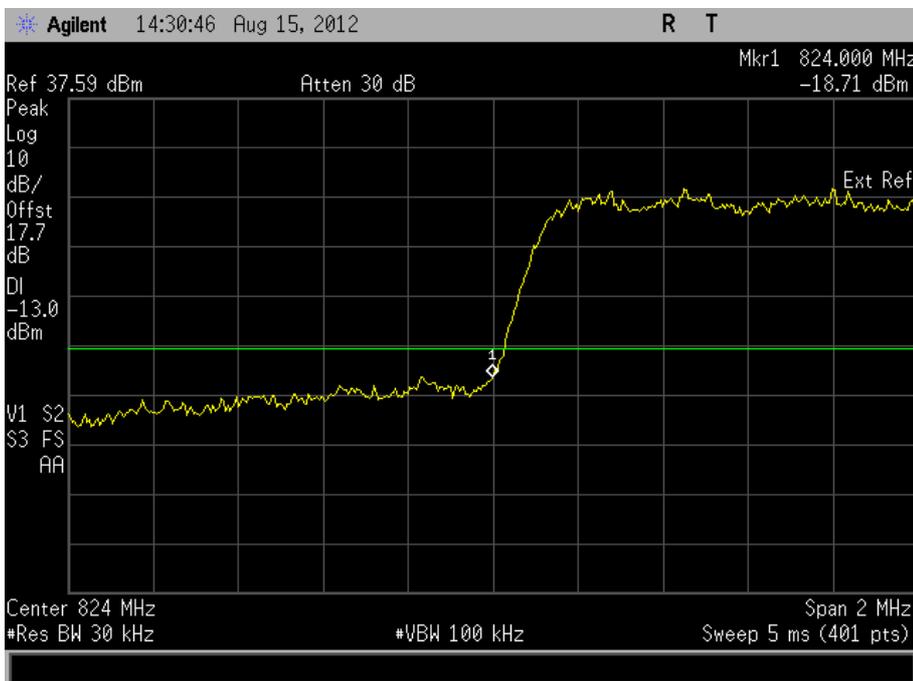



Product Service

Frequency Block B

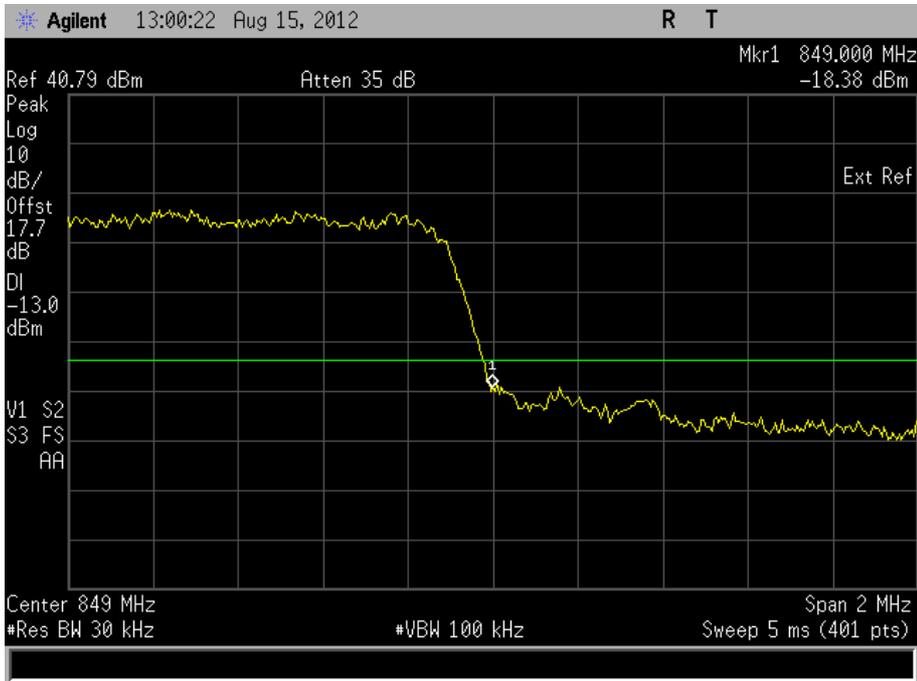

Please note that channels 1013 and 777 do not meet the specification requirements. Therefore, the operating frequency range of the equipment must be reduced to between channel 1015 and 775. This is 824.76 MHz to 848.25 MHz.

Limit Clause

-13 dBm at block edge.



## **2.2 EFFECTIVE RADIATED POWER**

### **2.2.1 Specification Reference**

FCC CFR 47 Part 22, Clause 22.913 (a)

### **2.2.2 Equipment Under Test and Modification State**

CDMA SHL21 S/N: IMEI 004401114094473 - Modification State 0

### **2.2.3 Date of Test**

7 August 2012

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Test Procedure**

Measurements of the fundamental from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The fundamental frequency was maximised by adjusting the antenna height, antenna polarisation and turntable azimuth. A peak detector was used with the trace set to max hold. The maximum result was recorded.

The EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result (ERP) was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

### **2.2.6 Environmental Conditions**

Ambient Temperature	20.4°C
Relative Humidity	61.0%



Product Service


**2.2.7 Test Results**

CDMA 2000 - Loopback Service

4.0 V DC Supply

824.70 MHz

Result (dBm)	Result (W)
23.64	0.231

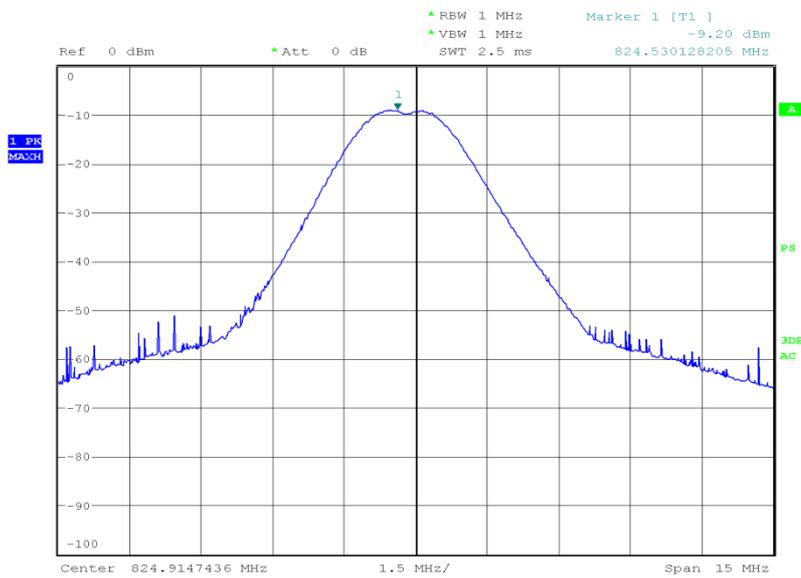


Date: 7.AUG.2012 20:44:24



Product Service

836.52 MHz

Result (dBm)	Result (W)
24.03	0.253

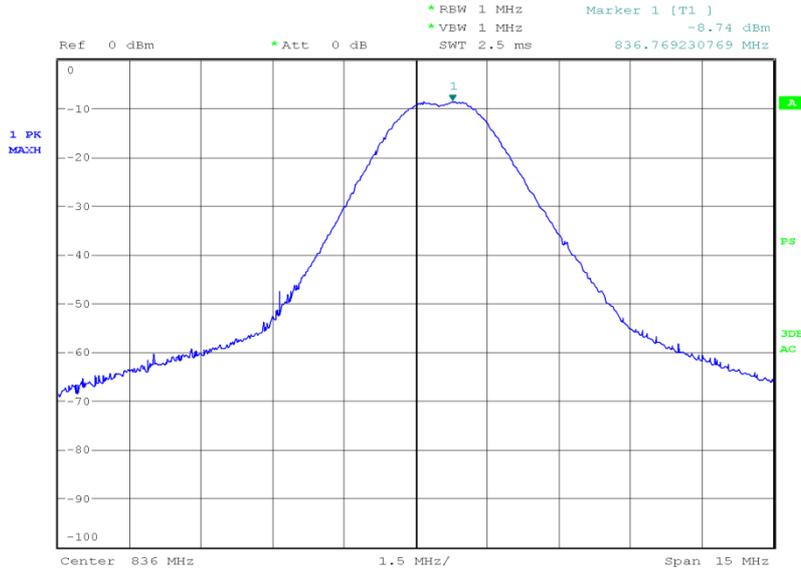


Date: 7.AUG.2012 20:59:45



Product Service

**848.31 MHz**

Result (dBm)	Result (W)
22.73	0.187

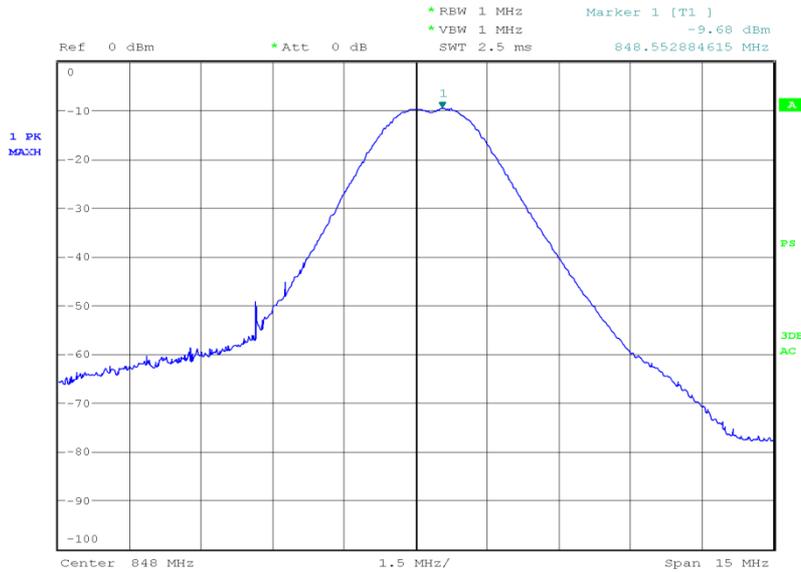

Date: 7.AUG.2012 21:04:15

**Limit Clause**

Mobile – 7 W or 38.45 dBm  
 Base Stations – 500 W or 57 dBm

**CDMA 2000 - Test Data Service**


4.0 V DC Supply



Product Service

824.70 MHz

Result (dBm)	Result (W)
22.93	0.196

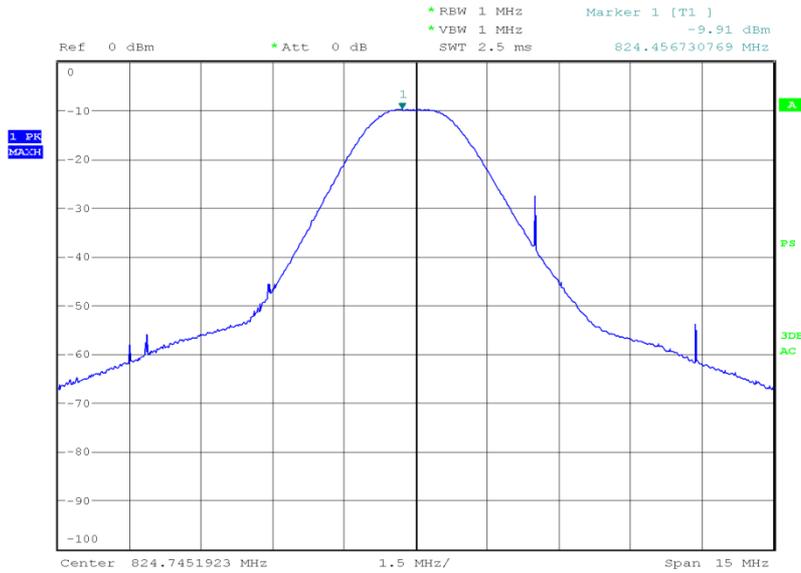


Date: 7.AUG.2012 21:19:35



Product Service

836.52 MHz

Result (dBm)	Result (W)
23.19	0.208

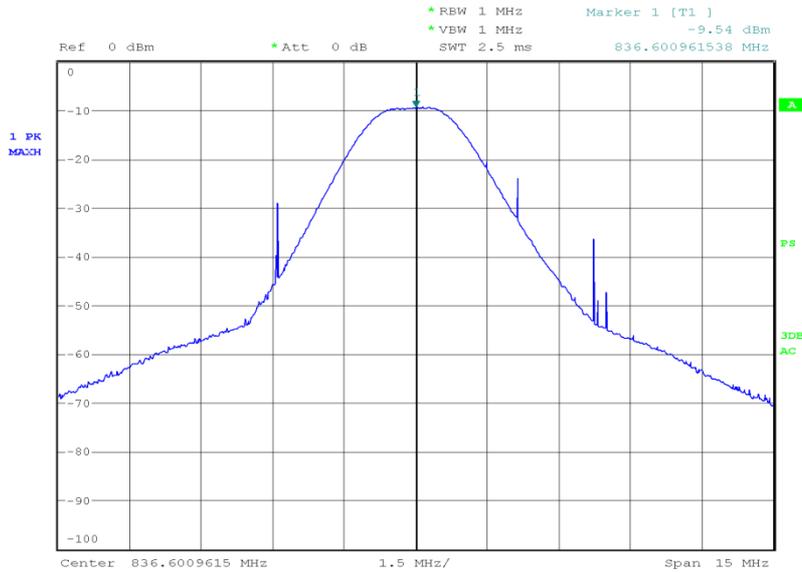


Date: 7.AUG.2012 21:22:14



Product Service

**848.31 MHz**

Result (dBm)	Result (W)
21.80	0.151

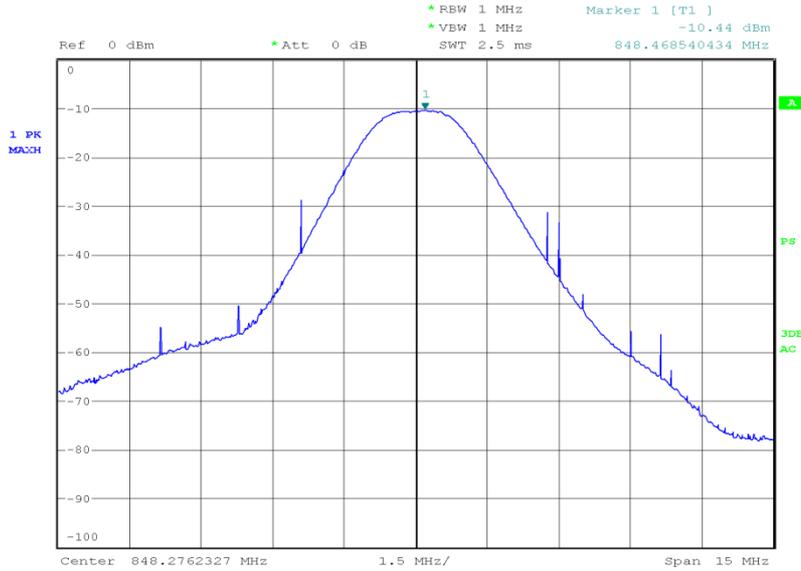

Date: 7.AUG.2012 21:34:04

**Limit Clause**

Mobile – 7 W or 38.45 dBm  
 Base Stations – 500 W or 57 dBm



Product Service

## **2.3 MAXIMUM PEAK OUTPUT POWER - CONDUCTED**

### **2.3.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1046  
FCC CFR 47 Part 22, Clause 22.913 (a)

### **2.3.2 Equipment Under Test and Modification State**

CDMA SHL21 S/N: IMEI 004401114094473 - Modification State 0

### **2.3.3 Date of Test**

15 August 2012

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.5 Test Procedure**

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals.

The EUT supports CDMA 2000 and was tested in two modes of operation. There were loopback service – SO55, RC1 with 64-Ray orthogonal modulation and Test Data Service – TD5032, FCH+SCH with BPSK modulation.

### **2.3.6 Environmental Conditions**

Ambient Temperature	26.1°C
Relative Humidity	51.5%



Product Service

**2.3.7 Test Results**

CDMA 2000 - Loopback Service

4.0 V DC Supply

824.70 MHz

Mode	Result (dBm)	Result (W)
SO55, RC1	28.65	0.733

836.52 MHz

Mode	Result (dBm)	Result (W)
SO55, RC1	28.36	0.685

848.31 MHz

Mode	Result (dBm)	Result (W)
SO55, RC1	27.23	0.528

Limit Clause

Mobile – 7 W or 38.45 dBm

Base Stations – 500 W or 57 dBm



Product Service

CDMA 2000 - Test Data Service

4.0 V DC Supply

824.70 MHz

Mode	Result (dBm)	Result (W)
SO55, RC1	27.83	0.607

836.52 MHz

Mode	Result (dBm)	Result (W)
SO55, RC1	28.24	0.667

848.31 MHz

Mode	Result (dBm)	Result (W)
SO55, RC1	26.96	0.497

Limit Clause

Mobile – 7 W or 38.45 dBm

Base Stations – 500 W or 57 dBm



## 2.4 EMISSION LIMITATIONS FOR CELLULAR EQUIPMENT

### 2.4.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.917

### 2.4.2 Equipment Under Test and Modification State

CDMA SHL21 S/N: IMEI 004401114094473 - Modification State 0

### 2.4.3 Date of Test

7 August 2012

### 2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.4.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions was obtained up to the 10th harmonic by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The EUT was set to transmit on maximum power with modulation. The EUT was tested on bottom, middle and top channels at maximum power.

For any emissions found the EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

### 2.4.6 Environmental Conditions

Ambient Temperature	20.4°C
Relative Humidity	61.0%




### 2.4.7 Test Results

#### CDMA 2000 - Loopback Service


#### 824.70 MHz

#### 30 MHz to 1 GHz

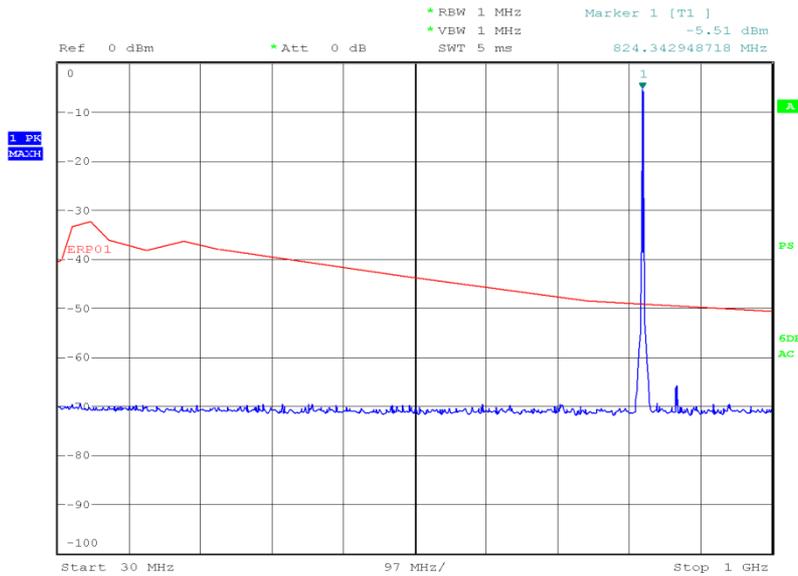

Date: 7.AUG.2012 16:47:27


#### 1 GHz to 8 GHz

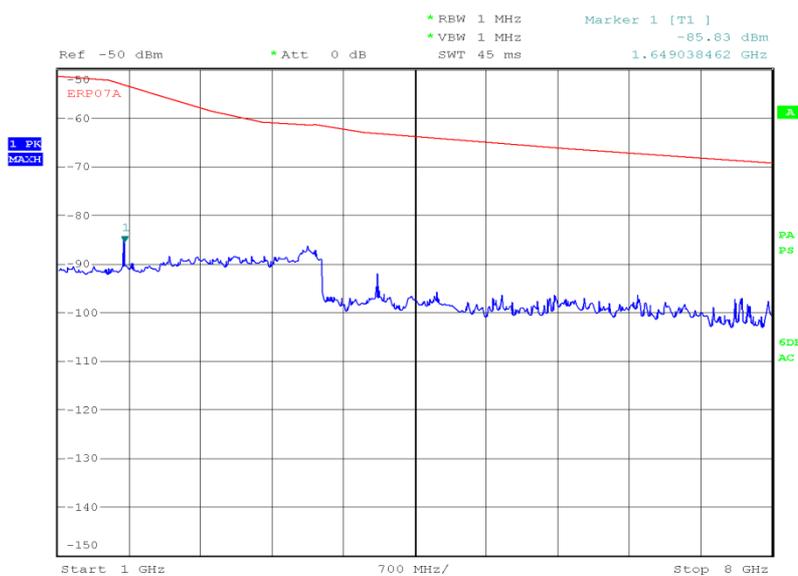

Date: 7.AUG.2012 20:48:33




8 GHz to 9 GHz

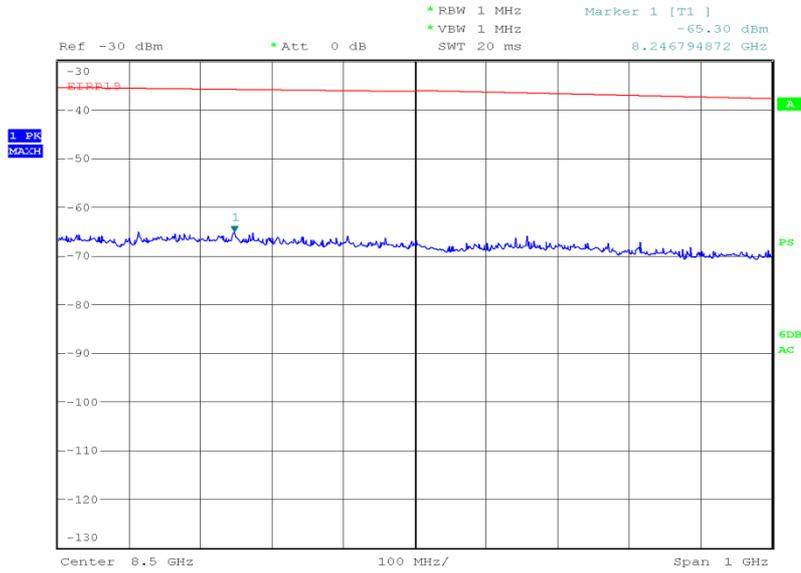

Date: 7.AUG.2012 22:45:57

836.52 MHz


30 MHz to 1 GHz

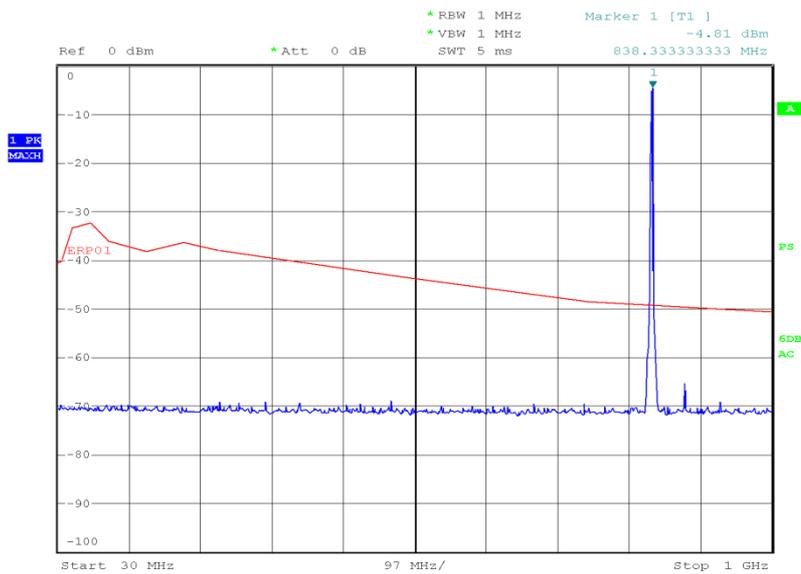

Date: 7.AUG.2012 16:49:17




1 GHz to 8 GHz

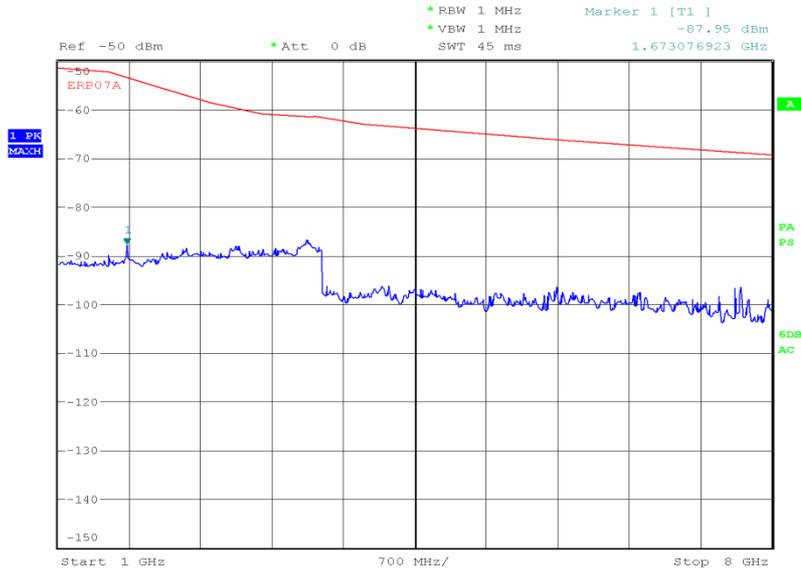

Date: 7.AUG.2012 20:54:30

8 GHz to 9 GHz

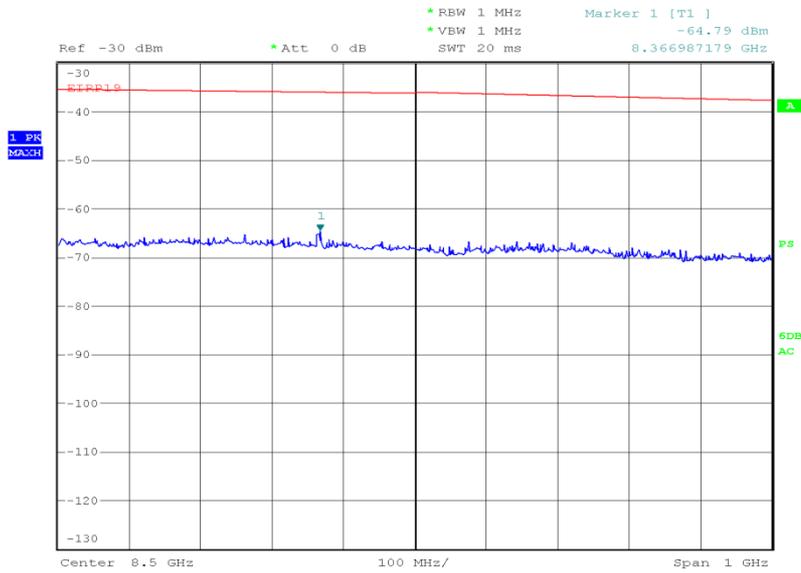


Date: 7.AUG.2012 22:48:21



Product Service


848.31 MHz

30 MHz to 1 GHz

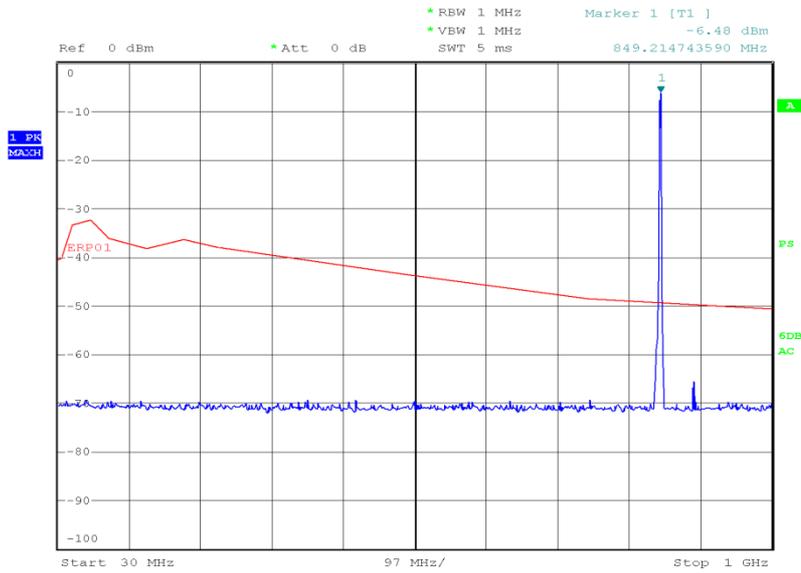

Date: 7.AUG.2012 16:51:12


1 GHz to 8 GHz

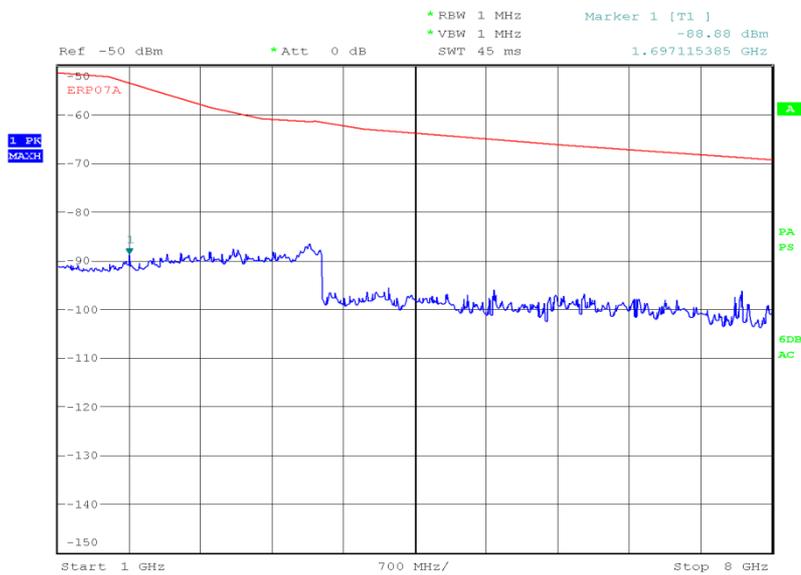

Date: 7.AUG.2012 21:10:30



8 GHz to 9 GHz

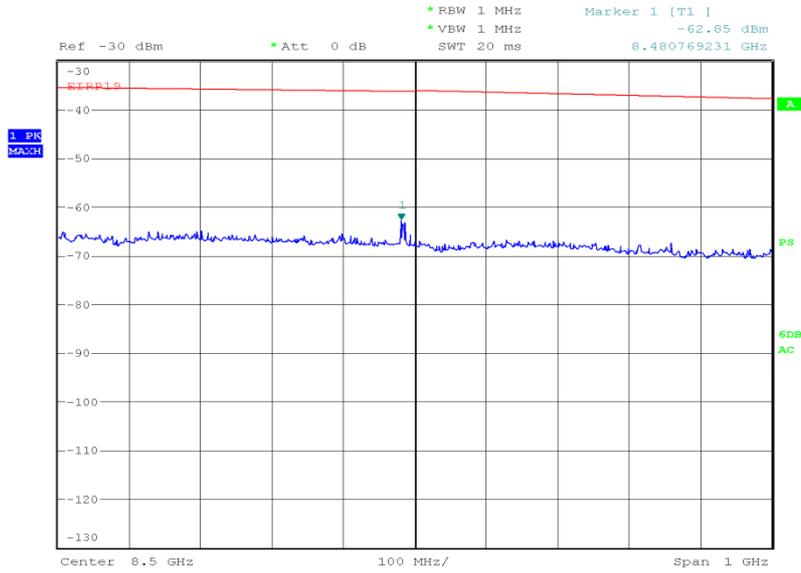

Date: 7.AUG.2012 22:55:16

Limit Clause

43+10log(P) or -13 dBm




Product Service

CDMA 2000 - Test Data Service


824.70 MHz

30 MHz to 1 GHz

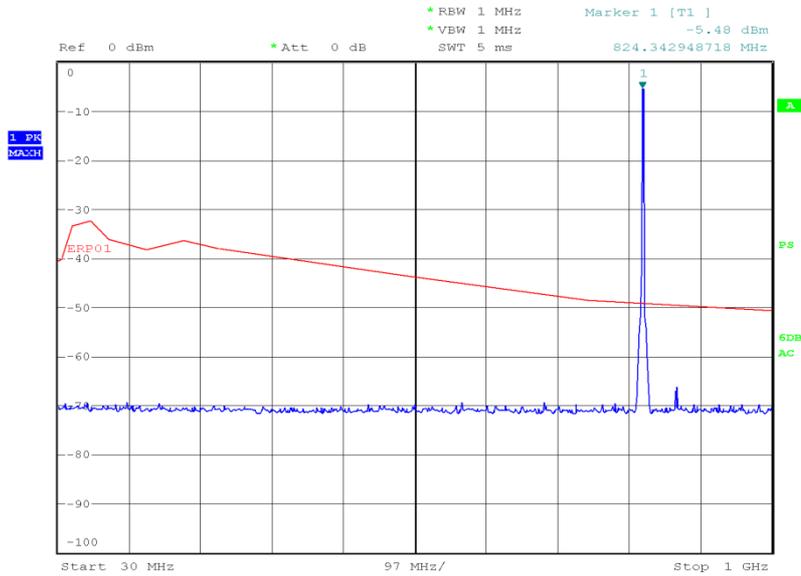

Date: 7.AUG.2012 16:25:48


1 GHz to 8 GHz

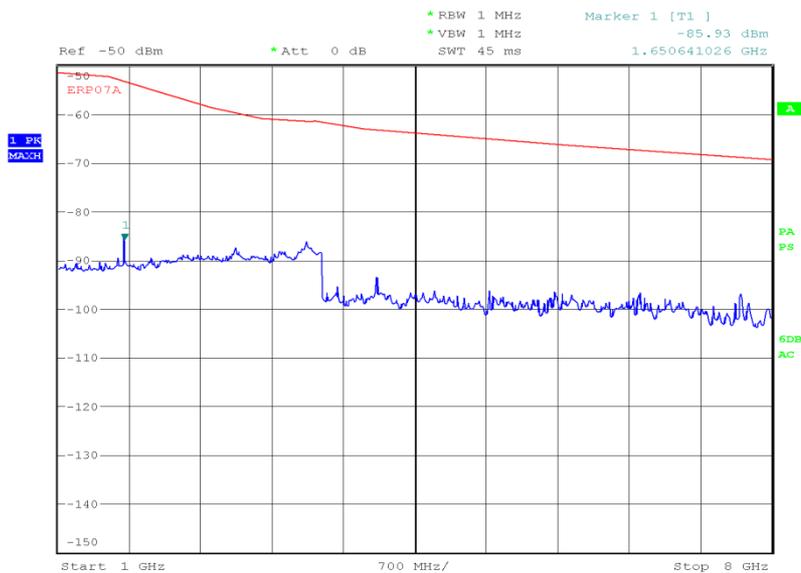

Date: 7.AUG.2012 21:13:34




8 GHz to 9 GHz

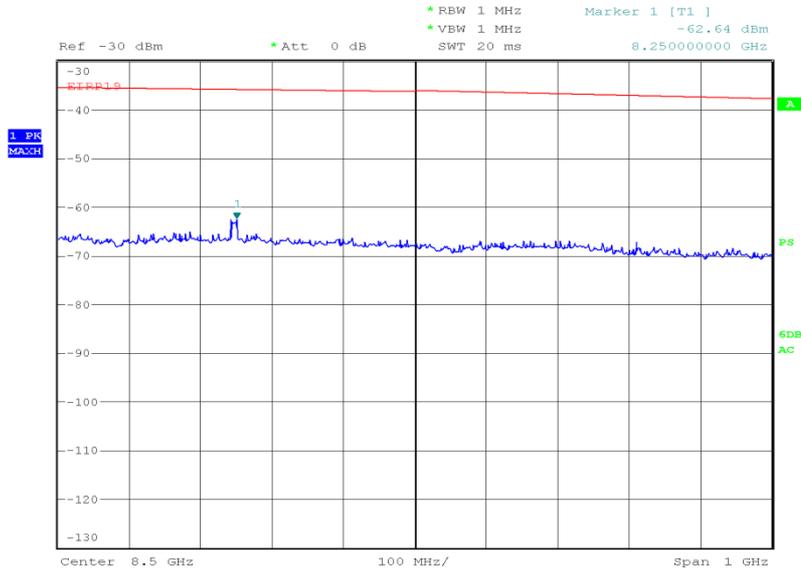

Date: 7.AUG.2012 22:37:04

836.52 MHz


30 MHz to 1 GHz

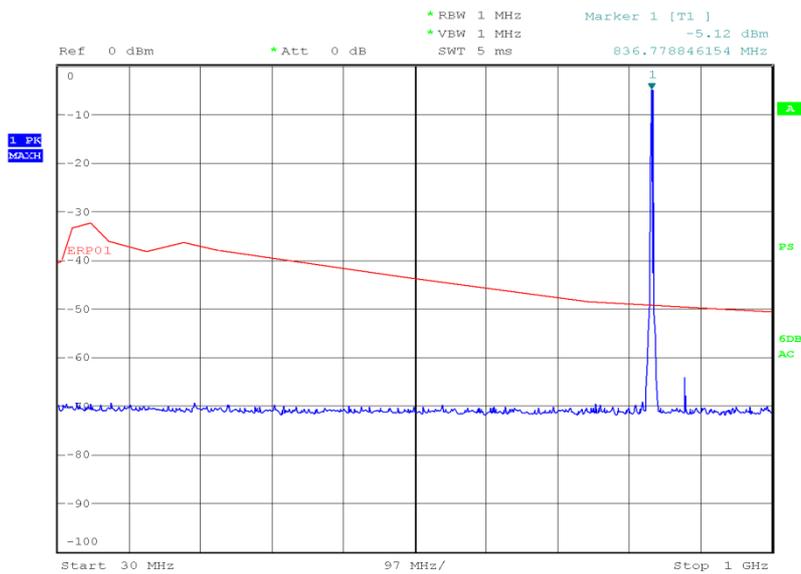

Date: 7.AUG.2012 16:27:35




1 GHz to 8 GHz

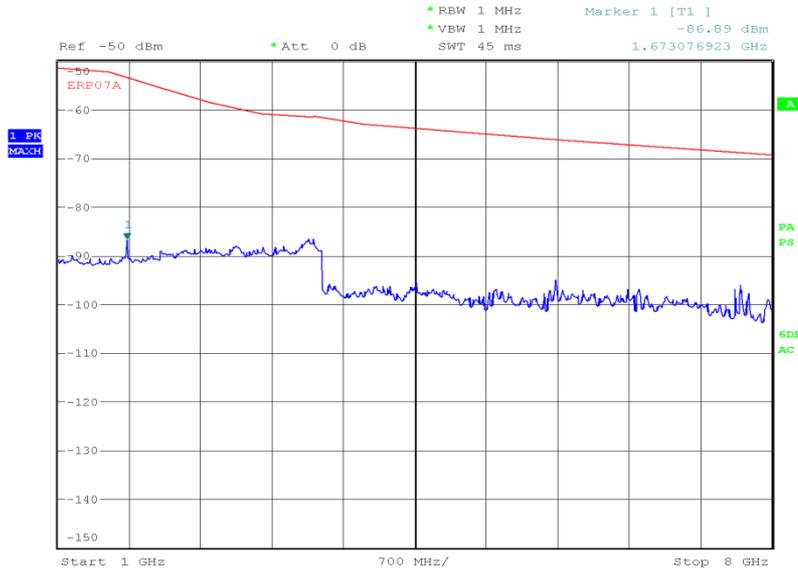

Date: 7.AUG.2012 21:27:18

8 GHz to 9 GHz

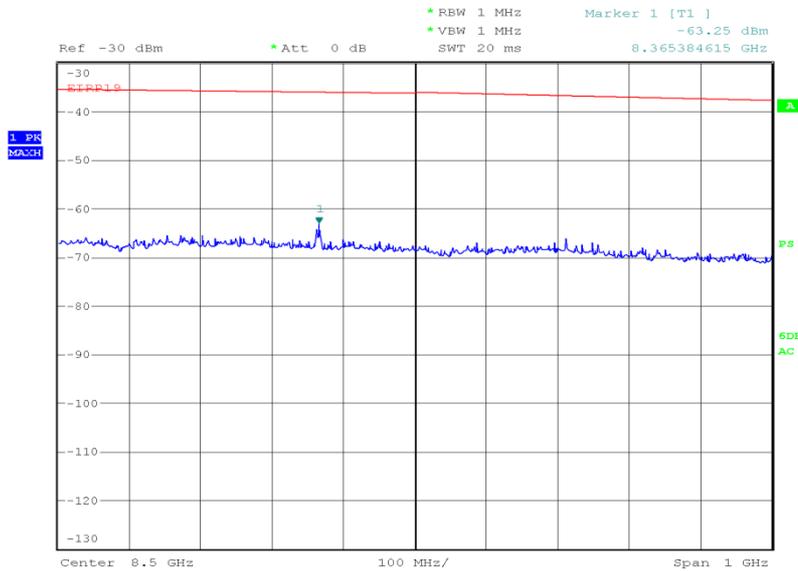


Date: 7.AUG.2012 22:39:22



Product Service


848.31 MHz

30 MHz to 1 GHz

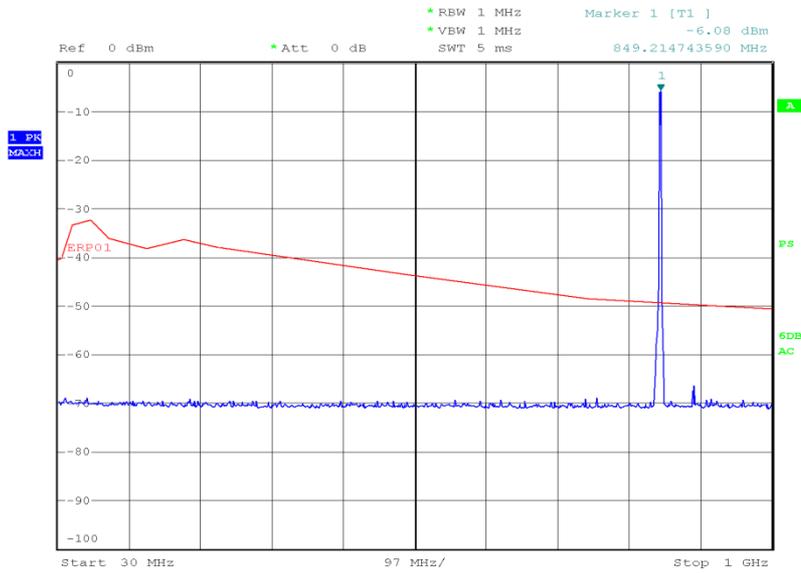

Date: 7.AUG.2012 16:35:17

1 GHz to 8 GHz

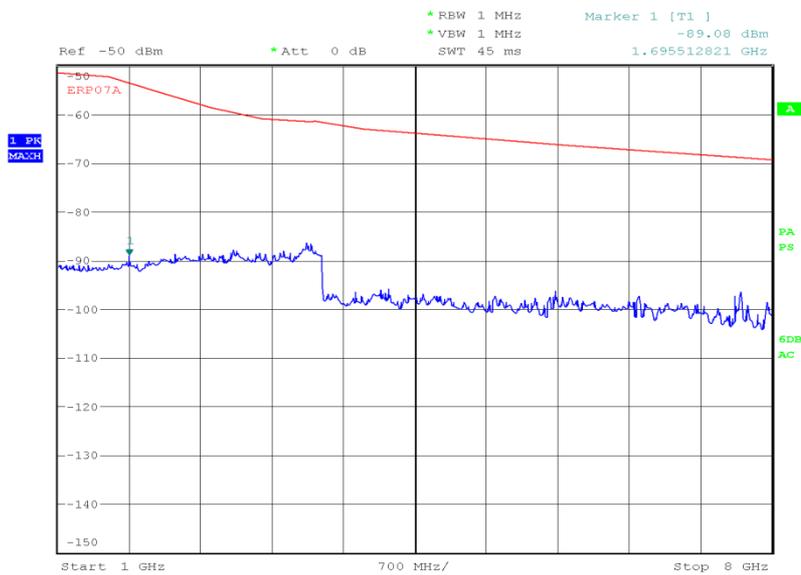


Date: 7.AUG.2012 21:29:59



Product Service

8 GHz to 9 GHz

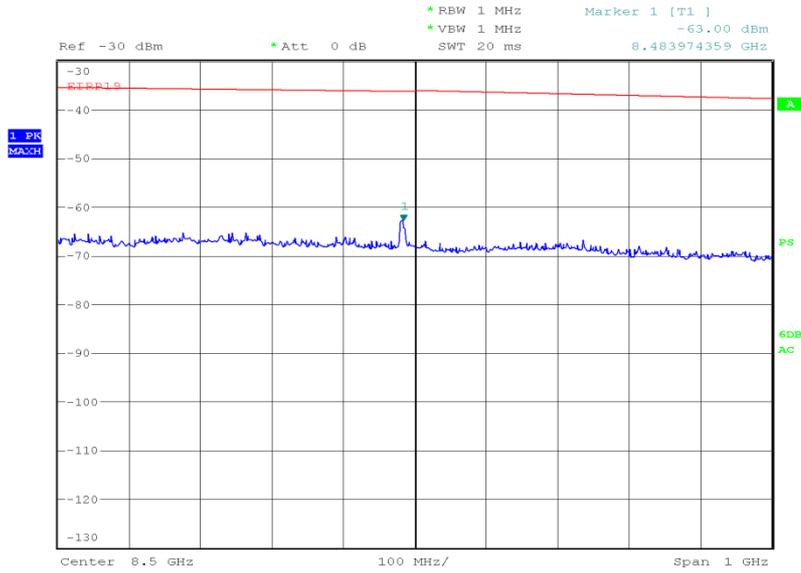

Date: 7.AUG.2012 22:41:37

Limit Clause

43+10log(P) or -13 dBm



Product Service

## **2.5 CONDUCTED SPURIOUS EMISSIONS**

### **2.5.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 22, Clause 22.917 (a)

### **2.5.2 Equipment Under Test and Modification State**

CDMA SHL21 S/N: IMEI 004401114094473 - Modification State 0

### **2.5.3 Date of Test**

15 August 2012

### **2.5.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.5 Test Procedure**

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9 kHz to the 10th harmonic. The EUT was set to transmit on full power with modulation. The EUT was tested on Bottom, Middle and Top channels for maximum power. The resolution and video bandwidths were set to 1 MHz and 3 MHz thus meeting the requirements of Part 22.917(b). The spectrum analyser detector was set to max hold.

From 9 kHz to 4 GHz, an attenuator was used. For measuring the range 1.5 GHz to 9 GHz an attenuator and high pass filter were used. This was to reduce saturation effects in the spectrum analyser.

The maximum path loss across the measurement bands were used as reference level offsets to ensure worst case.

### **2.5.6 Environmental Conditions**

Ambient Temperature	26.1°C
Relative Humidity	51.5%



Product Service


**2.5.7 Test Results**

CDMA 2000 - Loopback Service

4.0 V DC Supply

824.70 MHz


9 kHz to 1.5 GHz

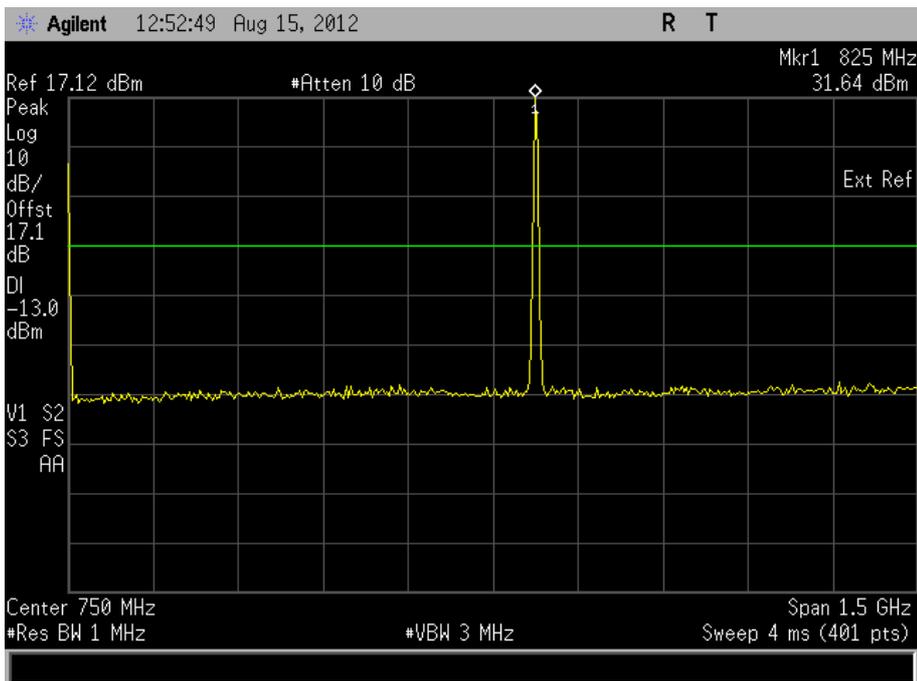




Product Service

1.5 GHz to 9 GHz

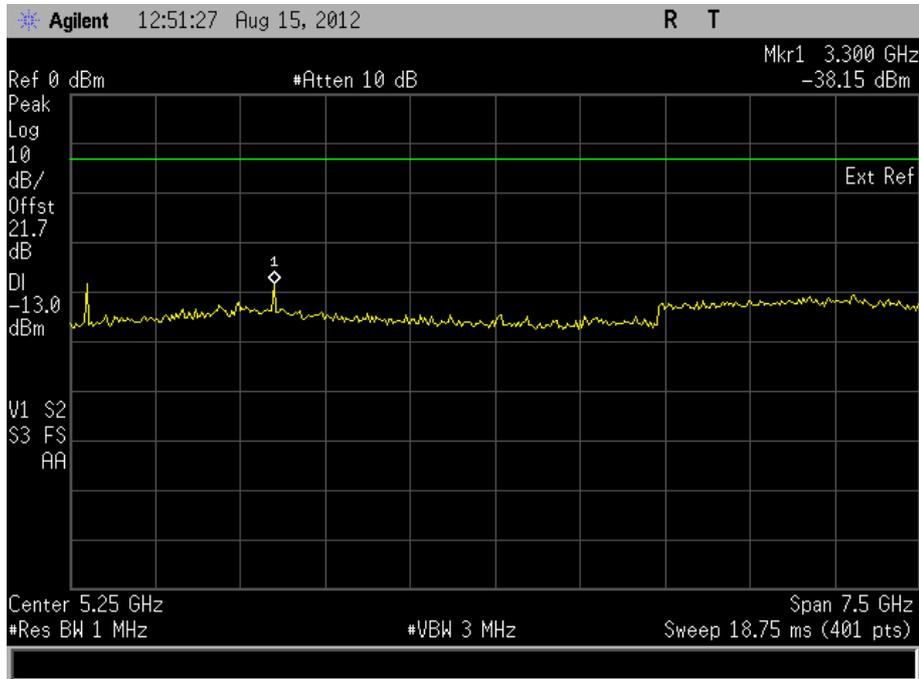

836.52 MHz


9 kHz to 1.5 GHz

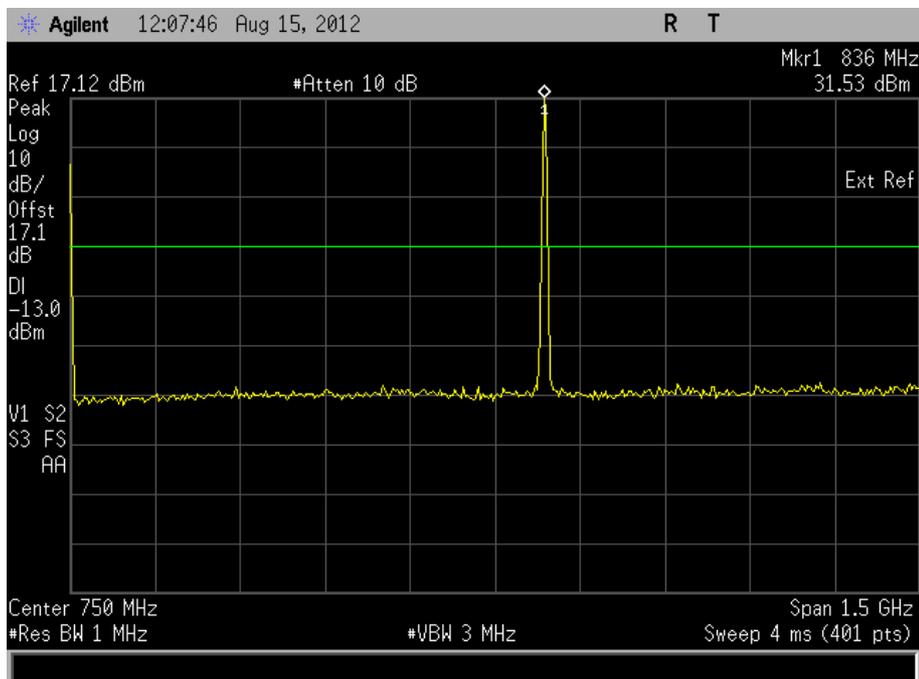




Product Service

1.5 GHz to 9 GHz

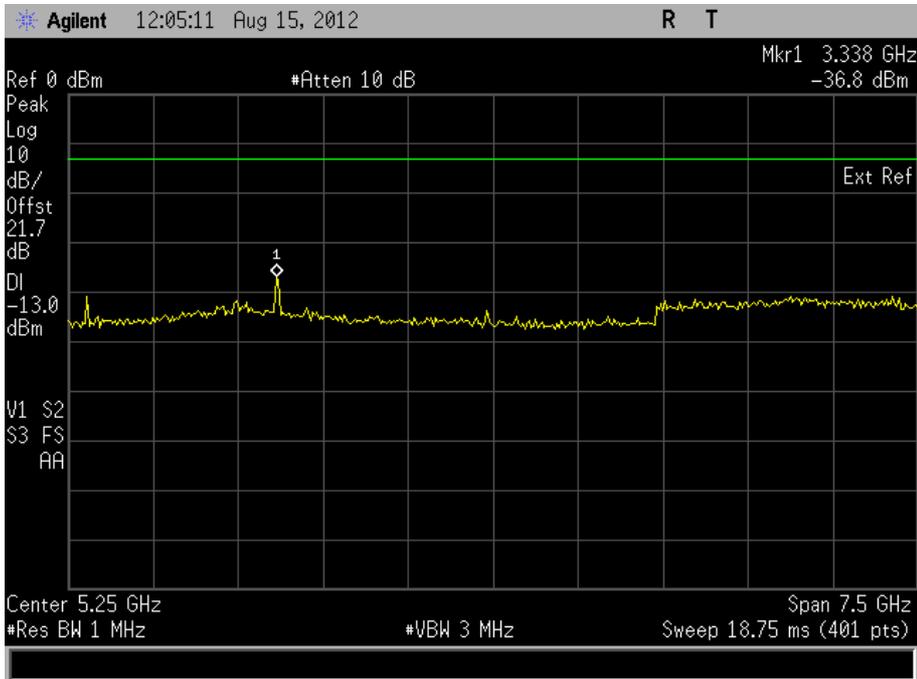

848.31 MHz


9 kHz to 1.5 GHz

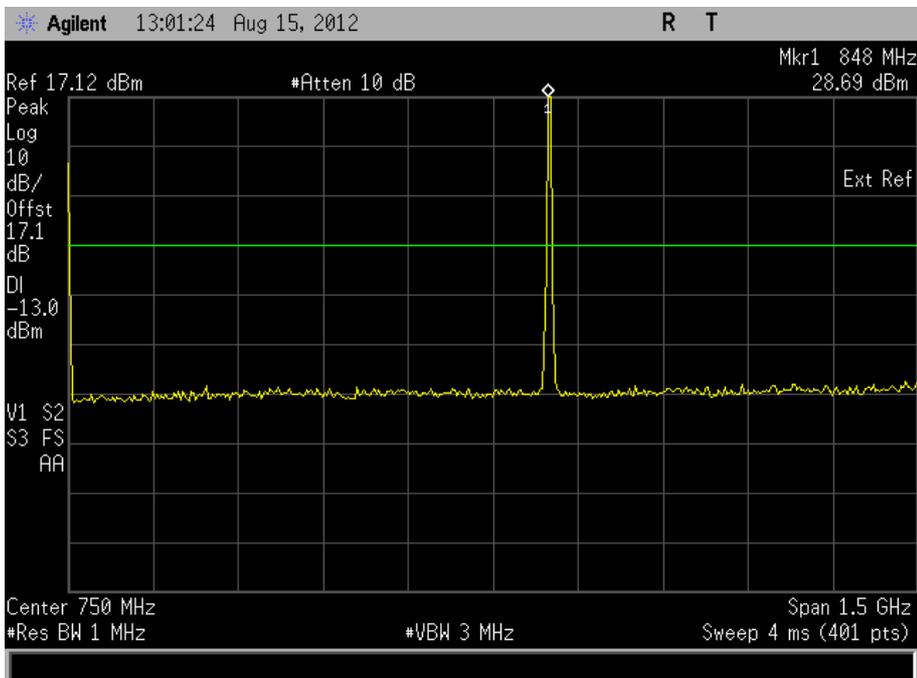



Product Service

1.5 GHz to 9 GHz

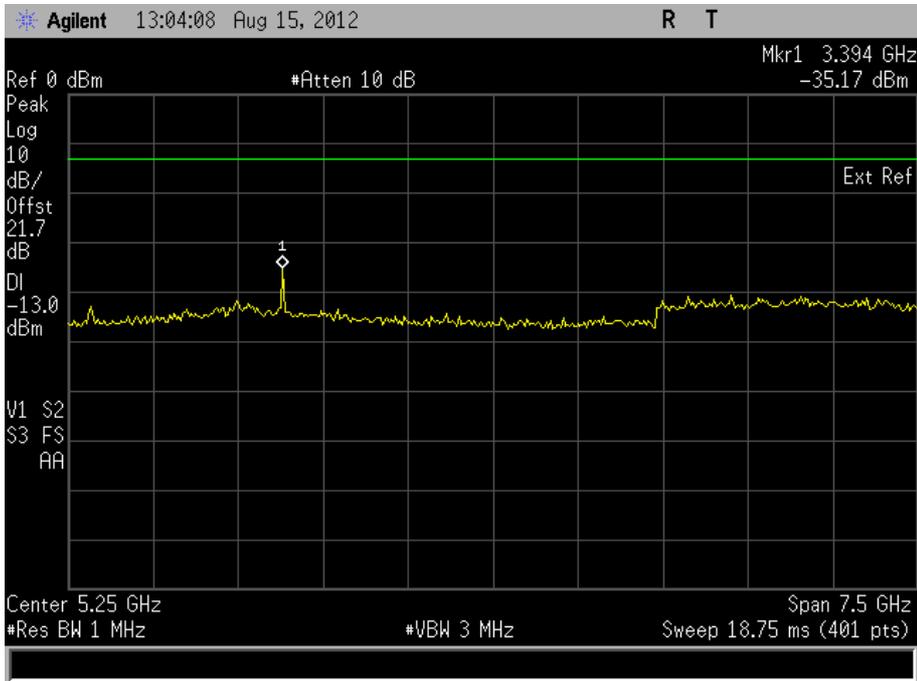

Limit Clause

43+10log(P) or -13 dBm




Product Service

CDMA 2000 - Test Data Service

4.0 V DC Supply

824.70 MHz


9 kHz to 1.5 GHz

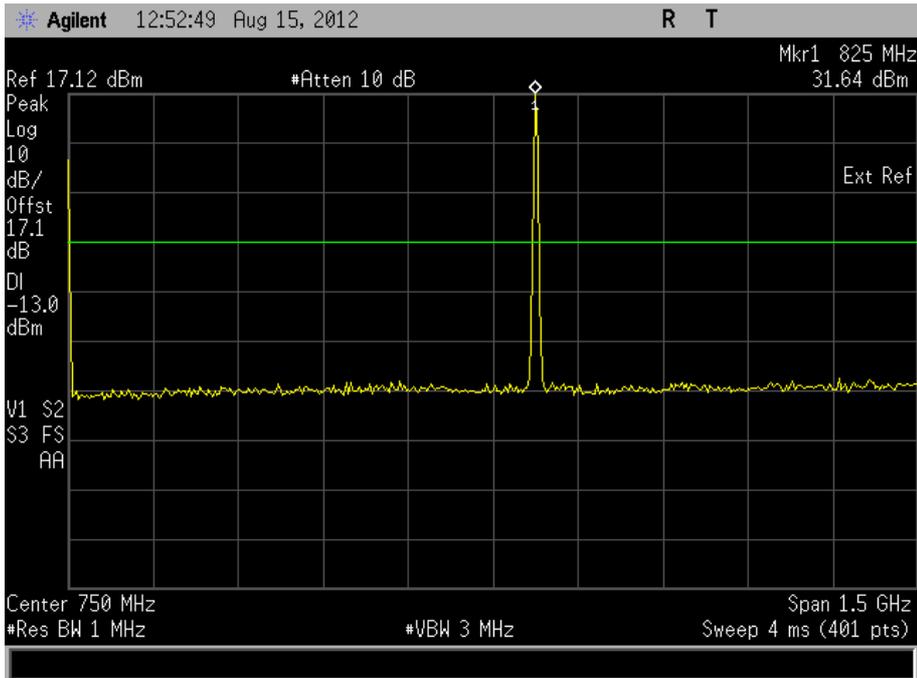




Product Service

1.5 GHz to 9 GHz

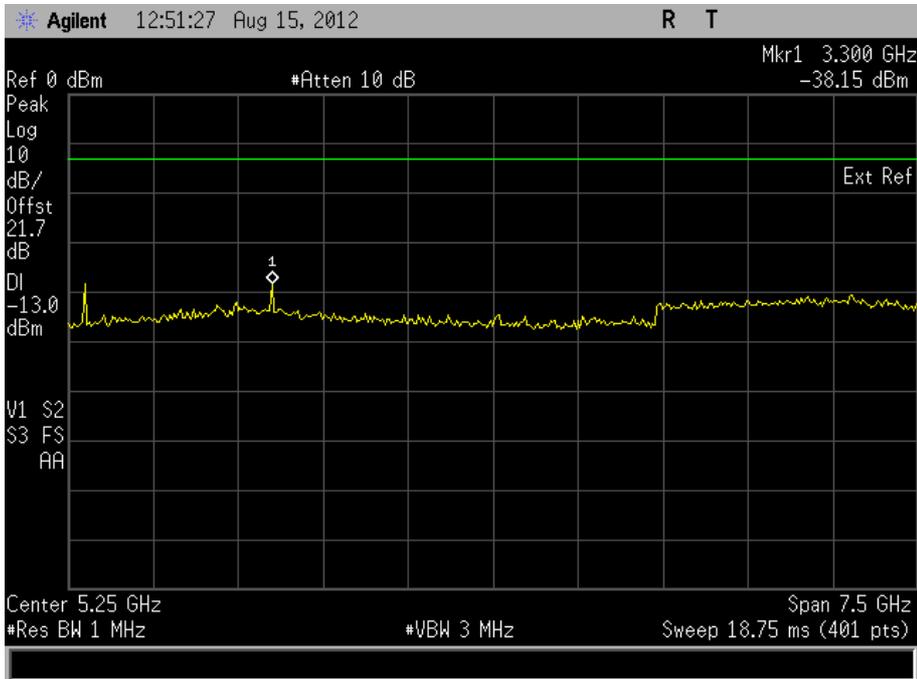

836.52 MHz


9 kHz to 1.5 GHz

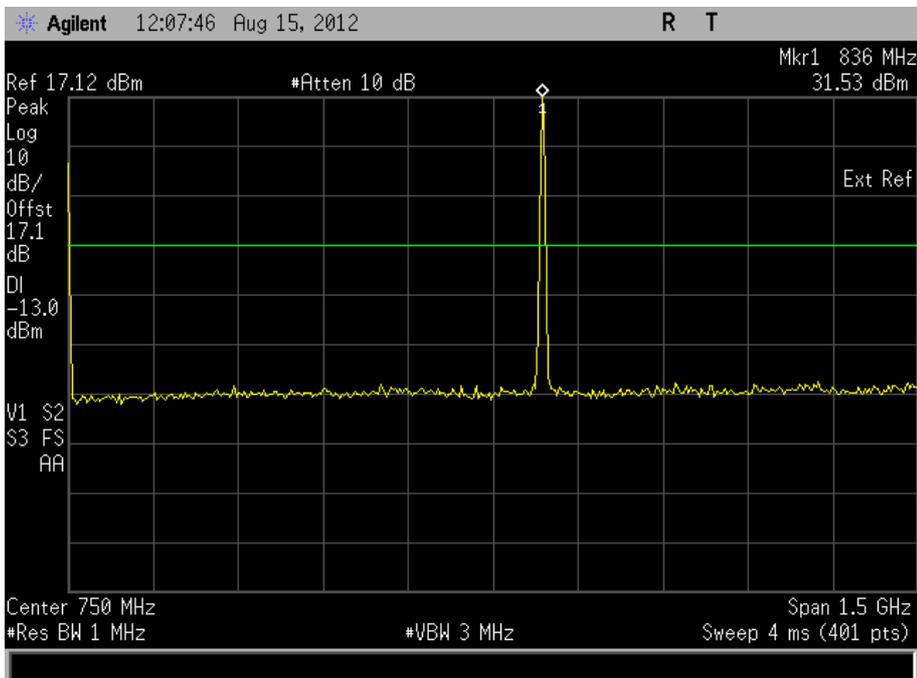




Product Service

1.5 GHz to 9 GHz

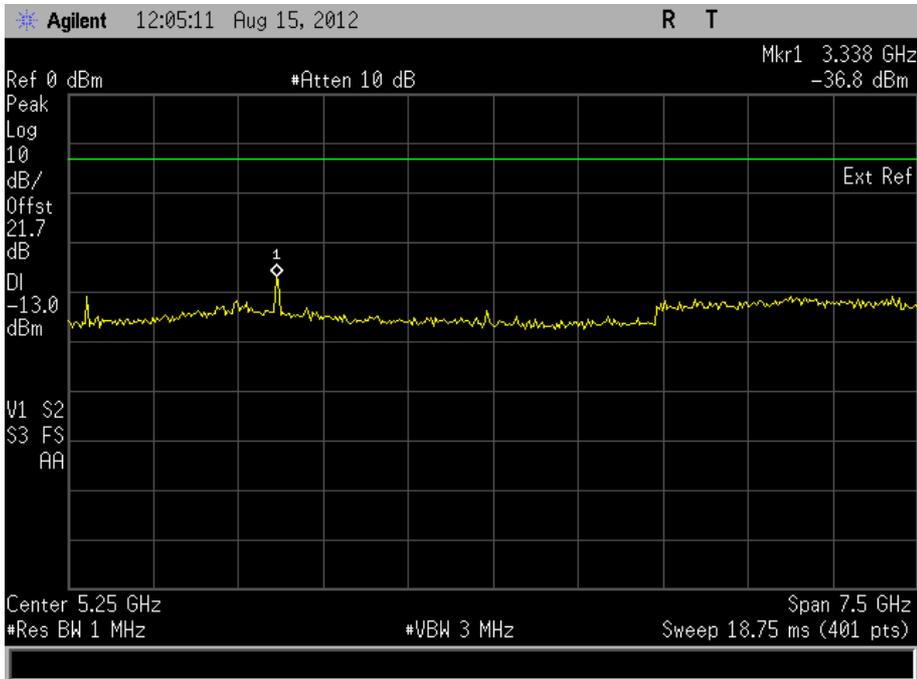

848.31 MHz


9 kHz to 1.5 GHz

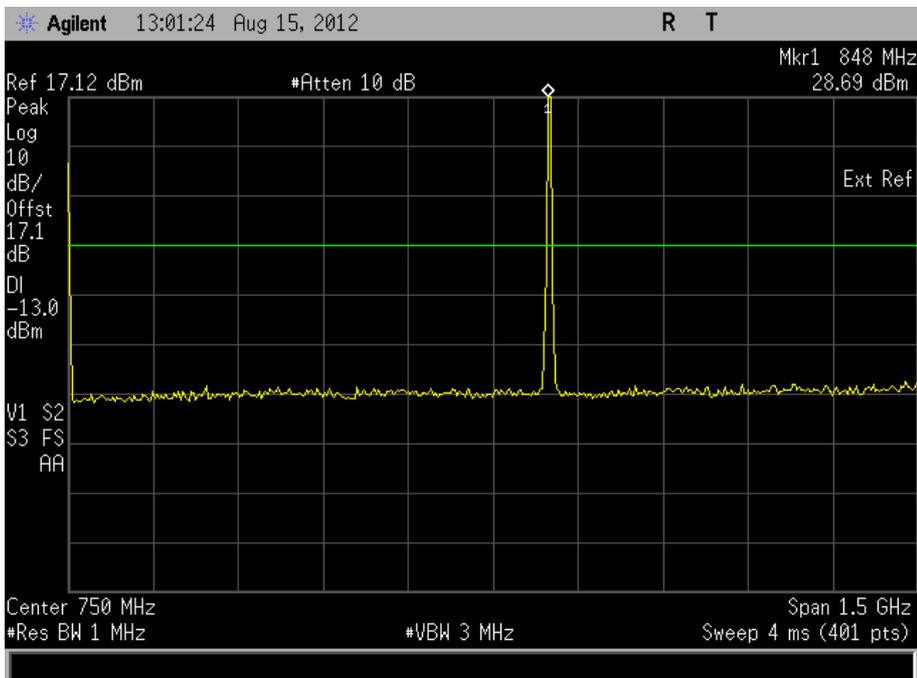



Product Service

1.5 GHz to 9 GHz

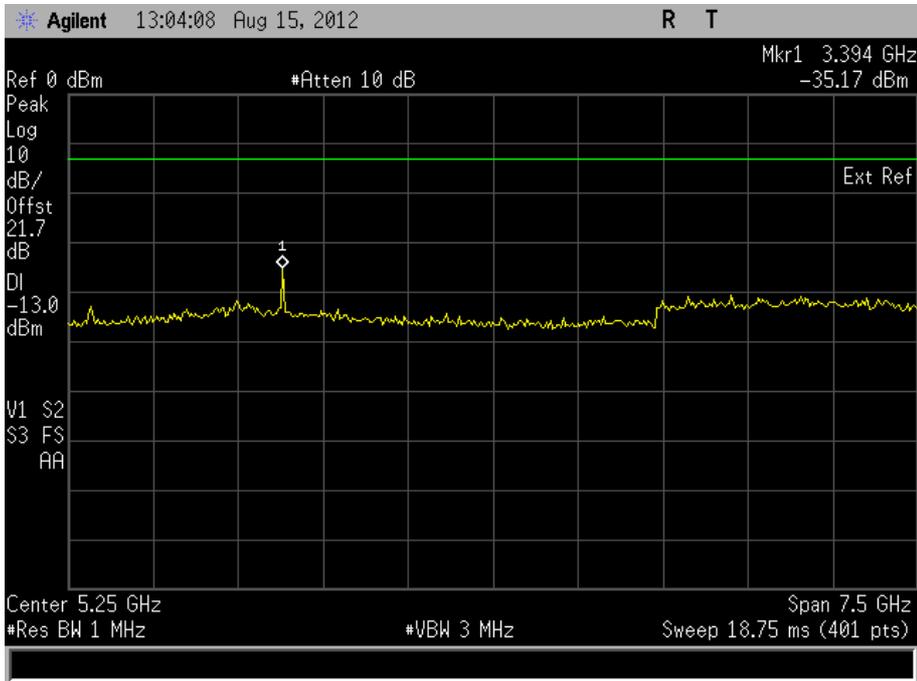

Limit Clause

43+10log(P) or -13 dBm



Product Service

## **2.6 OCCUPIED BANDWIDTH**

### **2.6.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1049 (h)  
FCC CFR 47 Part 22, Clause 22.917 (b)

### **2.6.2 Equipment Under Test and Modification State**

CDMA SHL21 S/N: IMEI 004401114094473 - Modification State 0

### **2.6.3 Date of Test**

15 August 2012

### **2.6.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.6.5 Test Procedure**

The EUT was transmitting at maximum power, with modulation. Using a resolution bandwidth of 10 kHz and a video bandwidth of 30 kHz, the -26 dBc points were established and the emission bandwidth determined.

The plot of the following pages shows the resultant display from the Spectrum Analyser.

### **2.6.6 Environmental Conditions**

Ambient Temperature	26.1°C
Relative Humidity	51.5%



Product Service


**2.6.7 Test Results**

CDMA 2000 - Loopback Service

4.0 V DC Supply

824.70 MHz

Mode	Occupied Bandwidth (kHz)
SO55, RC1	1425

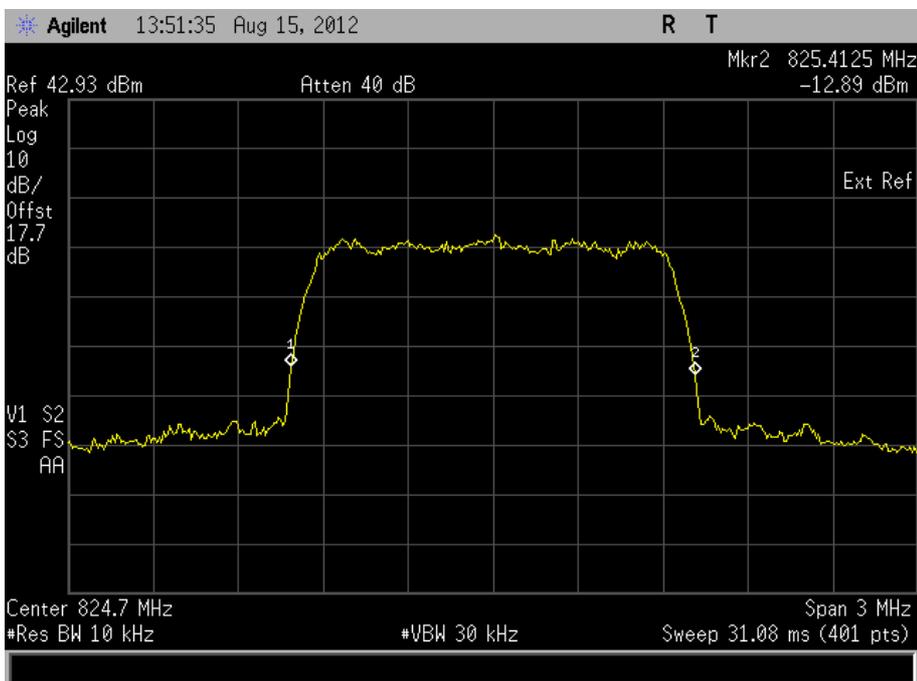




Product Service

836.52 MHz

Mode	Occupied Bandwidth (kHz)
SO55, RC1	1425

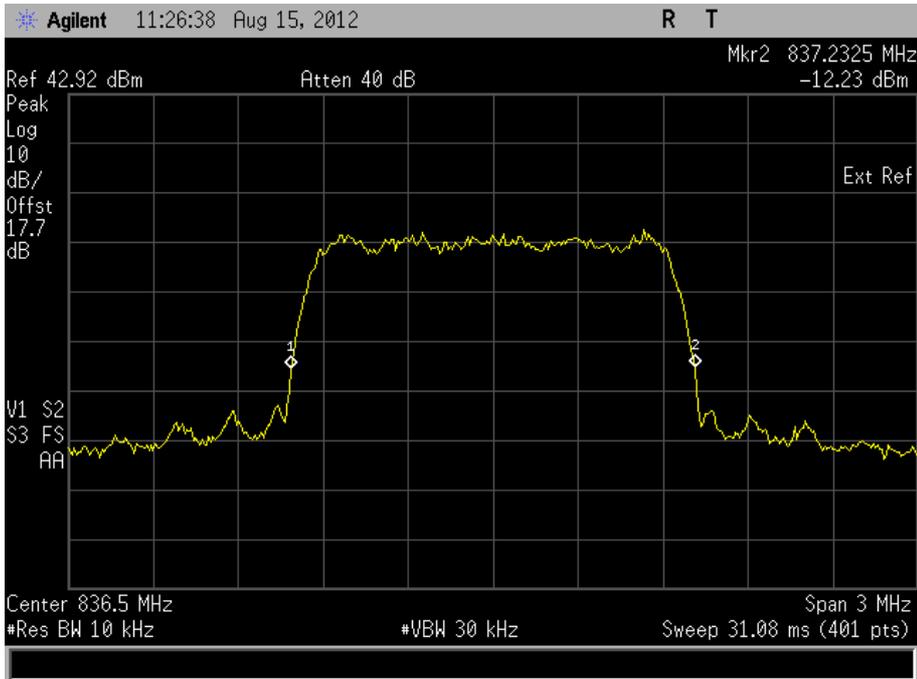




Product Service

848.31 MHz

Mode	Occupied Bandwidth (kHz)
SO55, RC1	1425

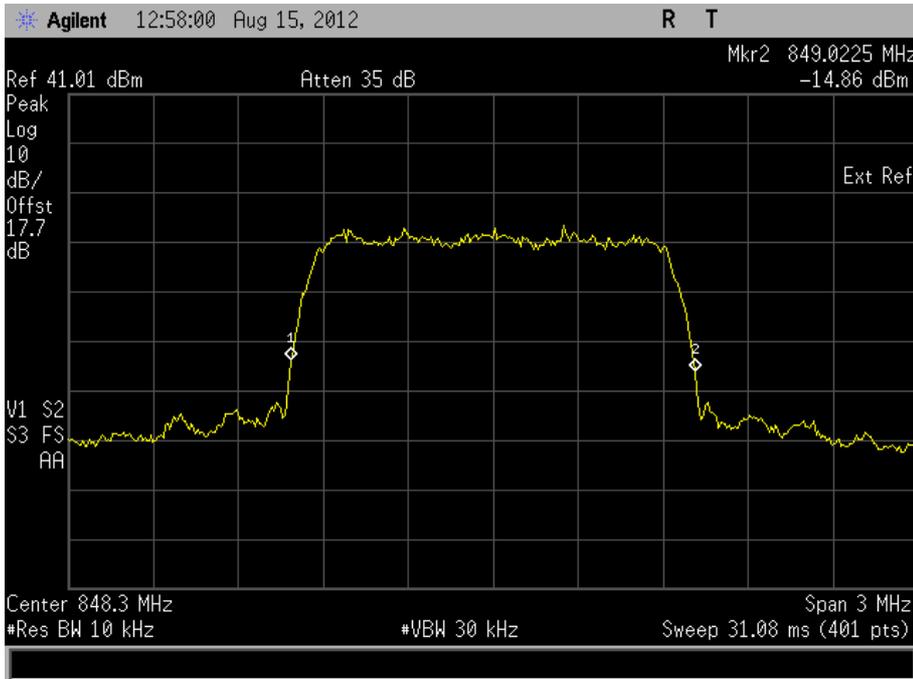

Limit Clause

The occupied bandwidth, that is the frequency bandwidth such that, below is lower and above is upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.




Product Service

CDMA 2000 - Test Data Service

4.0 V DC Supply

824.70 MHz

Mode	Occupied Bandwidth (kHz)
SO55, RC1	1425

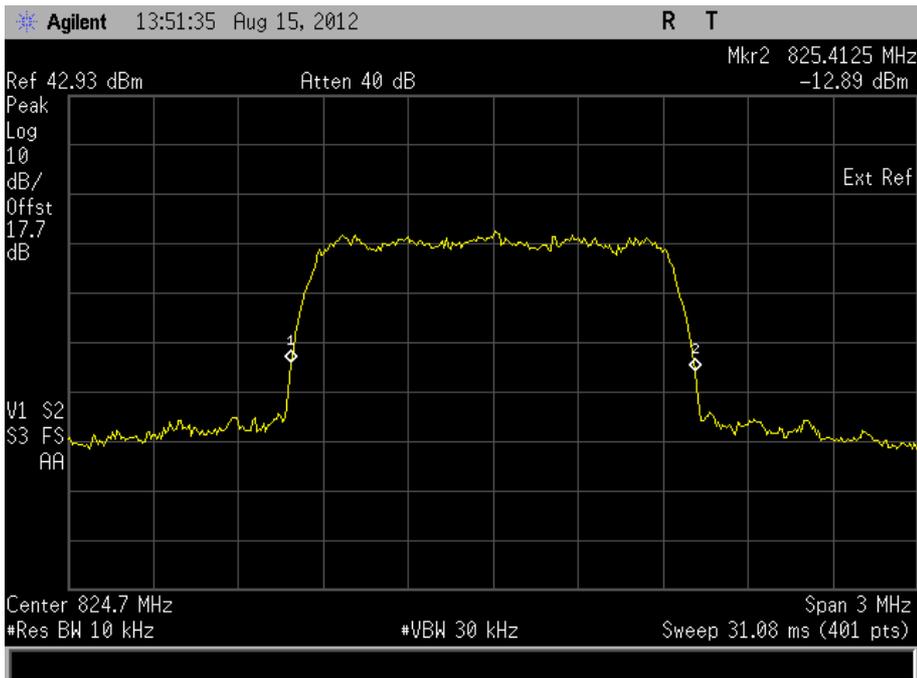




Product Service

836.52 MHz

Mode	Occupied Bandwidth (kHz)
SO55, RC1	1425

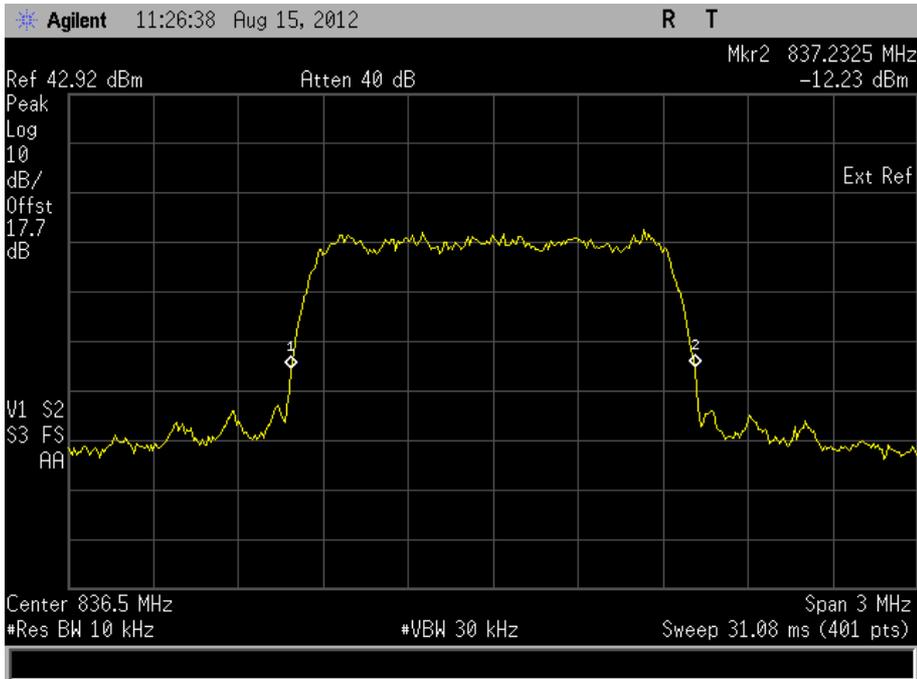




Product Service

848.31 MHz

Mode	Occupied Bandwidth (kHz)
SO55, RC1	1417.5

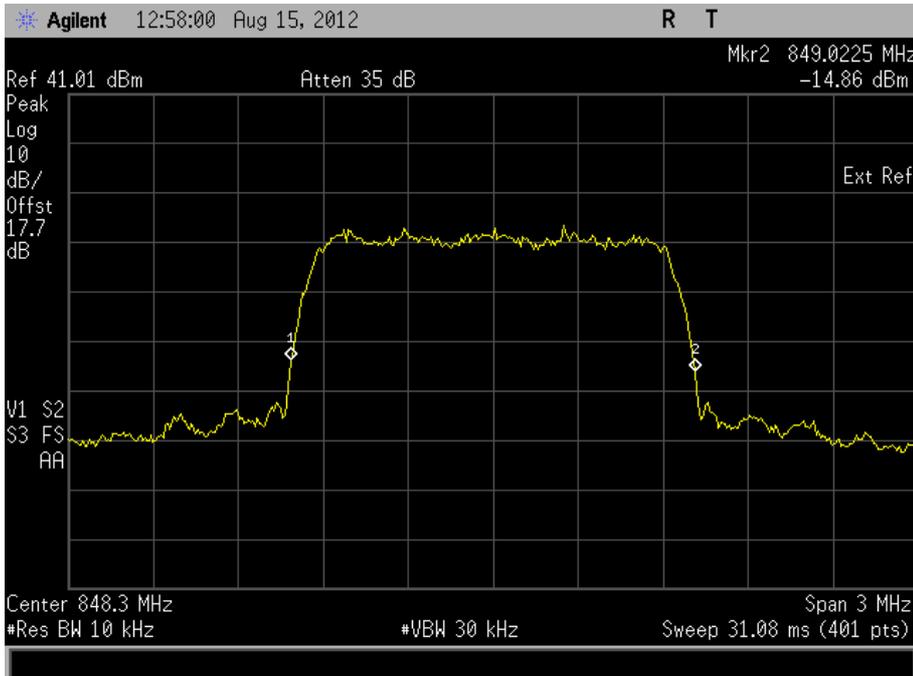

Limit Clause

The occupied bandwidth, that is the frequency bandwidth such that, below is lower and above is upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.



Product Service

## 2.7 FREQUENCY STABILITY

### 2.7.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1055  
FCC CFR 47 Part 22, Clause 22.355

### 2.7.2 Equipment Under Test and Modification State

CDMA SHL21 S/N: IMEI 004401114094473 - Modification State 0

### 2.7.3 Date of Test

16 August 2012

### 2.7.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.7.5 Test Procedure

The EUT was set to transmit on maximum power with modulation. An FSQ Signal Analyser, was used to measure the frequency error. The maximum result was taken over 200 bursts. The temperature was adjusted between -30°C and +50°C in 10° steps as per 2.1055 and the frequency error was measured at each temperature.

### 2.7.6 Environmental Conditions

Ambient Temperature	25.2°C
Relative Humidity	41.4%



Product Service

**2.7.7 Test Results**

CDMA 2000 - Loopback Service

4.0 V DC Supply

Under Temperature Variations

836.52 MHz

Temperature Interval (°C)	Mode	Modulation	Deviation (ppm)
-30	SO55, RC1	64-Ray Orthogonal	-0.009
-20	SO55, RC1	64-Ray Orthogonal	-0.011
-10	SO55, RC1	64-Ray Orthogonal	-0.009
0	SO55, RC1	64-Ray Orthogonal	-0.009
+10	SO55, RC1	64-Ray Orthogonal	-0.011
+20	SO55, RC1	64-Ray Orthogonal	-0.009
+30	SO55, RC1	64-Ray Orthogonal	-0.011
+40	SO55, RC1	64-Ray Orthogonal	-0.009
+50	SO55, RC1	64-Ray Orthogonal	-0.011

Limit Clause

Frequency Range (MHz)	Base, Fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5.0	-	-
929 to 960	1.5	-	-
2110 to 2220	10	-	-



Product Service

Under Voltage Variations

836.52 MHz

DC Voltage (V)	Mode	Modulation	Deviation (ppm)
4.0 V DC	SO55, RC1	64-Ray Orthogonal	-0.009
3.7 V DC	SO55, RC1	64-Ray Orthogonal	-0.009
4.0 V DC	SO55, RC1	64-Ray Orthogonal	-0.009

Limit Clause

Frequency Range (MHz)	Base, Fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a



Product Service

CDMA 2000 - Test Data Service

4.0 V DC Supply

Under Temperature Variations

836.52 MHz

Temperature Interval (°C)	Mode	Modulation	Deviation (ppm)
-30	SO55, RC1	64-Ray Orthogonal	-0.006
-20	SO55, RC1	64-Ray Orthogonal	-0.008
-10	SO55, RC1	64-Ray Orthogonal	-0.009
0	SO55, RC1	64-Ray Orthogonal	-0.009
+10	SO55, RC1	64-Ray Orthogonal	-0.008
+20	SO55, RC1	64-Ray Orthogonal	-0.009
+30	SO55, RC1	64-Ray Orthogonal	-0.011
+40	SO55, RC1	64-Ray Orthogonal	-0.009
+50	SO55, RC1	64-Ray Orthogonal	-0.011

Limit Clause

Frequency Range (MHz)	Base, Fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5.0	-	-
929 to 960	1.5	-	-
2110 to 2220	10	-	-



Product Service

Under Voltage Variations

836.52 MHz

DC Voltage (V)	Mode	Modulation	Deviation (ppm)
4.0 V DC	SO55, RC1	64-Ray Orthogonal	-0.009
3.7 V DC	SO55, RC1	64-Ray Orthogonal	-0.009
4.0 V DC	SO55, RC1	64-Ray Orthogonal	-0.009

Limit Clause

Frequency Range (MHz)	Base, Fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 - Spurious Emissions at Band Edge</b>					
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012
Communications Tester	Rohde & Schwarz	CMU200	-	-	O/P Mon
<b>Section 2.2 - Effective Radiated Power</b>					
Peak Power Analyser	Hewlett Packard	8990A	107	12	10-Feb-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	8-Dec-2012
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Power Sensor	Hewlett Packard	84812A	2743	-	TU
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	18-Nov-2012
Attenuator (20dB, 10W)	Aeroflex / Weinschel	23-20-34	3159	12	13-Jun-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3702	12	27-Jan-2013
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	26-Aug-2012
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.3 - Maximum Peak Output Power - Conducted</b>					
Signal Generator	Marconi	2031	53	12	08-Oct-2013
True RMS Multimeter	Fluke	79 Series III	411	12	25-Jul-2013
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	21-Sep-2012
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Programmable Power Supply	Iso-tech	IPS 2010	2438	-	O/P Mon
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	18-Nov-2012
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
Combiner/Splitter	Weinschel	1506A	3879	12	19-Mar-2013
DC - 12.4 GHz 10 dB Attenuator	Suhner	6810.17.A	3965	12	27-Jun-2013
P-Series Power Meter	Agilent	N1911A	3980	12	12-Sep-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012
Communications Tester	Rohde & Schwarz	CMU200	-	-	O/P Mon
<b>Section 2.4 - Emission Limitations for Cellular Equipment</b>					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	20-Sep-2012
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
High Pass Filter (3GHz)	RLC Electronics	F-100-3000-5-R	3349	12	29-May-2013
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Low Noise Amplifier	Wright Technologies	APS04-0085	3969	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.5 - Conducted Spurious Emissions</b>					
True RMS Multimeter	Fluke	79 Series III	411	12	25-Jul-2013
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Programmable Power Supply	Iso-tech	IPS 2010	2438	-	O/P Mon
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	18-Nov-2012
High Pass Filter (4GHz)	RLC Electronics	F-100-4000-5-R	2773	12	20-Sep-2012
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	21-Dec-2012
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	27-Jun-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	16-Apr-2013
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
Combiner/Splitter	Weinschel	1506A	3879	12	19-Mar-2013
P-Series Power Meter	Agilent	N1911A	3980	12	12-Sep-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012
Communications Tester	Rohde & Schwarz	CMU200	-	-	O/P Mon
<b>Section 2.6 - Occupied Bandwidth</b>					
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012
Communications Tester	Rohde & Schwarz	CMU200	-	-	O/P Mon



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.7 - Frequency Stability</b>					
Climatic Chamber	Votsch	VT4002	161	-	O/P Mon
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
GSM Test Set	Rohde & Schwarz	CMU 200	2809	12	8-Jun-2013
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
Attenuator (20dB, 10W)	Aeroflex / Weinschel	23-20-34	3159	12	13-Jun-2013
Thermocouple Thermometer	Fluke	51	3172	12	30-Jul-2013
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3702	12	27-Jan-2013
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	1	01-May-2013
Communications Tester	Rohde & Schwarz	CMU200	-	-	O/P Mon

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment

100003



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Effective Radiated Power	30MHz to 1GHz: $\pm 5.1$ dB 1GHz to 40GHz: $\pm 6.3$ dB
Spurious Emissions at Band Edge	30MHz to 1GHz: $\pm 5.1$ dB 1GHz to 40GHz: $\pm 6.3$ dB
Maximum Peak Output Power - Conducted	$\pm 0.70$ dB
Emission Limitations for Cellular Equipment	30MHz to 1GHz: $\pm 5.1$ dB 1GHz to 40GHz: $\pm 6.3$ dB
Conducted Spurious Emissions	$\pm 3.454$ dB
Occupied Bandwidth	$\pm 16.74$ kHz
Frequency Stability	$\pm 46.70$ Hz



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited