



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the
Sharp CDMA SHT21 Dual-band CDMA (BC0, BC6) & Dual-band LTE
(B11, B18). Dual mode Media Tablet with Bluetooth, WLAN,
NFC(Type-A/ B) and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00179

Document 75919259 Report 09 Issue 2

November 2012



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp CDMA SHT21 Dual-band CDMA (BC0, BC6) & Dual-band LTE
(B11, B18). Dual mode Media Tablet with Bluetooth, WLAN,
NFC(Type-A/ B) and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)

Document 75919259 Report 09 Issue 2

November 2012

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY



Natalie Bennett
Senior Administrator (Technical)

APPROVED BY



Mark Jenkins
Authorised Signatory

DATED

20 November 2012

This report has been up-issued to Issue 2 to amend a typographical error.


ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);



G Lawler



M Russell

Document 75919259 Report 09 Issue 2





Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE



COMMERCIAL-IN-CONFIDENCE



Product Service

CONTENTS

Section	Page No
1	REPORT SUMMARY 4
1.1	Introduction 5
1.2	Brief Summary of Results 6
1.3	Application Form 7
1.4	Product Information 12
1.5	Test Conditions 12
1.6	Deviations from the Standard 12
1.7	Modification Record 12
2	TEST DETAILS 13
2.1	AC Line Conducted Emissions 14
2.2	Frequency Hopping Systems - 20dB Bandwidth and Channel Separation 20
2.3	Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels 28
2.4	Maximum Peak Conducted Output Power 35
2.5	EIRP Peak Power 37
2.6	Spurious and Band Edge Emissions 41
3	TEST EQUIPMENT USED 54
3.1	Test Equipment Used 55
3.2	Measurement Uncertainty 57
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 58
4.1	Accreditation, Disclaimers and Copyright 59



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp CDMA SHT21 Dual-band CDMA (BC0, BC6) & Dual-band LTE (B11, B18). Dual mode
Media Tablet with Bluetooth, WLAN, NFC(Type-A/ B) and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp CDMA SHT21 Dual-band CDMA (BC0, BC6) & Dual-band LTE (B11, B18). Dual mode Media Tablet with Bluetooth, WLAN, NFC(Type-A/ B) and GPS to the requirements of FCC CFR 47 Part 15C.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	CDMA SHT21
Serial Number(s)	IMEI 004401114403831 IMEI 004401114403781
Number of Samples Tested	2
Test Specification/Issue/Date	FCC CFR 47 Part 15C (2011)
Incoming Release Date	Application Form 11 October 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9385 24 October 2012
Start of Test	18 October 2012
Finish of Test	1 November 2012
Name of Engineer(s)	G Lawler M Russell
Related Document(s)	ANSI C63.10: 2009



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15C is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
Bluetooth				
2.1	15.207	AC Line Conducted Emissions	Pass	
2.2	15.247 (a)(1)	Frequency Hopping Systems - 20dB Bandwidth and Channel Separation	Pass	
2.3	15.247 (a)(1)(iii)	Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels	Pass	
2.4	15.247 (b)(3)	Maximum Peak Conducted Output Power	Pass	
2.5	15.247 (b)(4)	EIRP Peak Power	Pass	
2.6	15.247 (d)	Spurious and Band Edge Emissions	Pass	



Product Service

1.3 APPLICATION FORM

EQUIPMENT DESCRIPTION	
Model Name/Number	CDMA SHT21
Part Number	
FCC ID (if applicable)	APYHRO00179
Industry Canada ID (if applicable)	
Technical Description (Please provide a brief description of the intended use of the equipment)	Dual-Band CDMA(800MHz_BC0, 1900MHz_BC6) and Dual-band LTE(1.5GHz_B11, 800MHz_B18) Dual Mode Cellular Phone with Bluetooth, W-LAN, NFC and GPS receiver enabled.

EXTREME TEMPERATURE RANGE over which the equipment is to be type tested	
<input type="checkbox"/> -20°C to +55°C	
<input checked="" type="checkbox"/> Other (2)	
<input type="checkbox"/> Not applicable (no extreme temperature testing required)	
Extreme temperature range for the host(s):	-10C to +55C

(2) The equipment shall be tested over the following temperature ranges :

- a) 0°C to +35°C for equipment for indoor use only, or intended for used in areas where the temperature is controlled within this range.
- b) Over the extremes of the temperature range(s) of the declared host equipment(s) in case of plug-in radio devices.

TYPE OF ANTENNA	
<input checked="" type="checkbox"/> Integral	
Temporary RF connector provided:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<input type="checkbox"/> Antenna connector	
<input type="checkbox"/> Number of antenna assembly(ies) submitted	
Gain of the antenna intended for normal use:	
2 dBi for assembly identified as Bluetooth	
2 dBi for assembly identified as WLAN	
dBi for assembly identified as	

TRANSMITTER TECHNICAL CHARACTERISTICS		
TRANSMITTER OPERATING FREQUENCY RANGE(S)		
	FCC and/or Industry Canada	EU
Bluetooth	2402 to 2480 MHz	2402 to 2480 MHz
WLAN	2412 to 2462 MHz	2412 to 2472 MHz
FCC and/or Industry Canada (only)		
Highest Internally Generated Frequency 1512.0 MHz		



SPREAD SPECTRUM PARAMETERS			
<input checked="" type="checkbox"/> Bluetooth			
FHSS:	Channel <input checked="" type="checkbox"/> 79 Other	EDR	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
Medium Access Protocol (Customer Declaration)			
"We have implemented Bluetooth protocol which satisfies the medium access protocol requirement of EN 300 328".			
<input checked="" type="checkbox"/> WLAN			
IEEE 802.11(b) – DSSS <input checked="" type="checkbox"/>			
IEEE 802.11(g) – OFDM <input checked="" type="checkbox"/>			
IEEE 802.11(n) – OFDM <input checked="" type="checkbox"/>			
Supported Spatial Streams		2.4 GHz	5GHz
	Transmitter (Tx)	Yes	Yes
	Receiver (Rx)	Yes	Yes
GI (Guard Interval)	<input checked="" type="checkbox"/> 800 ns	<input type="checkbox"/> 400 ns	
Band Width	<input checked="" type="checkbox"/> 20 MHz	<input checked="" type="checkbox"/> 40 MHz	
<input type="checkbox"/> Other Technology			
Direct Sequence	<input type="checkbox"/>	Frequency Hopping	<input type="checkbox"/>
		Combined	<input type="checkbox"/>
		Other	
DSSS	Chip Sequence Length	bit	
	Spectrum Width	MHz	
FHSS	Total Number of Hops		
	Dwell Time	ms	
	Bandwidth Per Hop	MHz	
	Maximum Separation of Hops	MHz for ETSI EN 300 328	
Other			
Medium Access Protocol (Customer Declaration)			
"We have implemented IEEE 802.11 (b/g/n) protocol which satisfies the medium access protocol requirement of EN 300 328".			



TRANSMITTER POWER CHARACTERISTICS				
Bluetooth				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)	0.004	W		
Effective radiated power (for equipment with integral antenna)	0.004	W		
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)	0.0003	W		
Effective radiated power (for equipment with integral antenna)	0.0003	W		
Is transmitter intended for :				
Continuous duty	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Intermittent duty	<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF	minutes	
Is continuous operation possible for testing purposes?				
	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Is transmitter output power variable:				
	<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on +Tx off))				
	%			
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
	dB per step			
WLAN				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)	b;0.05 (g.n;0.302)	W		
Effective radiated power (for equipment with integral antenna)	b;0.05 (g.n;0.032)	W		
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)		W		
Effective radiated power (for equipment with integral antenna)		W		
Is transmitter intended for :				
Continuous duty	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Intermittent duty	<input type="checkbox"/>	Yes	<input type="checkbox"/>	No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF	minutes	
Is continuous operation possible for testing purposes?				
	<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/>	No
Is transmitter output power variable:				
	<input type="checkbox"/>	Yes	<input checked="" type="checkbox"/>	No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on +Tx off))				
	%			
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
	dB per step			



Product Service

TRANSMITTER POWER SOURCE (3)			
<input checked="" type="checkbox"/> Common power source for transmitter and receiver			
<input type="checkbox"/> AC mains	State voltage		
AC supply frequency	(Hz)	VAC	Max Current
<input type="checkbox"/> Single phase			Hz
<input type="checkbox"/> Three phase			
And / Or			
<input type="checkbox"/> External DC supply			
Nominal voltage		Max Current	
Extreme upper voltage		A	
Battery		Extreme lower voltage	
<input type="checkbox"/> Nickel Cadmium			
<input type="checkbox"/> Lead acid (Vehicle regulated)			
<input type="checkbox"/> Alkaline			
<input checked="" type="checkbox"/> Lithium			
<input type="checkbox"/> Other Details :			
4.0 Volts nominal.			
End point voltage as quoted by equipment manufacturer		3.7	V

(3) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

AUTOMATIC EQUIPMENT SWITCH OFF	
If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated.	
<input checked="" type="checkbox"/> Applies	3.4 V cut-off voltage
<input type="checkbox"/> Does not apply	



Product Service

RECEIVER POWER SOURCE (4)				
<input type="checkbox"/> AC mains		State voltage		
AC supply frequency	(Hz)	VAC	Max Current	Hz
<input type="checkbox"/> Single phase		<input type="checkbox"/> Three phase		
And / Or				
<input type="checkbox"/> External DC supply				
Nominal voltage		Max Current		A
Extreme upper voltage		Extreme lower voltage		
Battery				
<input type="checkbox"/> Nickel Cadmium				
<input type="checkbox"/> Lead acid (Vehicle regulated)				
<input type="checkbox"/> Alkaline				
<input type="checkbox"/> Lithium				
<input type="checkbox"/> Other Details :				
	Volts nominal.			
End point voltage as quoted by equipment manufacturer				V

(4) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

AUTOMATIC EQUIPMENT SWITCH OFF	
If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated.	
<input type="checkbox"/> Applies	V cut-off voltage
<input type="checkbox"/> Does not apply	

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature: *M. Moroi* Name: Mototsugu Moroi
 Position held: Manager Date: 11th October, 2012



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp CDMA SHT21 Dual-band CDMA (BC0, BC6) & Dual-band LTE (B11, B18). Dual mode Media Tablet with Bluetooth, WLAN, NFC(Type-A/ B) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp CDMA SHT21 Dual-band CDMA (BC0, BC6) & Dual-band LTE (B11, B18). Dual mode
Media Tablet with Bluetooth, WLAN, NFC(Type-A/ B) and GPS
In accordance with FCC CFR 47 Part 15C (Bluetooth)



2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.207

2.1.2 Equipment Under Test and Modification State

CDMA SHT21 S/N: IMEI 004401114403831 - Modification State 0

2.1.3 Date of Test

31 October 2012

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.

2.1.6 Environmental Conditions


Ambient Temperature	21.5°C
Relative Humidity	36.0%



Product Service

2.1.7 Test Results

Live Line

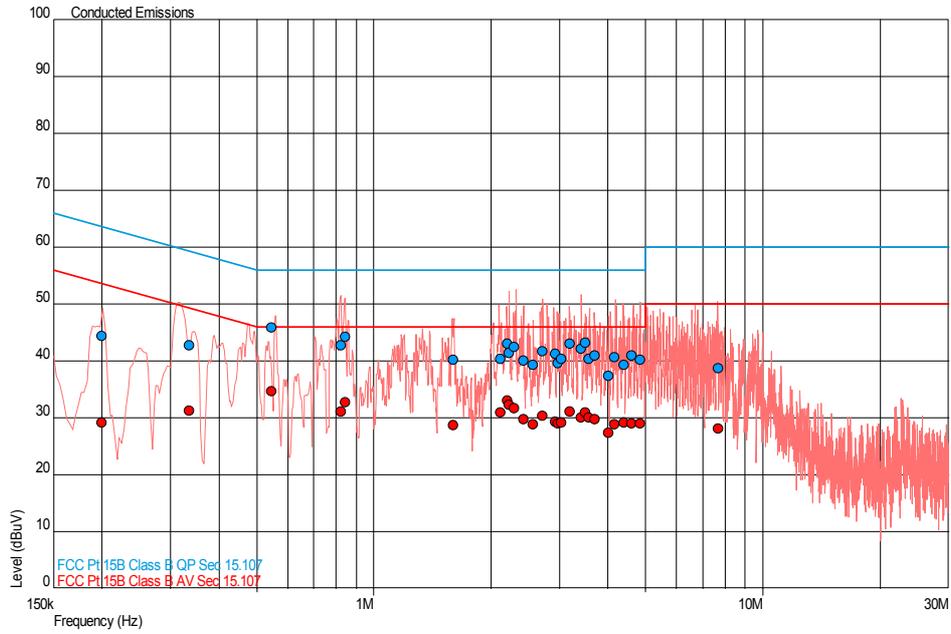



Frequency (MHz)	QP Level (dBµV)	QP Limit (dBµV)	QP Margin (dBµV)	AV Level (dBµV)	AV Limit (dBµV)	AV Margin (dBµV)
0.200	44.5	63.6	-19.1	29.2	53.6	-24.4
0.335	42.7	59.3	-16.6	31.3	49.3	-18.0
0.546	45.9	56.0	-10.1	34.7	46.0	-11.3
0.821	42.8	56.0	-13.2	31.1	46.0	-14.9
0.842	44.2	56.0	-11.8	32.8	46.0	-13.2
1.598	40.3	56.0	-15.7	28.8	46.0	-17.2
2.113	40.4	56.0	-15.6	31.0	46.0	-15.0
2.204	43.1	56.0	-12.9	33.0	46.0	-13.0
2.229	41.5	56.0	-14.5	32.4	46.0	-13.6
2.295	42.4	56.0	-13.6	31.8	46.0	-14.2
2.423	40.0	56.0	-16.0	29.8	46.0	-16.2
2.565	39.3	56.0	-16.7	28.8	46.0	-17.2
2.714	41.7	56.0	-14.3	30.3	46.0	-15.7
2.927	41.2	56.0	-14.8	29.3	46.0	-16.7
2.973	39.6	56.0	-16.4	29.0	46.0	-17.0
3.036	40.3	56.0	-15.7	29.2	46.0	-16.8
3.185	43.0	56.0	-13.0	31.2	46.0	-14.8
3.410	42.2	56.0	-13.8	30.1	46.0	-15.9
3.490	43.2	56.0	-12.8	30.9	46.0	-15.1
3.577	40.4	56.0	-15.6	30.1	46.0	-15.9
3.693	41.0	56.0	-15.0	29.8	46.0	-16.2
4.010	37.4	56.0	-18.6	27.4	46.0	-18.6
4.163	40.7	56.0	-15.3	28.9	46.0	-17.1
4.398	39.4	56.0	-16.6	29.1	46.0	-16.9
4.607	40.9	56.0	-15.1	29.0	46.0	-17.0
4.835	40.2	56.0	-15.8	29.0	46.0	-17.0




Product Service

7.676	38.8	60.0	-21.2	28.1	50.0	-21.9	
-------	------	------	-------	------	------	-------	--



Product Service

Neutral Line

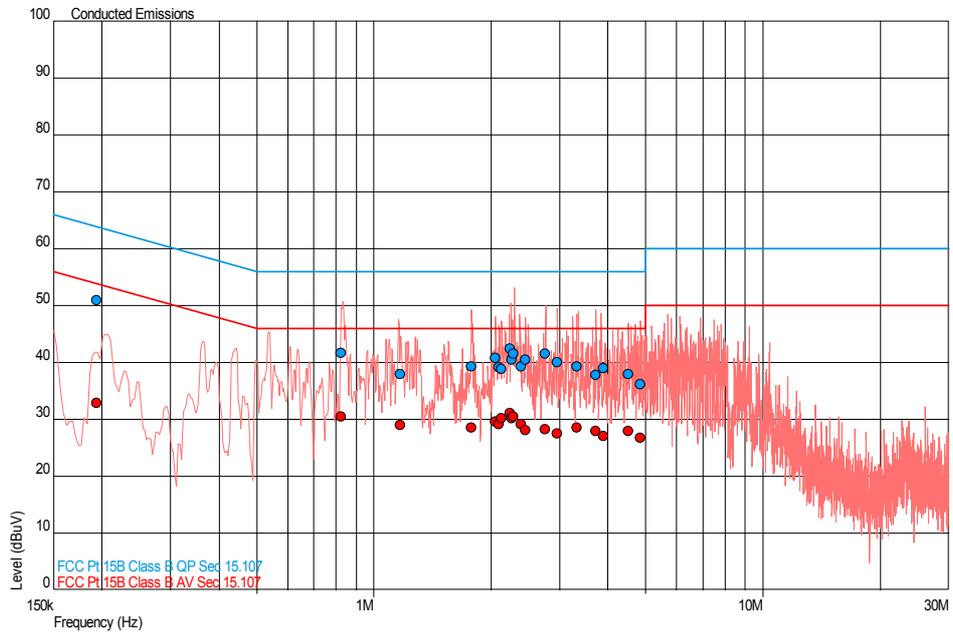



Product Service

Frequency (MHz)	QP Level (dBµV)	QP Limit (dBµV)	QP Margin (dBµV)	AV Level (dBµV)	AV Limit (dBµV)	AV Margin (dBµV)	
0.194	51.0	63.9	-12.8	32.8	53.9	-21.0	
0.822	41.7	56.0	-14.3	30.6	46.0	-15.4	
1.170	37.9	56.0	-18.1	29.0	46.0	-17.0	
1.778	39.3	56.0	-16.7	28.5	46.0	-17.5	
2.052	40.9	56.0	-15.1	29.7	46.0	-16.3	
2.091	39.2	56.0	-16.8	29.2	46.0	-16.8	
2.130	38.8	56.0	-17.2	30.2	46.0	-15.8	
2.233	42.5	56.0	-13.5	31.1	46.0	-14.9	
2.256	40.5	56.0	-15.5	30.2	46.0	-15.8	
2.284	41.6	56.0	-14.4	30.5	46.0	-15.5	
2.386	39.3	56.0	-16.7	29.2	46.0	-16.8	
2.450	40.6	56.0	-15.4	28.2	46.0	-17.8	
2.755	41.6	56.0	-14.4	28.4	46.0	-17.6	
2.964	40.1	56.0	-15.9	27.6	46.0	-18.4	
3.319	39.4	56.0	-16.6	28.6	46.0	-17.4	
3.713	37.8	56.0	-18.2	28.0	46.0	-18.0	
3.881	39.0	56.0	-17.0	27.0	46.0	-19.0	
4.506	37.9	56.0	-18.1	27.9	46.0	-18.1	
4.851	36.2	56.0	-19.8	26.7	46.0	-19.3	



2.2 FREQUENCY HOPPING SYSTEMS - 20dB BANDWIDTH AND CHANNEL SEPARATION

2.2.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)

2.2.2 Equipment Under Test and Modification State

CDMA SHT21 S/N: IMEI 004401114403781 - Modification State 0

2.2.3 Date of Test

18 October 2012 & 29 October 2012

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen. The peak point of the trace was measured and the markers positioned to give the -20dBc points of the displayed spectrum.

The EUT was transmitted at maximum power into a Spectrum Analyser. The trace was set to Max Hold to store several adjacent channels on screen. Using the marker delta function, the markers were positioned to show the separation between adjacent channels.

2.2.6 Environmental Conditions

Ambient Temperature	20.4 - 24.1°C
Relative Humidity	47.6 - 52.9%



Product Service

2.2.7 Test Results


4.0 V DC Supply

20dB Bandwidth

2402 MHz

Data Rate (Mbps)	20dB Bandwidth (kHz)
DH1	940
DH3	1030
DH5 (worst)	975


DH1

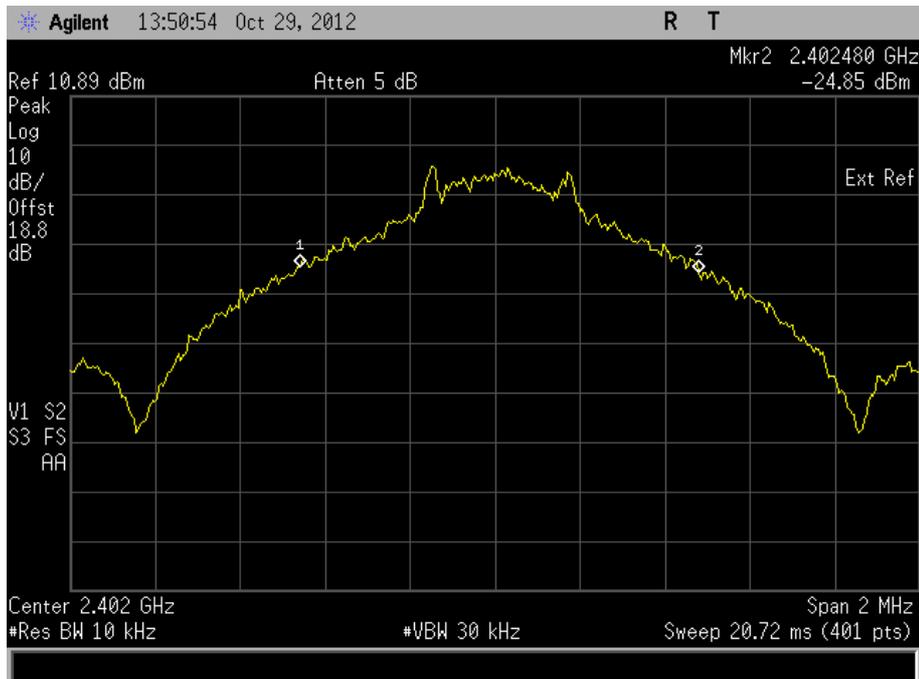




Product Service

DH3

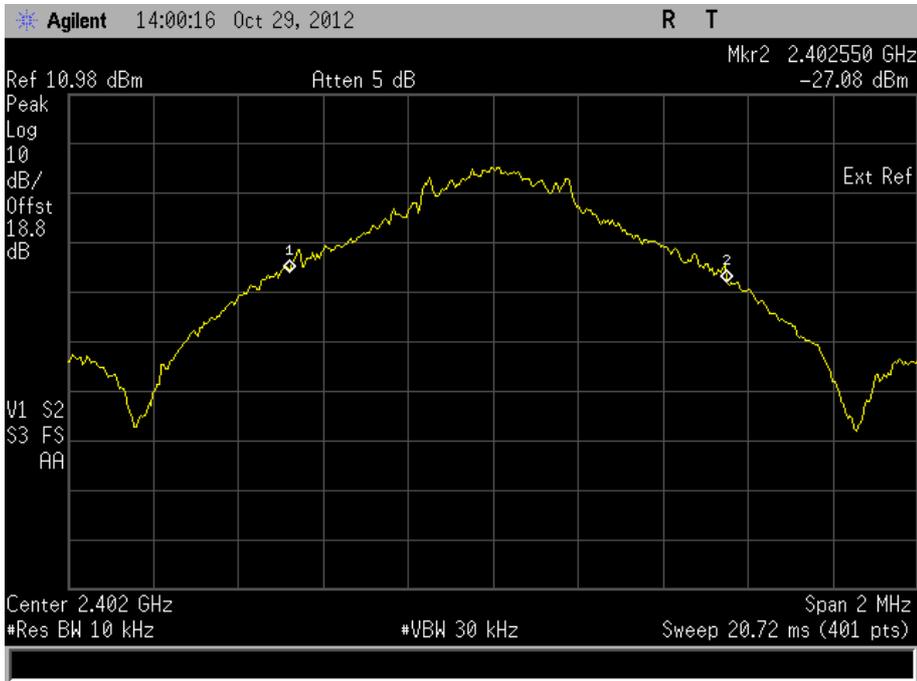

DH5 (worst)

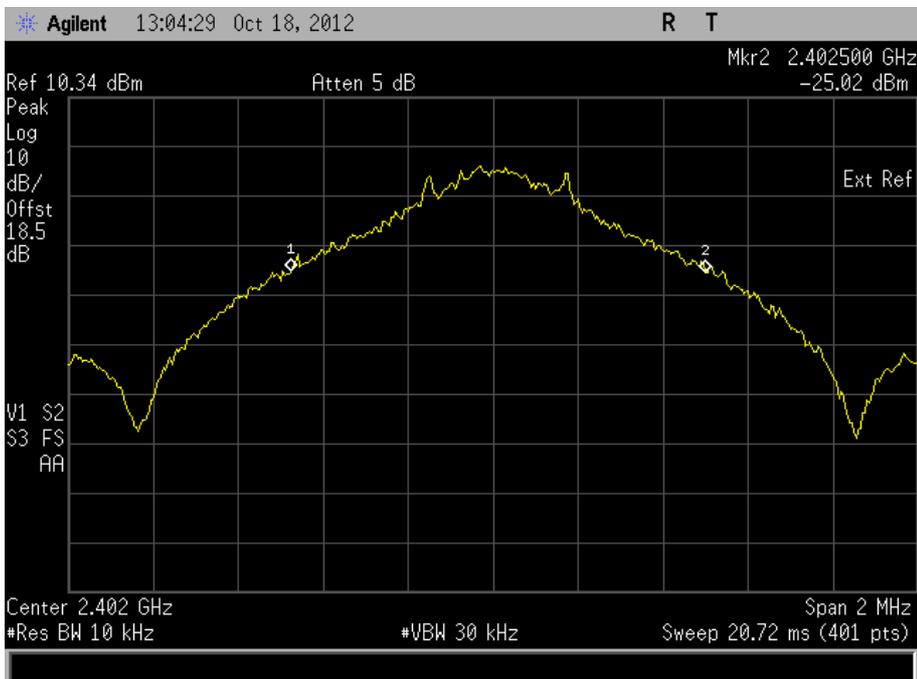




Product Service

2441 MHz

Data Rate (Mbps)	20dB Bandwidth (kHz)
DH1	945
DH3	985
DH5 (worst)	995


DH1

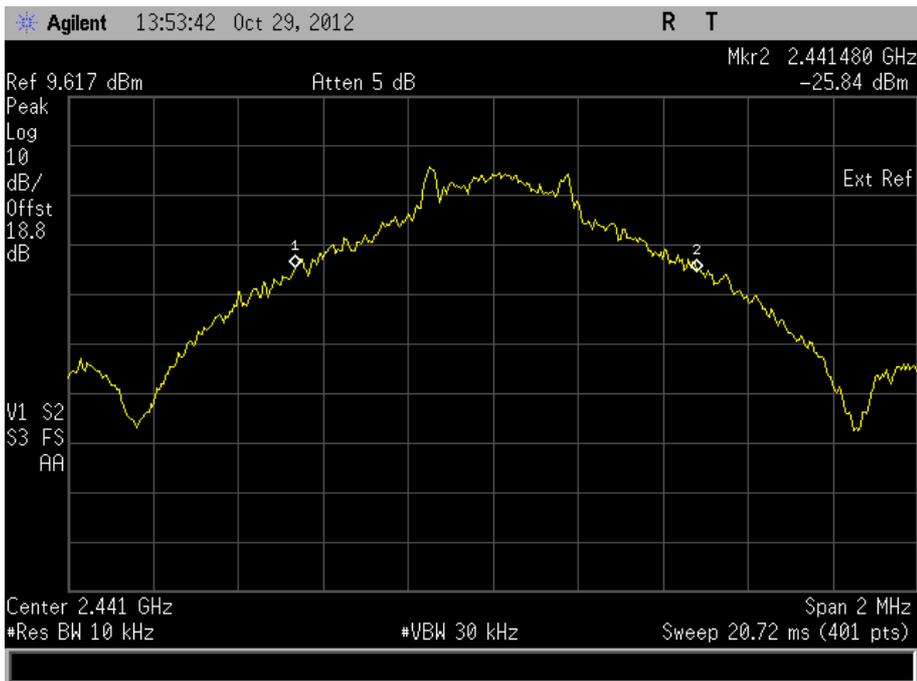




Product Service

DH3

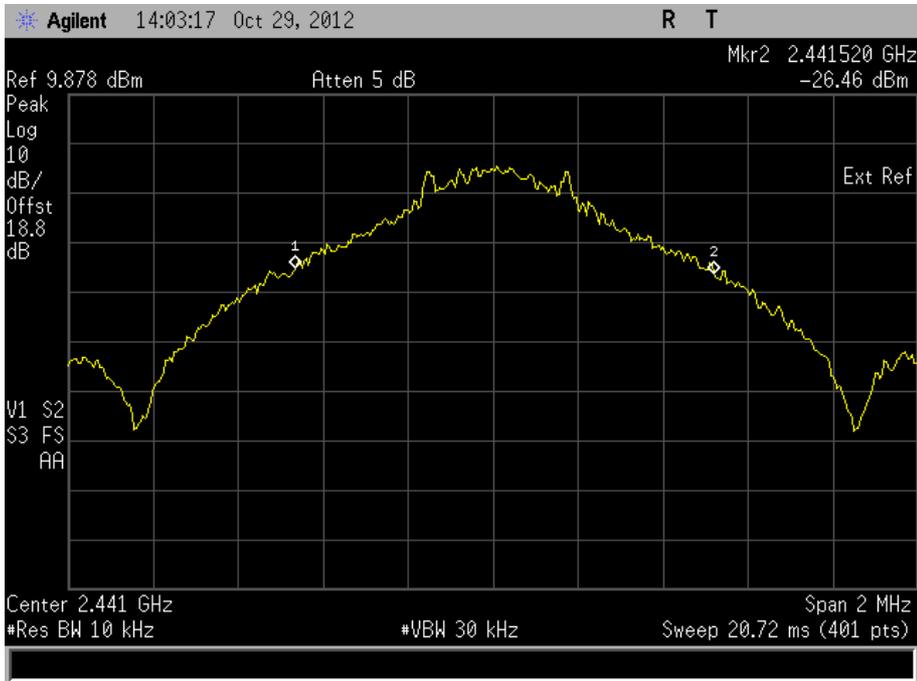

DH5 (worst)

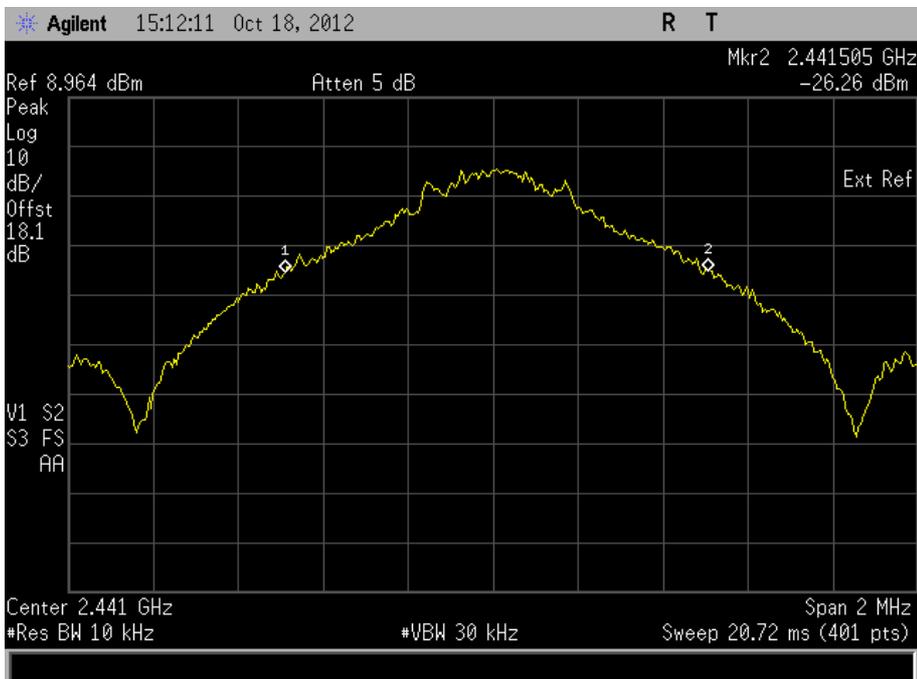




Product Service

2480 MHz

Data Rate (Mbps)	20dB Bandwidth (kHz)
DH1	940
DH3	1015
DH5 (worst)	1000


DH1

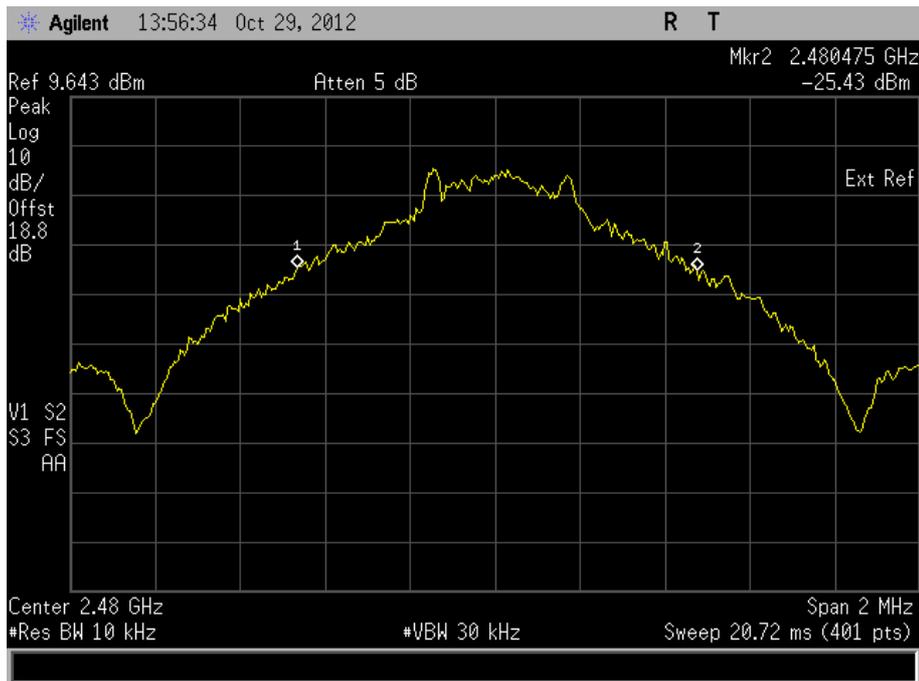




Product Service

DH3

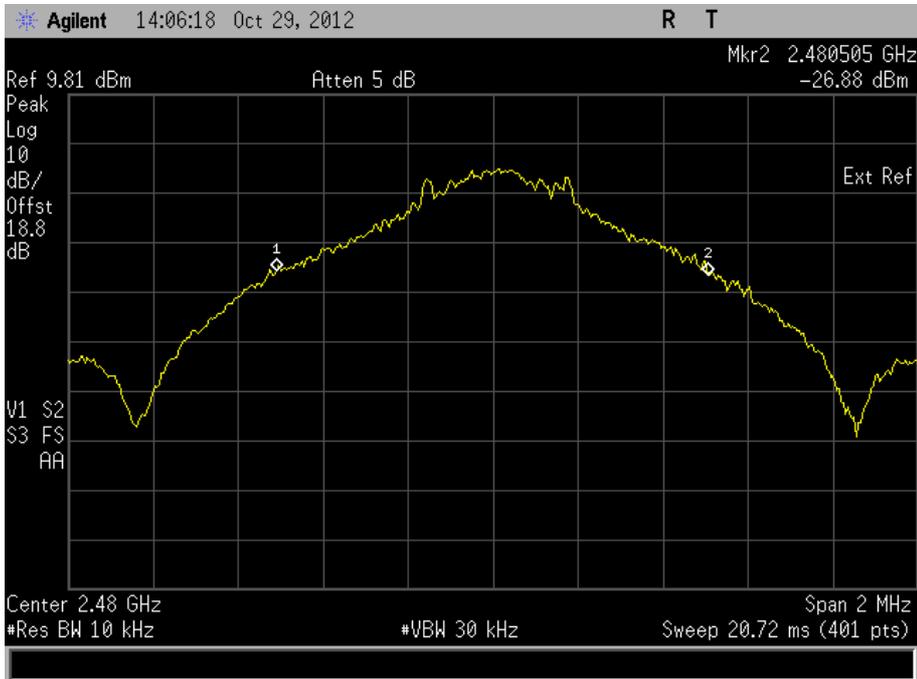

DH5 (worst)

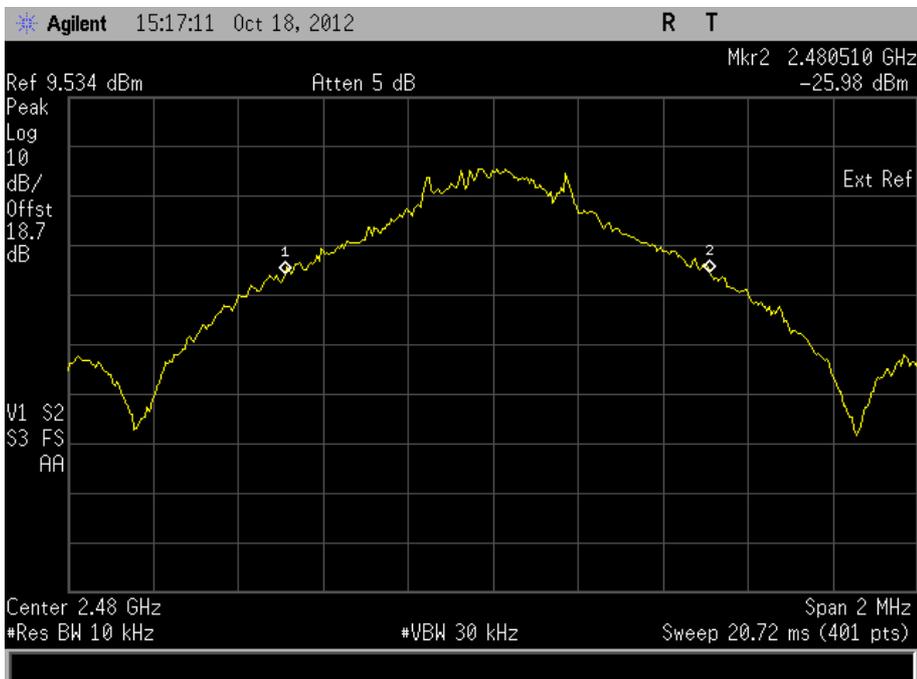


Limit Clause

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater.



Product Service

Channel Separation

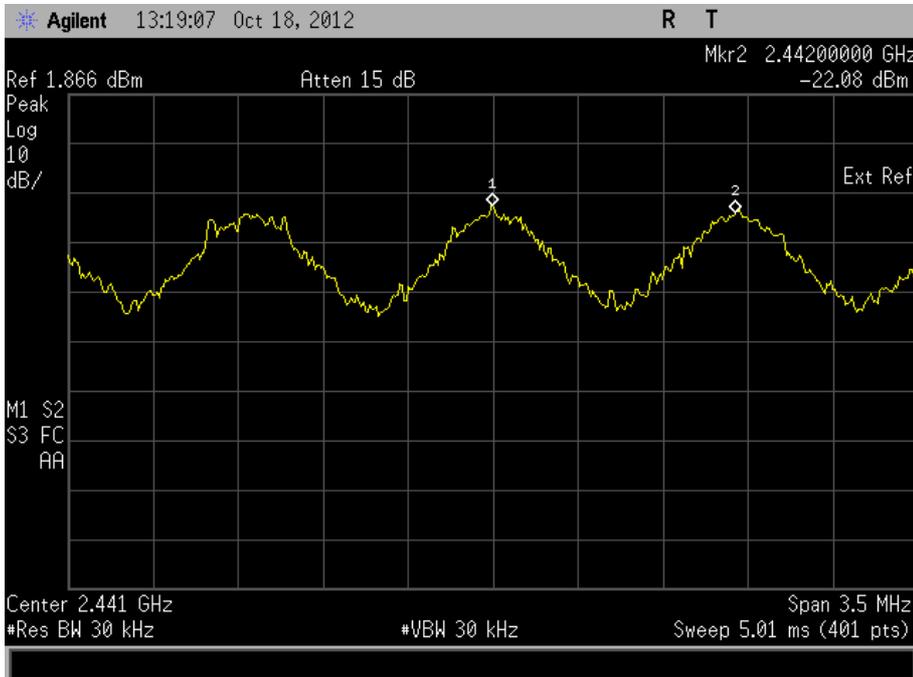

Limit Clause

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.

The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



Product Service

2.3 FREQUENCY HOPPING SYSTEMS - CHANNEL DWELL TIME AND NUMBER OF HOPPING CHANNELS

2.3.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (a)(1)(iii)

2.3.2 Equipment Under Test and Modification State

CDMA SHT21 S/N: IMEI 004401114403781 - Modification State 0

2.3.3 Date of Test

18 October 2012

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

DH1


The Bluetooth system hops at a rate of 1600 times per second. Thus, this equates to 1600 timeslots in 1 second.

The DH1 data rate operates on a Transmit on 1 timeslot and Receive on 1 timeslot basis. Thus, in 1 second, there are 800 Transmit timeslots and 800 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

In 1 transmit timeslot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

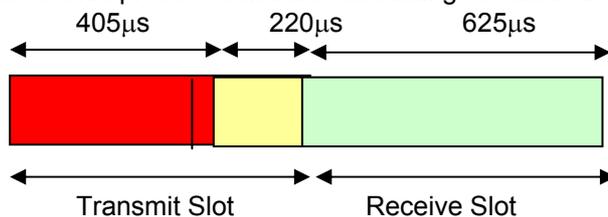



Product Service

DH1 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle

So, with 800 Tx and 800 Rx timeslots, the transmitter is on for $800 \times 405\mu s = 0.324$ seconds.

$$\therefore \frac{\text{Total Tx Time On}}{\text{No of Channels}} = \frac{0.324}{80} = 4.05\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 4.05\text{ms} = 0.1296 \text{ seconds}$$

DH3


With data rate DH3, the data payload is higher and can use up to 3 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 3 slots, (ie. no receive slot in-between the 3 transmit slots). The $220\mu s$ off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 3 transmit timeslots. 2 are $625\mu s$ long and the final slot is transmitting for $405\mu s$.

The DH3 data rate operates on a Transmit on 3 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1200 Transmit timeslots and 400 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu s$$

The first 2 Transmit timeslots are transmitting for the complete $625\mu s$. In the third transmit slot, the transmit on time is only $405\mu s$. $220\mu s$ is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

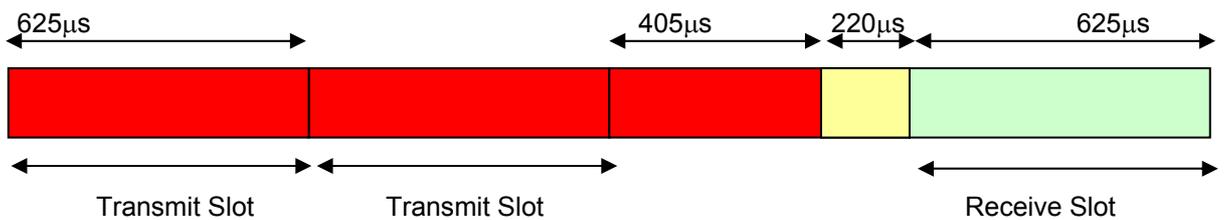



Product Service

DH3 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) = 1.655\text{ms}$$

So:

$$\begin{aligned} 800 \times 625\mu\text{s} &= 0.5 \text{ seconds} \\ 400 \times 405\mu\text{s} &= 0.162 \text{ seconds} \end{aligned}$$

Thus: $0.5 + 0.162 = 0.662 \text{ seconds}$

$$\therefore \frac{\text{Total Tx Time On}}{\text{No Of Channels}} = \frac{0.662}{80} = 8.275\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 8.275\text{ms} = 0.2648 \text{ seconds}$$

DH5


With data rate DH5, the data payload is higher and can use up to 5 timeslots. When more than one timeslot is used, the frequency does not hop and transmission is continuous on all 5 slots, (ie. no receive slot in-between the 5 transmit slots). The 220µs off time for synthesizer re-tuning at the end of a slot is only used on the final slot. Thus, for one cycle, there are 5 transmit timeslots. 4 are 625µs long and the final slot is transmitting for 405µs.

The DH5 data rate operates on a Transmit on 5 timeslots and Receives on 1 timeslot basis, (assuming maximum data payload). The frequency-hopping rate is the same. Thus, in 1 second, there are 1333.3 Transmit timeslots and 266.7 Receive timeslots.

Thus:

$$1 \text{ Timeslot} = \frac{1}{1600} = 625\mu\text{s}$$

The first 4 Transmit timeslots are transmitting for the complete 625µs. In the fifth transmit slot, the transmit on time is only 405µs. 220µs is reserved as off time for the synthesizer to re-tune ready for the next transmit frequency. The following timeslot is a receive slot. This process continues assuming the data rate remains the same.

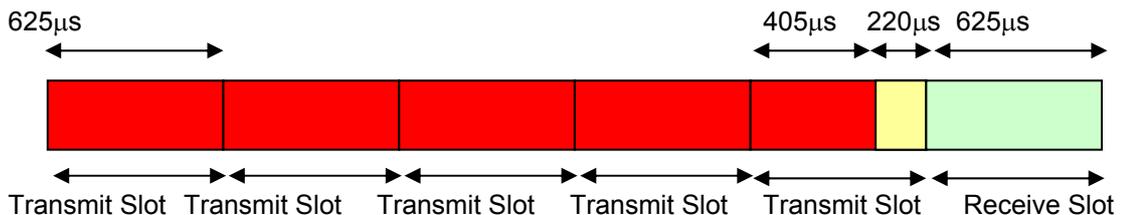



Product Service

DH5 Timeslot Arrangement Showing One Complete Transmit and Receive Cycle, (Maximum Payload)

Thus, the transmitter for one complete transmit and receive cycle would be on for:

$$\text{Tx} \quad (2 \times 625\mu\text{s}) + (1 \times 405\mu\text{s}) \quad = \quad 2.905\text{ms}$$

So:

$$1066.7 \times 625\mu\text{s} \quad = \quad 0.666 \text{ seconds}$$

$$266.7 \times 405\mu\text{s} \quad = \quad 0.108 \text{ seconds}$$

$$\text{Thus:} \quad 0.666 + 0.108 = 0.774 \text{ seconds}$$

$$\therefore \quad \frac{\text{Total Tx Time On}}{\text{No Of Channels}} \quad = \quad \frac{0.774}{80} \quad = \quad 9.675\text{ms}$$

So, in 32 seconds, the transmitter dwell time per channel is:

$$32 \times 9.675\text{ms} = \quad 0.31 \text{ seconds}$$

2.3.6 Environmental Conditions

Ambient Temperature 20.6°C
Relative Humidity 47.0%



Product Service


2.3.7 Test Results

4.0 V DC Supply

Channel Dwell Time

DH1

0.4 ms

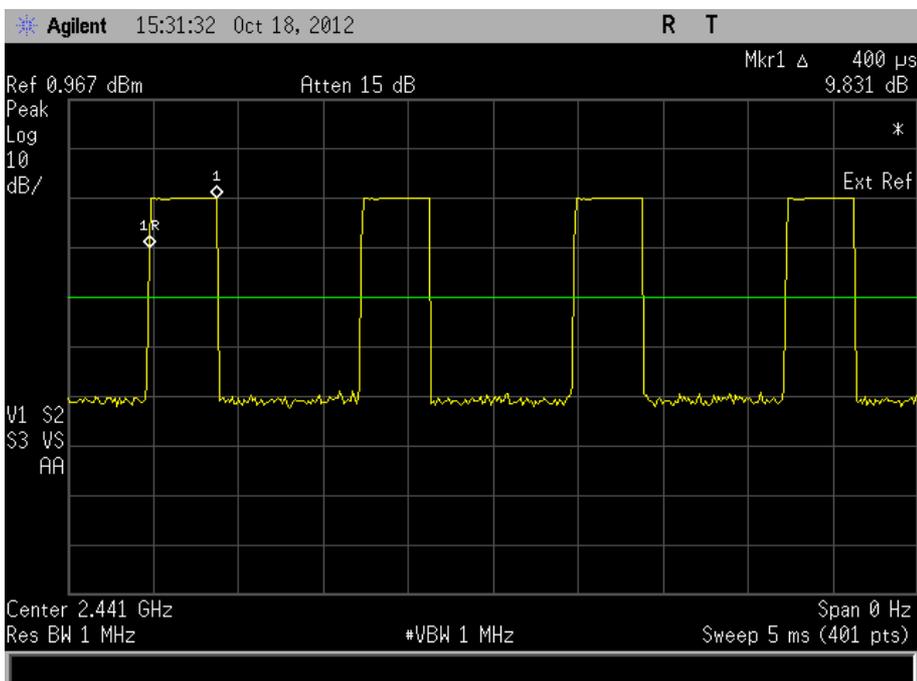




Product Service


DH3

0.4 ms

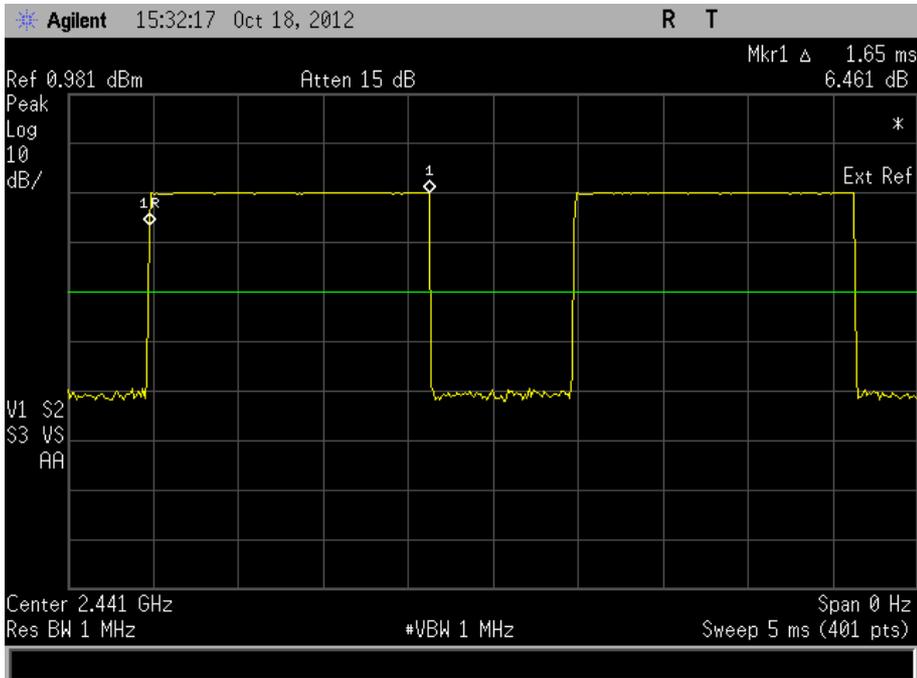

DH5

2.9 ms

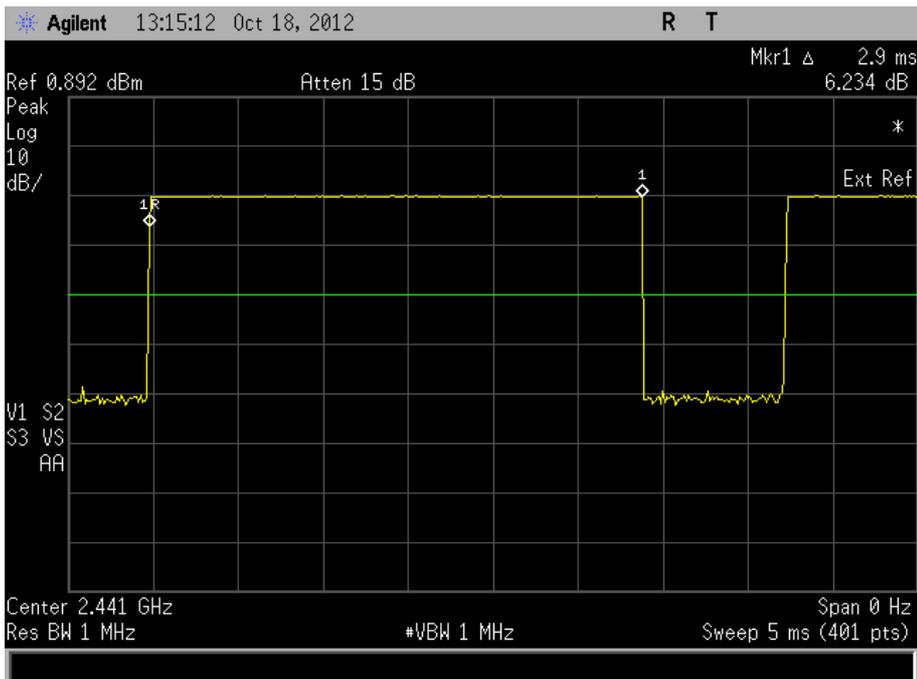




Product Service

Limit

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.

Number of Hopping Channels

79

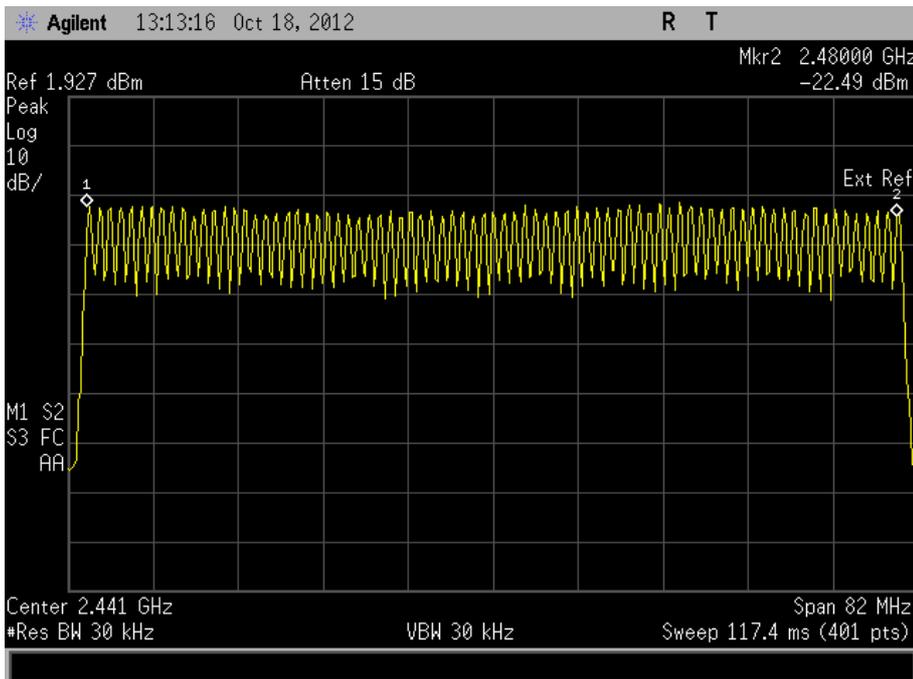

Limit

≥ 15 channels



2.4 MAXIMUM PEAK CONDUCTED OUTPUT POWER

2.4.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(3)

2.4.2 Equipment Under Test and Modification State

CDMA SHT21 S/N: IMEI 004401114403781 - Modification State 0

2.4.3 Date of Test

18 October 2012 & 29 October 2012

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Peak Power Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a reference level offset was entered to account for the measurement path loss. The measurement bandwidth was set according to the signal being measured and the peak and average levels were recorded.

2.4.6 Environmental Conditions

Ambient Temperature	22.9 - 23.4°C
Relative Humidity	48.5 - 51.2%



Product Service

2.4.7 Test Results

4.0 V DC Supply

Packet Type	Maximum Peak Conducted Output Power					
	dBm			mW		
	2402 MHz	2441 MHz	2480 MHz	2402 MHz	2441 MHz	2480 MHz
DH1	-3.52	-4.71	-4.80	0.000303	0.000019	0.000015
DH3	-0.20	-1.17	-1.30	0.95	0.76	0.74
DH5 (worst)	-0.05	-1.46	-0.93	0.98	0.71	-0.80

Limit Clause

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



2.5 EIRP PEAK POWER

2.5.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (b)(4)

2.5.2 Equipment Under Test and Modification State

CDMA SHT21 S/N: IMEI 004401114403831 - Modification State 0

2.5.3 Date of Test

22 October 2012

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Procedure

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a resolution bandwidth and video bandwidth of 1 MHz were used to perform the measurement. The level on the spectrum analyser was maximised by rotating the EUT 360° and a height search of the measuring antenna. A substitution was then performed using a substitution antenna and signal generator.

This level was maximised by adjusting the height of the measuring antenna once more. The level from the signal generator was then adjusted to achieve the same raw result as with the EUT. This level was then corrected to account for cable loss and antenna factor. If applicable, a peak power analyser was also used to obtain a correction factor for wideband signals such as WLAN.

A calculation was then performed to obtain the final figure.

2.5.6 Environmental Conditions

Ambient Temperature	21.2°C
Relative Humidity	58.0%




Product Service

2.5.7 Test Results

2402 MHz

EIRP (dBm)	EIRP (mW)
-4.09	0.381

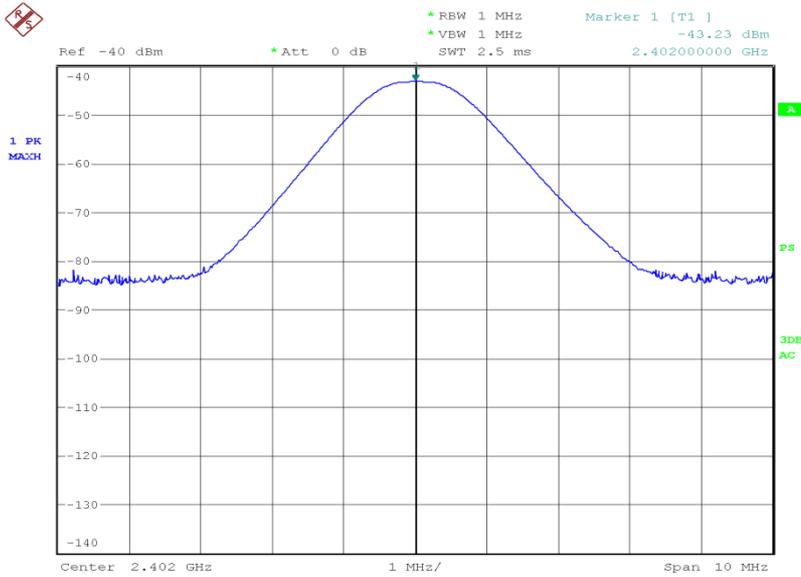


Date: 22.OCT.2012 18:09:09



Product Service

2441 MHz

EIRP (dBm)	EIRP (mW)
-4.31	0.371

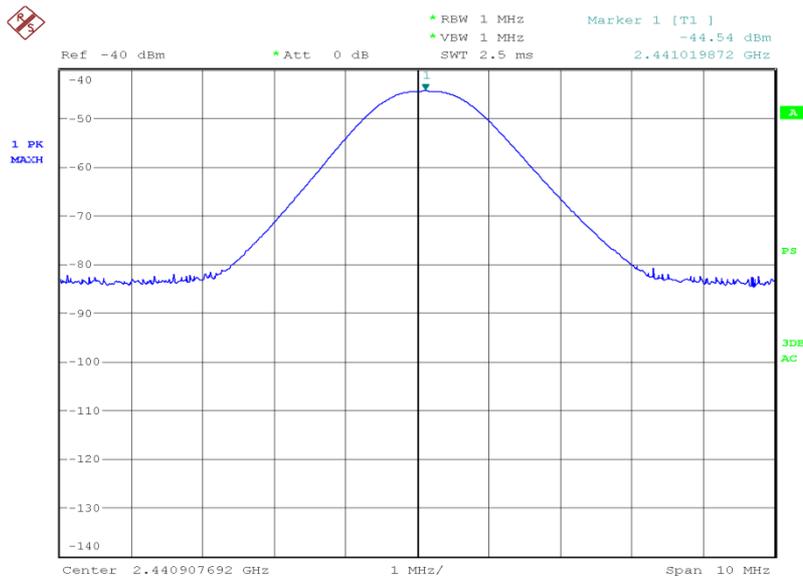


Date: 22.OCT.2012 18:51:12



Product Service

2480 MHz

EIRP (dBm)	EIRP (mW)
-4.45	0.359

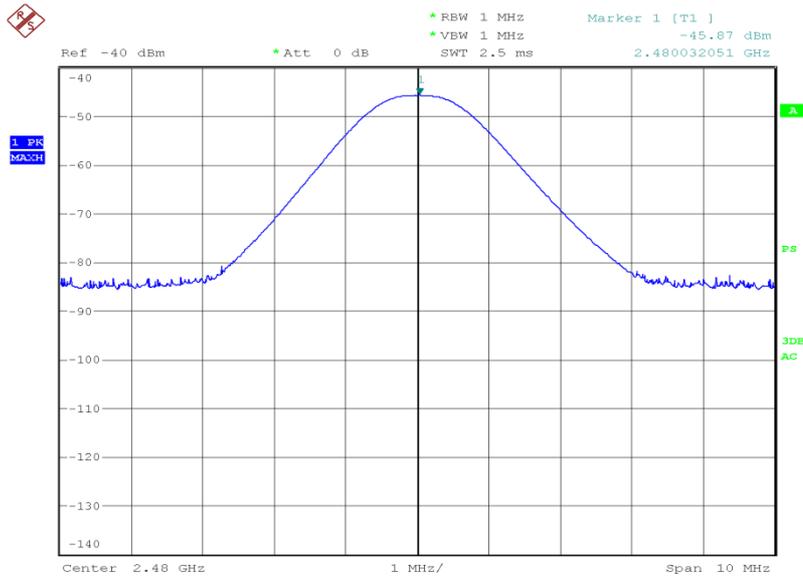

Date: 22.OCT.2012 19:08:36

Limit

EIRP (dBm)	EIRP (mW)
36.0	4000



2.6 SPURIOUS AND BAND EDGE EMISSIONS

2.6.1 Specification Reference

FCC CFR 47 Part 15C, Clause 15.247 (d)

2.6.2 Equipment Under Test and Modification State

CDMA SHT21 S/N: IMEI 004401114403831 - Modification State 0

2.6.3 Date of Test

22 October 2012, 23 October 2012 & 1 November 2012

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Procedure

For conducted emissions, the EUT was set to operate at maximum power on the worst case data rate. The test was performed on the bottom, middle and top channels. The test was performed from 9 kHz to 25 GHz. Firstly, the power of each fundamental frequency was measured in 100 kHz bandwidth and this was used to show a -20 dBc limit line on the trace. The measurement path loss in each relevant frequency band was measured and entered as a reference level offset.

For radiated emissions, the test method described above was also used. However, the measurement was performed from 30 MHz to 25 GHz and the path loss is incorporated as a transducer factor and entered into the spectrum analyser.

The band edge measurements were performed in accordance with ANSI C63.10, Clause 6.9.3. The results were analysed to ensure compliance with restricted bands. The EUT was set to the lowest and highest operating frequencies.

2.6.6 Environmental Conditions

Ambient Temperature	21.2 - 23.6°C
Relative Humidity	31.1 - 58.0%



Product Service

2.6.7 Test Results


4.0 V DC Supply

Spurious Conducted Emissions

DH5

2402 MHz


9 kHz to 4 GHz

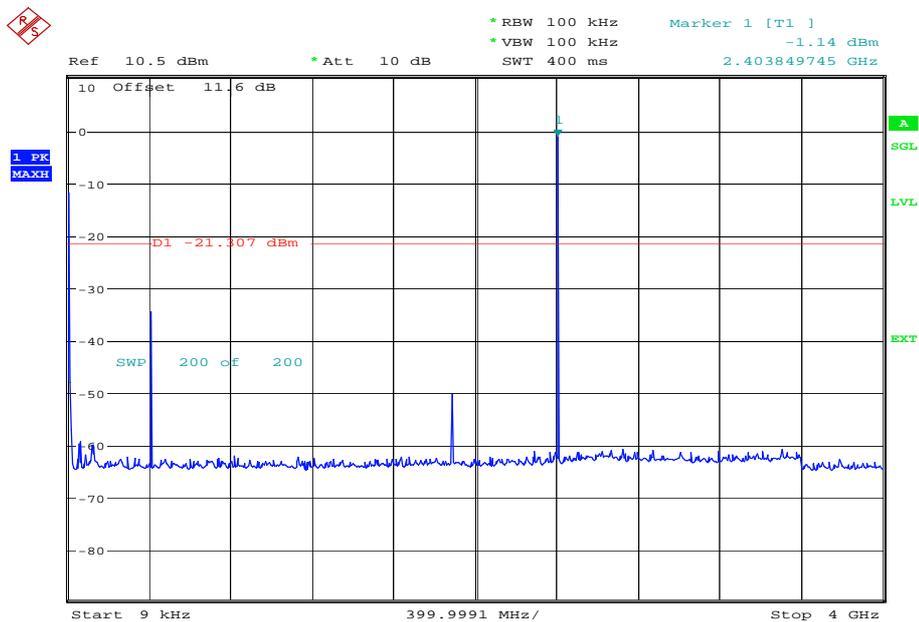

Date: 1.NOV.2012 18:03:43




4 GHz to 12 GHz

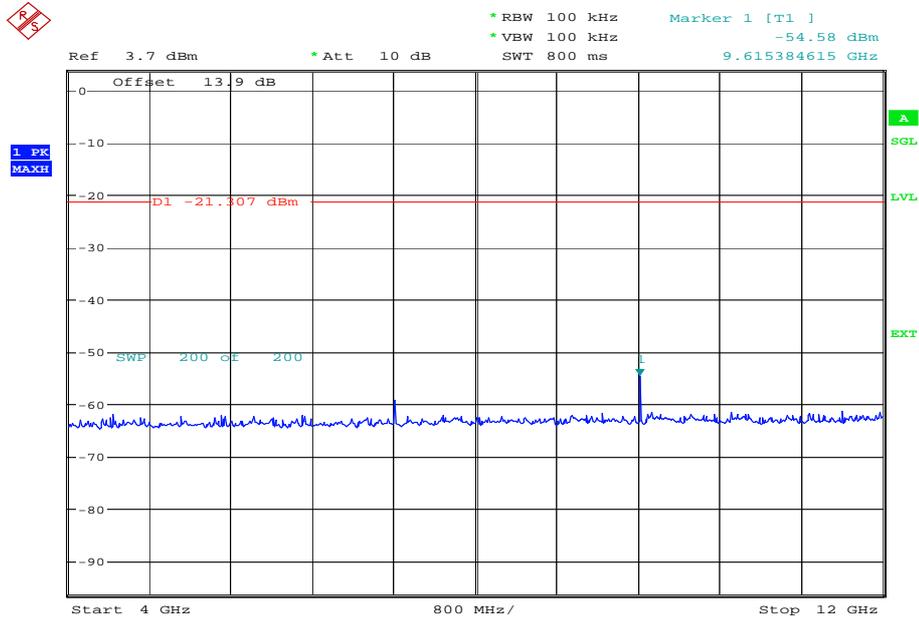

Date: 1.NOV.2012 18:14:57

12 GHz to 18 GHz

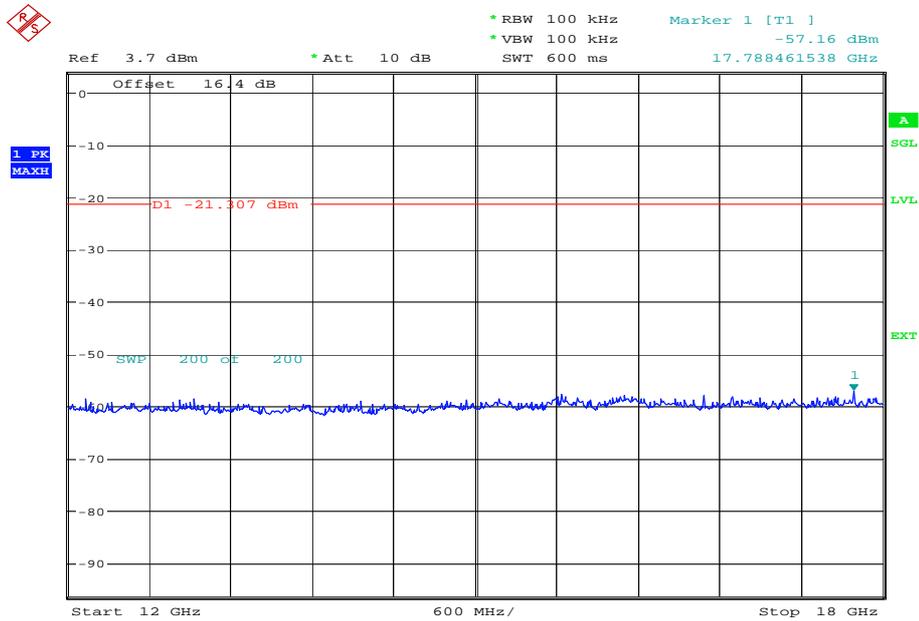


Date: 1.NOV.2012 18:17:26



Product Service


18 GHz to 25 GHz

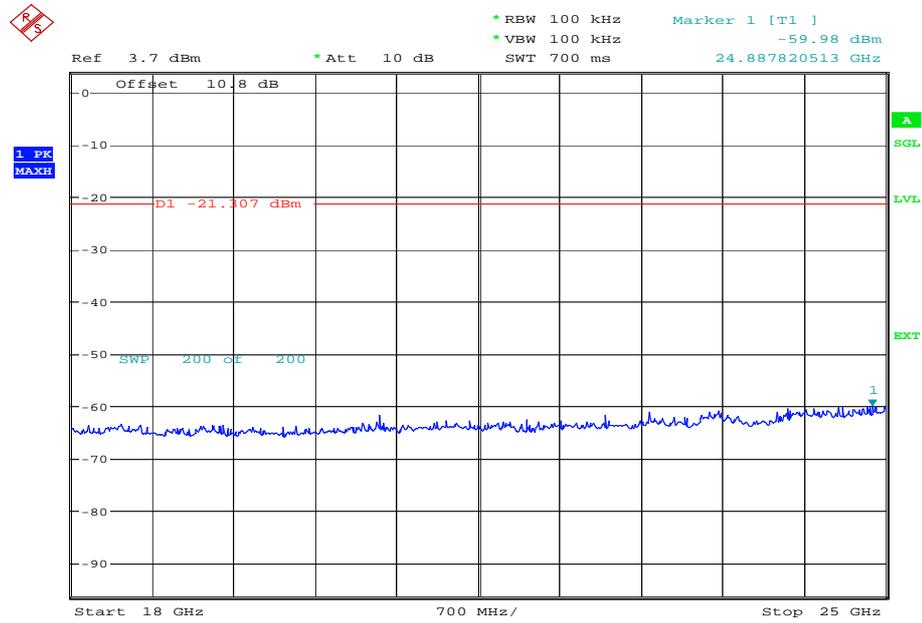

Date: 2.NOV.2012 10:02:39

2441 MHz


9 kHz to 4 GHz

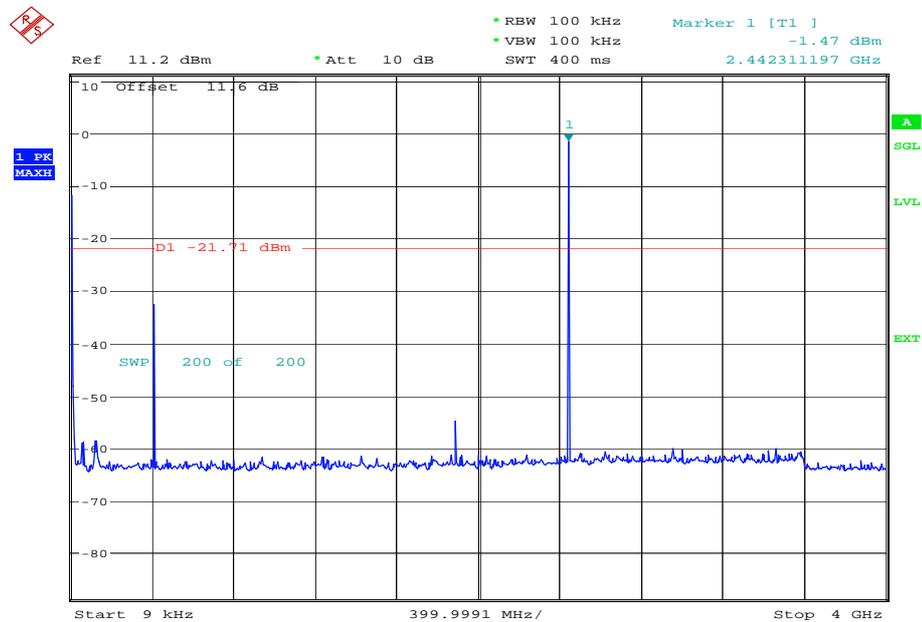

Date: 1.NOV.2012 18:06:21




4 GHz to 12 GHz

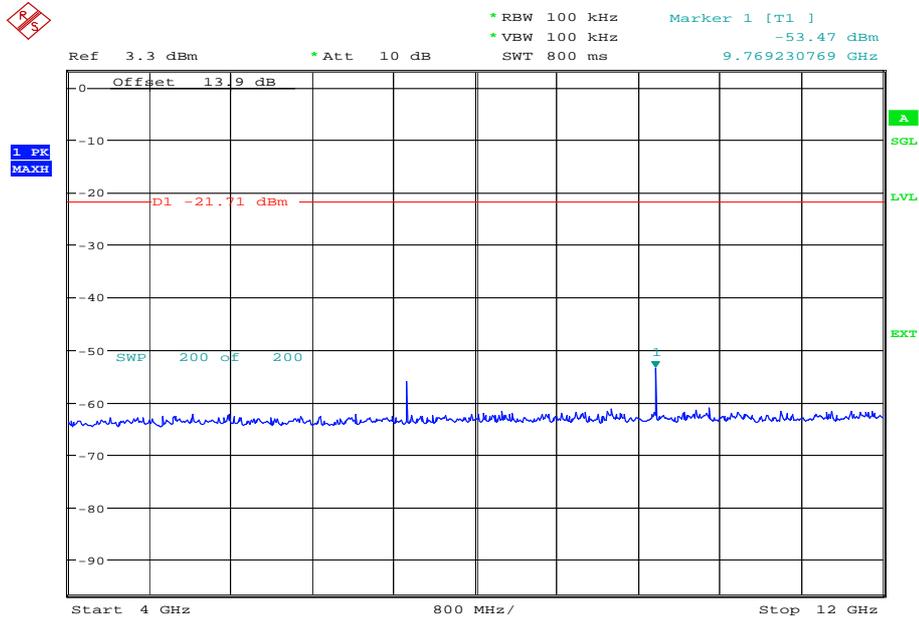

Date: 1.NOV.2012 18:20:53


12 GHz to 18 GHz

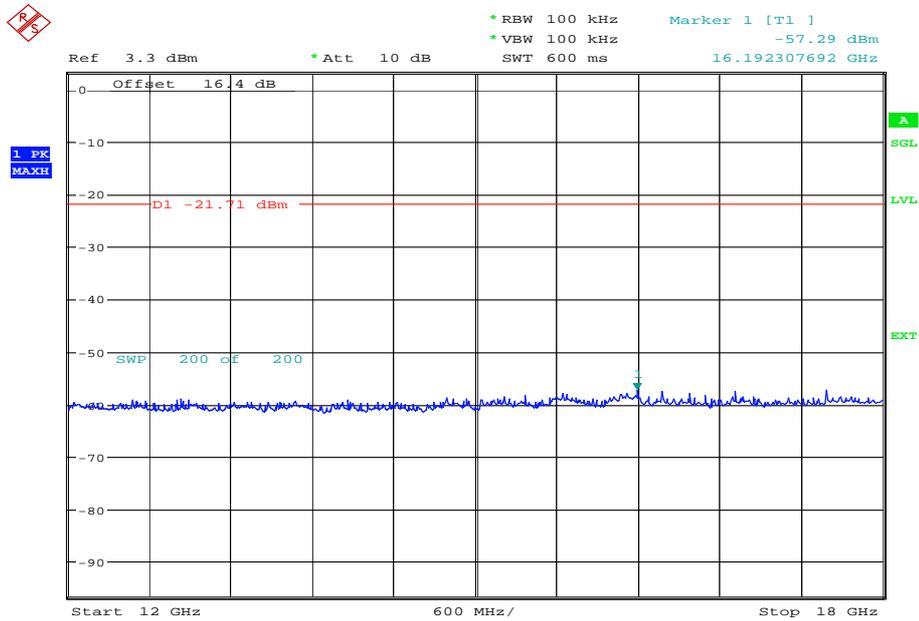

Date: 1.NOV.2012 18:23:22




18 GHz to 25 GHz

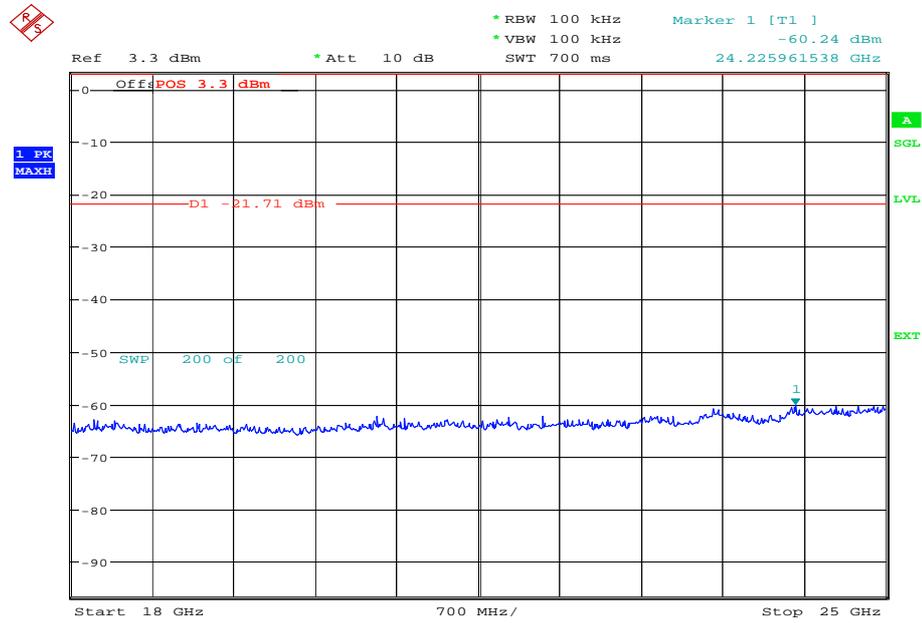

Date: 2.NOV.2012 10:10:23

2480 MHz


9 kHz to 4 GHz

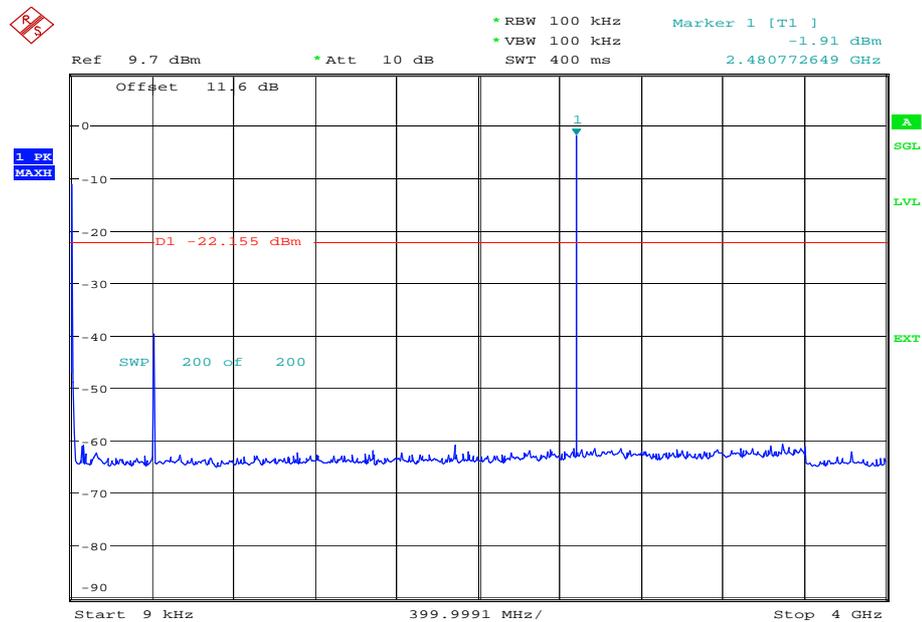

Date: 1.NOV.2012 18:08:59




4 GHz to 12 GHz

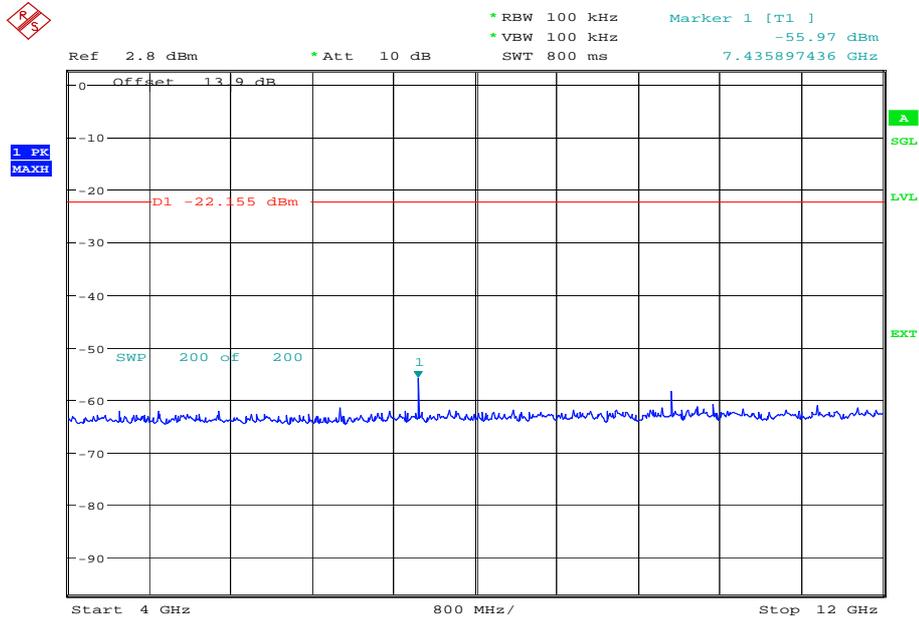

Date: 1.NOV.2012 18:26:51


12 GHz to 18 GHz

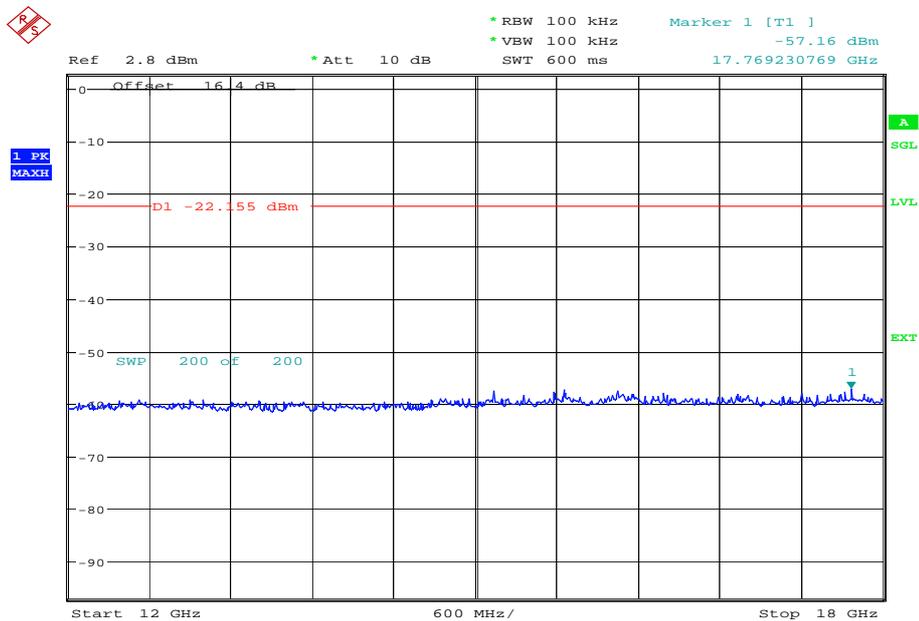

Date: 1.NOV.2012 18:29:19



18 GHz to 25 GHz

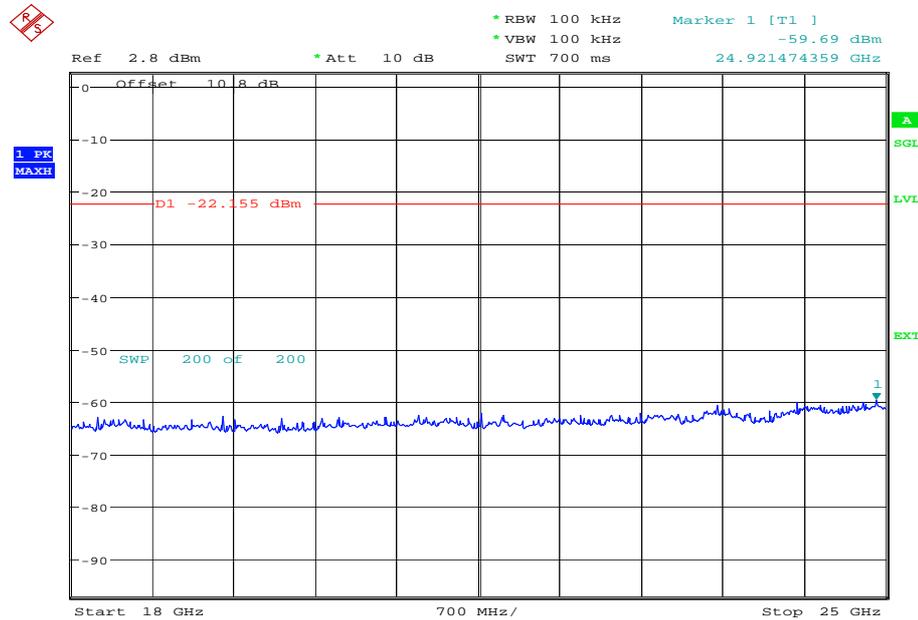

Date: 2.NOV.2012 10:13:44

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.



Spurious Radiated Emissions

2402 MHz


30 MHz to 1 GHz

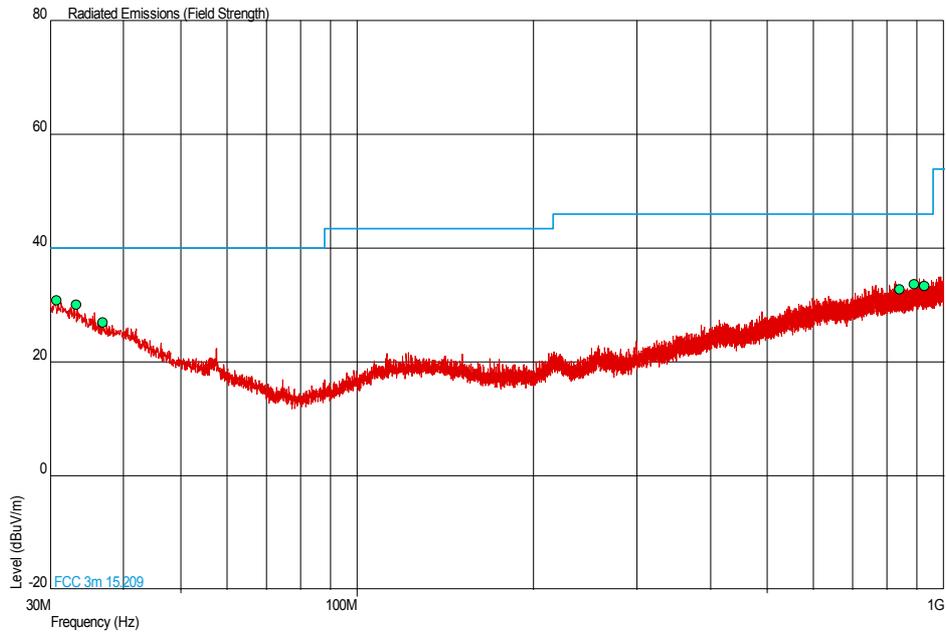

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.728	30.8	34.7	40.0	100	-9.2	65.3	180	1.00	Vertical
33.250	30.0	31.6	40.0	100	-10.0	68.4	180	1.00	Horizontal
36.887	27.0	22.4	40.0	100	-13.0	77.6	0	1.00	Horizontal
842.084	32.8	43.7	46.0	200	-13.2	156.3	0	1.00	Vertical
891.797	33.6	47.9	46.0	200	-12.4	152.1	180	1.00	Vertical
926.668	33.4	46.8	46.0	200	-12.6	153.2	0	1.00	Vertical




1 GHz to 3 GHz

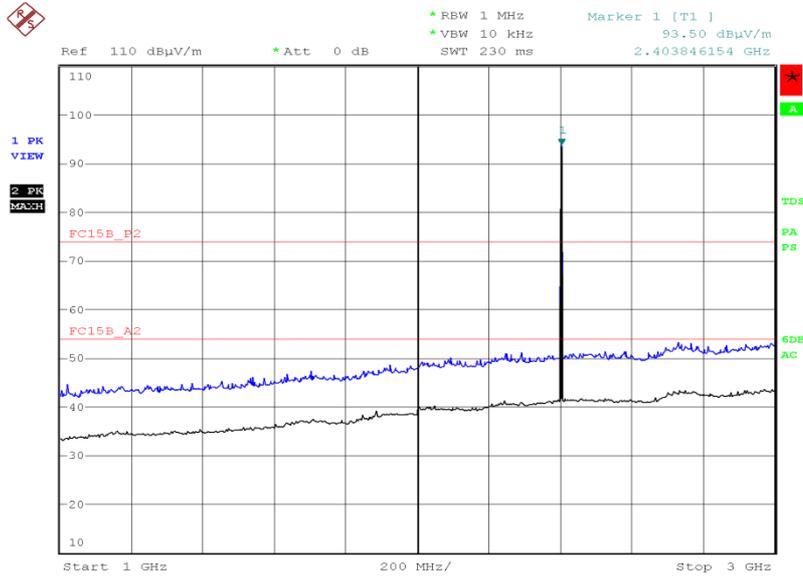

Date: 22.OCT.2012 18:22:58

3 GHz to 8 GHz

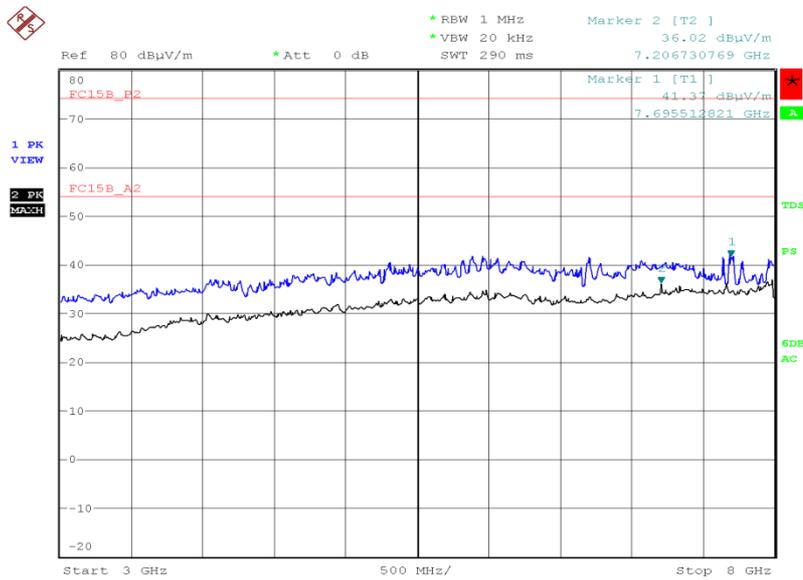


Date: 22.OCT.2012 20:55:14




Product Service

8 GHz to 18 GHz

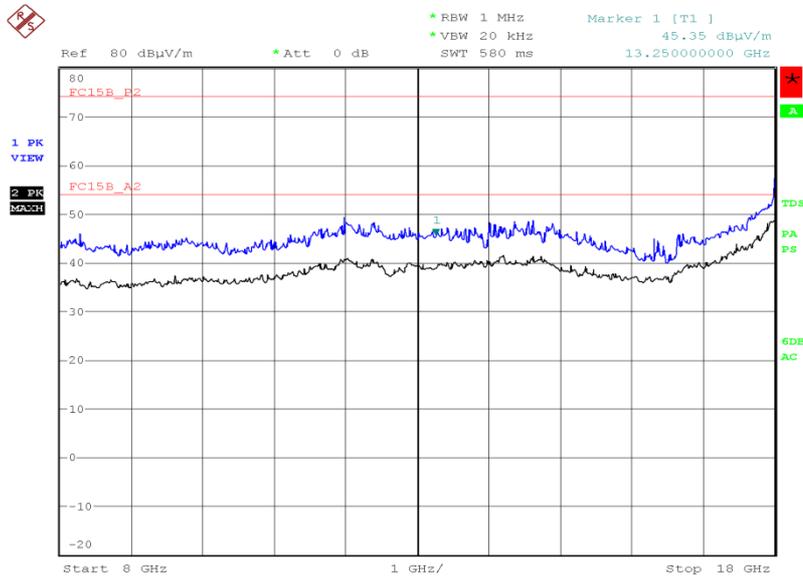

Date: 22.OCT.2012 21:12:14

18 GHz to 25 GHz

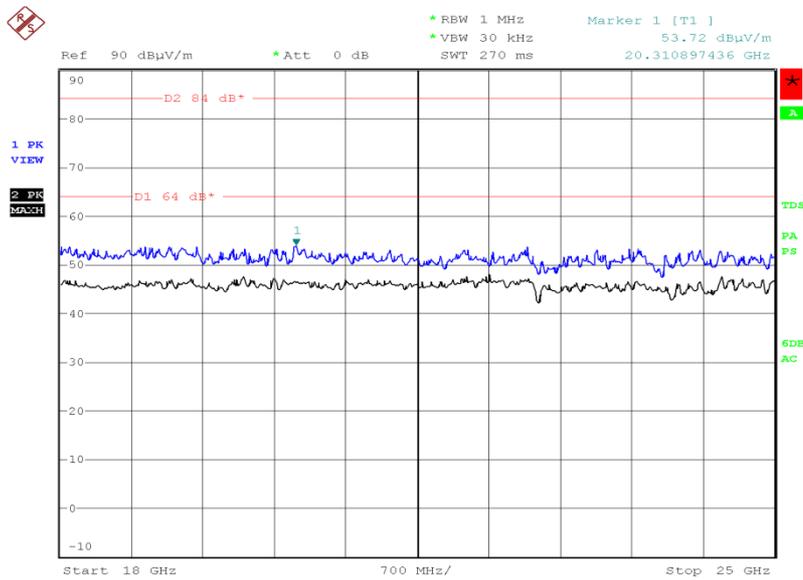

Date: 23.OCT.2012 21:49:42

Limit

Peak (dBμV/m)	Average (dBμV/m)
74.0	54.0




Product Service

Band Edge Emissions

2402 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Vertical	49.74	38.70

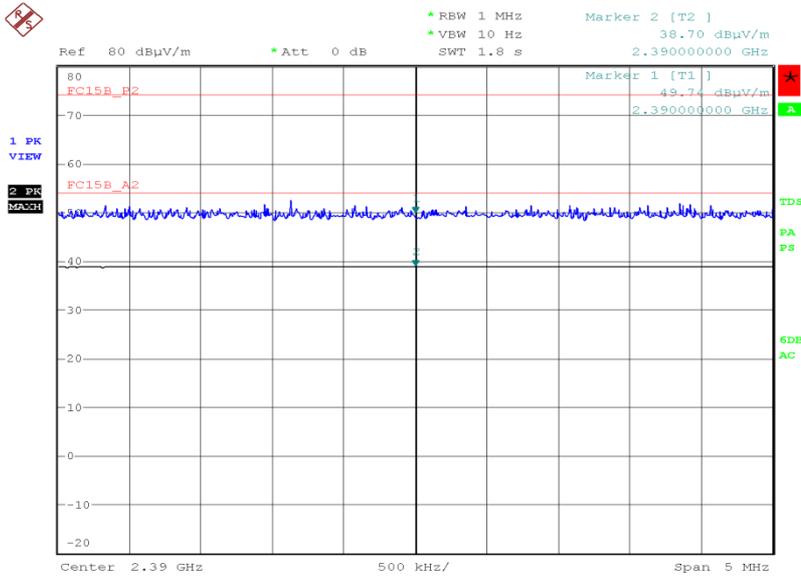


Date: 22.OCT.2012 18:14:48



2480 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	50.29	38.38

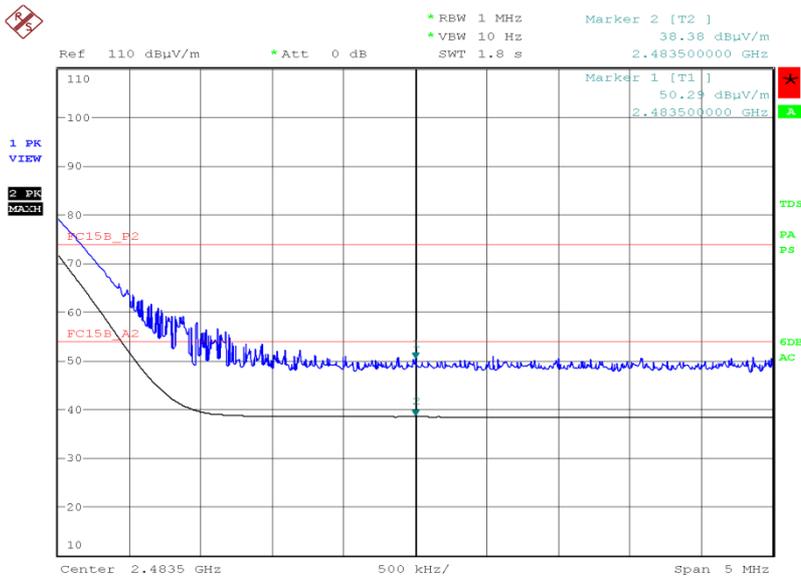

Date: 22.OCT.2012 20:17:34

Limit

Peak (dBµV/m)	Average (dBµV/m)
74.0	54.0



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 – AC Line Conducted Emissions					
LISN (1 Phase)	Chase	MN 2050	336	12	23-Mar-2013
Transient Limiter	Hewlett Packard	11947A	1032	12	28-Jun-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
Section 2.2 - Frequency Hopping Systems - 20dB Bandwidth and Channel Separation					
RF Coupler	TUV SUD Product Service	TUV	415	-	TU
Broadband Resistive Power Divider	Weinschel	1506A	601	12	2-Dec-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jul-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Multimeter	Iso-tech	IDM101	2424	12	10-Sep-2013
Power Supply	Iso-tech	IPS 2010	2439	-	O/P Mon
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	27-Jun-2013
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Vector Signal Generator	Rohde & Schwarz	SMU 200A	3493	12	19-Nov-2012
Section 2.3 - Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels					
Broadband Resistive Power Divider	Weinschel	1506A	601	12	2-Dec-2012
Spectrum Analyser	Hewlett Packard	E4407B	1154	12	17-Jul-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Power Supply	Iso-tech	IPS 2010	2439	-	O/P Mon
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Vector Signal Generator	Rohde & Schwarz	SMU 200A	3493	12	19-Nov-2012
Section 2.4 - Maximum Peak Conducted Output Power					
Broadband Resistive Power Divider	Weinschel	1506A	601	12	2-Dec-2012
Multimeter	Iso-tech	IDM101	2424	12	10-Sep-2013
Power Supply	Iso-tech	IPS 2010	2439	-	O/P Mon
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Vector Signal Generator	Rohde & Schwarz	SMU 200A	3493	12	19-Nov-2012
P-Series Power Meter	Agilent	N1911A	3981	12	17-Sep-2013
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	17-Sep-2013
Section 2.5 - EIRP Peak Power					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	24-May-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturu GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturu GmbH	NCD	3917	-	TU



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.6 - Spurious and Band Edge Emissions					
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	13-Sep-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Filter (High Pass)	Lorch	SHP7-7000-SR	566	12	20-Feb-2013
Pre-Amplifier	Phase One	PS04-0086	1533	12	27-Sep-2013
Pre-Amplifier	Phase One	PSO4-0087	1534	12	28-Sep-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Test Receiver	Rohde & Schwarz	ESIB40	1934	12	25-Oct-2012
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	16-Apr-2013
'2.92mm' - '2.92mm' RF Cable (2m)	Rhophase	KPS-1503-2000-KPS	3694	12	25-Oct-2013
'2.92mm' - '2.92mm' RF Cable (2m)	Rhophase	KPS-1503-2000-KPS	3695	12	15-Oct-2013
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Low Noise Amplifier	Wright Technologies	APS04-0085	3969	-	TU

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Frequency Hopping Systems - Channel Dwell Time and Number of Hopping Channels	-
Frequency Hopping Systems - 20dB Bandwidth and Channel Separation	± 16.74 kHz
EIRP Peak Power	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
Maximum Peak Conducted Output Power	± 0.70 dB
Spurious and Band Edge Emissions	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
AC Line Conducted Emissions	± 3.2 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2012 TÜV SÜD Product Service