



Product Service

---

**Choose certainty.  
Add value.**

# Report On

FCC Testing of the  
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI)  
Cellular Phone with Bluetooth, WLAN and GPS  
In accordance with FCC CFR 47 Part 15C (WLAN)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00188

Document 75921586 Report 10 Issue 1

March 2013



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North, Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the  
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with Bluetooth, WLAN and GPS  
In accordance with FCC CFR 47 Part 15C (WLAN)

Document 75921586 Report 10 Issue 1

March 2013

PREPARED FOR

Sharp Communication Compliance Ltd  
Azure House  
Bagshot Road  
Bracknell  
Berkshire  
RG12 7QY

PREPARED BY

**Natalie Bennett**  
Senior Administrator (Technical)

APPROVED BY

**Mark Jenkins**  
Authorised Signatory

DATED

26 March 2013

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

R Henley

G Lawler



M Russell



## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Application Form ..... 7
1.4	Product Information ..... 12
1.5	Test Conditions ..... 12
1.6	Deviations from the Standard ..... 12
1.7	Modification Record ..... 12
<b>2</b>	<b>TEST DETAILS ..... 13</b>
2.1	AC Line Conducted Emissions ..... 14
2.2	Maximum Peak Conducted Output Power ..... 17
2.3	EIRP Peak Power ..... 21
2.4	Power Spectral Density ..... 31
2.5	Spurious and Band Edge Emissions ..... 65
2.6	6dB Bandwidth ..... 120
<b>3</b>	<b>TEST EQUIPMENT USED ..... 154</b>
3.1	Test Equipment Used ..... 155
3.2	Measurement Uncertainty ..... 158
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 159</b>
4.1	Accreditation, Disclaimers and Copyright ..... 160



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

FCC Testing of the  
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with  
Bluetooth, WLAN and GPS  
In accordance with FCC CFR 47 Part 15C (WLAN)



Product Service

## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with Bluetooth, WLAN and GPS to the requirements of FCC CFR 47 Part 15C.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	204SH
Serial Number(s)	IMEI 004401114727304 IMEI 004401114727023
Number of Samples Tested	2
Test Specification/Issue/Date	FCC CFR 47 Part 15C (2012)
Incoming Release Date	Application Form 01 March 2013
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	9557 27 February 2013
Start of Test	2 March 2013
Finish of Test	7 March 2013
Name of Engineer(s)	R Henley G Lawler M Russell
Related Document(s)	ANSI C63.10: 2009



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15C is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
802.11(b)				
2.1	15.207	AC Line Conducted Emissions	Pass	
2.2	15.247 (b)(3)	Maximum Peak Conducted Output Power	Pass	
2.3	15.247 (b)(4)	EIRP Peak Power	Pass	
2.4	15.247 (e)	Power Spectral Density	Pass	
2.5	15.247 (d)	Spurious and Band Edge Emissions	Pass	
2.6	15.247 (2)	6dB Bandwidth	Pass	
802.11(g)				
2.2	15.247 (b)(3)	Maximum Peak Conducted Output Power	Pass	
2.3	15.247 (b)(4)	EIRP Peak Power	Pass	
2.4	15.247 (e)	Power Spectral Density	Pass	
2.5	15.247 (d)	Spurious and Band Edge Emissions	Pass	
2.6	15.247 (2)	6dB Bandwidth	Pass	



Product Service

Section	Spec Clause	Test Description	Result	Comments/Base Standard
802.11(n)				
2.2	15.247 (b)(3)	Maximum Peak Conducted Output Power	Pass	
2.3	15.247 (b)(4)	EIRP Peak Power	Pass	
2.4	15.247 (e)	Power Spectral Density	Pass	
2.5	15.247 (d)	Spurious and Band Edge Emissions	Pass	
2.6	15.247 (2)	6dB Bandwidth	Pass	



Product Service

**1.3 APPLICATION FORM**

EQUIPMENT DESCRIPTION	
Model Name/Number	204SH
Part Number	
FCC ID (if applicable)	APYHRO00188
Industry Canada ID (if applicable)	
Technical Description (Please provide a brief description of the intended use of the equipment)	Quad-band WCDMA ( FDD I / FDD V / FDD VIII / FDD XI ) Cellular Phone with Bluetooth, WLAN and GPS

EXTREME TEMPERATURE RANGE over which the equipment is to be type tested	
<input type="checkbox"/> -20°C to +55°C	
<input checked="" type="checkbox"/> Other (2)	
<input type="checkbox"/> Not applicable (no extreme temperature testing required)	
Extreme temperature range for the host(s):	10C to 55C

- (2) The equipment shall be tested over the following temperature ranges :
- a) 0°C to +35°C for equipment for indoor use only, or intended for used in areas where the temperature is controlled within this range.
  - b) Over the extremes of the temperature range(s) of the declared host equipment(s) in case of plug-in radio devices.

TYPE OF ANTENNA	
<input checked="" type="checkbox"/> Integral	
Temporary RF connector provided:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<input type="checkbox"/> Antenna connector	
<input type="checkbox"/> Number of antenna assembly(ies) submitted	
Gain of the antenna intended for normal use:	
0 dBi for assembly identified as Bluetooth/WLAN	
dBi for assembly identified as	

TRANSMITTER TECHNICAL CHARACTERISTICS		
TRANSMITTER OPERATING FREQUENCY RANGE(S)		
	FCC and/or Industry Canada	EU
<b>Bluetooth</b>	2402 to 2480 MHz	2402 to 2480 MHz
<b>WLAN</b>	2412 to 2462 MHz	2412 to 2472 MHz
FCC and/or Industry Canada (only)		
Highest Internally Generated Frequency 1400 MHz		



SPREAD SPECTRUM PARAMETERS		
<input checked="" type="checkbox"/> <b>Bluetooth</b>	Version: 3.0 ( H/W : 2.1+EDR )	
FHSS: Channel <input checked="" type="checkbox"/> 79 Other	EDR <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
<b>Medium Access Protocol (Customer Declaration)</b>		
"We have implemented Bluetooth protocol which satisfies the medium access protocol requirement of EN 300 328".		
<input checked="" type="checkbox"/> <b>WLAN</b>		
IEEE 802.11(b) – DSSS <input checked="" type="checkbox"/>		
IEEE 802.11(g) – OFDM <input checked="" type="checkbox"/>		
IEEE 802.11(n) – OFDM <input checked="" type="checkbox"/>		
Supported Spatial Streams	2.4 GHz	5GHz
Transmitter (Tx)	1	0
Receiver (Rx)	1	0
GI (Guard Interval) <input checked="" type="checkbox"/> 800 ns <input type="checkbox"/> 400 ns		
Band Width <input checked="" type="checkbox"/> 20 MHz <input type="checkbox"/> 40 MHz		
<b>Medium Access Protocol (Customer Declaration)</b>		
"We have implemented IEEE 802.11 (b/g/n) protocol which satisfies the medium access protocol requirement of EN 300 328".		
<input type="checkbox"/> <b>Other Technology</b>		
<input type="checkbox"/> Direct Sequence	<input type="checkbox"/> Frequency Hopping	<input type="checkbox"/> Combined <input type="checkbox"/> Other
DSSS	Chip Sequence Length	bit
	Spectrum Width	MHz
FHSS	Total Number of Hops	
	Dwell Time	ms
	Bandwidth Per Hop	MHz
	Maximum Separation of Hops	MHz for ETSI EN 300 328
Other		
<b>Medium Access Protocol (Customer Declaration)</b>		
"We have implemented a protocol which satisfies the medium access protocol requirement of EN 300 328".		



<b>TRANSMITTER POWER CHARACTERISTICS</b>				
<b>Bluetooth</b>				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)	2.5m			W
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)	0.25m			W
Is transmitter intended for :				
Continuous duty		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Intermittent duty		<input type="checkbox"/>	Yes	<input type="checkbox"/> No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF		minutes
Is continuous operation possible for testing purposes?				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Is transmitter output power variable:				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on + Tx off))				
%				
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
dB per step				
<b>WLAN</b>				
Maximum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)	0.1			W
Minimum Rated Transmitter Output				
Effective radiated power (for equipment with antenna connector)				W
Effective radiated power (for equipment with integral antenna)				W
Is transmitter intended for :				
Continuous duty		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Intermittent duty		<input type="checkbox"/>	Yes	<input type="checkbox"/> No
If intermittent state DUTY CYCLE				
Transmitter ON	seconds	Transmitter OFF		minutes
Is continuous operation possible for testing purposes?				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
Is transmitter output power variable:				
		<input checked="" type="checkbox"/>	Yes	<input type="checkbox"/> No
State during the test:				
Transmitter duty cycle	Tx on	Seconds	Tx Off	Seconds
Duty cycle (Tx on / (Tx on + Tx off))				
%				
<input type="checkbox"/> Continuously variable		<input type="checkbox"/> Stepped		
dB per step				





Product Service

RECEIVER POWER SOURCE (4)				
<input type="checkbox"/> AC mains		State voltage		
AC supply frequency	(Hz)	VAC	Max Current	Hz
<input type="checkbox"/> Single phase		<input type="checkbox"/> Three phase		
And / Or				
<input type="checkbox"/> External DC supply				
Nominal voltage		Max Current		A
Extreme upper voltage		Extreme lower voltage		
Battery				
<input type="checkbox"/> Nickel Cadmium				
<input type="checkbox"/> Lead acid (Vehicle regulated)				
<input type="checkbox"/> Alkaline				
<input type="checkbox"/> Lithium				
<input type="checkbox"/> Other Details :				
	Volts nominal.			
End point voltage as quoted by equipment manufacturer				V

(4) If a transmitter and receiver use the same power source, this should be declared. In such cases only the box for the transmitter power source should be filled in.

AUTOMATIC EQUIPMENT SWITCH OFF	
If the equipment is designed to automatically switch off at a predetermined voltage level which is higher or lower in value than the battery minimum and minimum calculated values this shall be clearly stated.	
<input type="checkbox"/> Applies	V cut-off voltage
<input type="checkbox"/> Does not apply	

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature:  Name: Hiroyuki Uwatoko  
 Position held: Junior Manager Date: 01<sup>st</sup> March, 2013



Product Service

## **1.4 PRODUCT INFORMATION**

### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with Bluetooth, WLAN and GPS. A full technical description can be found in the manufacturer's documentation.

## **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

## **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard or test plan were made during testing.

## **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC Testing of the  
Sharp 204SH Quad-band WCDMA (FDD I / FDD V / FDD VIII / FDD XI) Cellular Phone with  
Bluetooth, WLAN and GPS  
In accordance with FCC CFR 47 Part 15C (WLAN)



## **2.1 AC LINE CONDUCTED EMISSIONS**

### **2.1.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.207

### **2.1.2 Equipment Under Test and Modification State**

204SH S/N: IMEI 004401114727304 - Modification State 0

### **2.1.3 Date of Test**

6 March 2013

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Test Procedure**

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.

### **2.1.6 Environmental Conditions**


Ambient Temperature	18.8°C
Relative Humidity	35.0%



2.1.7 Test Results

802.11(b)


Live Line

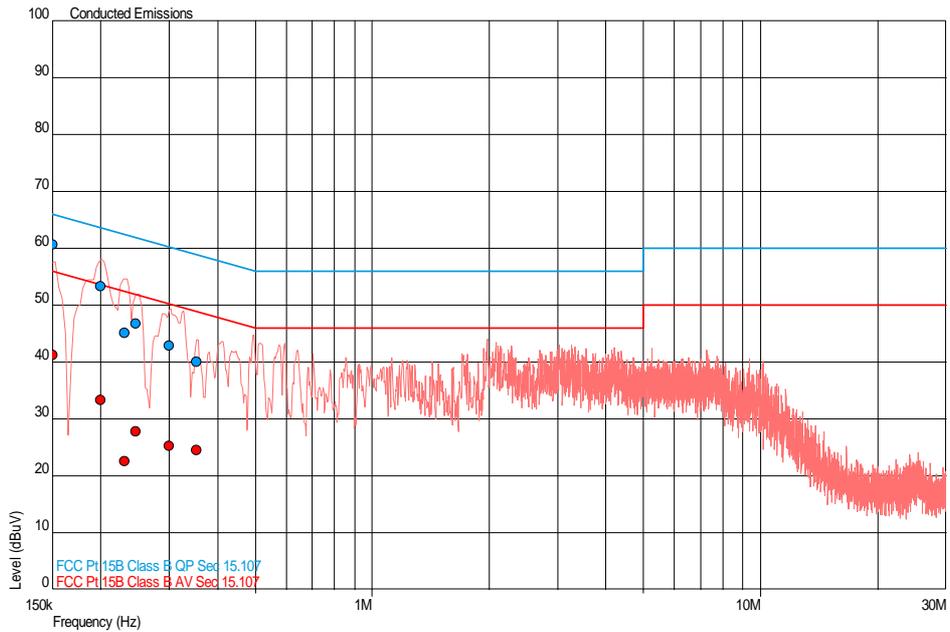

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	60.7	66.0	-5.3	41.2	56.0	-14.7
0.200	53.4	63.6	-10.3	33.3	53.6	-20.3
0.230	45.2	62.4	-17.3	22.6	52.4	-29.8
0.246	46.7	61.9	-15.1	27.9	51.9	-24.0
0.300	42.9	60.3	-17.3	25.3	50.3	-25.0
0.353	40.1	58.9	-18.8	24.5	48.9	-24.4



Neutral Line

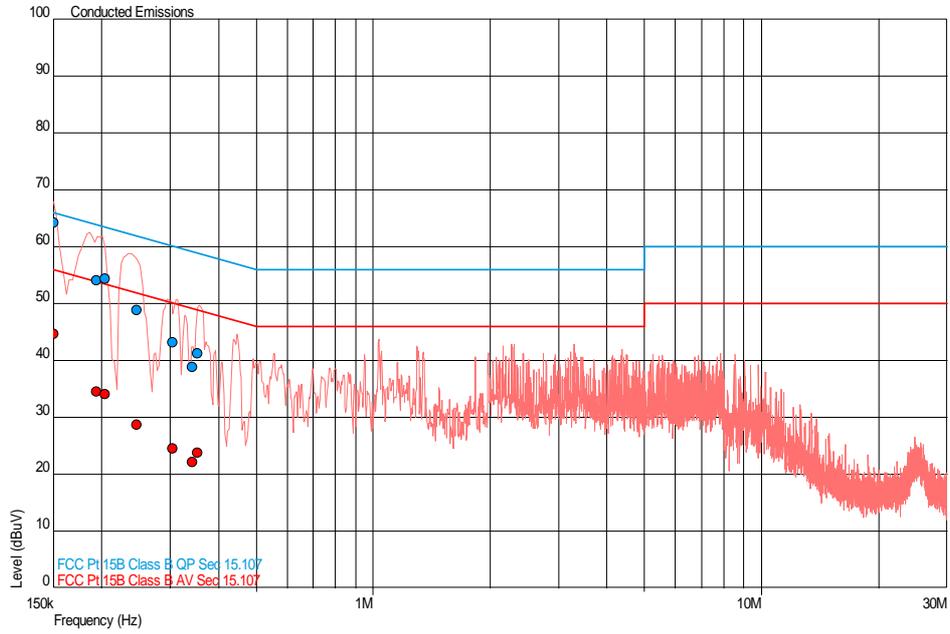

Frequency (MHz)	QP Level (dBµV)	QP Limit (dBµV)	QP Margin (dBµV)	AV Level (dBµV)	AV Limit (dBµV)	AV Margin (dBµV)
0.151	64.3	66.0	-1.7	44.6	56.0	-11.3
0.193	54.0	63.9	-9.8	34.5	53.9	-19.4
0.204	54.4	63.4	-9.1	34.1	53.4	-19.3
0.247	48.9	61.9	-12.9	28.8	51.9	-23.1
0.305	43.1	60.1	-17.0	24.5	50.1	-25.6
0.342	38.8	59.2	-20.3	22.2	49.2	-27.0
0.353	41.3	58.9	-17.6	23.9	48.9	-25.0



## **2.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER**

### **2.2.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (b)(3)

### **2.2.2 Equipment Under Test and Modification State**

204SH S/N: IMEI 004401114727023 - Modification State 0

### **2.2.3 Date of Test**

5 March 2013 & 6 March 2013

### **2.2.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.2.5 Test Procedure**

The EUT was transmitted at maximum power via a cable to the Peak Power Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a reference level offset was entered to account for the measurement path loss. The measurement bandwidth was set according to the signal being measured and the peak and average levels were recorded.

### **2.2.6 Environmental Conditions**

Ambient Temperature	24.8°C
Relative Humidity	29.1%



Product Service

**2.2.7 Test Results**

802.11(b)

4.0 V DC Supply

Modulation Data Rate (Mbps)	Maximum Peak Conducted Output Power					
	dBm			mW		
	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
1	19.02	19.19	19.30	79.85	82.90	85.10
2	18.82	19.20	19.16	76.29	83.10	82.41
5.5	18.90	19.20	19.15	77.70	83.13	82.18
11	18.88	19.14	19.22	77.28	82.11	83.63

Limit Clause

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



Product Service

802.11(g)

4.0 V DC Supply

Modulation Data Rate (Mbps)	Maximum Peak Conducted Output Power					
	dBm			mW		
	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
6	23.86	23.90	24.48	243.14	245.28	280.35
9	23.55	23.98	24.31	226.26	249.93	269.91
12	22.72	23.35	23.40	187.27	187.27	216.30
18	23.20	23.32	23.63	209.08	215.00	230.79
24	23.10	23.27	23.35	204.12	212.55	216.29
36	23.72	23.76	23.88	212.14	237.43	244.37
48	23.18	23.27	23.57	207.83	212.32	227.61
54	22.79	23.27	23.37	190.15	212.12	217.22

Limit Clause

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



Product Service

802.11(n)

4.0 V DC Supply

Modulation Data Rate (Mbps)	Maximum Peak Conducted Output Power					
	dBm			mW		
	2412 MHz	2437 MHz	2462 MHz	2412 MHz	2437 MHz	2462 MHz
6.5	23.50	24.04	23.77	223.83	253.54	238.29
13	23.87	24.28	24.41	243.61	267.95	275.84
19.5	23.30	23.49	23.62	208.75	223.60	230.35
26	22.89	23.75	23.48	194.67	236.95	222.79
39	22.72	23.51	23.37	186.96	224.18	217.32
52	22.58	23.57	23.50	181.23	227.49	223.69
58.5	23.01	23.34	23.69	199.87	215.69	234.02
65	23.02	23.39	23.57	200.35	218.17	227.74

Limit Clause

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



## **2.3 EIRP PEAK POWER**

### **2.3.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (b)(4)

### **2.3.2 Equipment Under Test and Modification State**

204SH S/N: IMEI 004401114727304 - Modification State 0

### **2.3.3 Date of Test**

2 March 2013

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.5 Test Procedure**

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen and a resolution bandwidth and video bandwidth of 1 MHz were used to perform the measurement. The level on the spectrum analyser was maximised by rotating the EUT 360° and a height search of the measuring antenna. A substitution was then performed using a substitution antenna and signal generator.

This level was maximised by adjusting the height of the measuring antenna once more. The level from the signal generator was then adjusted to achieve the same raw result as with the EUT. This level was then corrected to account for cable loss and antenna factor. If applicable, a peak power analyser was also used to obtain a correction factor for wideband signals such as WLAN.

A calculation was then performed to obtain the final figure.

### **2.3.6 Environmental Conditions**

Ambient Temperature	18.0°C
Relative Humidity	25.0%



Product Service


**2.3.7 Test Results**

802.11(b)

4.0 V DC Supply

2412 MHz

EIRP (dBm)	EIRP (mW)
15.74	37.50

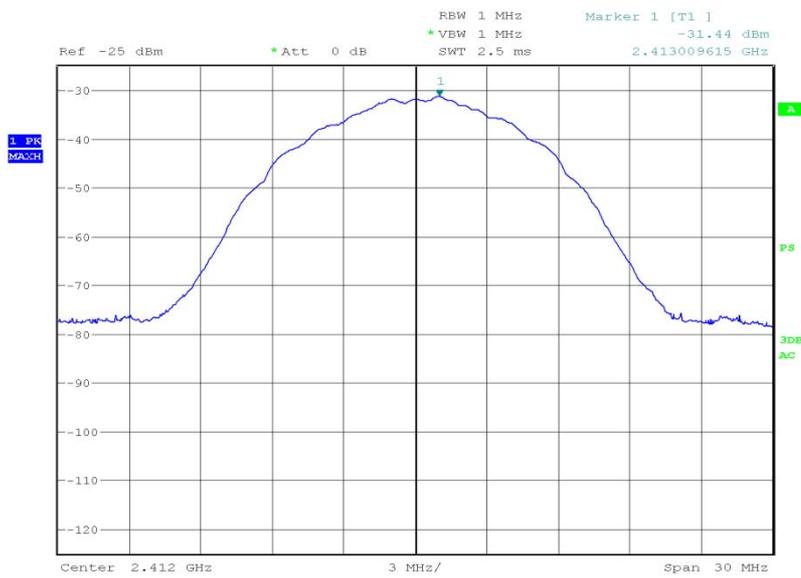


Date: 2.MAR.2013 16:42:50



Product Service

2437 MHz

EIRP (dBm)	EIRP (mW)
15.52	35.65

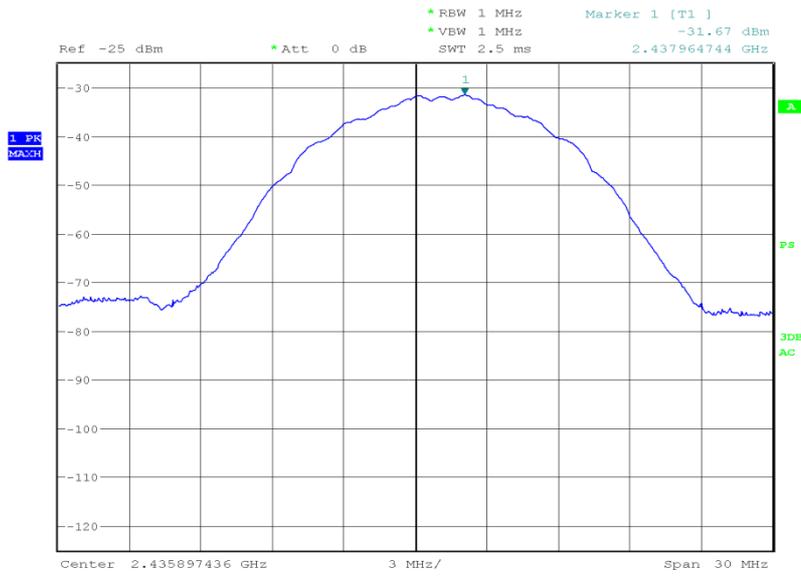


Date: 2.MAR.2013 17:08:49



Product Service

2462 MHz

EIRP (dBm)	EIRP (mW)
13.83	24.15

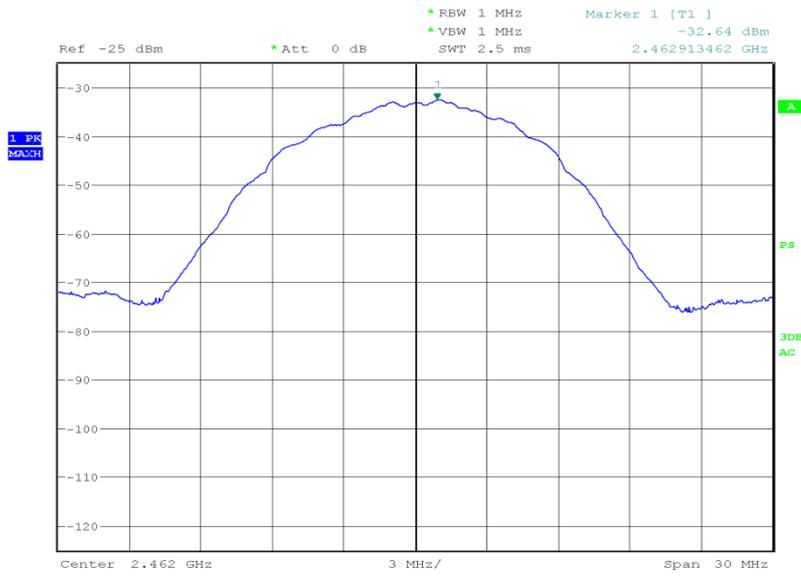

Date: 2.MAR.2013 17:14:04

Limit

EIRP (dBm)	EIRP (mW)
36.0	4000




Product Service

802.11(g)

4.0 V DC Supply

2412 MHz

EIRP (dBm)	EIRP (mW)
15.69	37.07

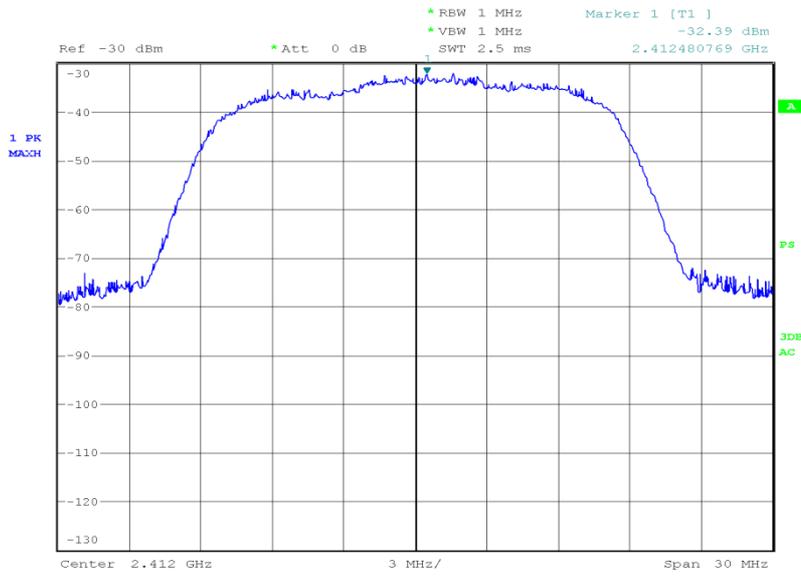


Date: 2.MAR.2013 17:46:13



Product Service

2437 MHz

EIRP (dBm)	EIRP (mW)
15.89	38.82

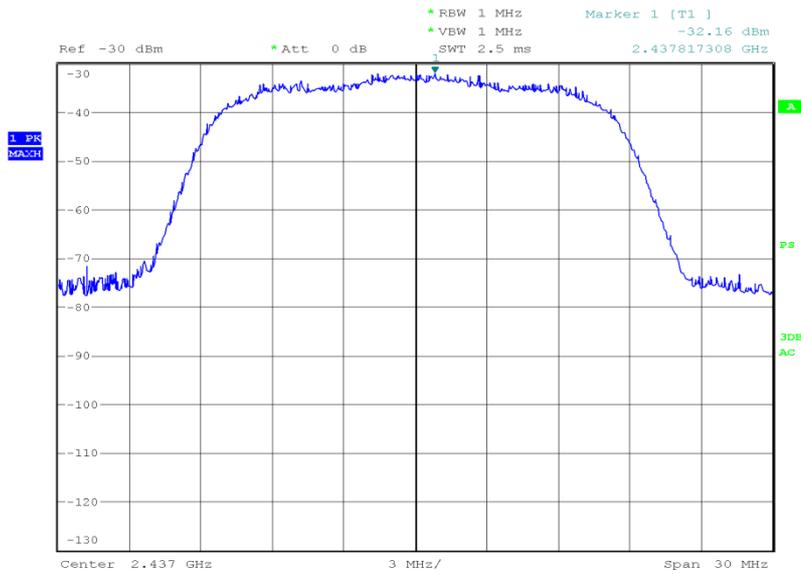


Date: 2.MAR.2013 10:32:40



2462 MHz

EIRP (dBm)	EIRP (mW)
14.55	28.51

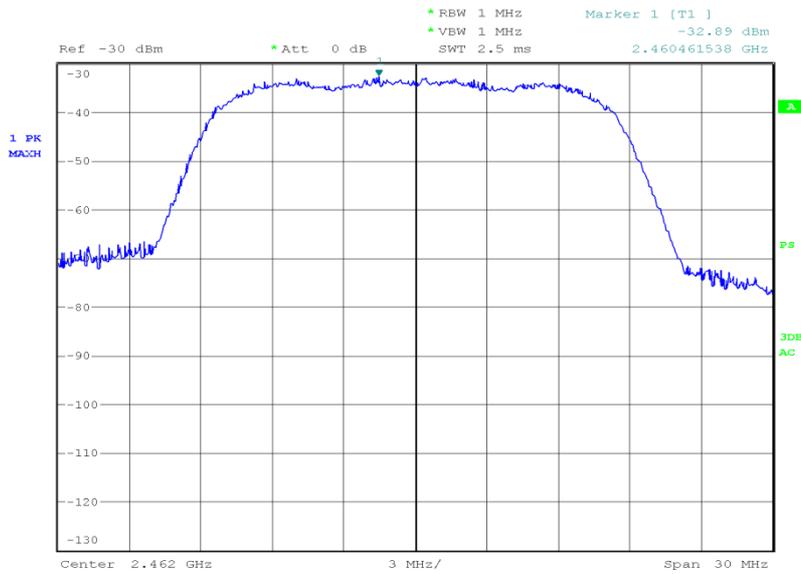

Date: 2.MAR.2013 10:38:23

Limit

EIRP (dBm)	EIRP (mW)
36.0	4000




Product Service

802.11(n)

4.0 V DC Supply

2412 MHz

EIRP (dBm)	EIRP (mW)
15.96	39.45

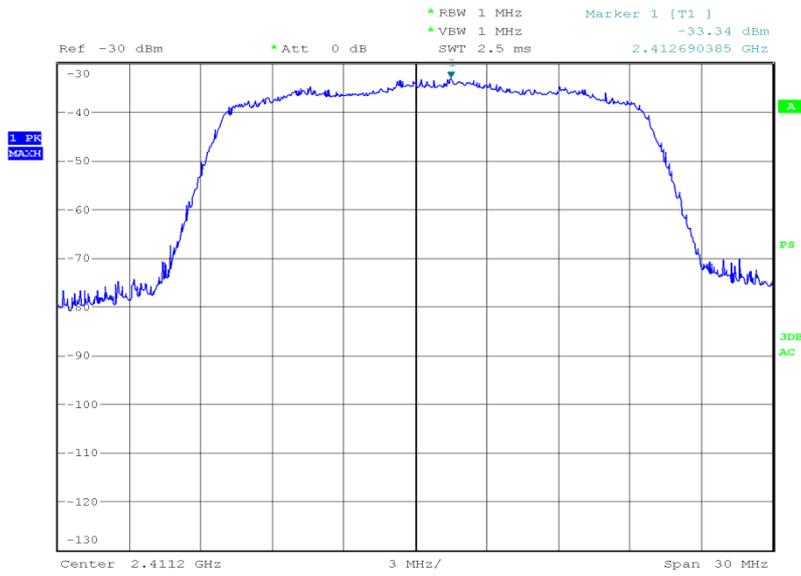


Date: 2.MAR.2013 20:14:24



Product Service

2437 MHz

EIRP (dBm)	EIRP (mW)
16.40	43.65

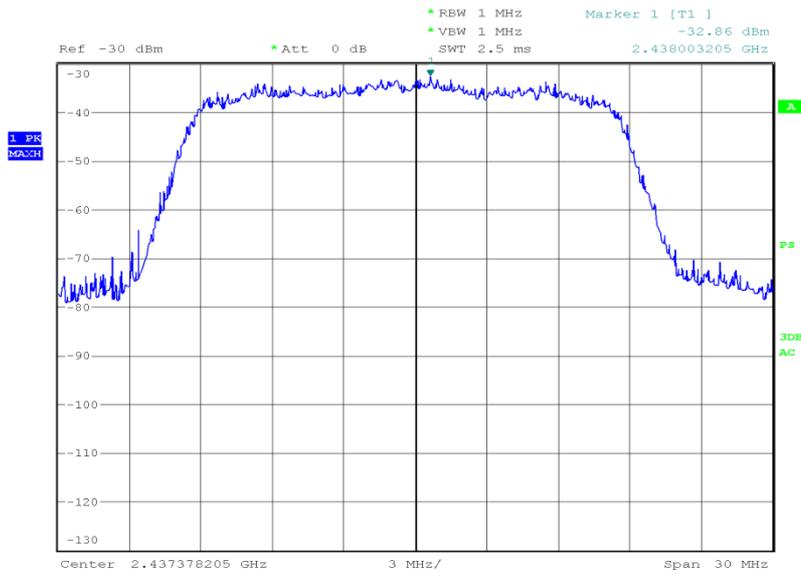


Date: 3.MAR.2013 00:35:16



Product Service

2462 MHz

EIRP (dBm)	EIRP (mW)
16.12	40.93

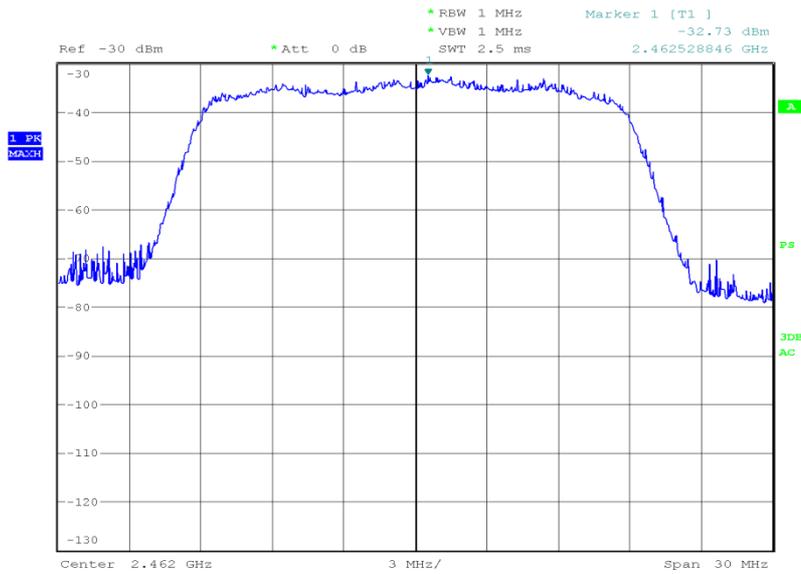

Date: 2.MAR.2013 19:55:24

Limit

EIRP (dBm)	EIRP (mW)
36.0	4000



## **2.4 POWER SPECTRAL DENSITY**

### **2.4.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (e)

### **2.4.2 Equipment Under Test and Modification State**

204SH S/N: IMEI 004401114727023 - Modification State 0

### **2.4.3 Date of Test**

5 March 2013 & 6 March 2013

### **2.4.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.5 Test Procedure**

The EUT was connected to a spectrum analyser via a 10 dB attenuator. The path loss was measured between the EUT and the spectrum analyser and entered as a reference level offset. The trace was set to max hold and using a peak detector the maximum response was established. With the spectrum analyser RBW at 3 kHz and VBW at 10 kHz, the power spectral density in a 3 kHz bandwidth was measured.

### **2.4.6 Environmental Conditions**

Ambient Temperature	24.8°C
Relative Humidity	29.1%



Product Service

**2.4.7 Test Results**

802.11(b)

4.0 V DC Supply


Frequency	Data Rate (Mbps)	Power Spectral Density in 3 kHz Bands (dBm)
2412 MHz	1	-5.03
	2	-4.19
	5	-4.48
	11	-6.12
2437 MHz	1	-3.72
	2	-4.93
	5	-5.41
	11	-6.13
2462 MHz	1	-4.48
	2	-5.28
	5	-6.16
	11	-5.88



Product Service


2412 MHz

1 Mbps

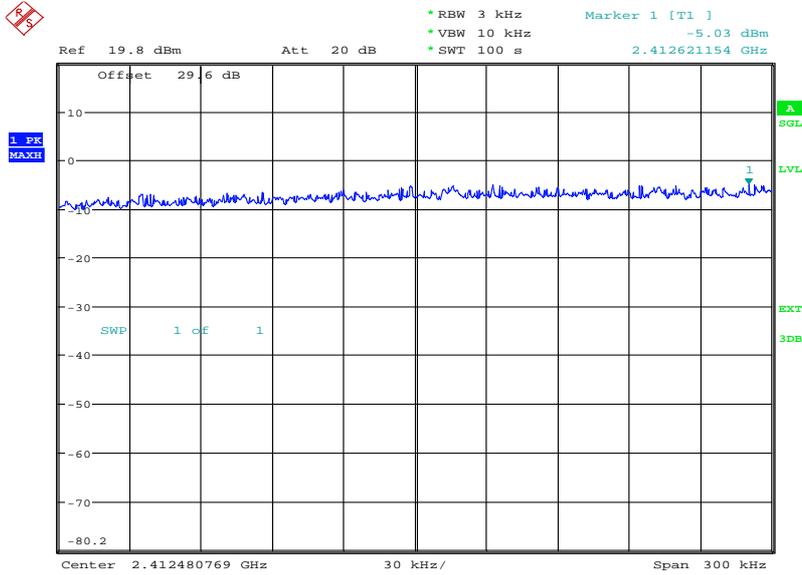

Date: 5.MAR.2013 12:30:42

2 Mbps

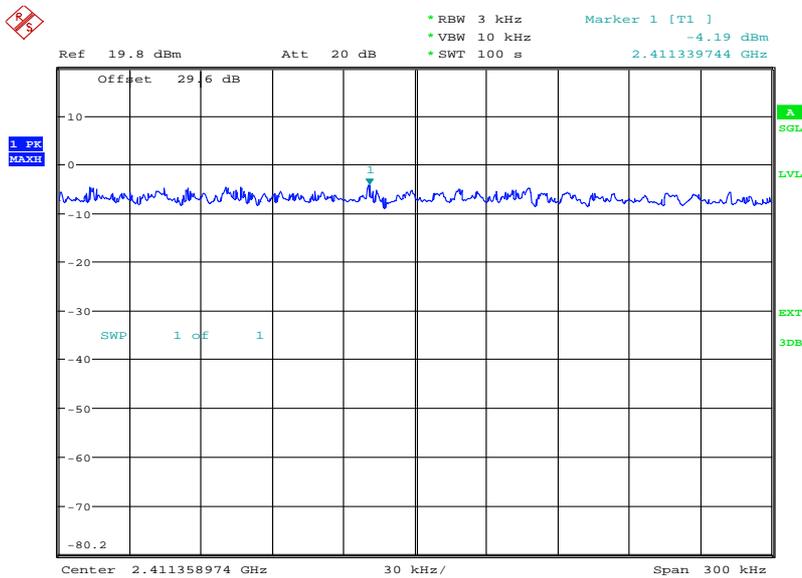


Date: 5.MAR.2013 12:48:54




Product Service

### 5.5 Mbps

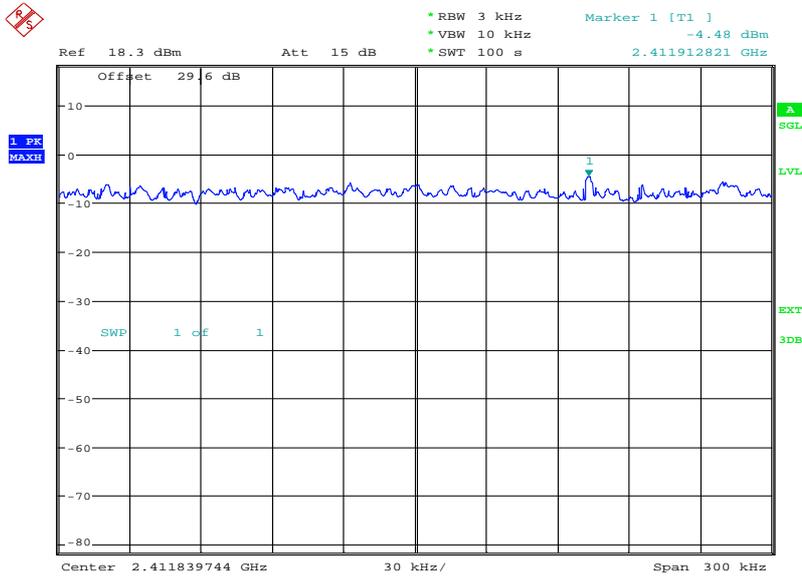

Date: 5.MAR.2013 13:02:19

### 11 Mbps

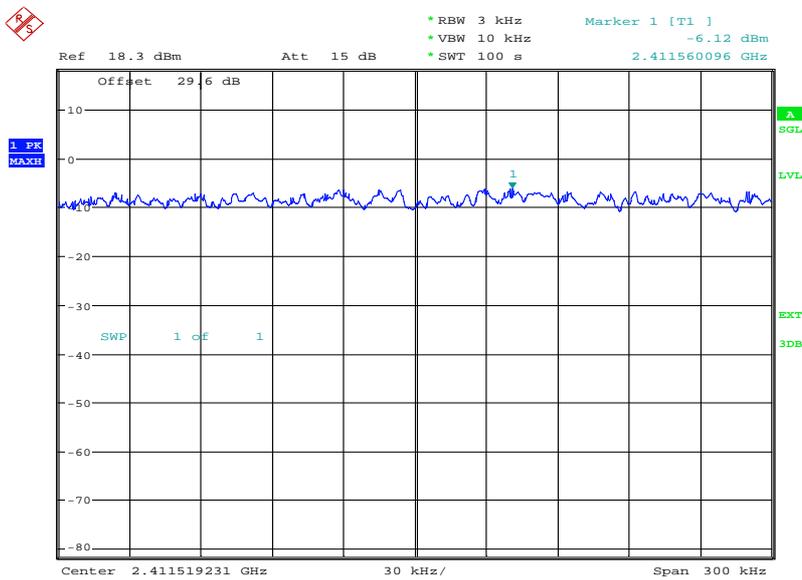


Date: 5.MAR.2013 13:15:27



Product Service


2437 MHz

1 Mbps

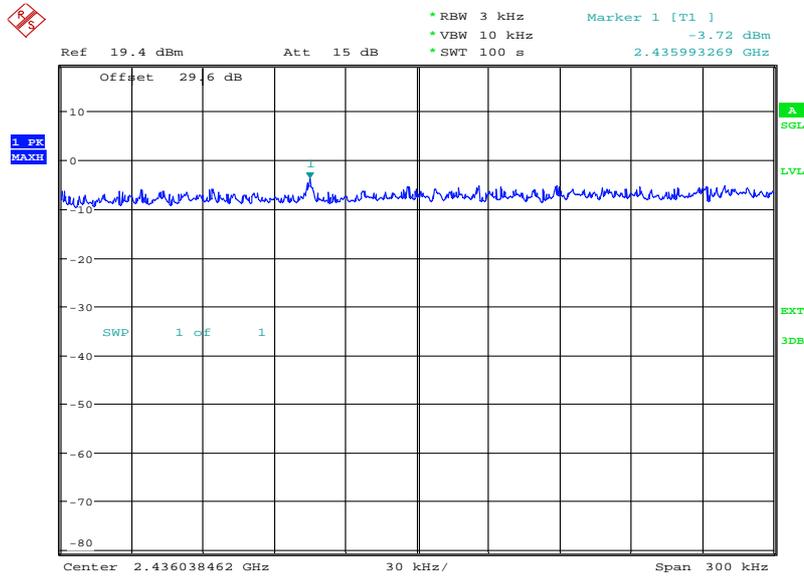

Date: 5.MAR.2013 12:36:18

2 Mbps

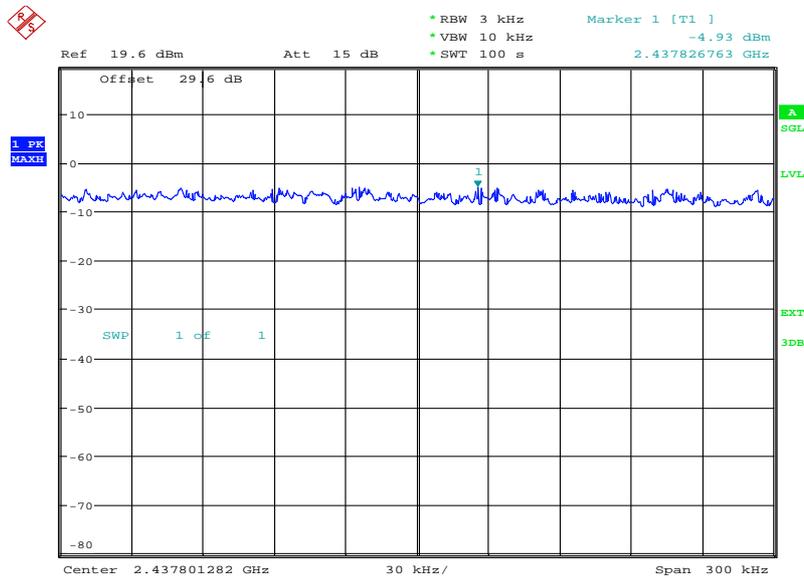


Date: 5.MAR.2013 12:52:53




Product Service

### 5.5 Mbps

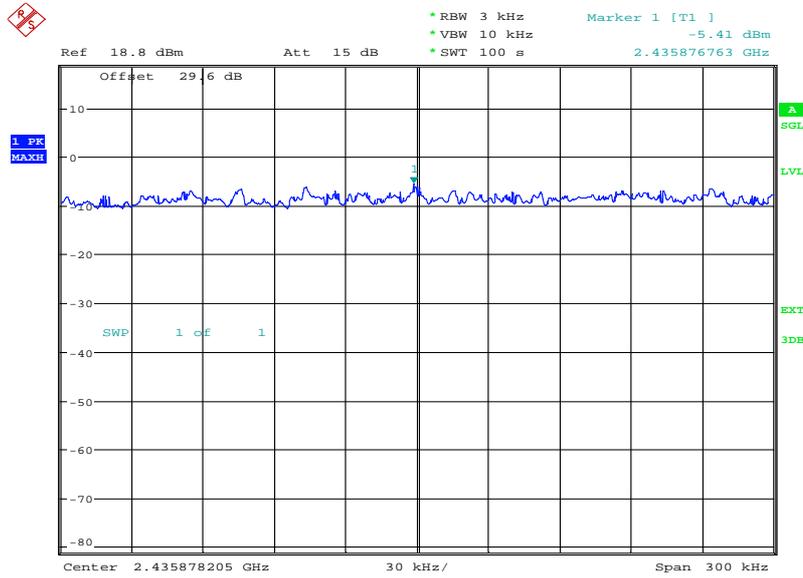

Date: 5.MAR.2013 13:06:39

### 11 Mbps

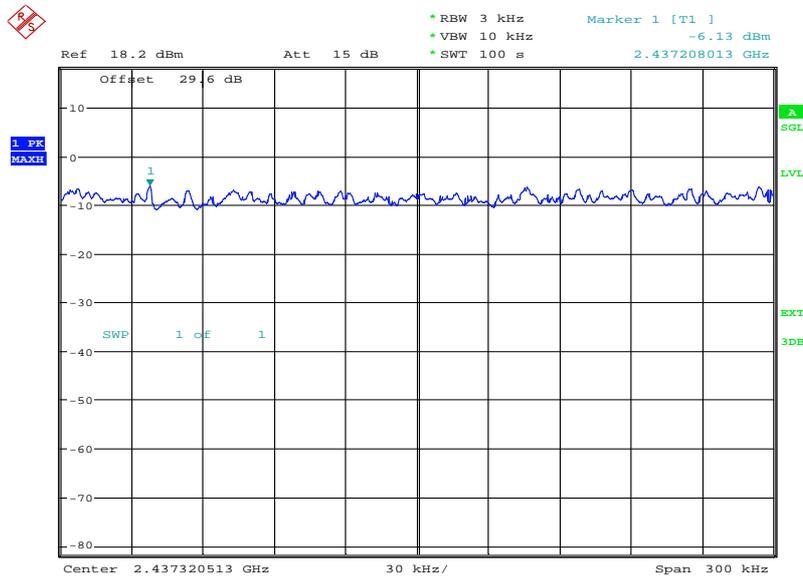


Date: 5.MAR.2013 13:20:10



Product Service


2462 MHz

1 Mbps

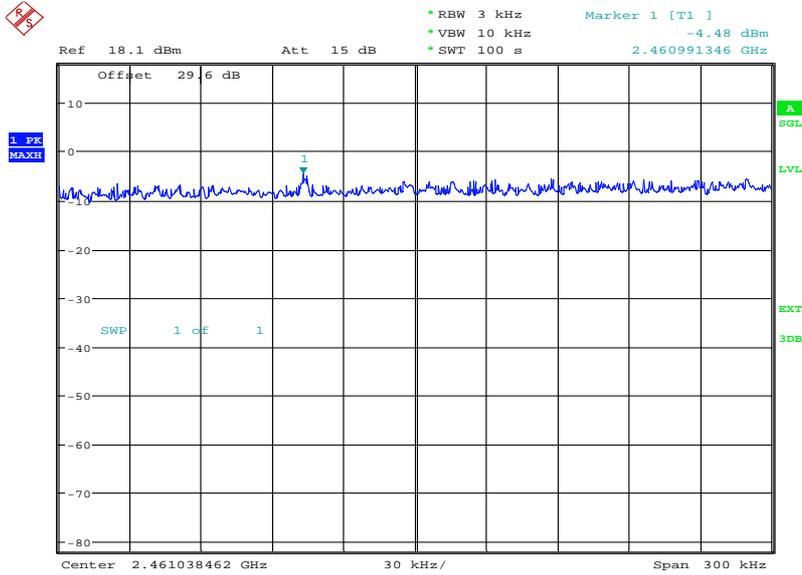

Date: 5.MAR.2013 12:43:52

2 Mbps

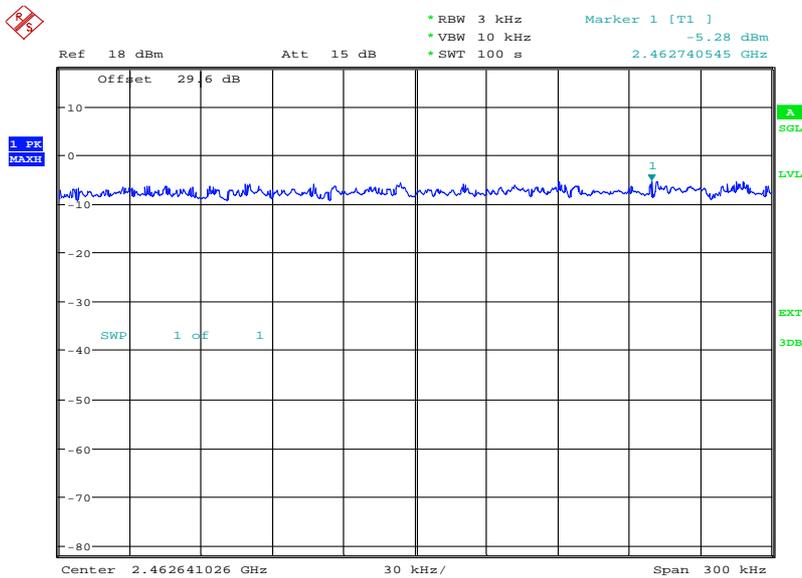


Date: 5.MAR.2013 12:57:29




Product Service

### 5.5 Mbps

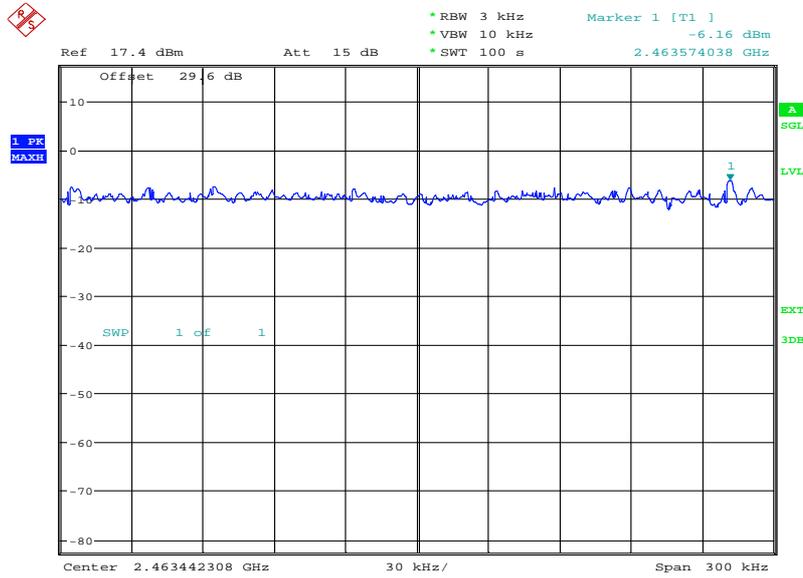

Date: 5.MAR.2013 13:10:35

### 11 Mbps

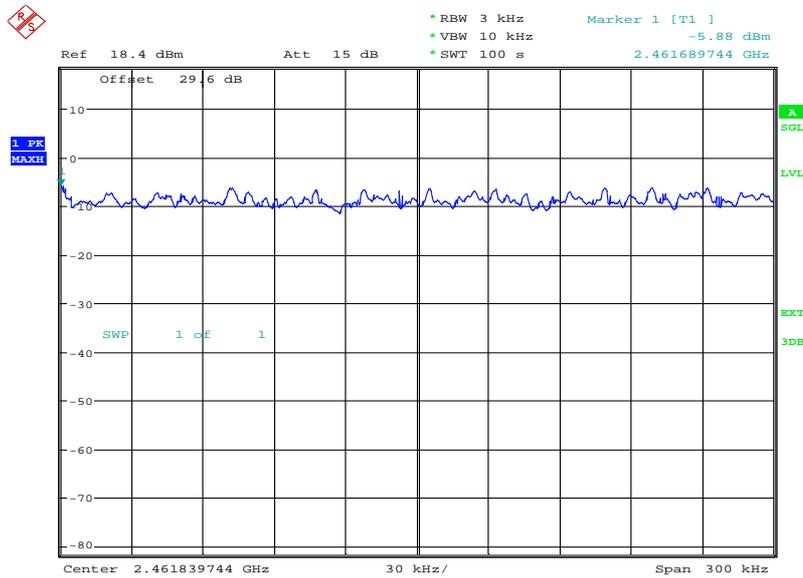

Date: 5.MAR.2013 13:24:32

### Limit Clause

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



Product Service

802.11(g)

4.0 V DC Supply


Frequency	Data Rate (Mbps)	Power Spectral Density in 3 kHz Bands (dBm)
2412 MHz	6	-10.93
	9	-11.52
	12	-12.75
	18	-11.26
	24	-11.42
	36	-10.52
	48	-11.44
	54	-11.65
2437 MHz	6	-12.73
	9	-12.61
	12	-10.99
	18	-12.89
	24	-11.59
	36	-11.56
	48	-10.83
	54	-12.06
2462 MHz	6	-12.12
	9	-13.31
	12	-10.38
	18	-11.41
	24	-10.71
	36	-11.05
	48	-12.10
	54	-12.26



Product Service


2412 MHz

6 Mbps

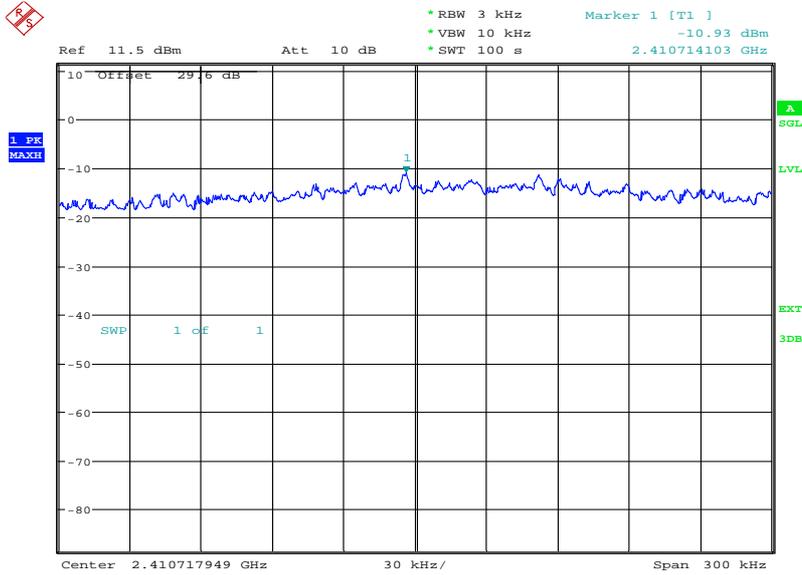

Date: 5.MAR.2013 13:29:56

9 Mbps

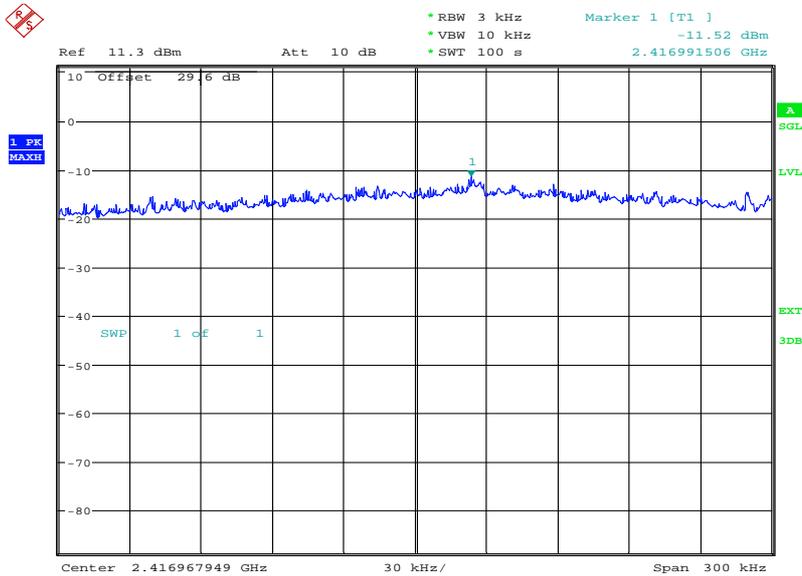


Date: 5.MAR.2013 13:55:13




Product Service

### 12 Mbps

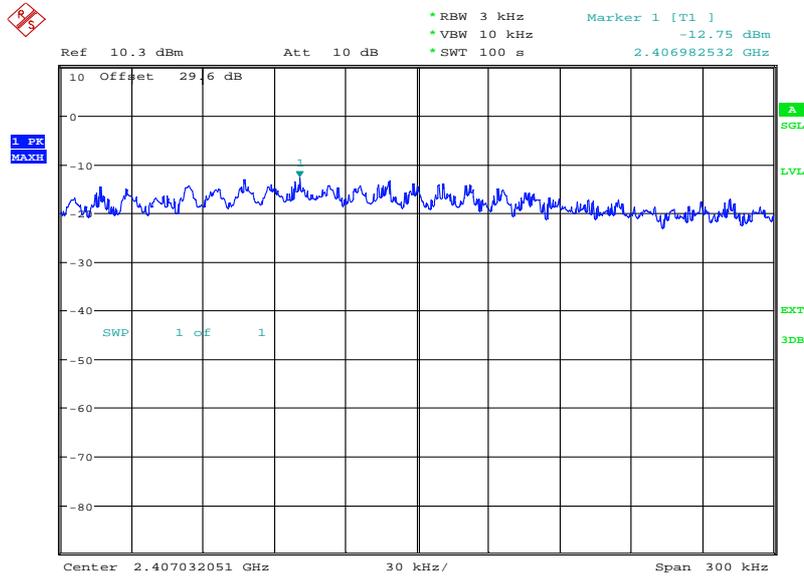

Date: 5.MAR.2013 14:09:37

### 18 Mbps

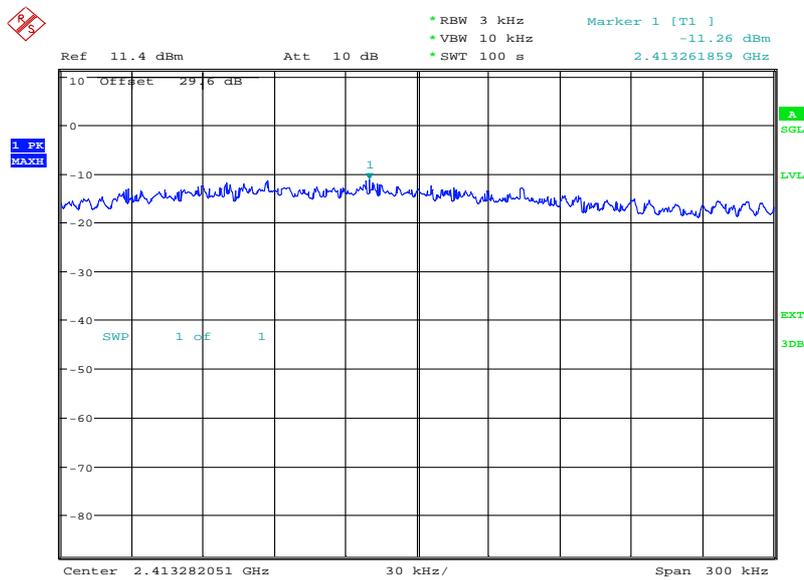


Date: 5.MAR.2013 14:22:37




Product Service

### 24 Mbps

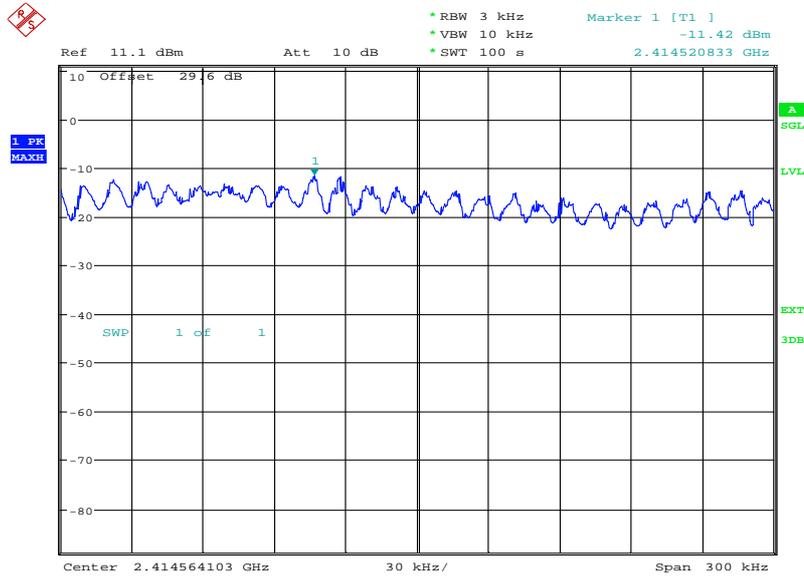

Date: 5.MAR.2013 14:36:10

### 36 Mbps

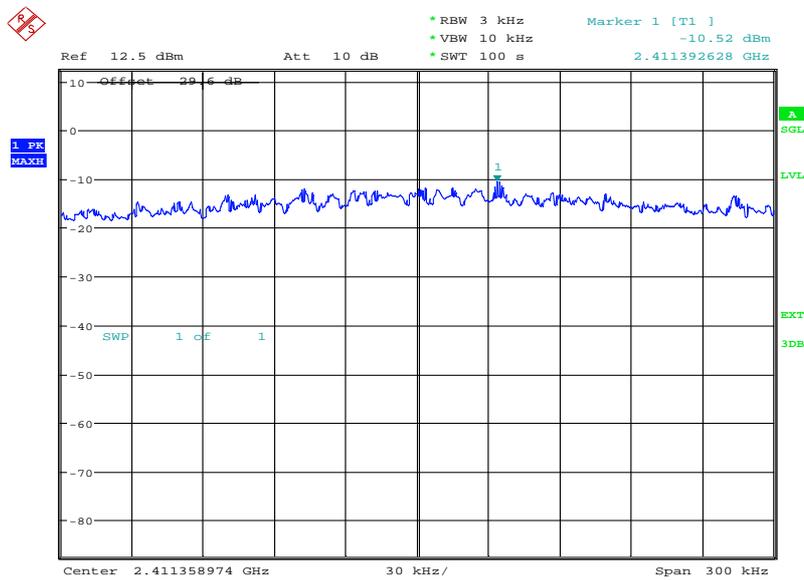


Date: 5.MAR.2013 14:50:01




Product Service

### 48 Mbps

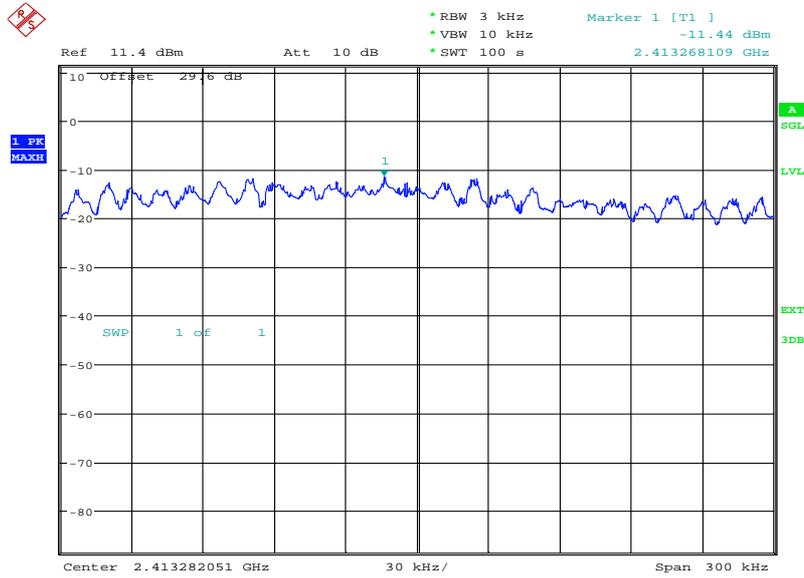

Date: 5.MAR.2013 15:02:37

### 54 Mbps

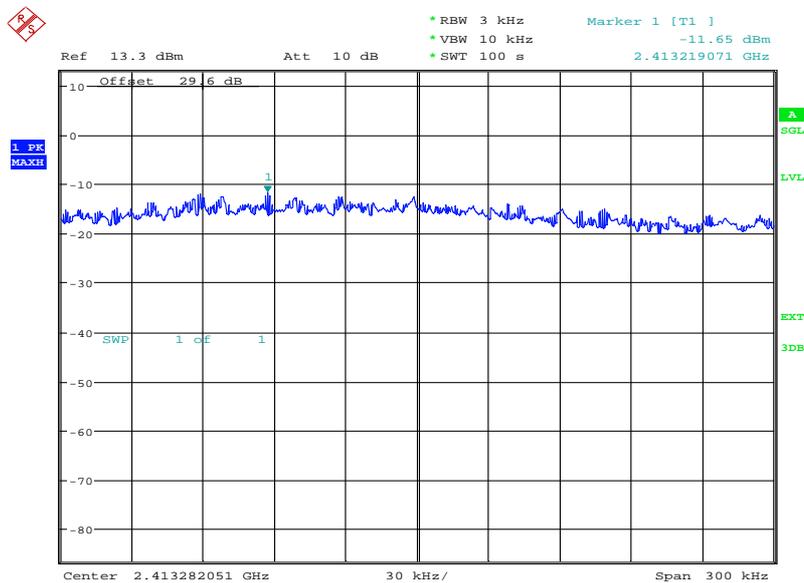


Date: 5.MAR.2013 15:20:03



Product Service


2437 MHz

6 Mbps

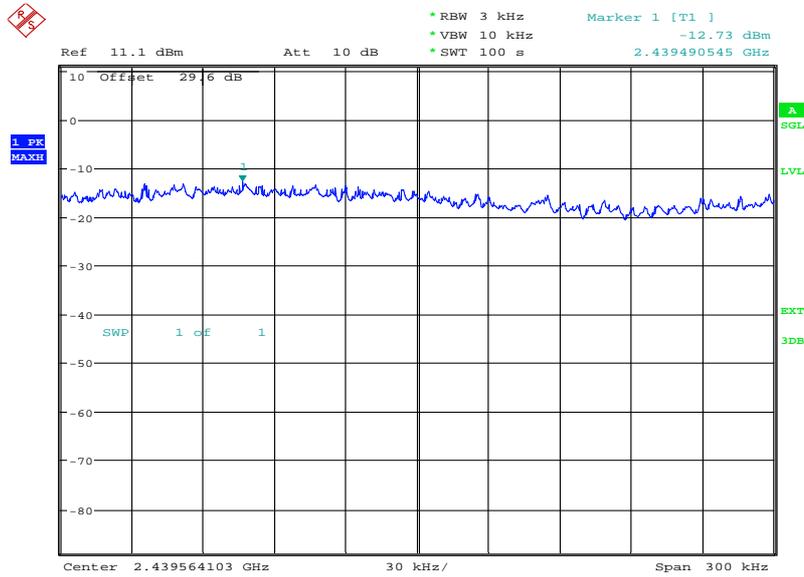

Date: 5.MAR.2013 13:33:48

9 Mbps

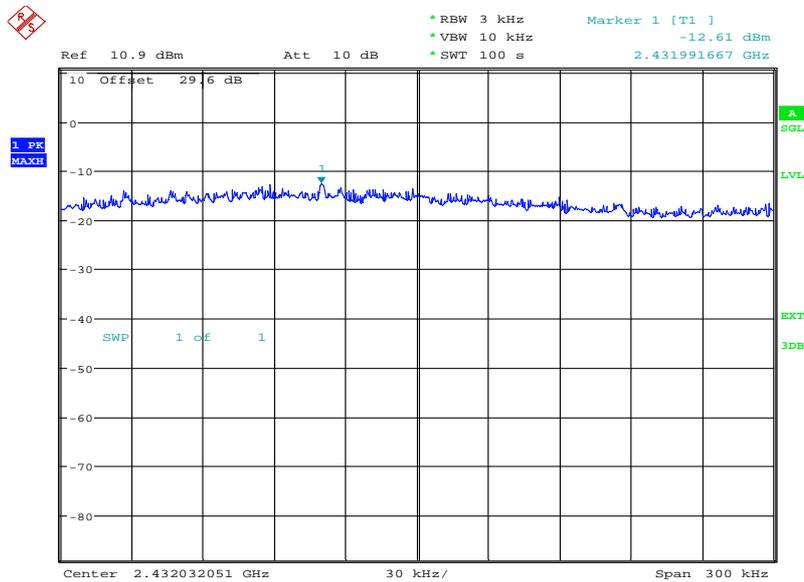


Date: 5.MAR.2013 13:59:03




Product Service

### 12 Mbps

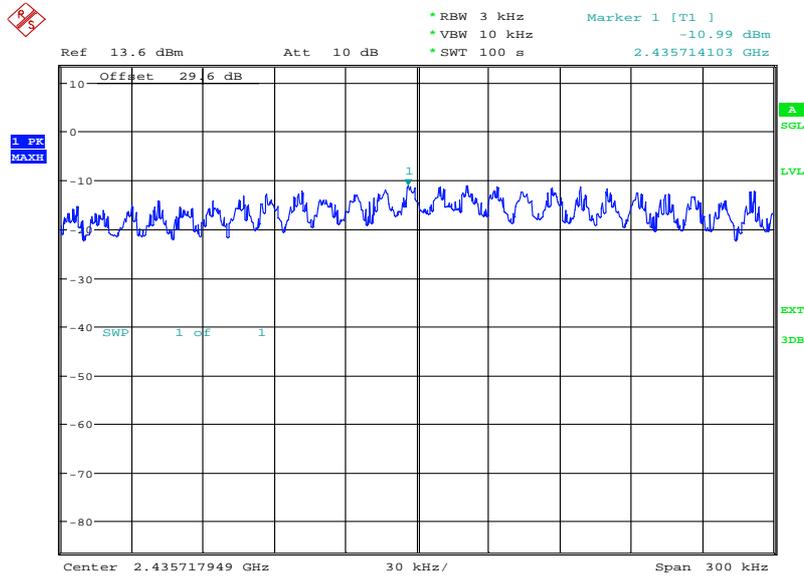

Date: 5.MAR.2013 14:13:33


### 18 Mbps

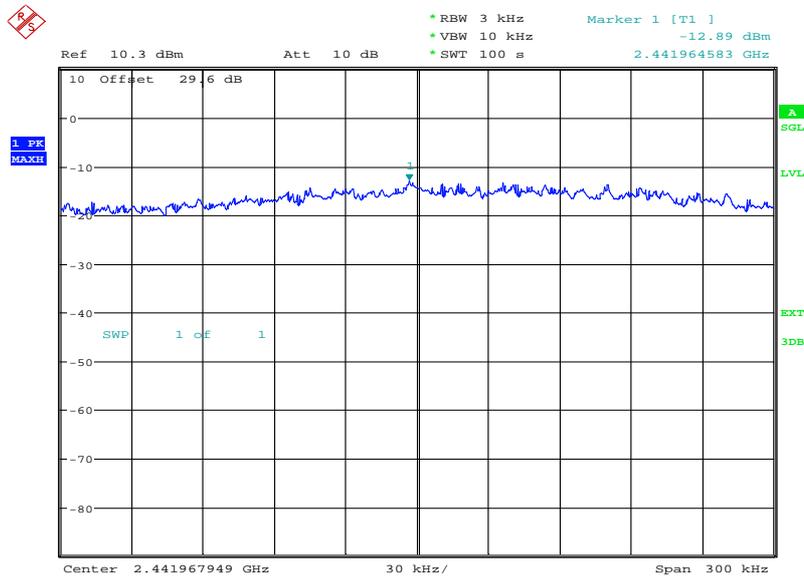

Date: 5.MAR.2013 14:26:49




24 Mbps

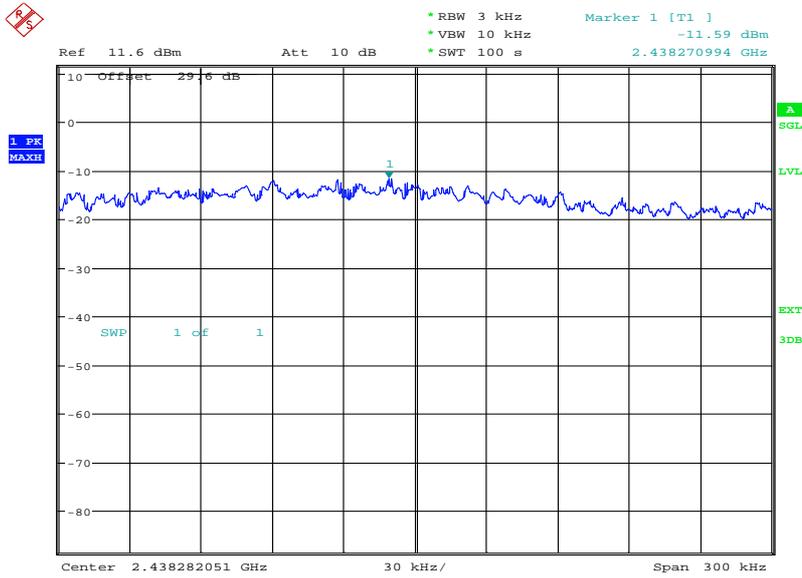

Date: 5.MAR.2013 14:40:16

36 Mbps

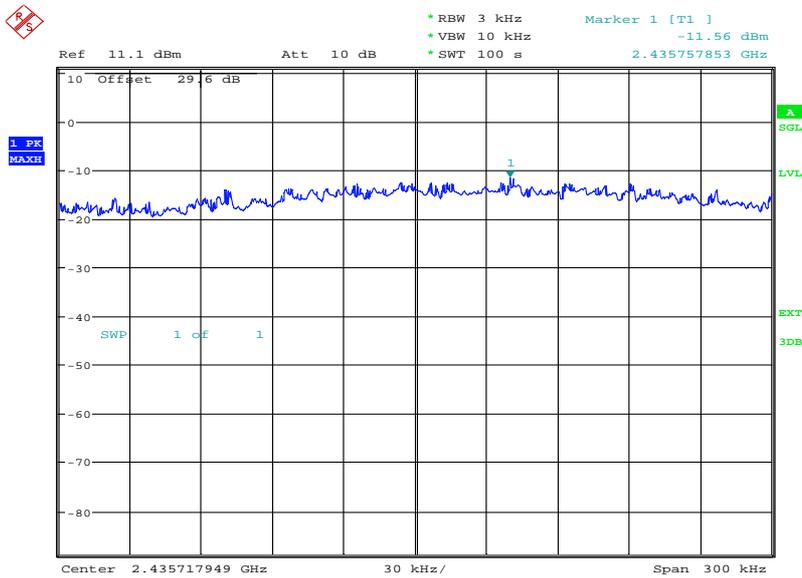


Date: 5.MAR.2013 14:53:52




Product Service

### 48 Mbps

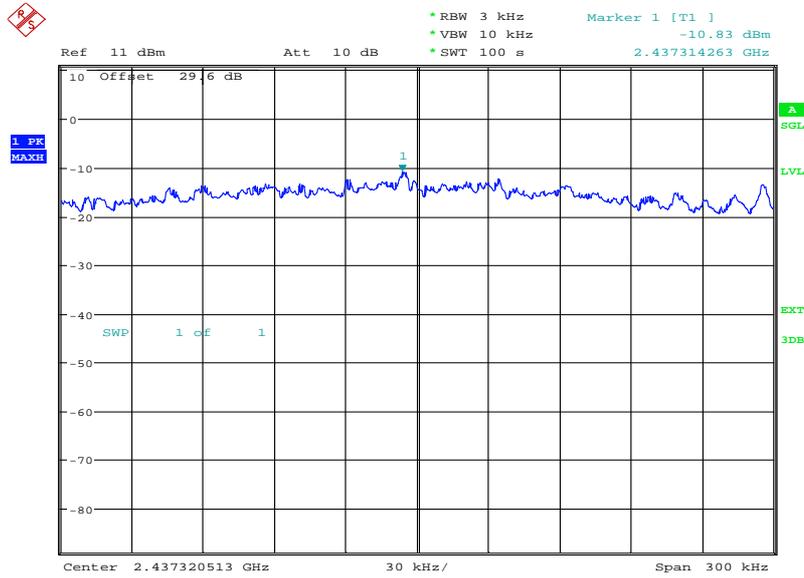

Date: 5.MAR.2013 15:09:05

### 54 Mbps

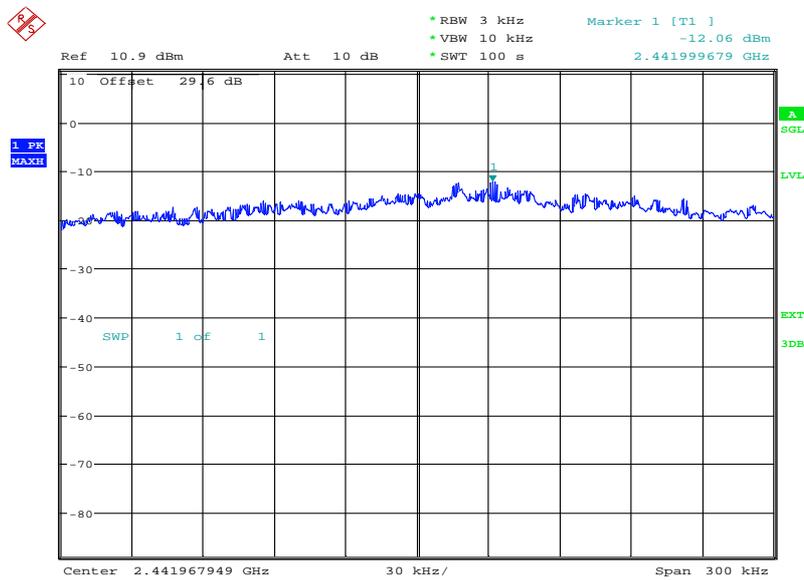


Date: 5.MAR.2013 15:23:48



Product Service


2462 MHz

6 Mbps

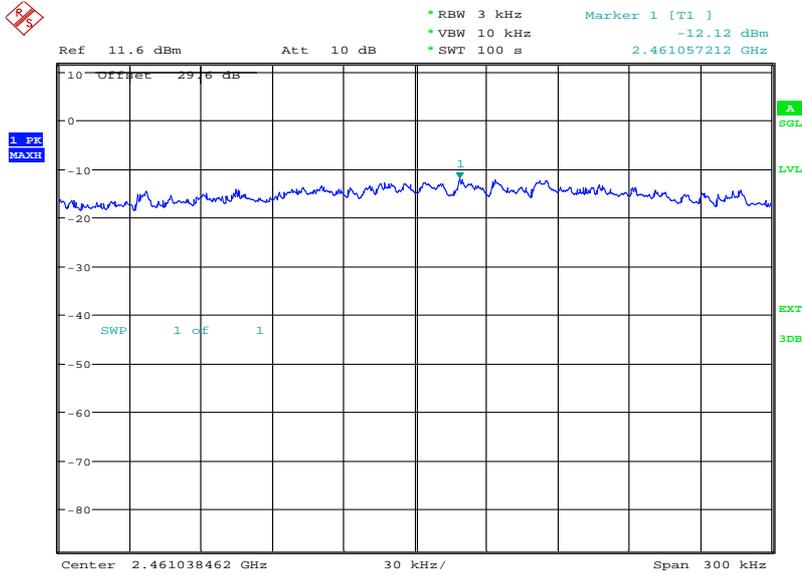

Date: 5.MAR.2013 13:47:49


9 Mbps

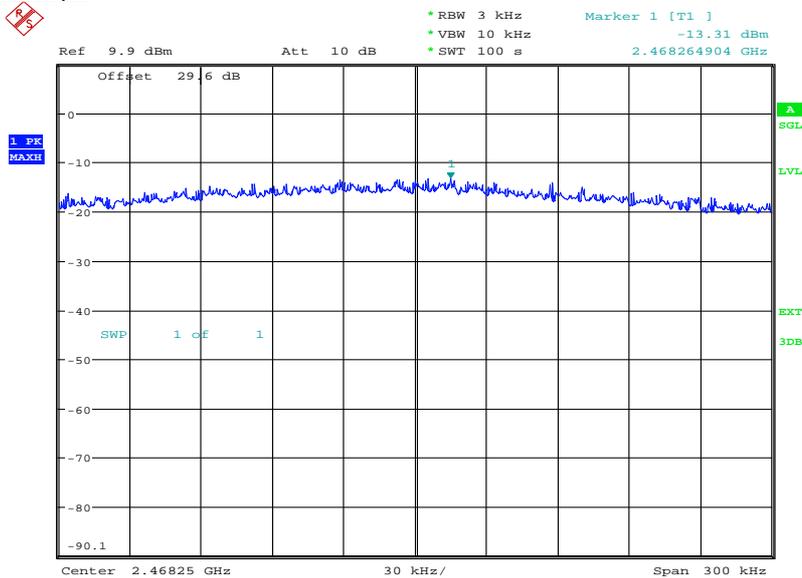

Date: 5.MAR.2013 14:03:29




12 Mbps

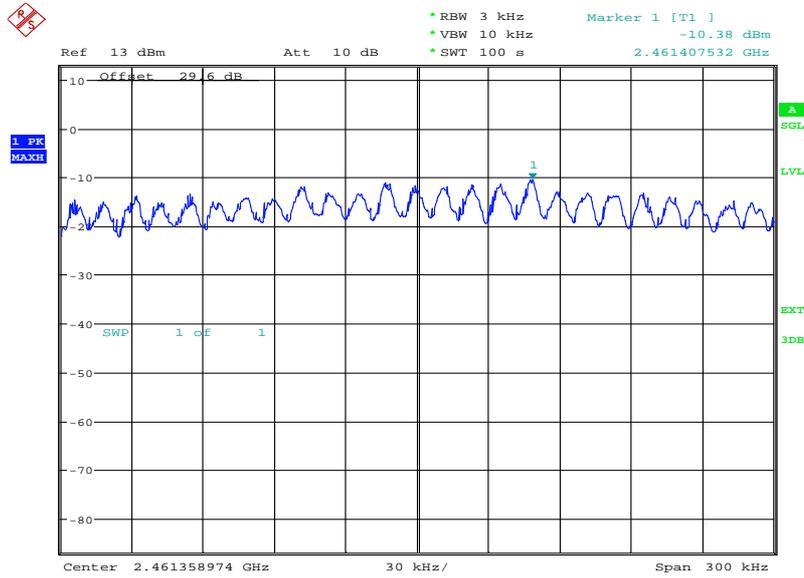

Date: 5.MAR.2013 14:17:52

18 Mbps

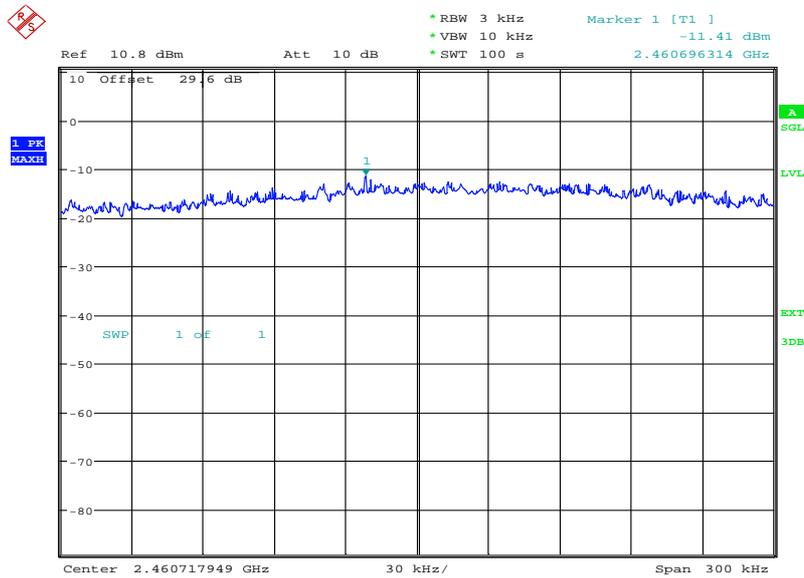


Date: 5.MAR.2013 14:31:05




Product Service

### 24 Mbps

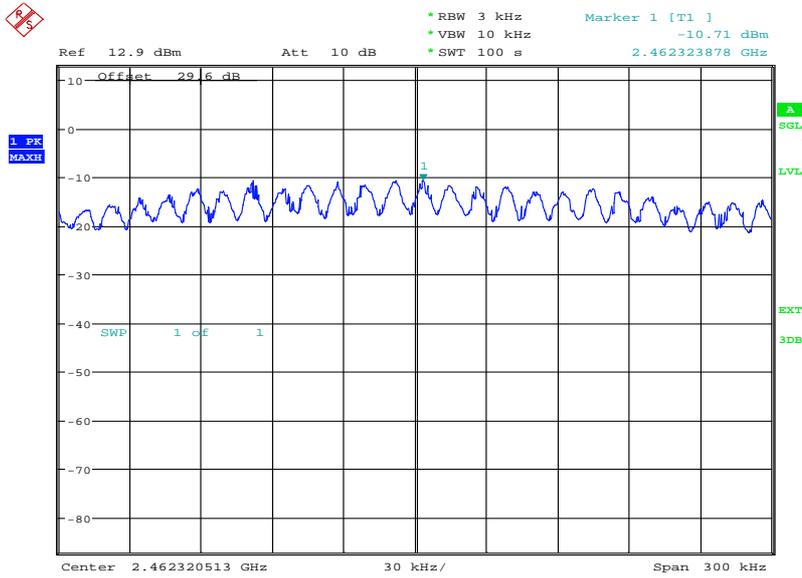

Date: 5.MAR.2013 14:44:13

### 36 Mbps

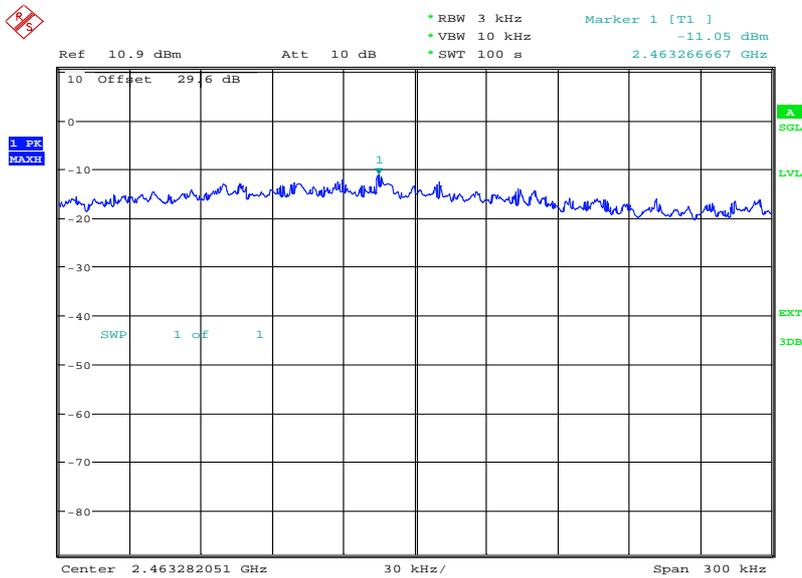


Date: 5.MAR.2013 14:58:01




Product Service

48 Mbps

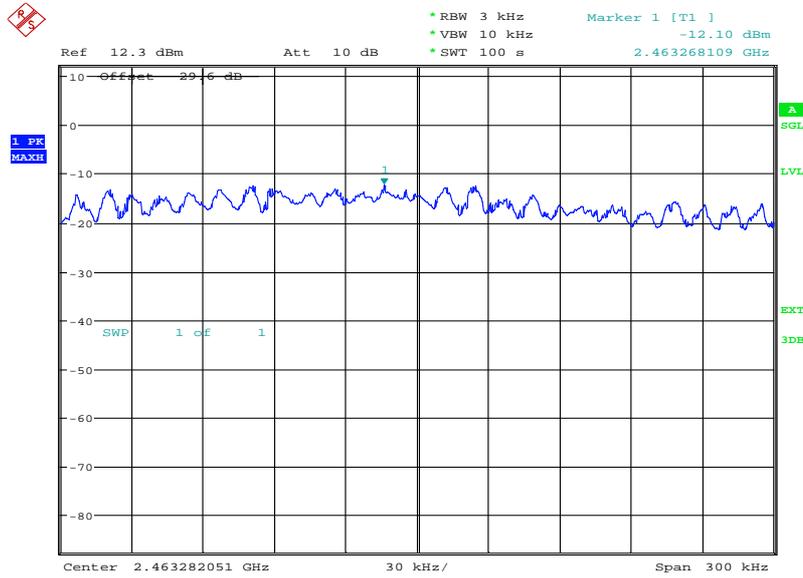

Date: 5.MAR.2013 15:13:02

54 Mbps

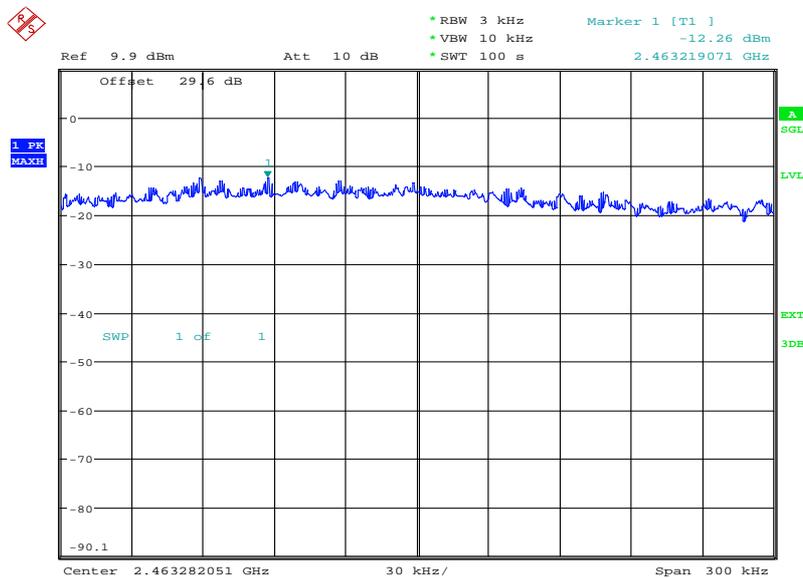

Date: 5.MAR.2013 15:29:59

Limit Clause

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



Product Service

802.11(n)

4.0 V DC Supply


Frequency	Data Rate (Mbps)	Power Spectral Density in 3 kHz Bands (dBm)
2412 MHz	6.5	-10.82
	13	-11.55
	19.5	-12.04
	26	-12.39
	39	-12.28
	52	-11.95
	58.5	-11.91
	65	-12.67
2437 MHz	6.5	-11.05
	13	-11.12
	19.5	-11.31
	26	-11.10
	39	-12.05
	52	-12.22
	58.5	-12.47
	65	-12.21
2462 MHz	6.5	-11.77
	13	-11.75
	19.5	-11.87
	26	-11.56
	39	-12.26
	52	-12.37
	58.5	-13.85
	65	-11.63



Product Service


2412 MHz

6.5 Mbps

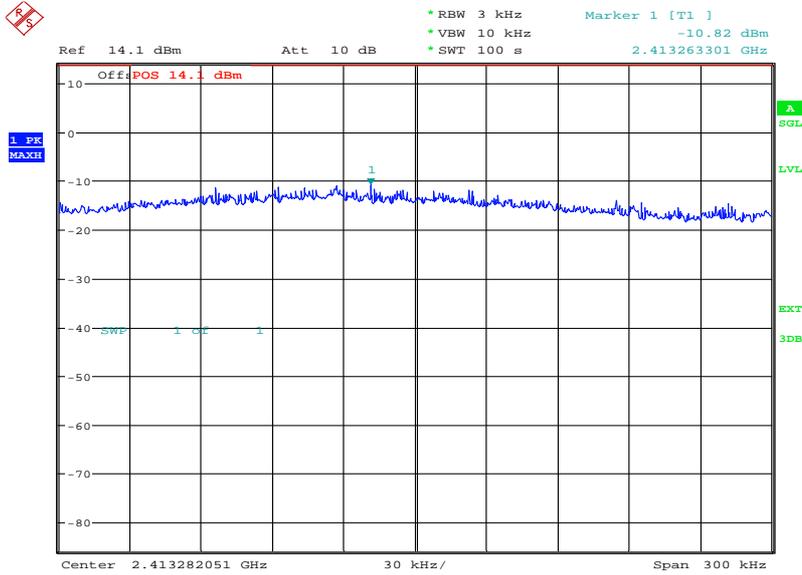

Date: 6.MAR.2013 09:41:26

13 Mbps

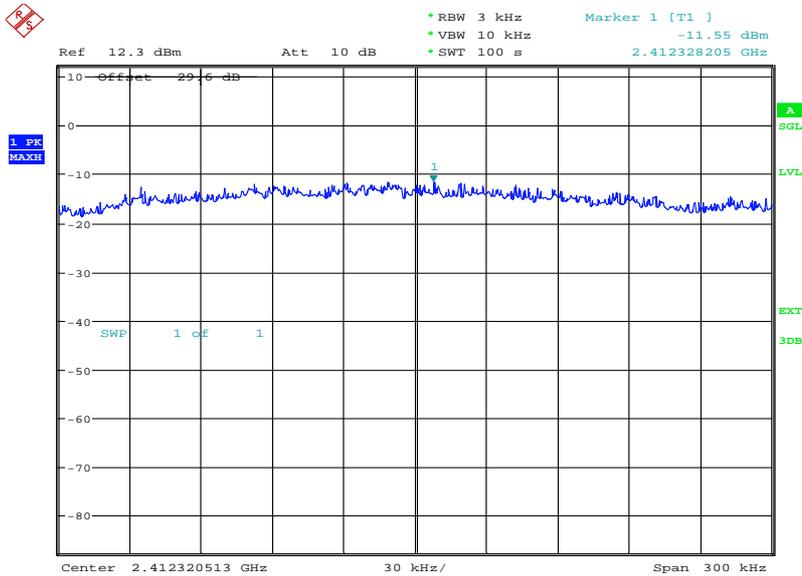


Date: 6.MAR.2013 09:54:27




Product Service

### 19.5 Mbps

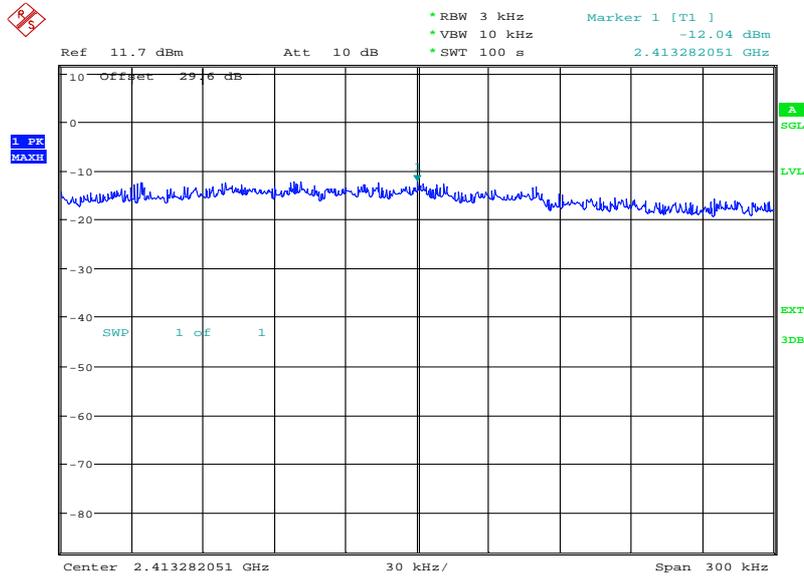

Date: 6.MAR.2013 10:07:50


### 26 Mbps

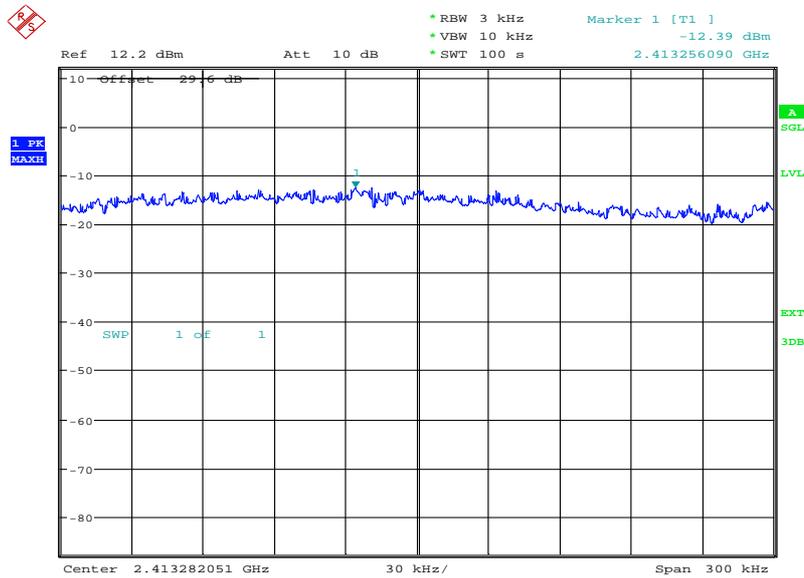

Date: 6.MAR.2013 10:22:38




39 Mbps

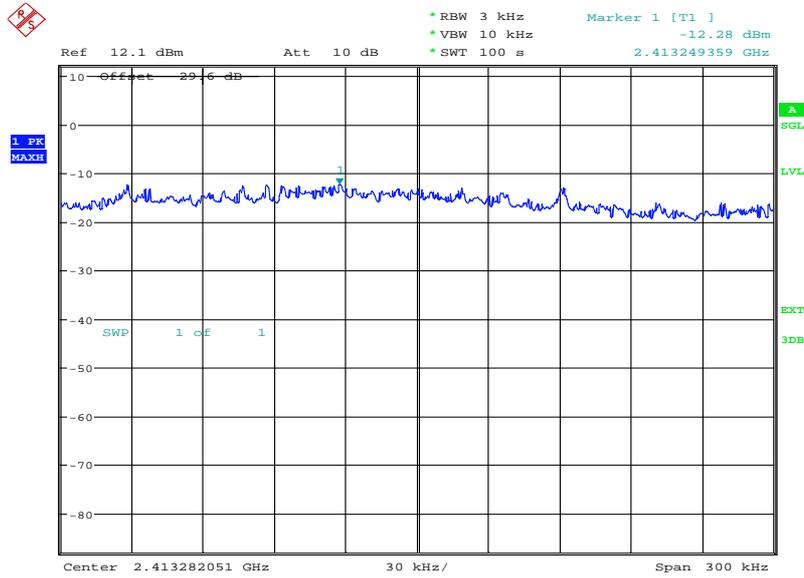

Date: 6.MAR.2013 10:38:29

52 Mbps

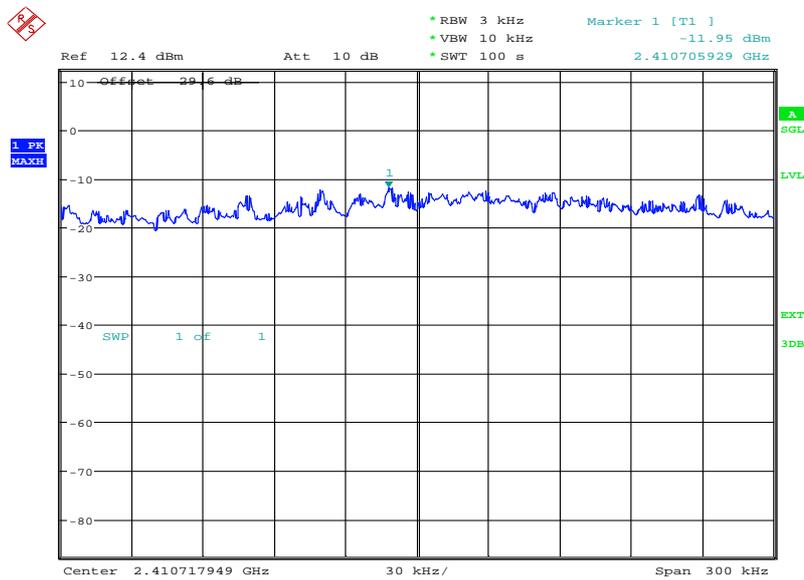


Date: 6.MAR.2013 10:51:04




Product Service

### 58.5 Mbps

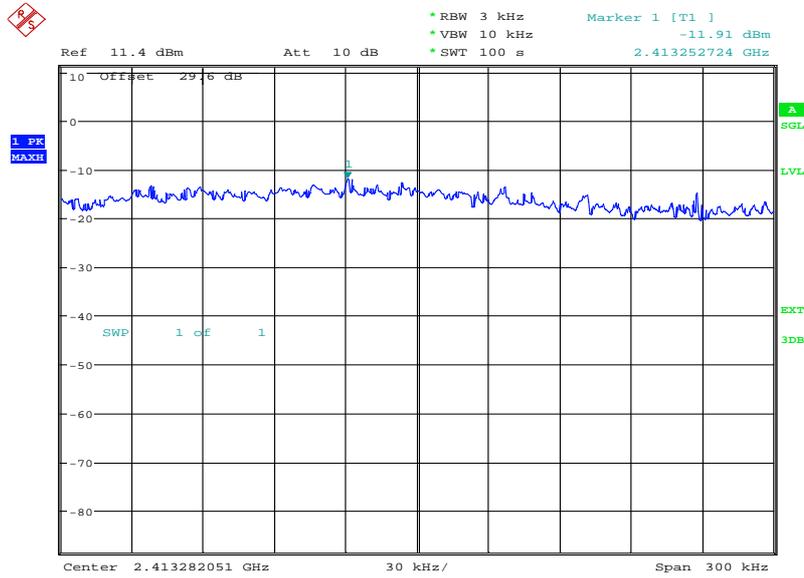

Date: 6.MAR.2013 11:11:27

### 65 Mbps

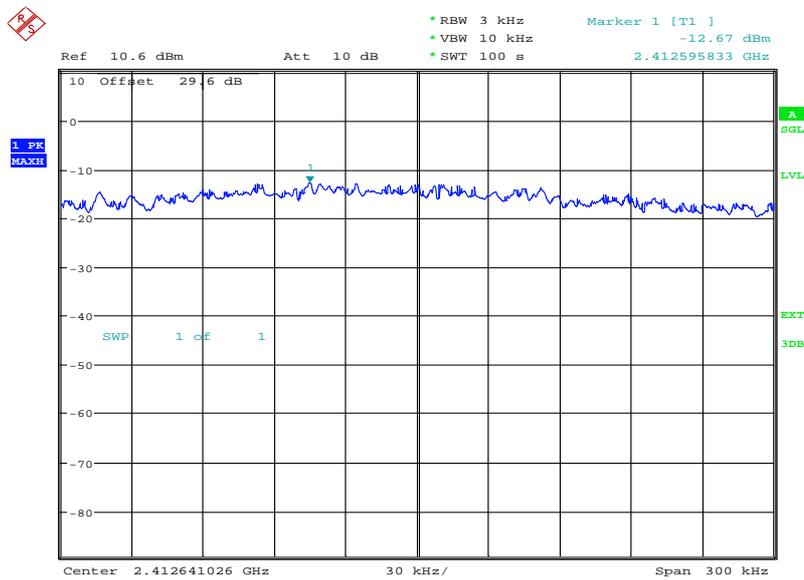


Date: 6.MAR.2013 11:26:19



Product Service


2437 MHz

6.5 Mbps

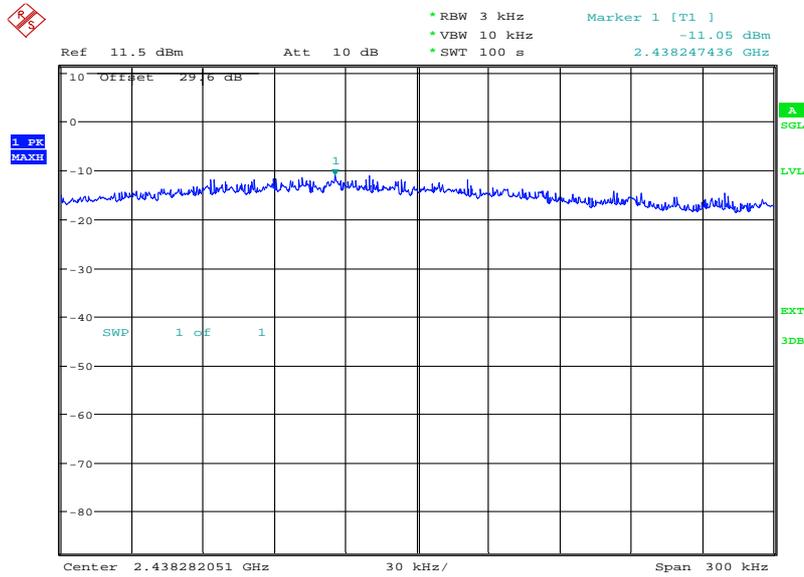

Date: 6.MAR.2013 09:45:20

13 Mbps

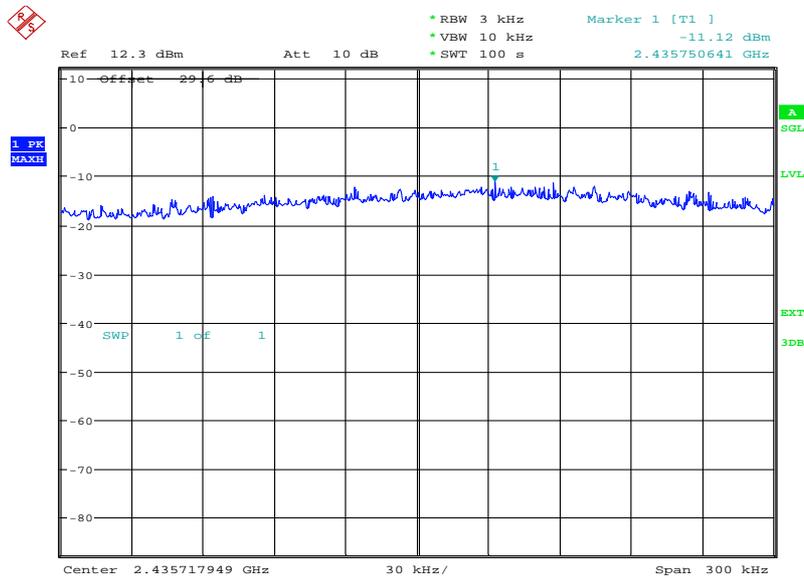


Date: 6.MAR.2013 09:58:16




Product Service

### 19.5 Mbps

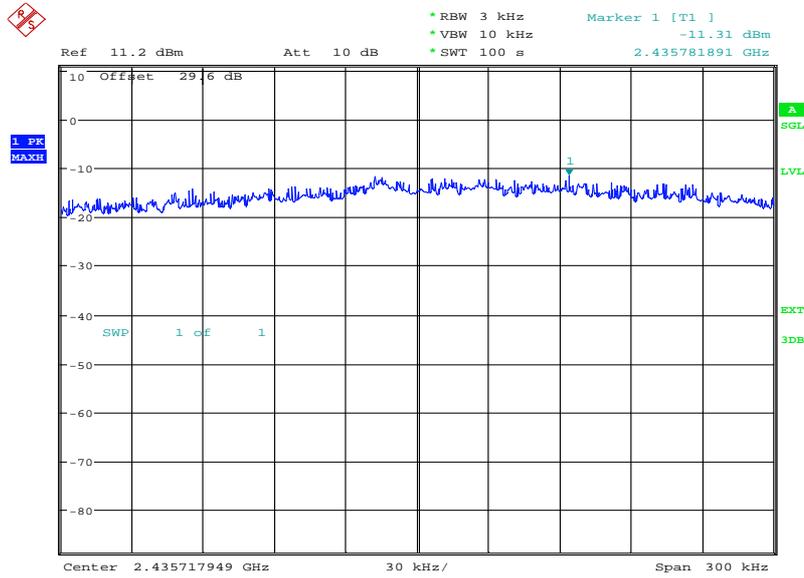

Date: 6.MAR.2013 10:13:45

### 26 Mbps

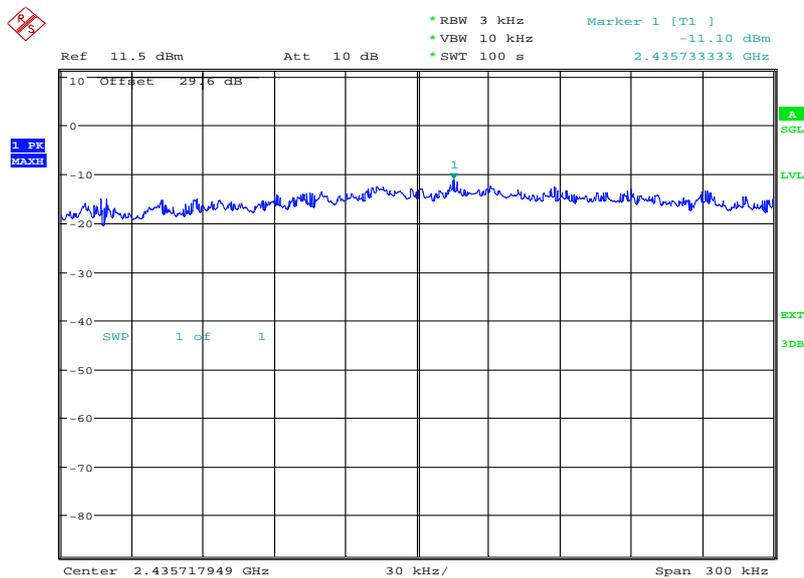


Date: 6.MAR.2013 10:26:25




Product Service

### 39 Mbps

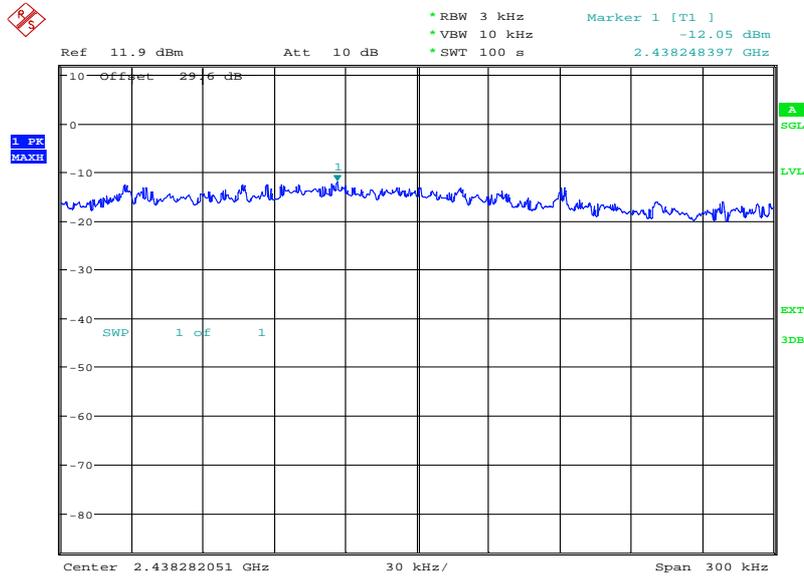

Date: 6.MAR.2013 10:42:20

### 52 Mbps

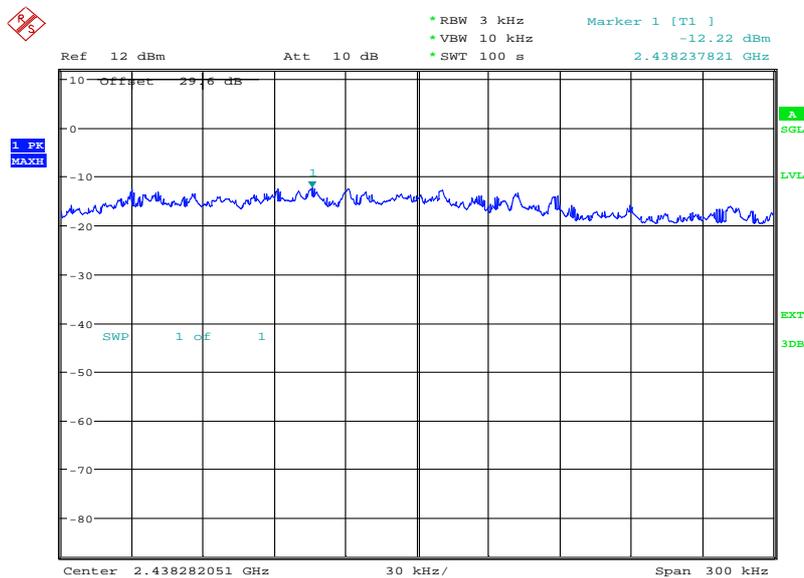


Date: 6.MAR.2013 10:55:06




Product Service

### 58.5 Mbps

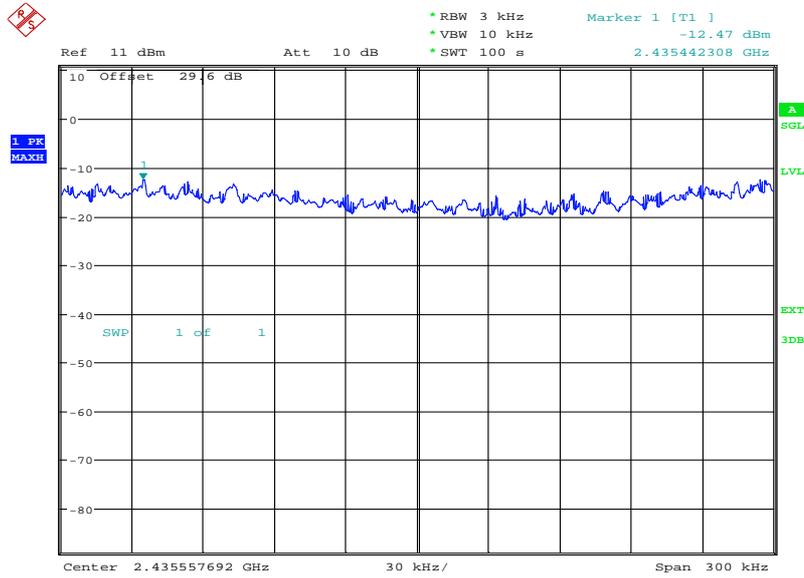

Date: 6.MAR.2013 11:15:10

### 65 Mbps

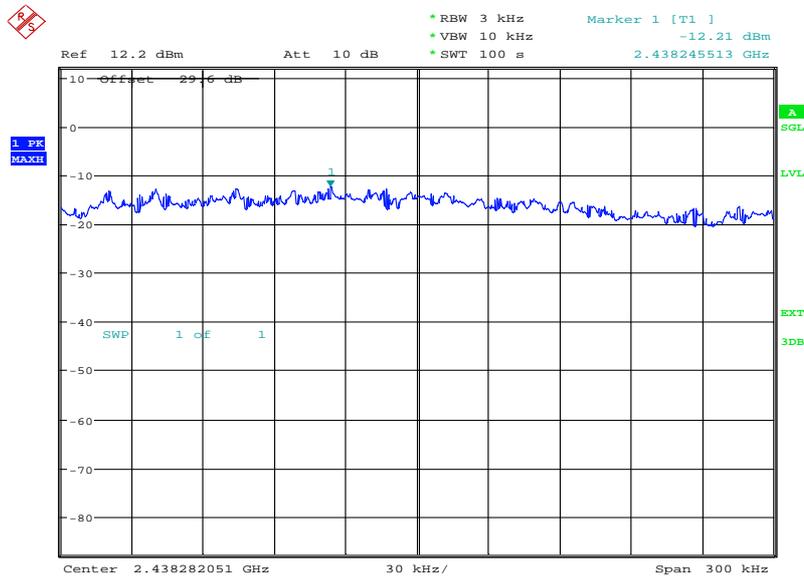


Date: 6.MAR.2013 11:30:59



Product Service


2462 MHz

6.5 Mbps

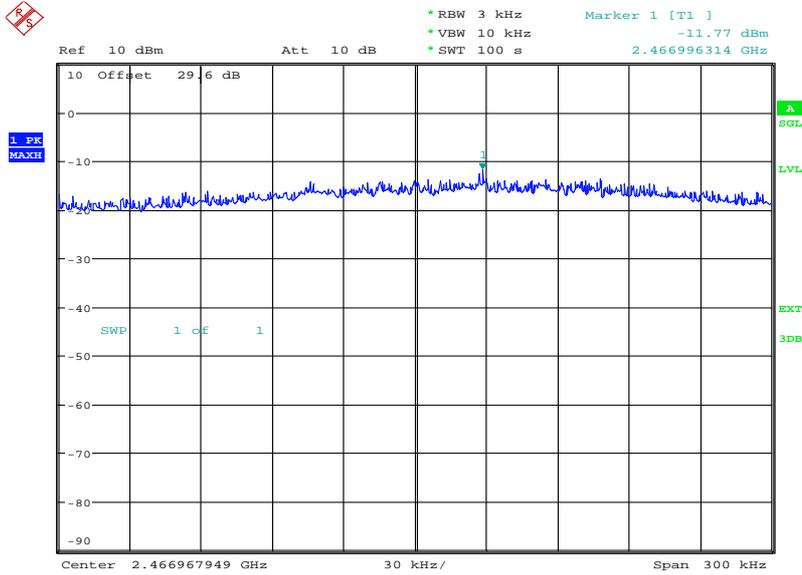

Date: 6.MAR.2013 09:49:20

13 Mbps

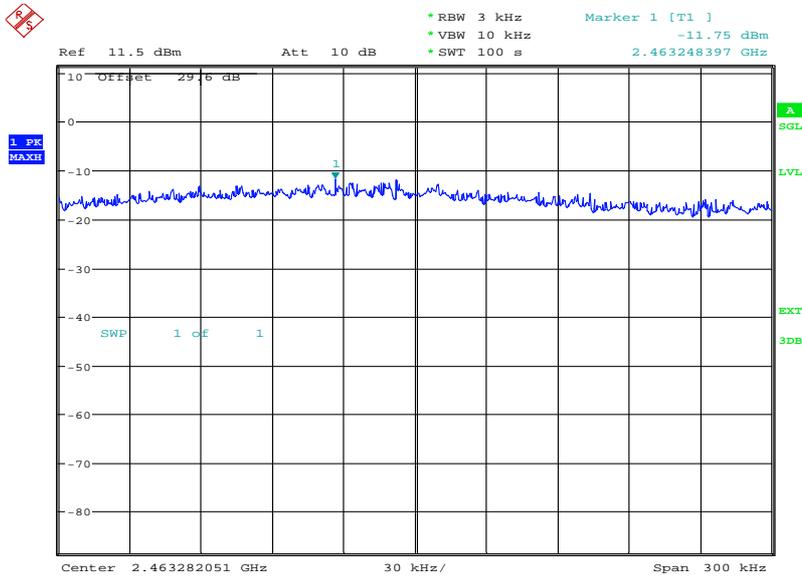


Date: 6.MAR.2013 10:02:15




Product Service

### 19.5 Mbps

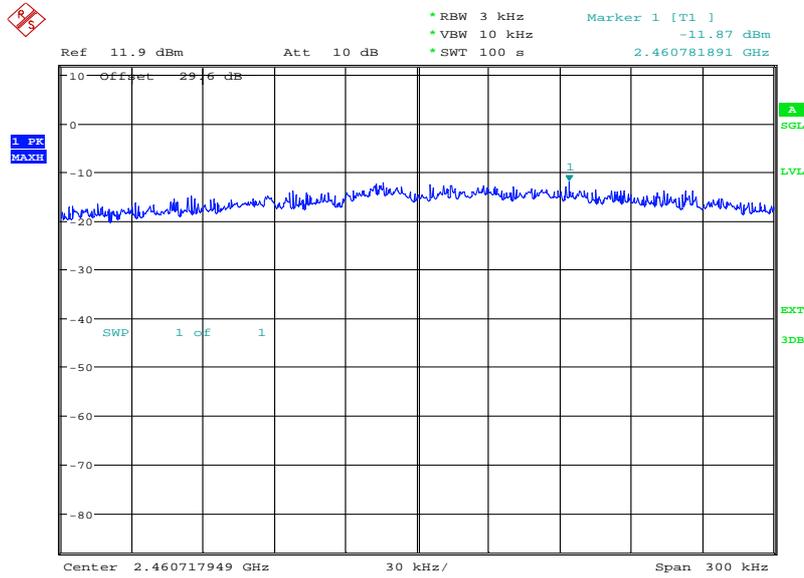

Date: 6.MAR.2013 10:17:45

### 26 Mbps

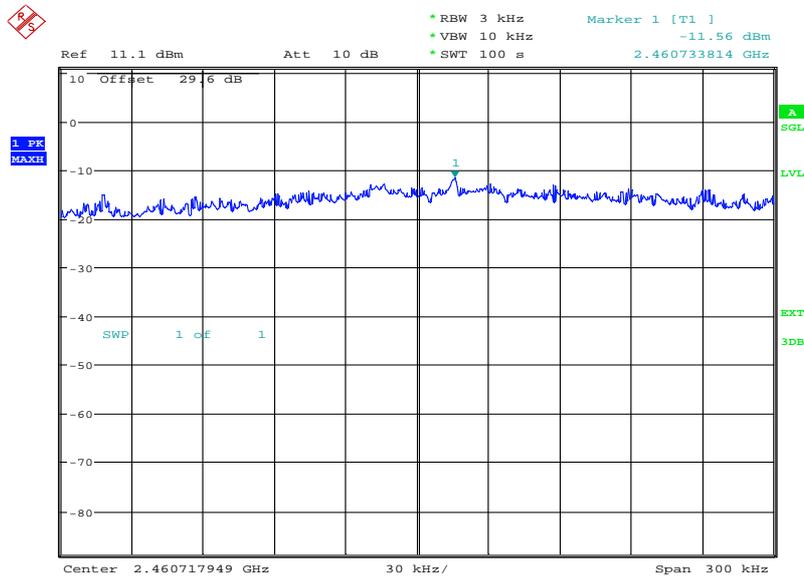


Date: 6.MAR.2013 10:32:26




Product Service

39 Mbps

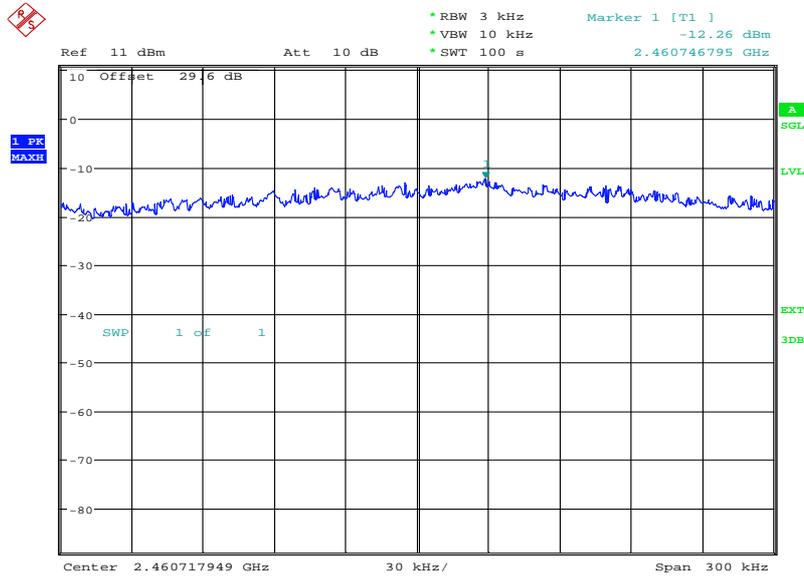

Date: 6.MAR.2013 10:46:29

52 Mbps

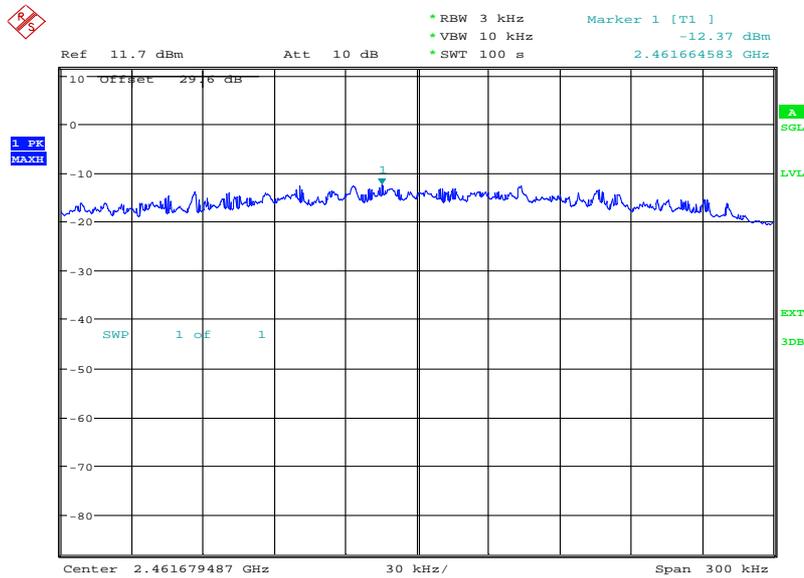


Date: 6.MAR.2013 11:06:41




Product Service

**58.5 Mbps**

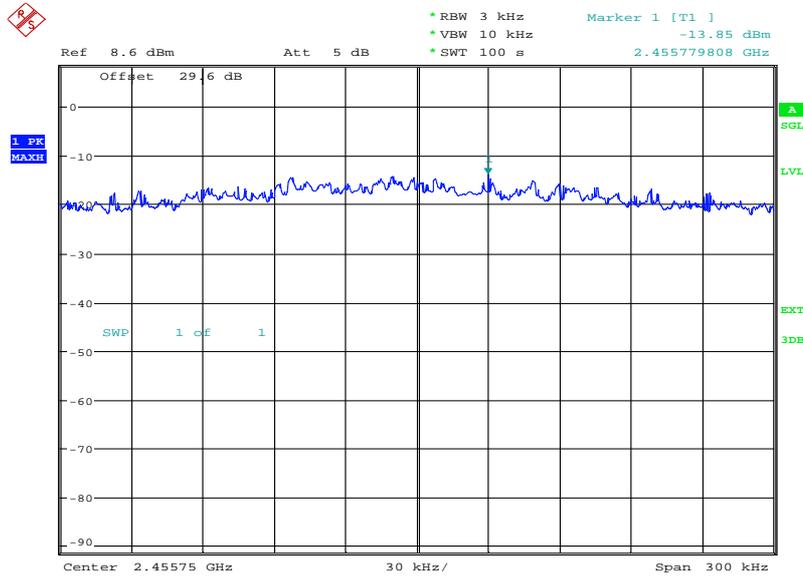

Date: 6.MAR.2013 11:21:12

**65 Mbps**

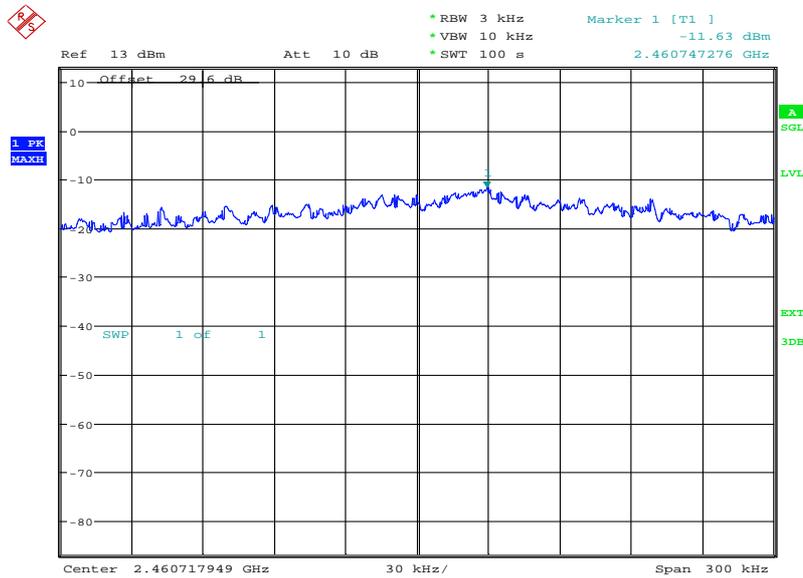

Date: 6.MAR.2013 11:34:52

**Limit Clause**

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



## **2.5 SPURIOUS AND BAND EDGE EMISSIONS**

### **2.5.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (d)

### **2.5.2 Equipment Under Test and Modification State**

204SH S/N: IMEI 004401114727023 - Modification State 0

### **2.5.3 Date of Test**

2 March 2013, 4 March 2013, 5 March 2013 & 7 March 2013

### **2.5.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.5.5 Test Procedure**

For conducted emissions, the EUT was set to operate at maximum power on the worst case data rate. The test was performed on the bottom, middle and top channels. The test was performed from 9 kHz to 25 GHz. Firstly, the power of each fundamental frequency was measured in 100 kHz bandwidth and this was used to show a -20 dBc limit line on the trace. The measurement path loss in each relevant frequency band was measured and entered as a reference level offset.

For radiated emissions, the test method described above was also used. However, the measurement was performed from 30 MHz to 25 GHz and the path loss is incorporated as a transducer factor and entered into the spectrum analyser.

The band edge measurements were performed in accordance with ANSI C63.10, Clause 6.9.3. The results were analysed to ensure compliance with restricted bands. The EUT was set to the lowest and highest operating frequencies.

### **2.5.6 Environmental Conditions**

Ambient Temperature	18.0 - 24.5°C
Relative Humidity	25.0 - 37.6%



Product Service

### 2.5.7 Test Results

802.11(b)


4.0 V DC Supply

Spurious Conducted Emissions

1 Mbps

2412 MHz


9 kHz to 4 GHz

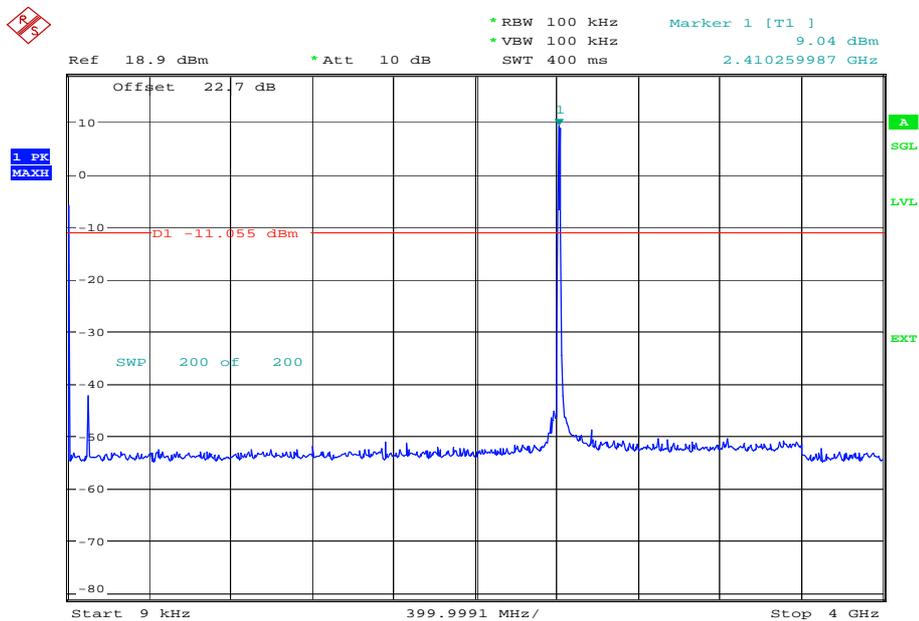

Date: 7.MAR.2013 09:02:47




4 GHz to 12 GHz

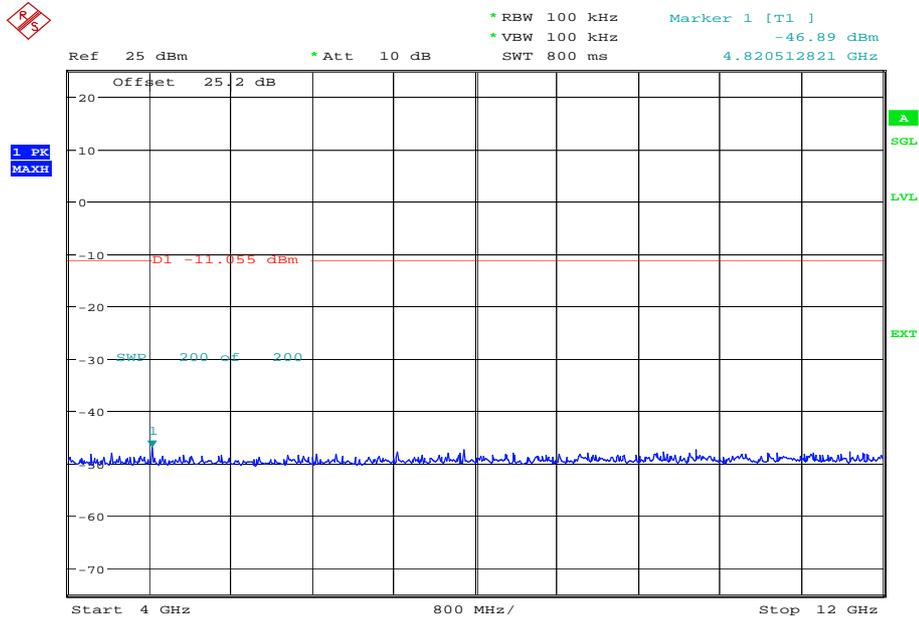

Date: 7.MAR.2013 10:25:37

12 GHz to 18 GHz

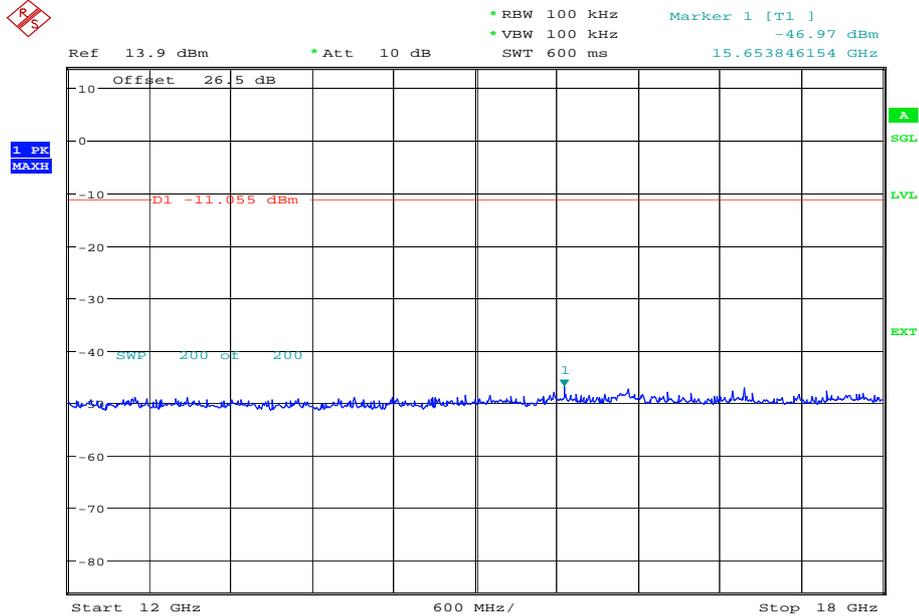


Date: 7.MAR.2013 10:28:07



Product Service


18 GHz to 25 GHz

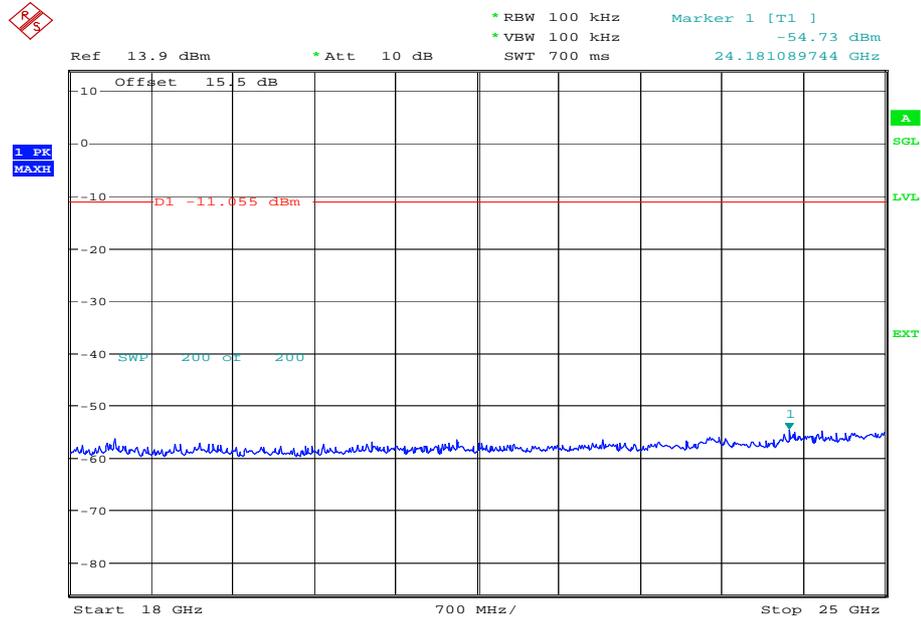

Date: 7.MAR.2013 11:10:23

2437 MHz


9 kHz to 4 GHz

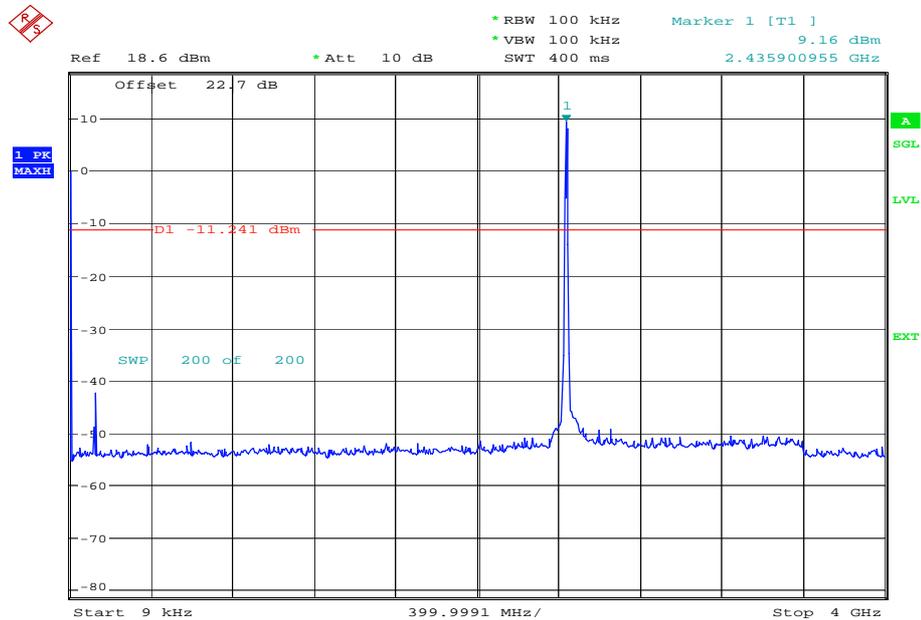

Date: 7.MAR.2013 10:37:20




4 GHz to 12 GHz

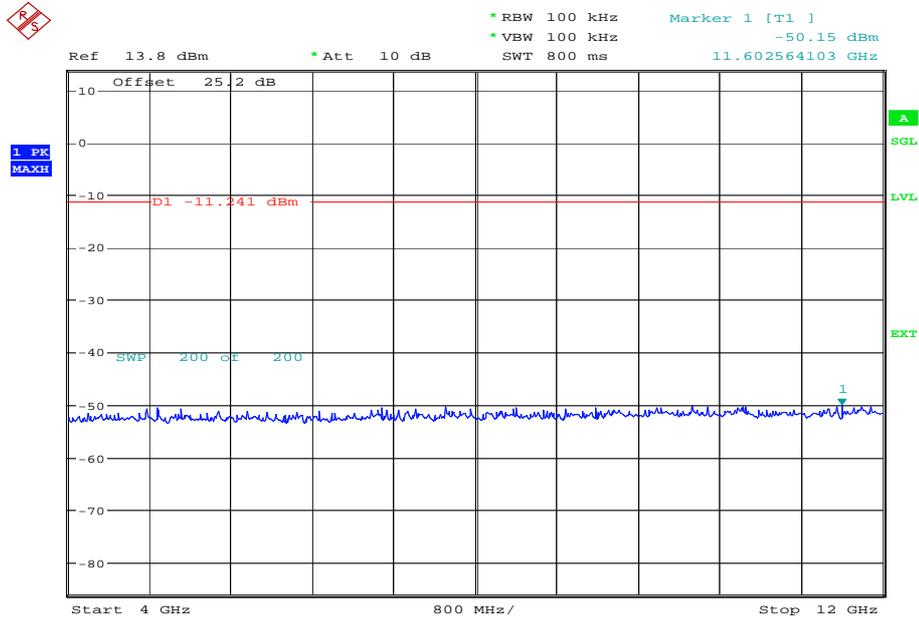

Date: 7.MAR.2013 10:42:00

12 GHz to 18 GHz

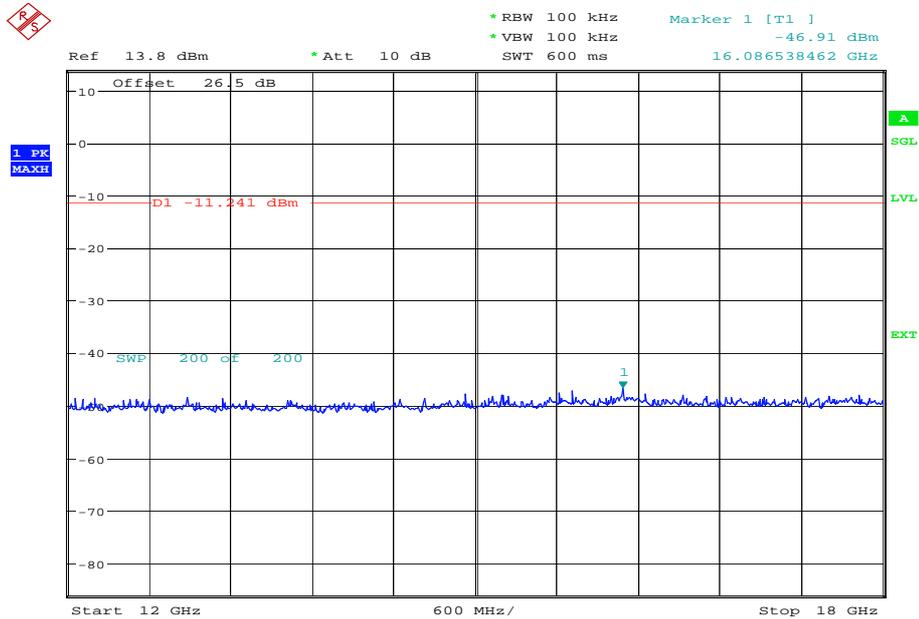


Date: 7.MAR.2013 10:44:28



Product Service


18 GHz to 25 GHz

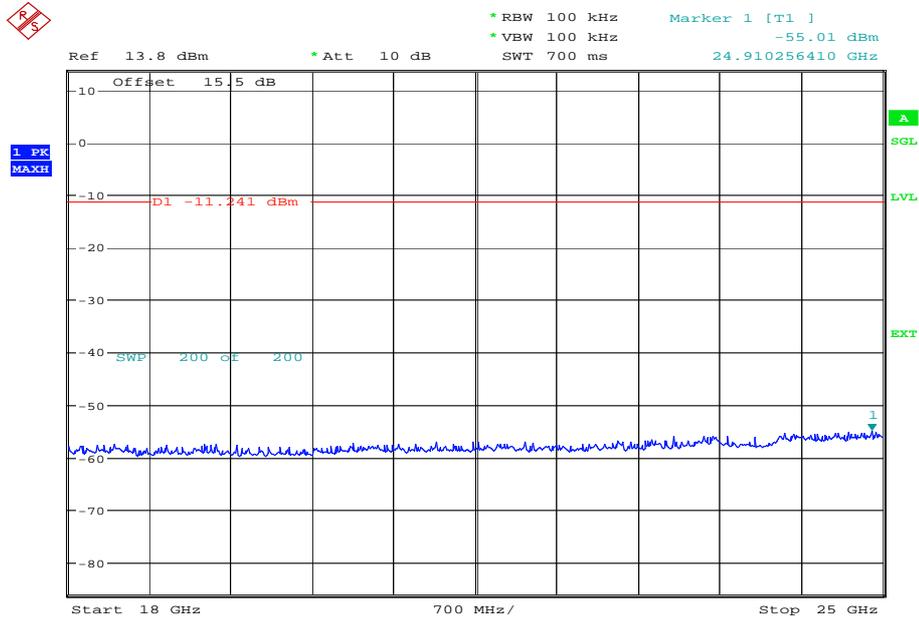

Date: 7.MAR.2013 11:07:00

2462 MHz


9 kHz to 4 GHz

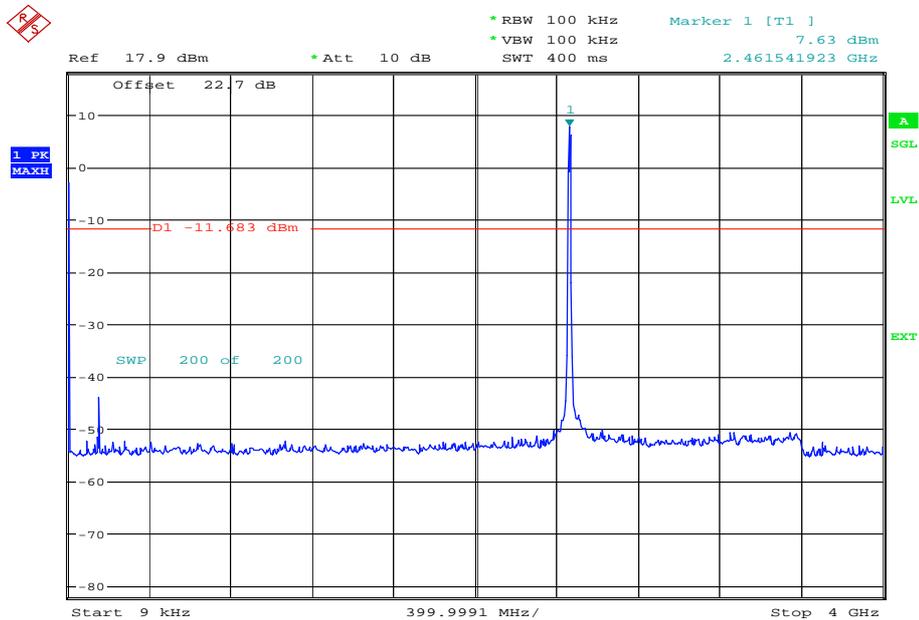

Date: 7.MAR.2013 09:09:13




### 4 GHz to 12 GHz

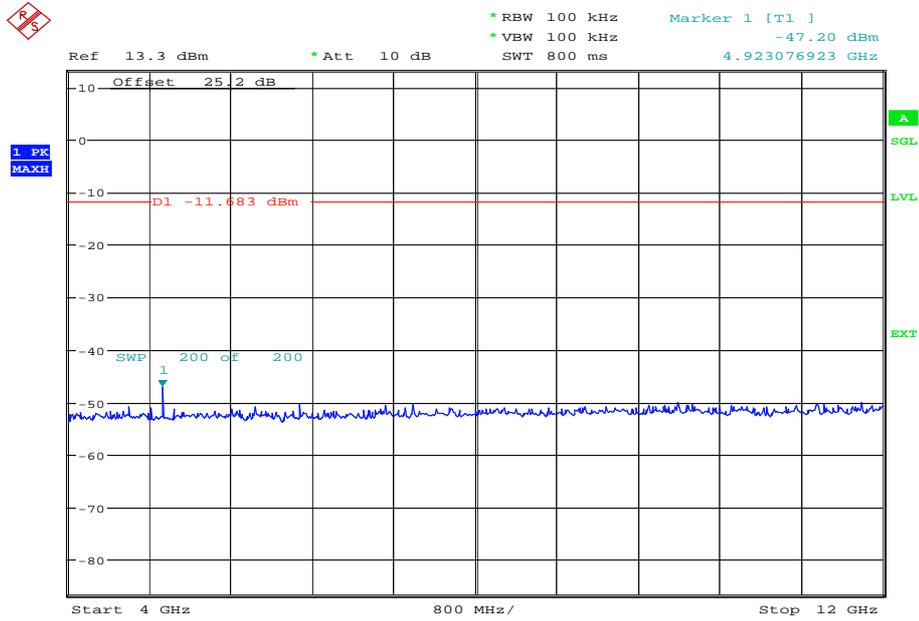

Date: 7.MAR.2013 10:56:56

### 12 GHz to 18 GHz

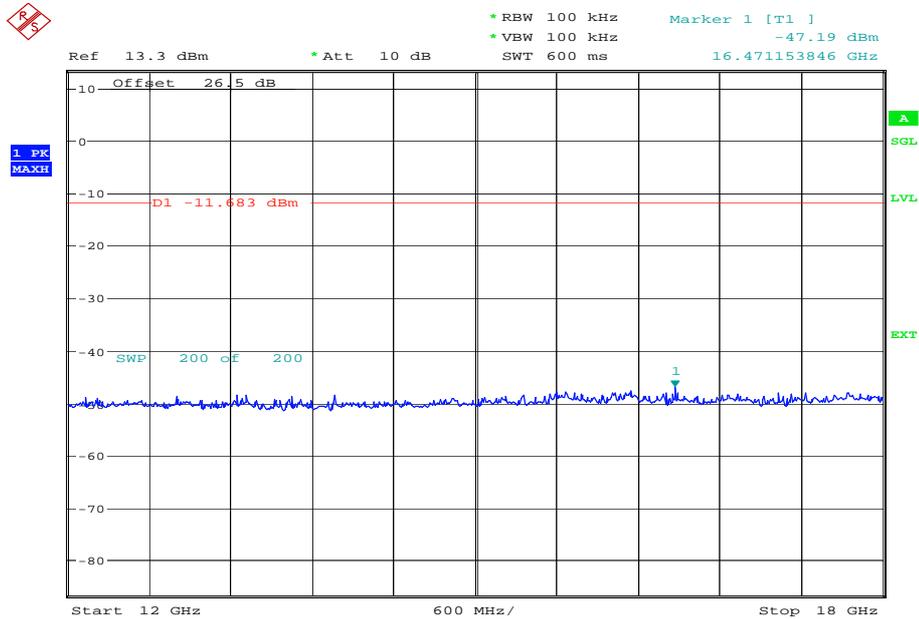


Date: 7.MAR.2013 10:59:28



Product Service

18 GHz to 25 GHz

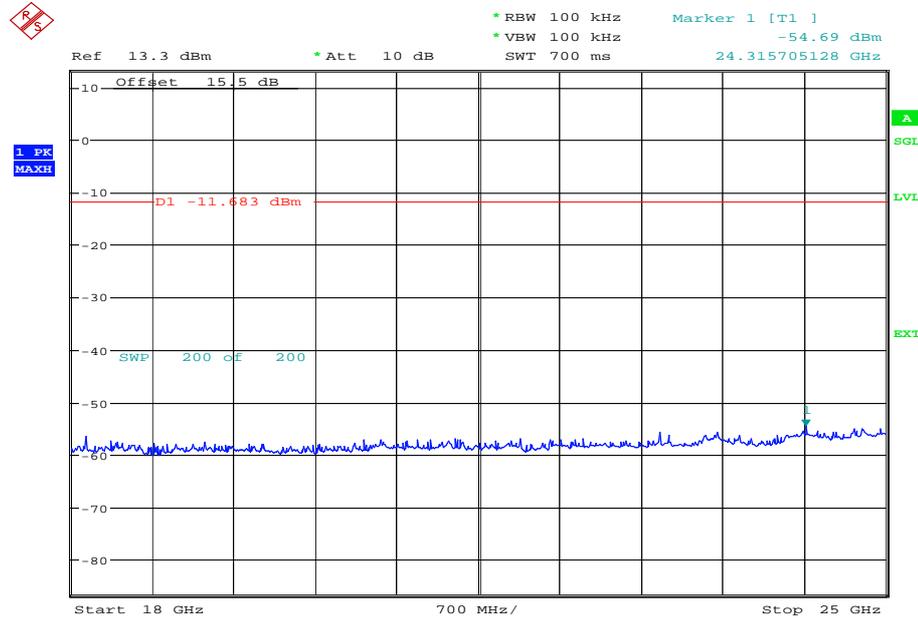

Date: 7.MAR.2013 11:03:55

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.



Spurious Radiated Emissions

2412 MHz


30 MHz to 1 GHz

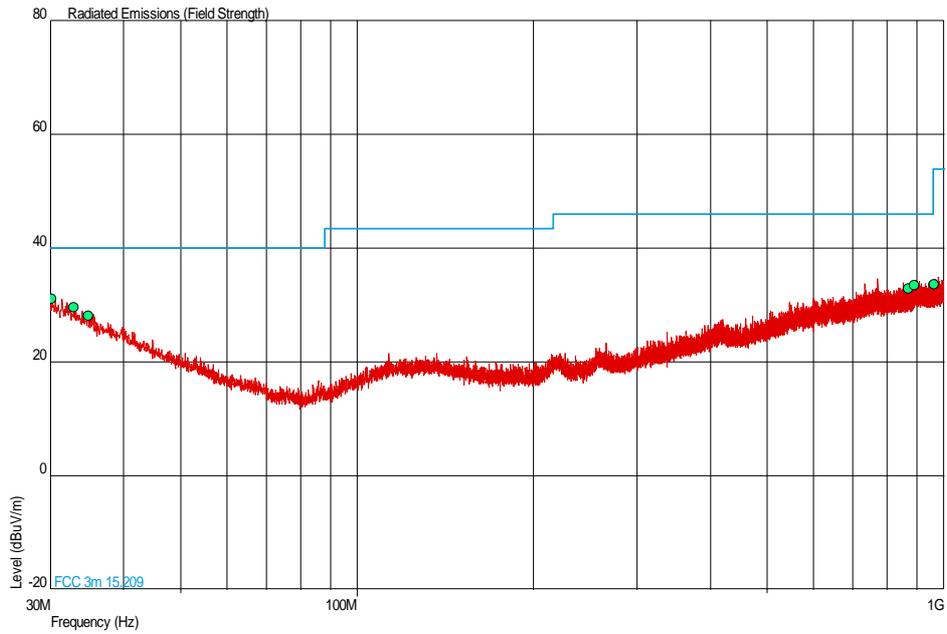

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.194	31.1	35.9	40.0	100	-8.9	64.1	180	1.00	Horizontal
32.910	29.6	30.2	40.0	100	-10.4	69.8	180	1.00	Vertical
34.802	28.1	25.4	40.0	100	-11.9	74.6	0	1.00	Horizontal
869.972	32.9	44.2	46.0	200	-13.1	155.8	0	1.00	Vertical
891.845	33.5	47.3	46.0	200	-12.5	152.7	180	1.00	Horizontal
962.461	33.6	47.9	54.0	501	-20.4	452.1	0	1.00	Vertical




1GHz to 3GHz

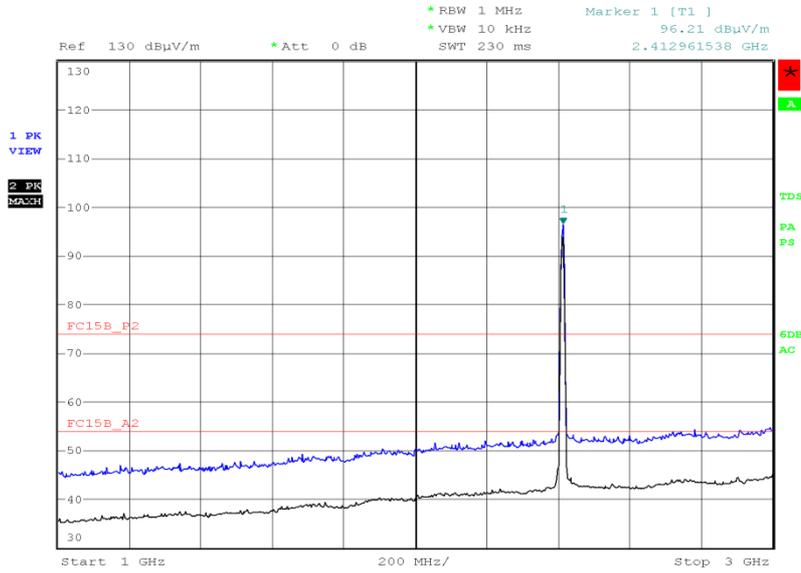

Date: 2.MAR.2013 16:56:35


3GHz to 8GHz

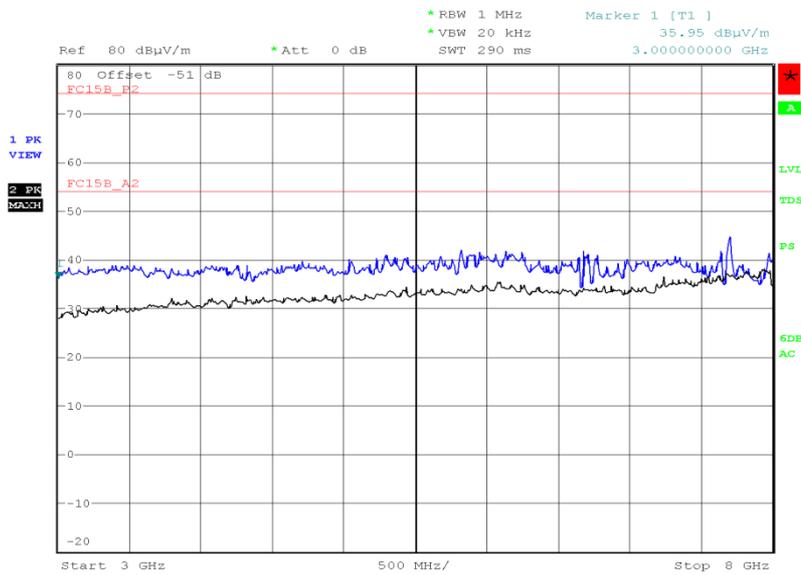

Date: 4.MAR.2013 21:42:09




8GHz to 18GHz

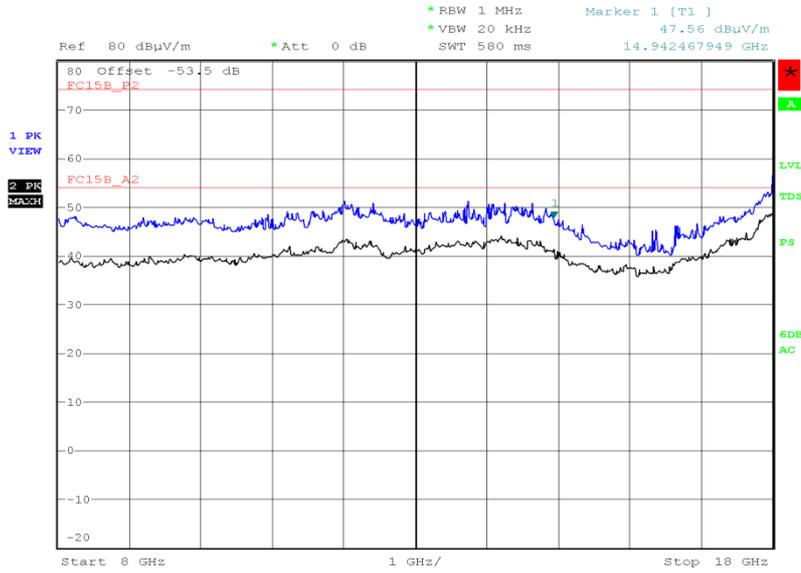

Date: 5.MAR.2013 17:40:48

18GHz to 25 GHz

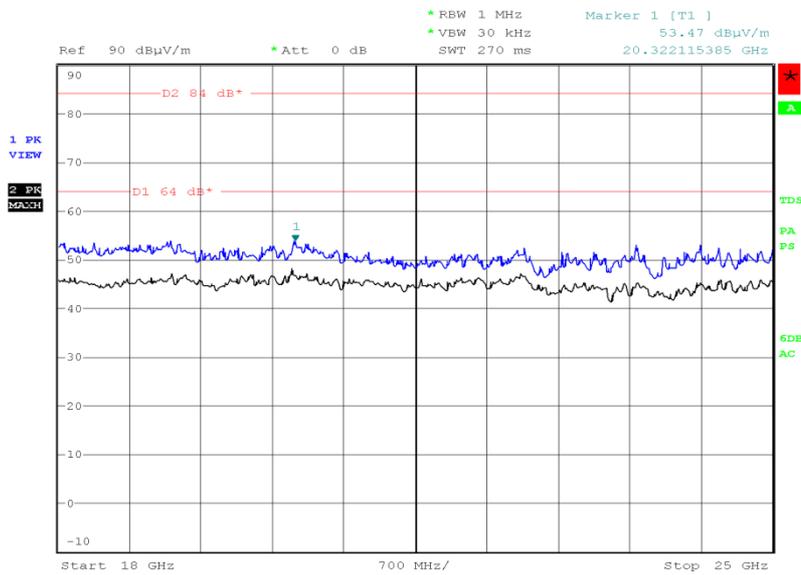


Date: 5.MAR.2013 21:19:54



2437 MHz

30 MHz to 1 GHz

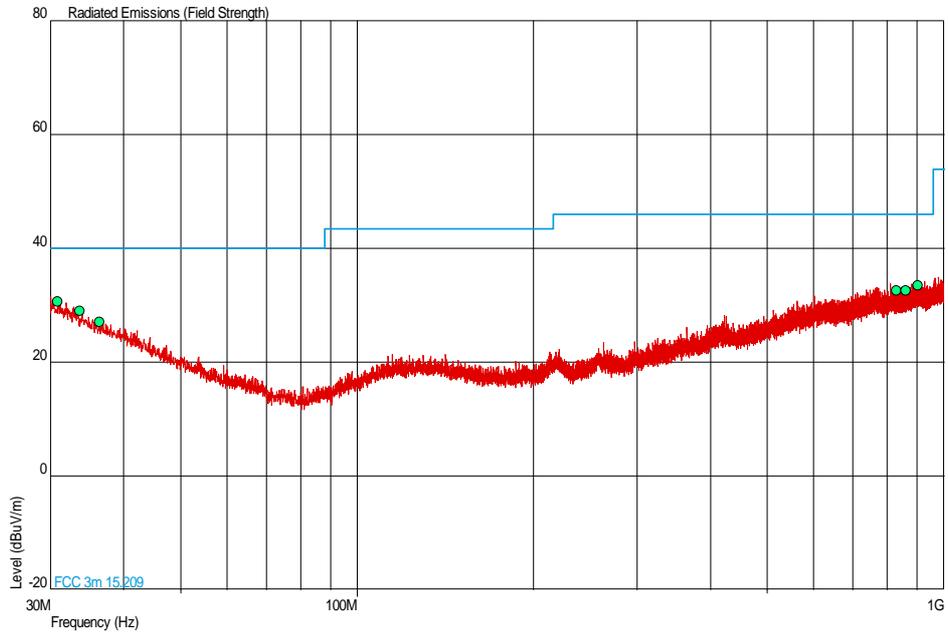


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.873	30.7	34.3	40.0	100	-9.3	65.7	180	1.00	Horizontal
33.686	29.0	28.2	40.0	100	-11.0	71.8	0	1.00	Vertical
36.354	27.1	22.6	40.0	100	-12.9	77.4	0	1.00	Vertical
829.329	32.6	42.7	46.0	200	-13.4	157.3	180	1.00	Vertical
860.223	32.7	43.2	46.0	200	-13.3	156.8	0	1.00	Horizontal
903.291	33.6	47.9	46.0	200	-12.4	152.1	180	1.00	Vertical




Product Service

1GHz to 3GHz

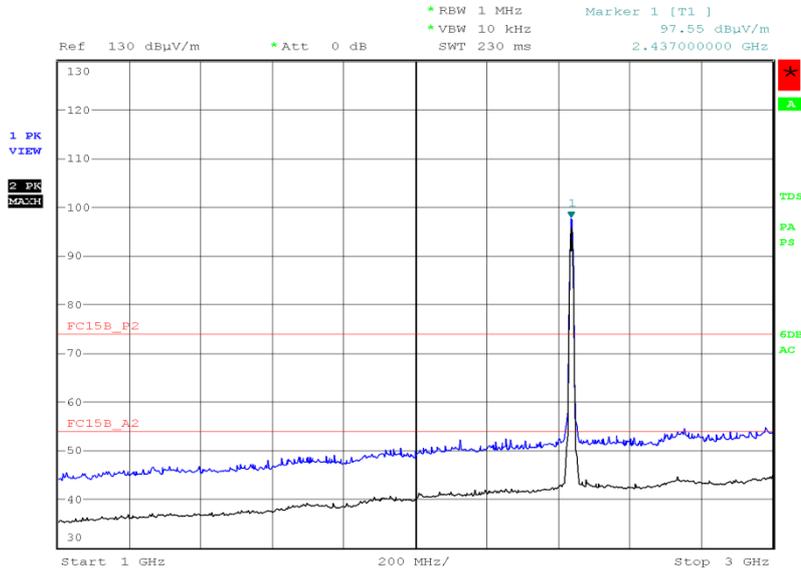

Date: 2.MAR.2013 17:00:59


3GHz to 8GHz

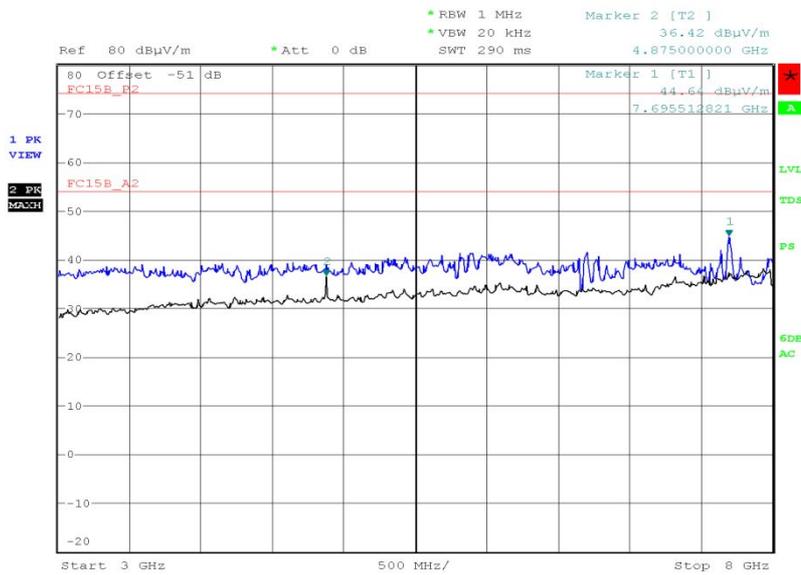

Date: 4.MAR.2013 21:46:48




8GHz to 18GHz

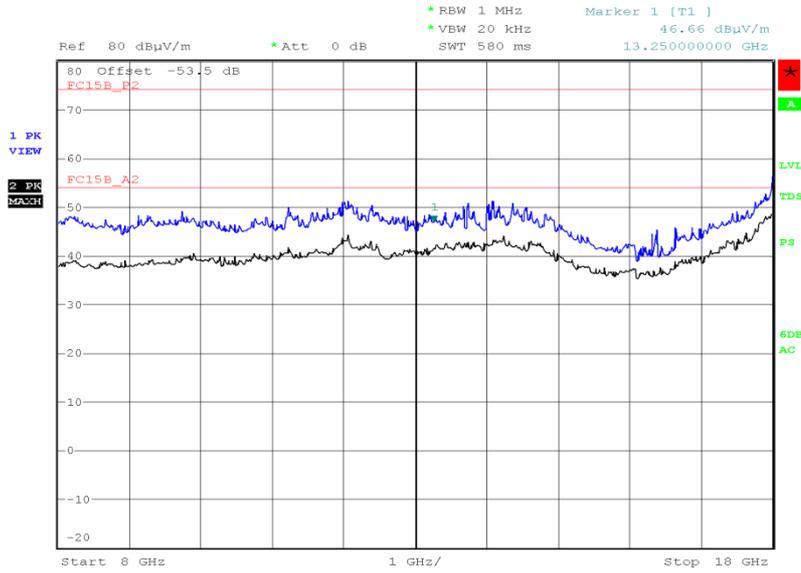

Date: 5.MAR.2013 17:50:43

18GHz to 25 GHz

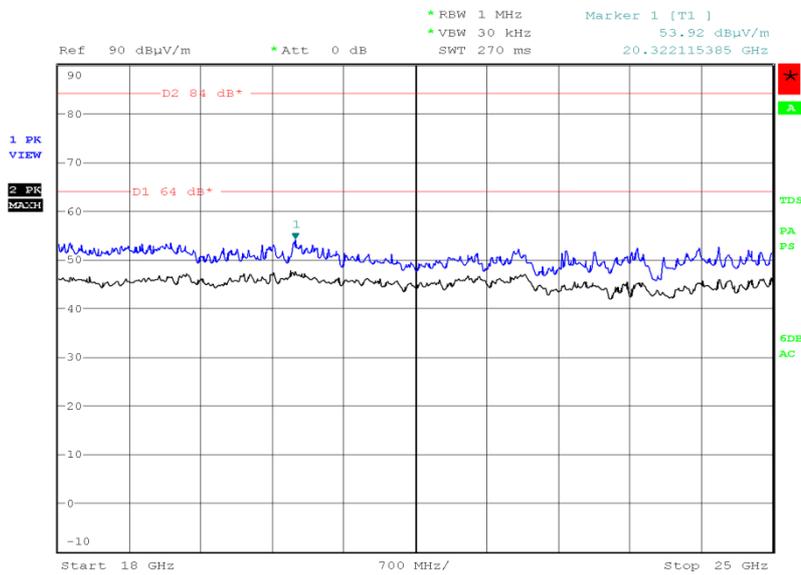


Date: 5.MAR.2013 21:34:04



2462 MHz

30 MHz to 1 GHz

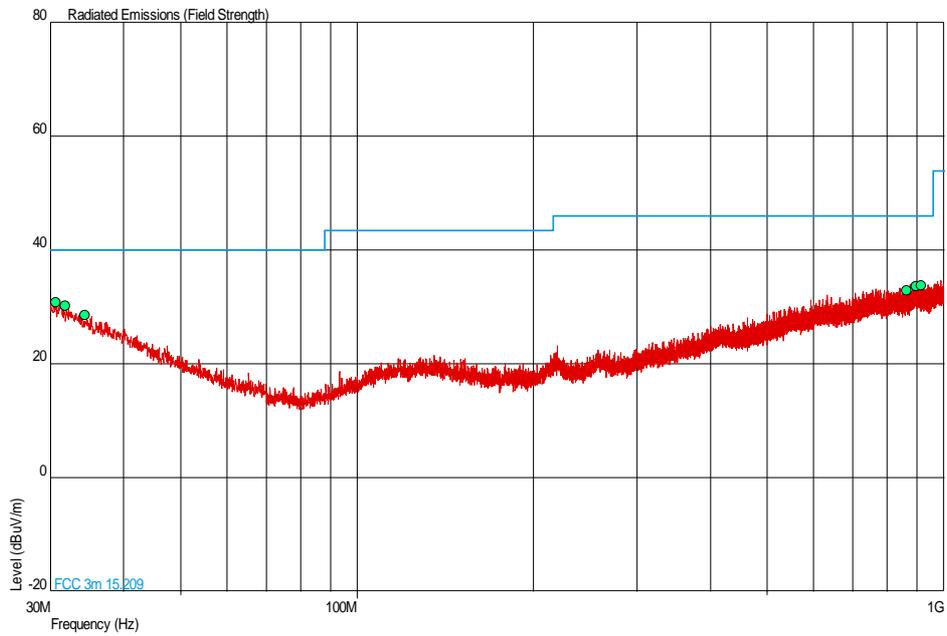


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.631	30.8	34.7	40.0	100	-9.2	65.3	180	1.00	Horizontal
31.795	30.2	32.4	40.0	100	-9.8	67.6	180	1.00	Vertical
34.317	28.5	26.6	40.0	100	-11.5	73.4	0	1.00	Vertical
863.618	32.9	44.2	46.0	200	-13.1	155.8	180	1.00	Horizontal
897.326	33.6	47.9	46.0	200	-12.4	152.1	180	1.00	Horizontal
914.640	33.8	49.0	46.0	200	-12.2	151.0	180	1.00	Vertical




Product Service

1GHz to 3GHz

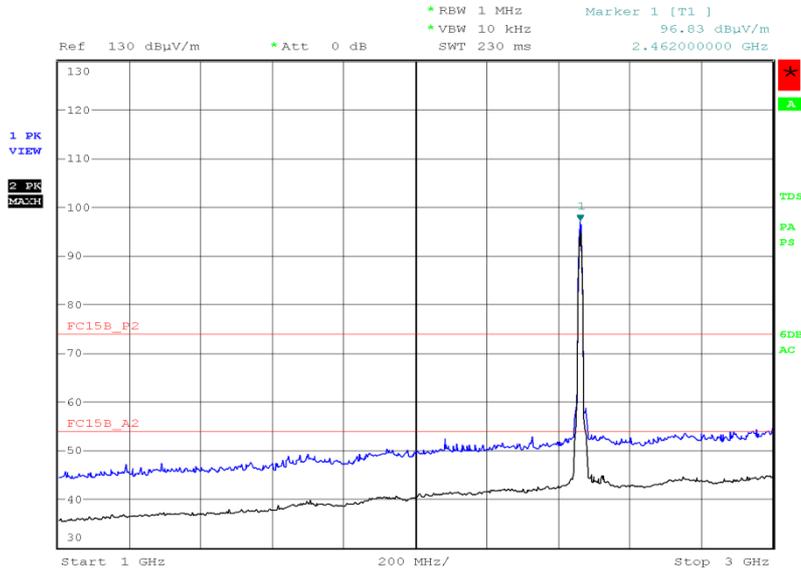

Date: 2.MAR.2013 17:28:51

3GHz to 8GHz

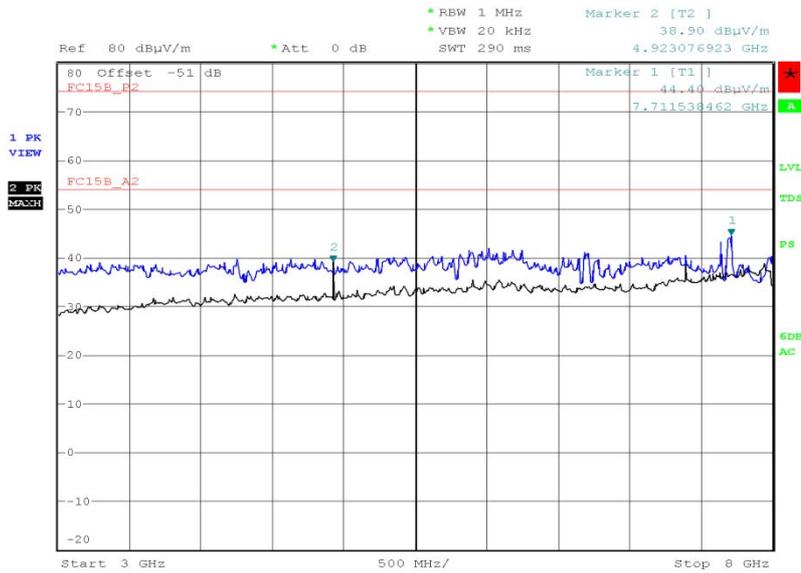


Date: 4.MAR.2013 21:52:06




Product Service

8GHz to 18GHz

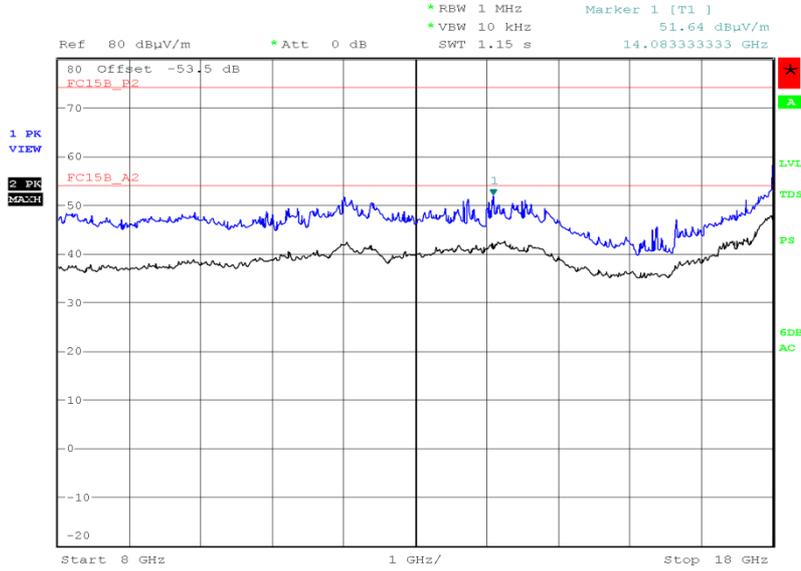

Date: 5.MAR.2013 19:07:18

18GHz to 25 GHz

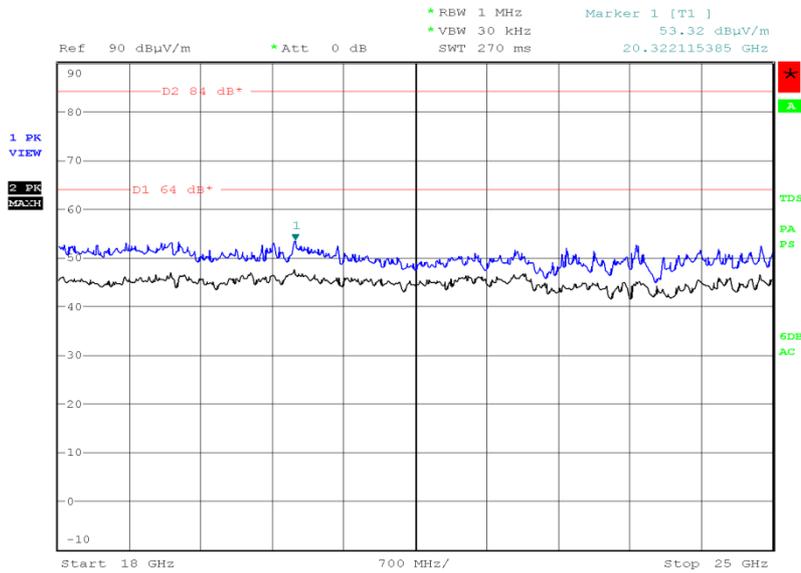

Date: 5.MAR.2013 21:37:26

<inf p5f>

Limit

Peak (dBuV/m)	Average (dBuV/m)
74.0	54.0




Product Service

Band Edge Emissions

2412 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	54.19	43.96

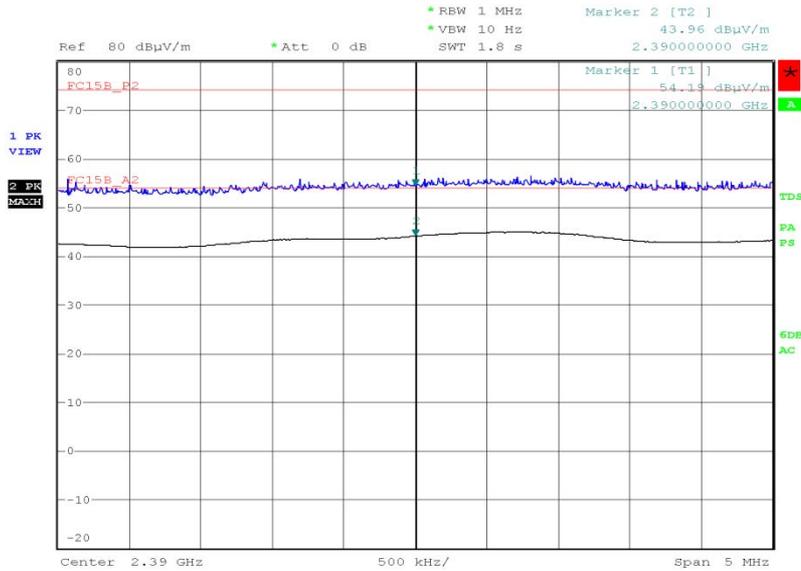


Date: 2.MAR.2013 16:46:59



2462 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	54.75	44.76

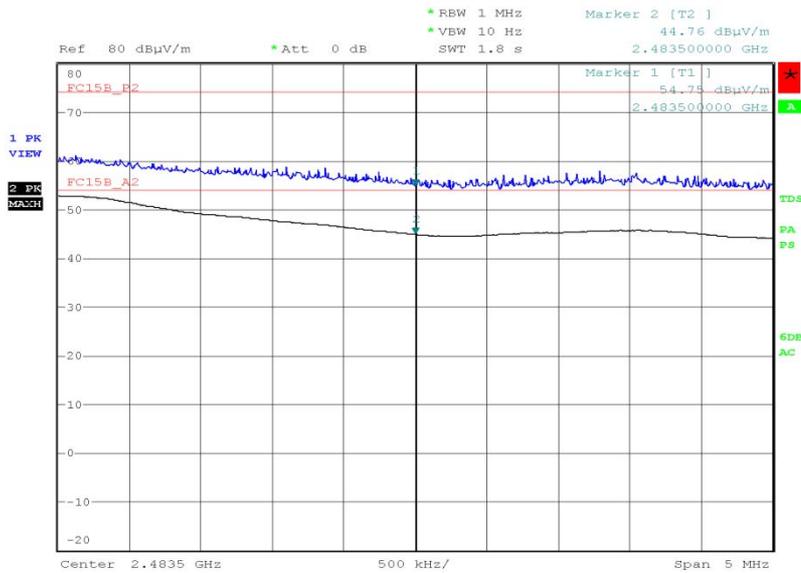

Date: 2.MAR.2013 17:18:43


Limit

Peak (dBµV/m)	Average (dBµV/m)
74.0	54.0






### 4 GHz to 12 GHz

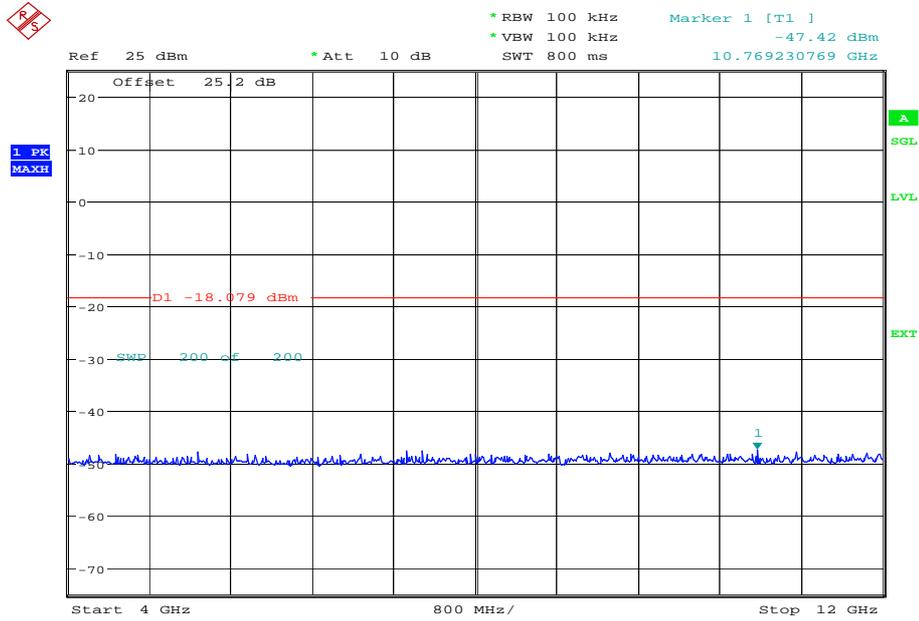

Date: 7.MAR.2013 10:06:35


### 12 GHz to 18 GHz

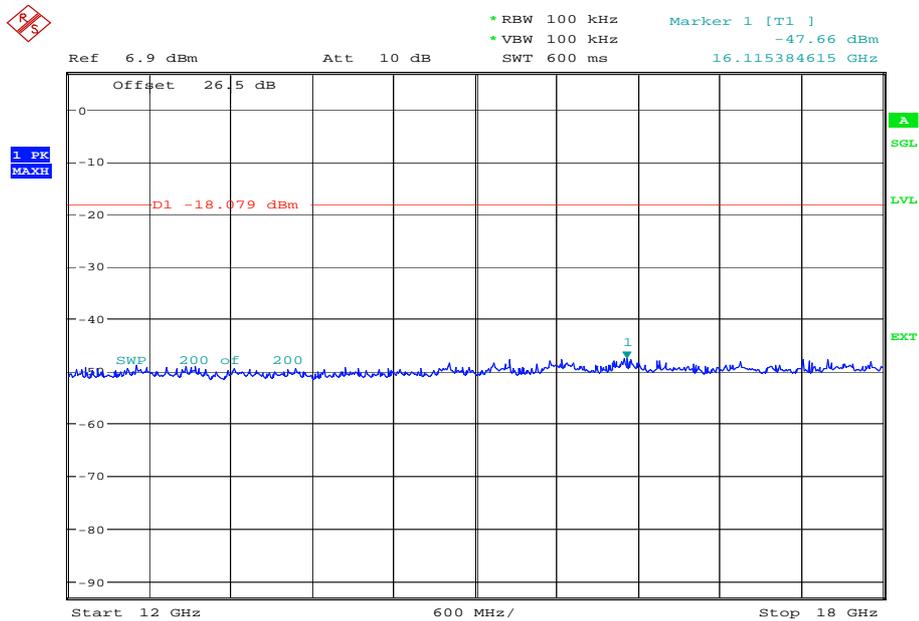

Date: 7.MAR.2013 10:09:02




18 GHz to 25 GHz

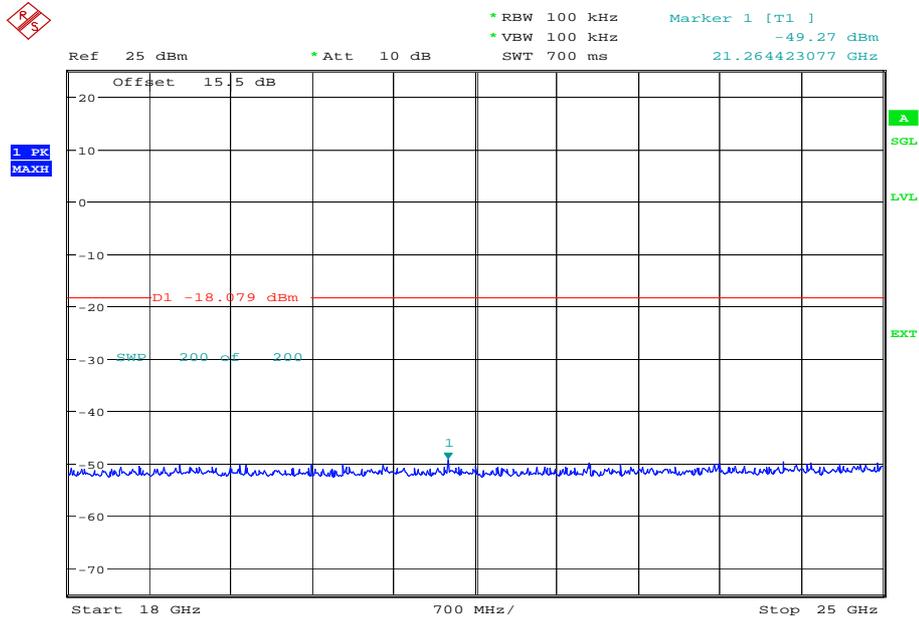

Date: 7.MAR.2013 11:13:37

2437 MHz


9 kHz to 4 GHz

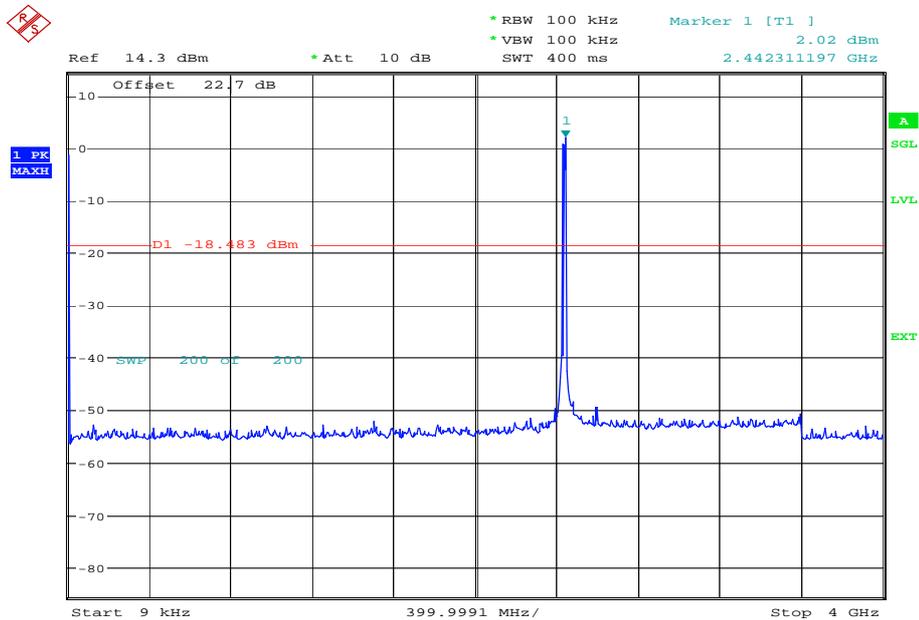

Date: 7.MAR.2013 09:17:04




4 GHz to 12 GHz

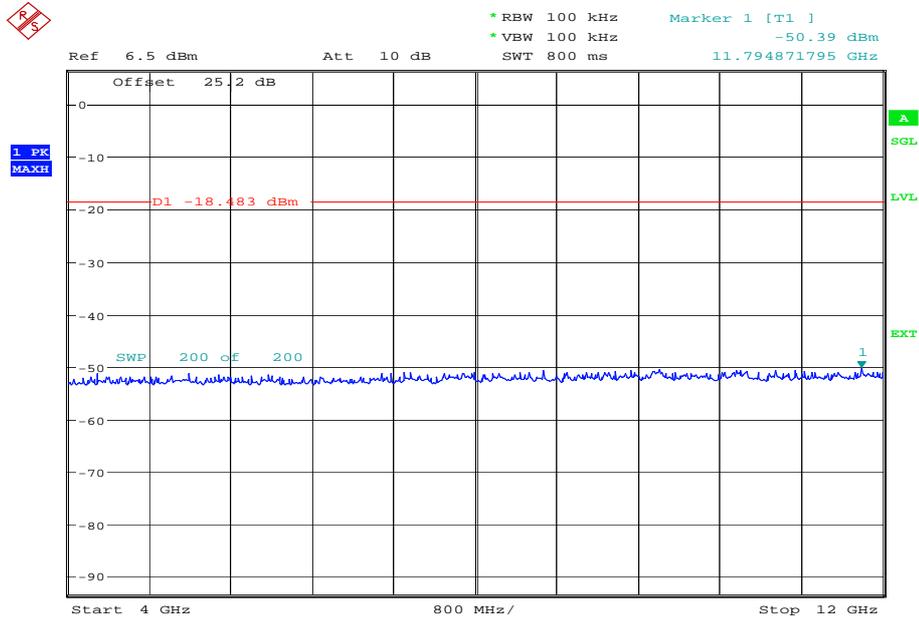

Date: 7.MAR.2013 10:12:33


12 GHz to 18 GHz

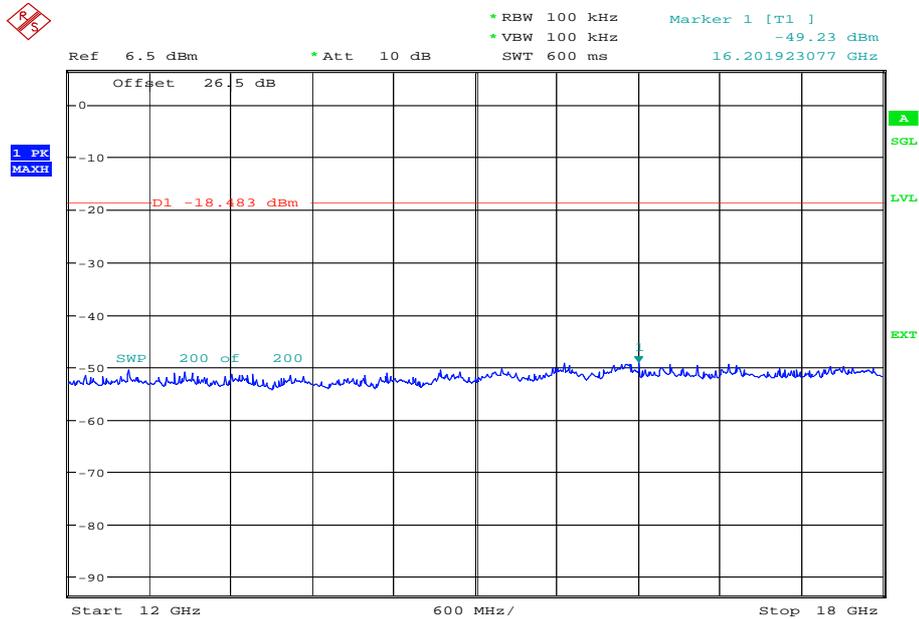

Date: 7.MAR.2013 10:15:01




18 GHz to 25 GHz

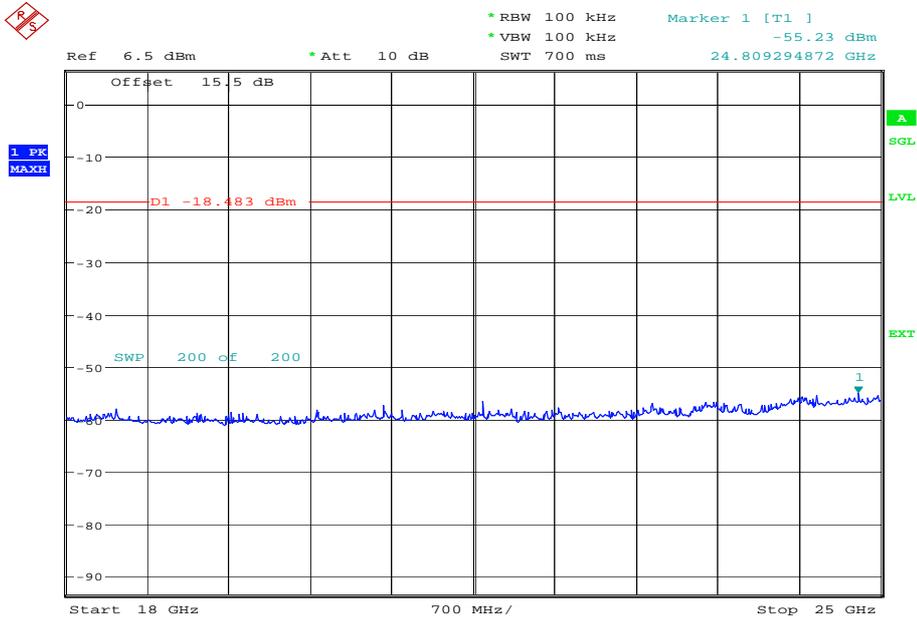

Date: 7.MAR.2013 11:16:44

2462 MHz


9 kHz to 4 GHz

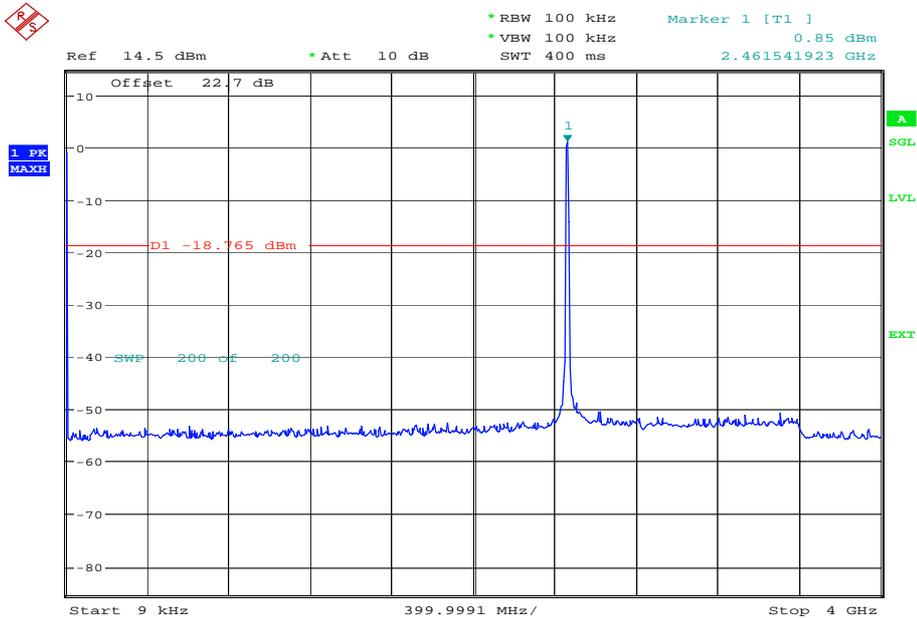

Date: 7.MAR.2013 09:20:19




4 GHz to 12 GHz

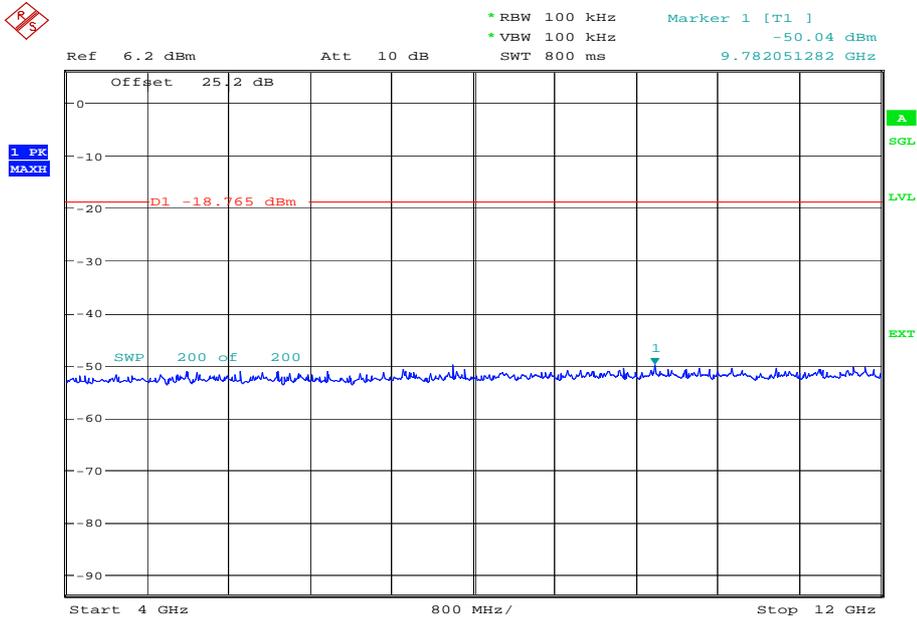

Date: 7.MAR.2013 10:18:44


12 GHz to 18 GHz

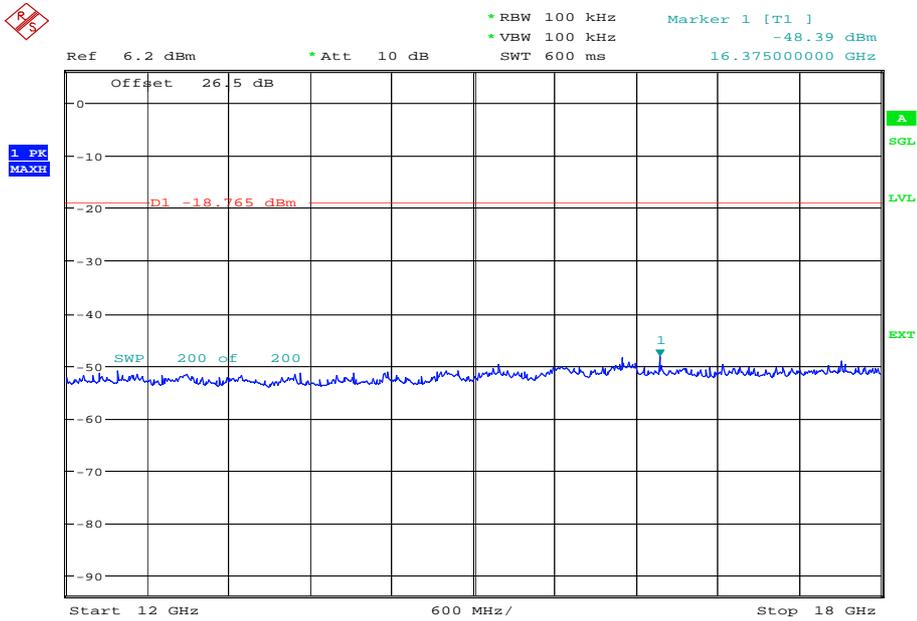

Date: 7.MAR.2013 10:21:12



18 GHz to 25 GHz

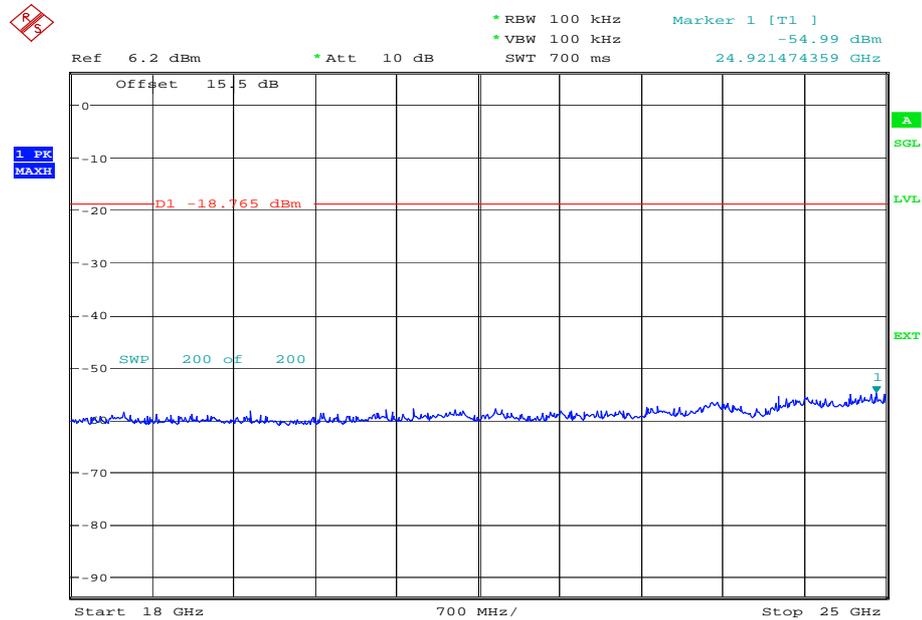

Date: 7.MAR.2013 11:19:58

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.



Spurious Radiated Emissions

2412 MHz


30 MHz to 1 GHz

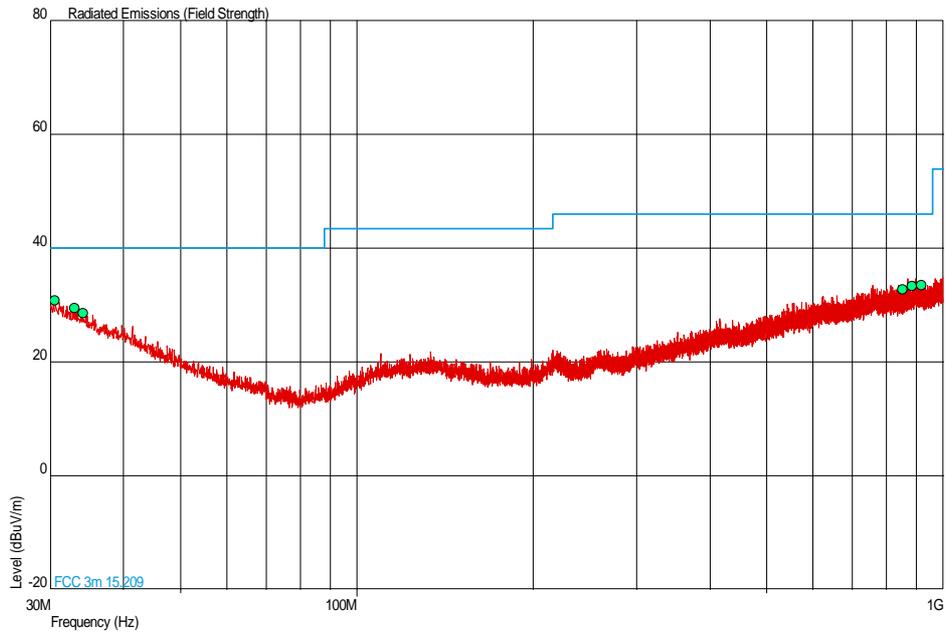

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.579	30.8	34.7	40.0	100	-9.2	65.3	0	0.00	Horizontal
33.011	29.5	29.9	40.0	100	-10.5	70.1	0	0.00	Horizontal
34.123	28.6	26.9	40.0	100	-11.4	73.1	0	1.00	Vertical
852.754	32.7	43.2	46.0	200	-13.3	156.8	0	1.00	Horizontal
885.928	33.3	46.2	46.0	200	-12.7	153.8	0	1.00	Horizontal
917.017	33.6	47.9	46.0	200	-12.4	152.1	0	1.00	Horizontal




1GHz to 3GHz

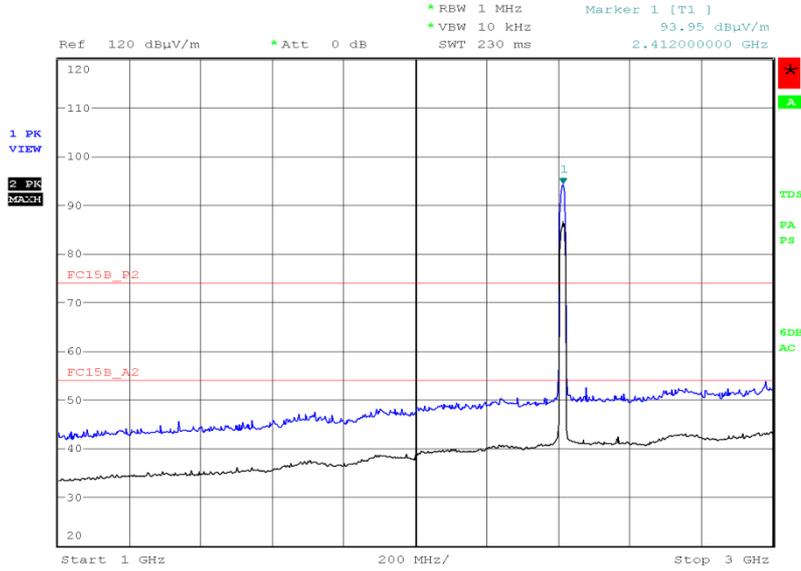

Date: 2.MAR.2013 17:58:54


3GHz to 8GHz

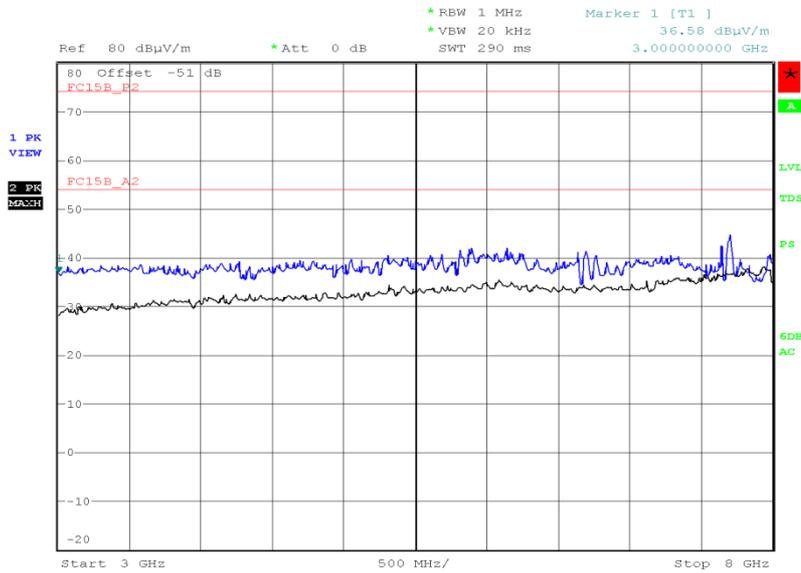

Date: 4.MAR.2013 21:24:17




8GHz to 18GHz

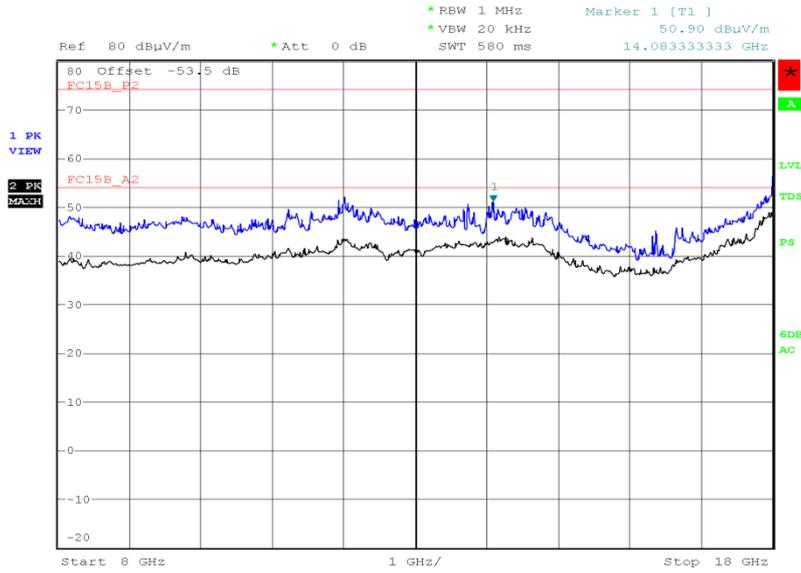

Date: 5.MAR.2013 18:08:28

18GHz to 25GHz

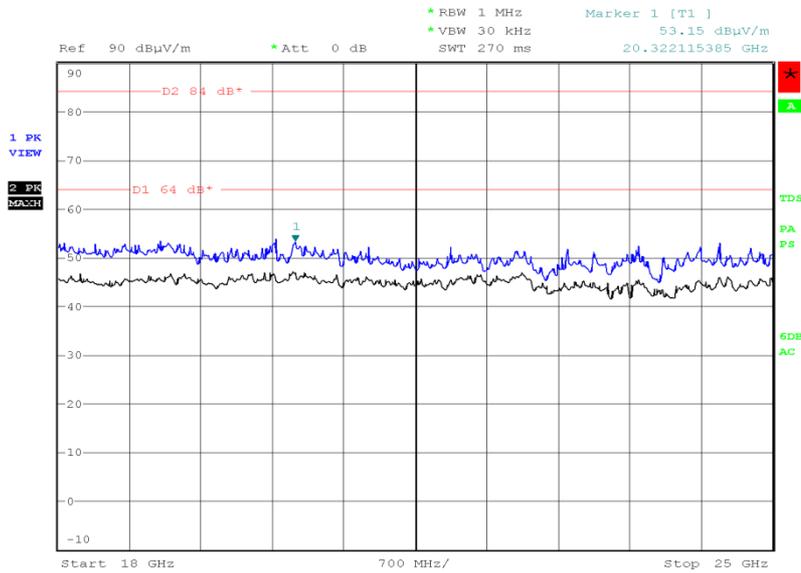


Date: 5.MAR.2013 21:40:55



2437 MHz


30 MHz to 1 GHz

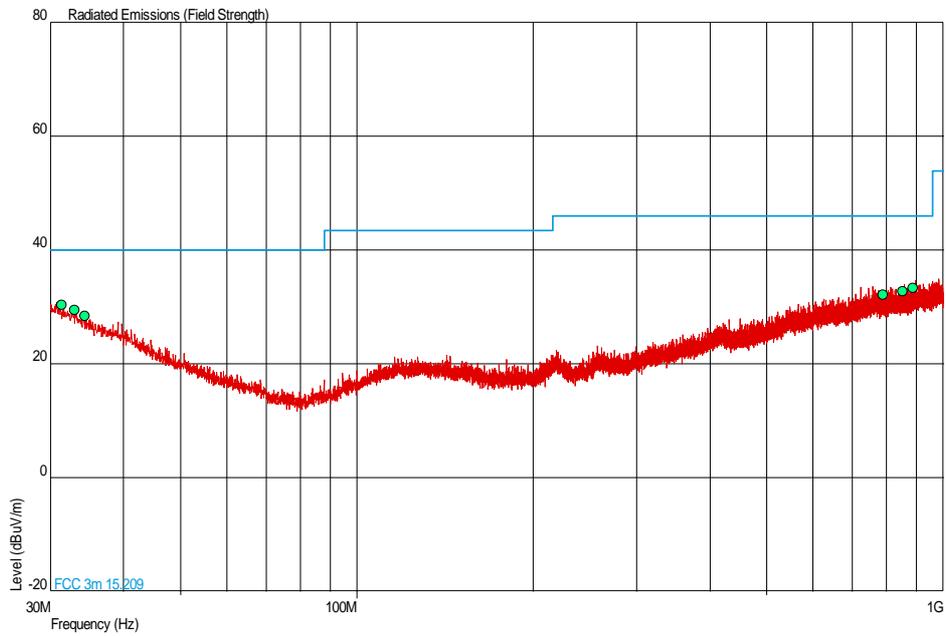

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
31.407	30.4	33.1	40.0	100	-9.6	66.9	0	1.00	Vertical
33.007	29.5	29.9	40.0	100	-10.5	70.1	180	1.00	Horizontal
34.317	28.5	26.6	40.0	100	-11.5	73.4	0	1.00	Vertical
790.432	32.2	40.7	46.0	200	-13.8	159.3	180	1.00	Horizontal
852.900	32.8	43.7	46.0	200	-13.2	156.3	0	1.00	Horizontal
888.790	33.3	46.2	46.0	200	-12.7	153.8	0	1.00	Vertical




1GHz to 3GHz

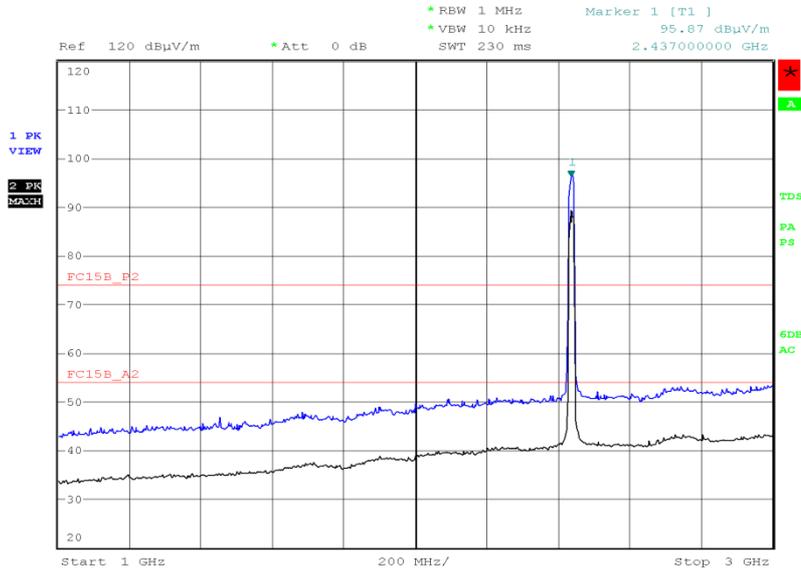

Date: 2.MAR.2013 18:15:14


3GHz to 8GHz

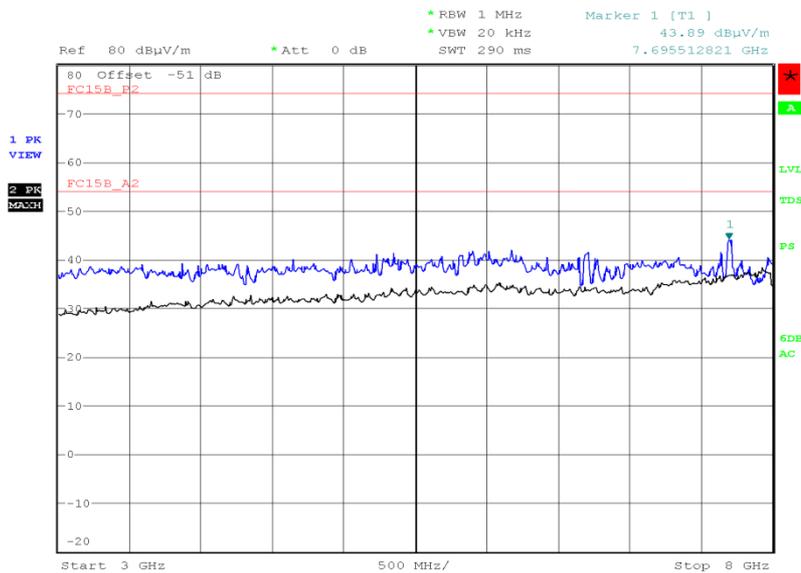

Date: 4.MAR.2013 21:29:04




8GHz to 18GHz

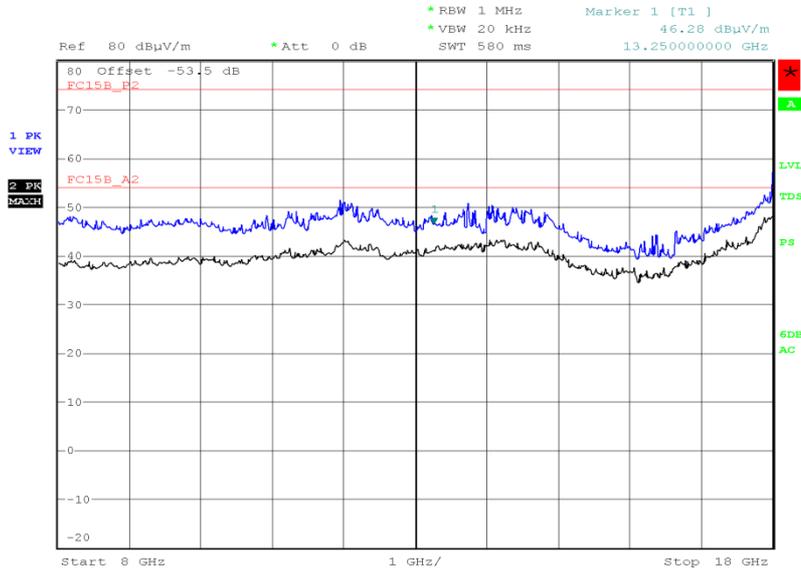

Date: 5.MAR.2013 18:21:12

18GHz to 25GHz

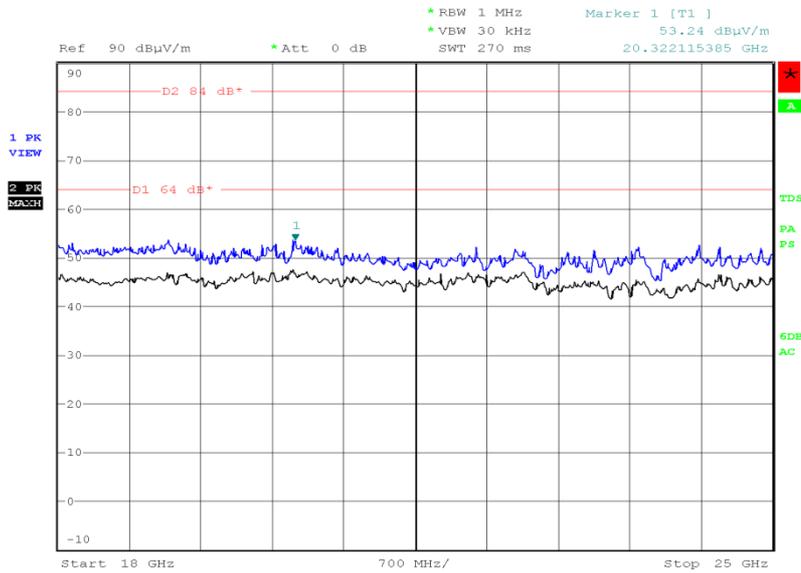


Date: 5.MAR.2013 21:46:39



2462 MHz


30 MHz to 1 GHz

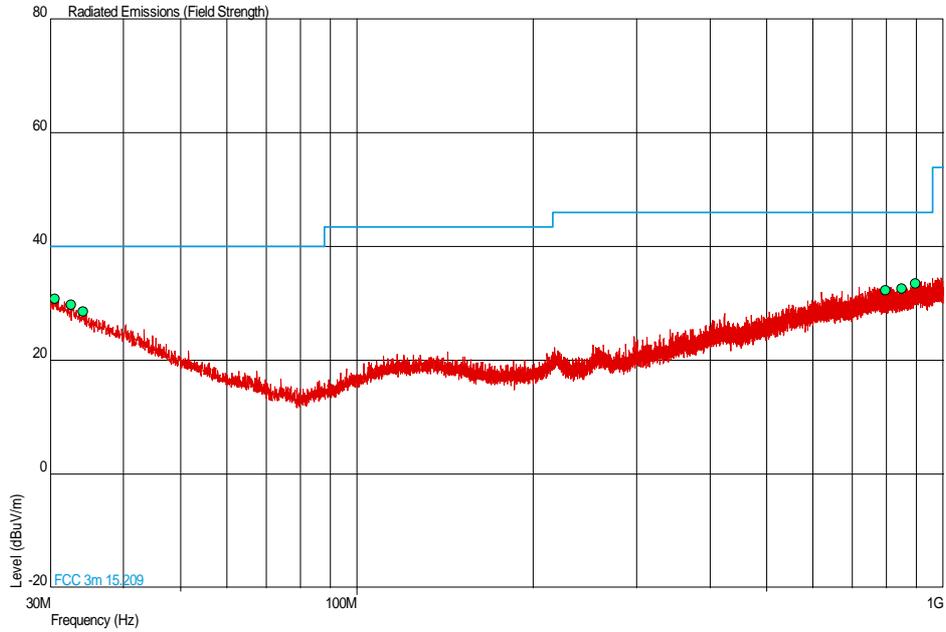

Frequency (MHz)	QP Level (dB $\mu$ V/m)	QP Level ( $\mu$ V/m)	QP Limit (dB $\mu$ V/m)	QP Limit ( $\mu$ V/m)	QP Margin (dB $\mu$ V/m)	QP Margin ( $\mu$ V/m)	Angle (Deg)	Height (m)	Polarity
30.579	30.8	34.7	40.0	100	-9.2	65.3	0	0.00	Horizontal
32.571	29.8	30.9	40.0	100	-10.2	69.1	180	1.00	Horizontal
34.123	28.6	26.9	40.0	100	-11.4	73.1	180	1.00	Horizontal
796.979	32.4	41.7	46.0	200	-13.6	158.3	180	1.00	Horizontal
849.068	32.7	43.2	46.0	200	-13.3	156.8	0	1.00	Vertical
896.356	33.5	47.3	46.0	200	-12.5	152.7	180	1.00	Horizontal




1GHz to 3GHz

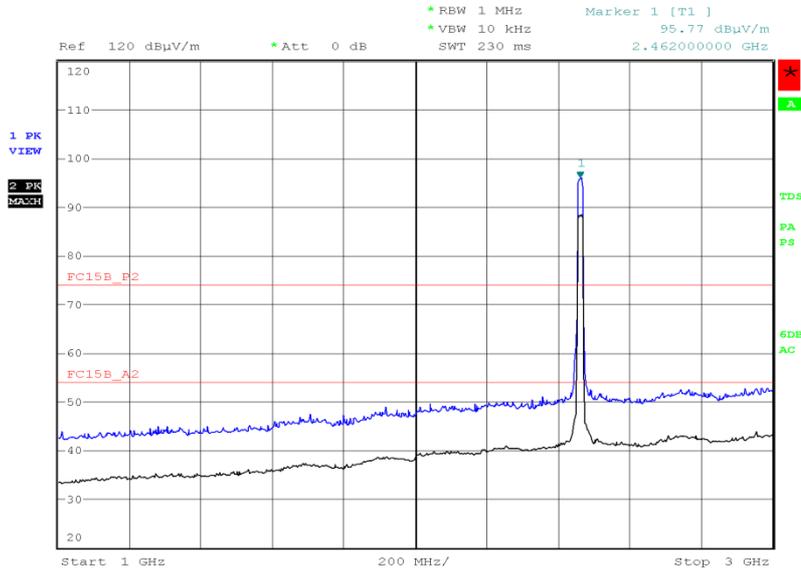

Date: 2.MAR.2013 18:51:36


3GHz to 8GHz

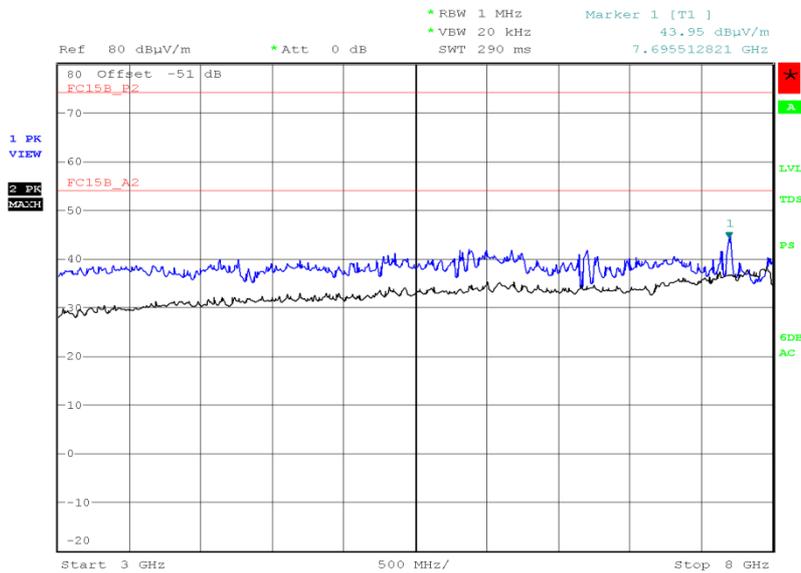

Date: 4.MAR.2013 21:33:34




8GHz to 18GHz

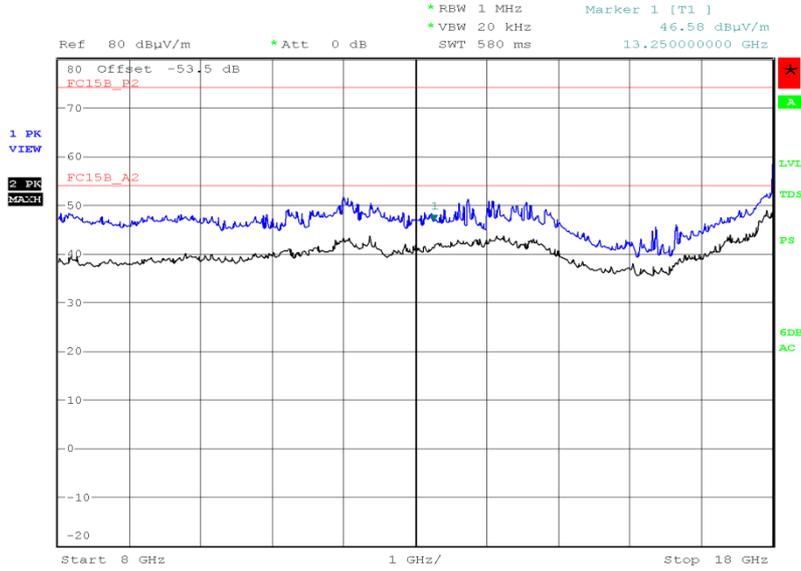

Date: 5.MAR.2013 18:33:15

18GHz to 25GHz

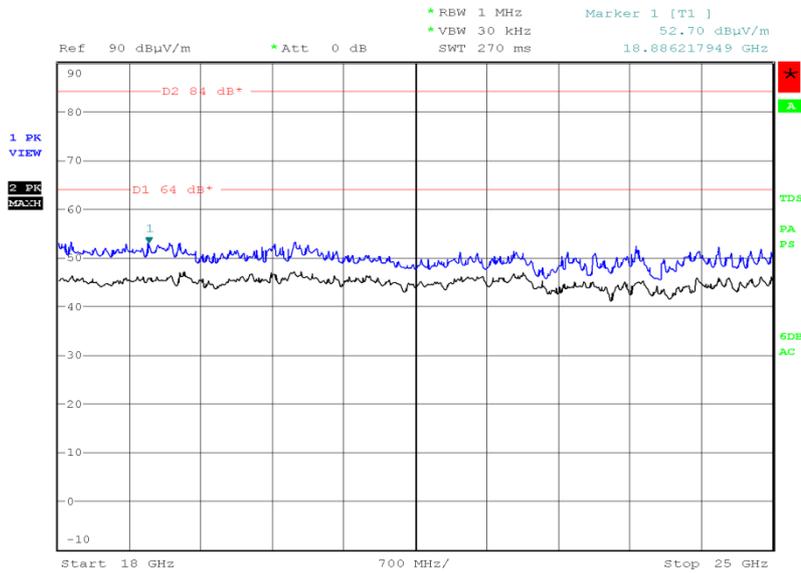

Date: 5.MAR.2013 21:50:06

Limit

Peak (dBμV/m)	Average (dBμV/m)
74.0	54.0




Product Service

Band Edge Emissions

2412 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	54.16	40.81

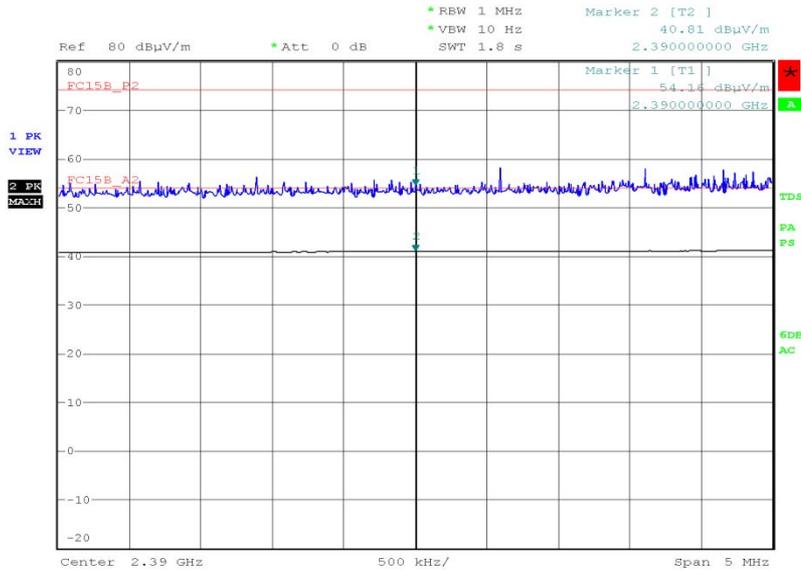


Date: 2.MAR.2013 17:50:01



2462 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	54.99	42.59

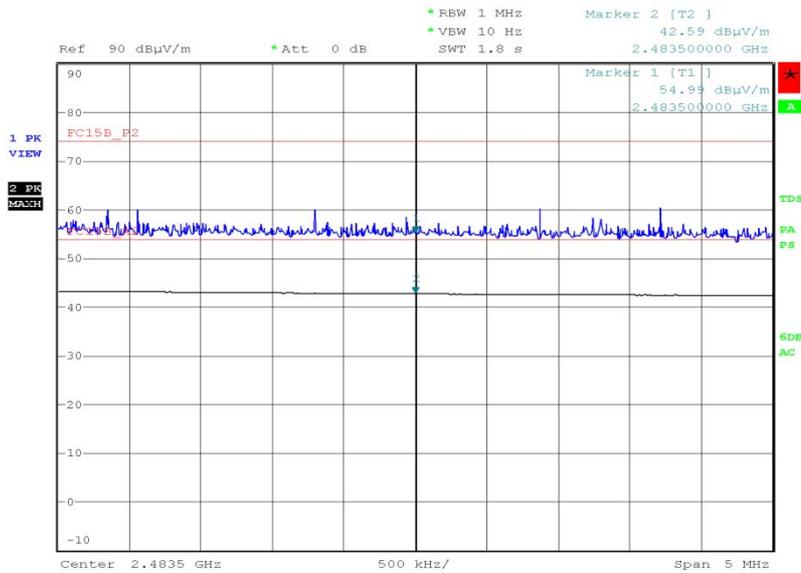

Date: 2.MAR.2013 18:45:17

Limit

Peak (dBµV/m)	Average (dBµV/m)
74.0	54.0



Product Service

802.11(n)


4.0 V DC Supply

Spurious Conducted Emissions

65 Mbps

2412 MHz


9 kHz to 4 GHz

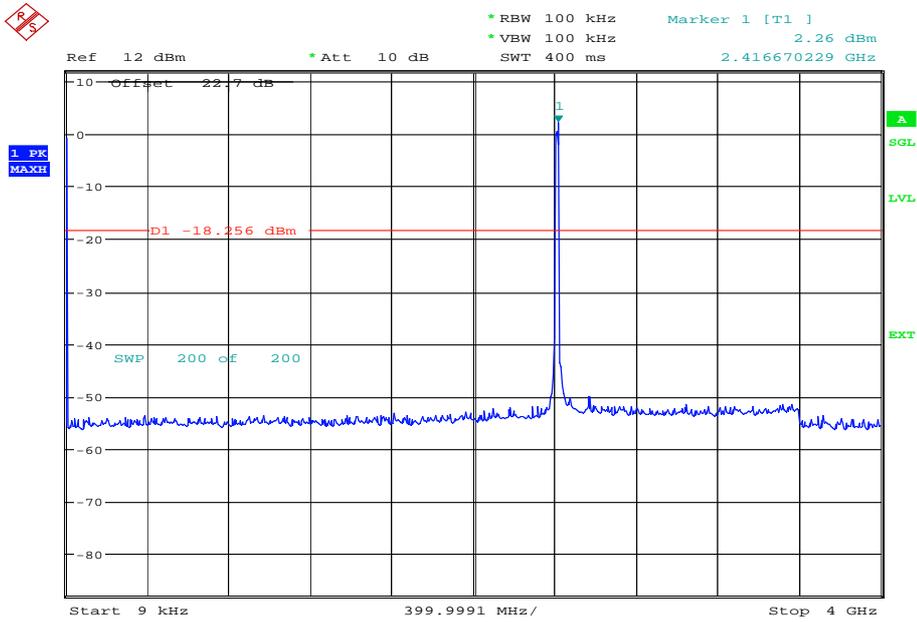

Date: 7.MAR.2013 09:24:11




4 GHz to 12 GHz

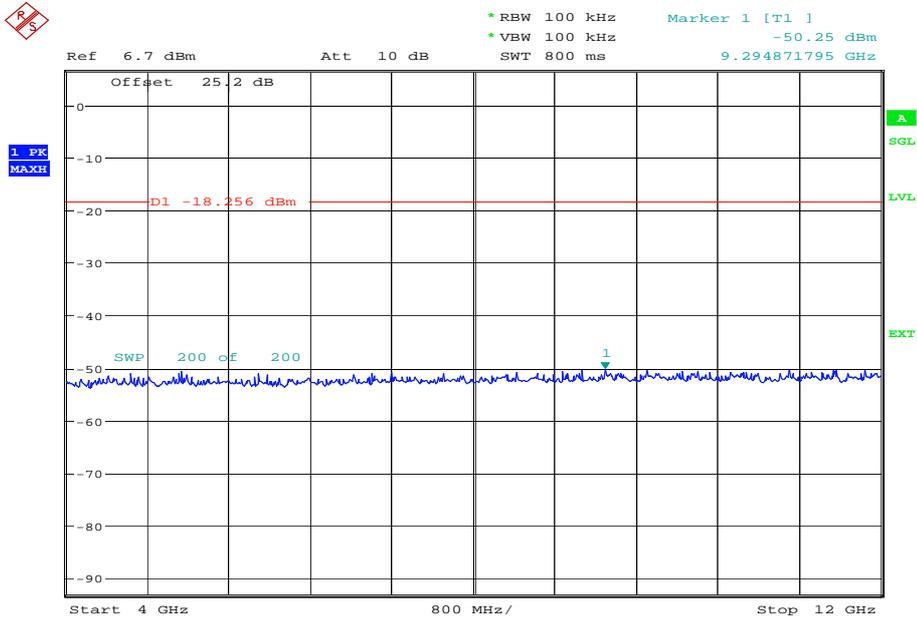

Date: 7.MAR.2013 09:53:14

12 GHz to 18 GHz

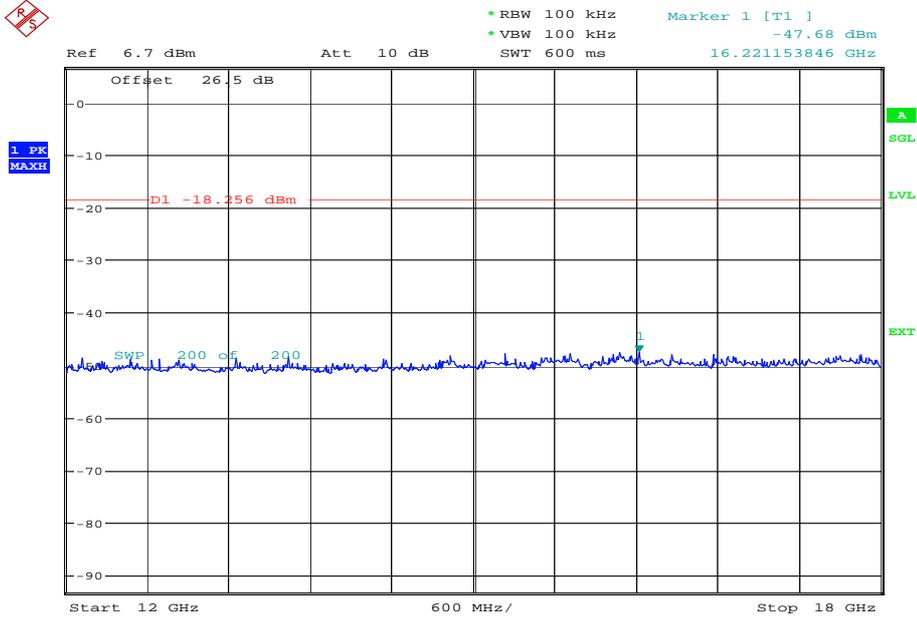


Date: 7.MAR.2013 09:55:56



Product Service


18 GHz to 25 GHz

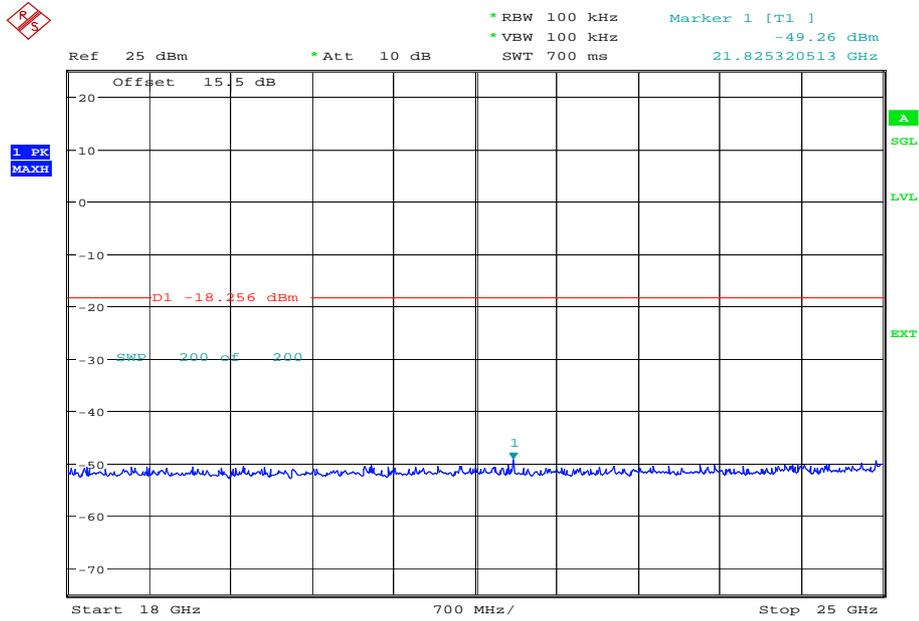

Date: 7.MAR.2013 11:23:24

2437 MHz


9 kHz to 4 GHz

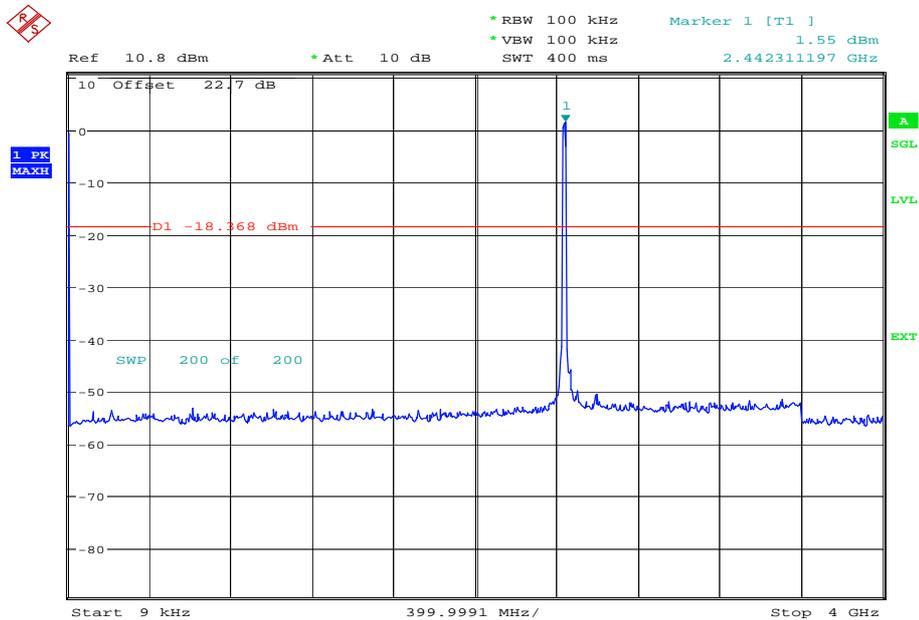

Date: 7.MAR.2013 09:27:02




### 4 GHz to 12 GHz

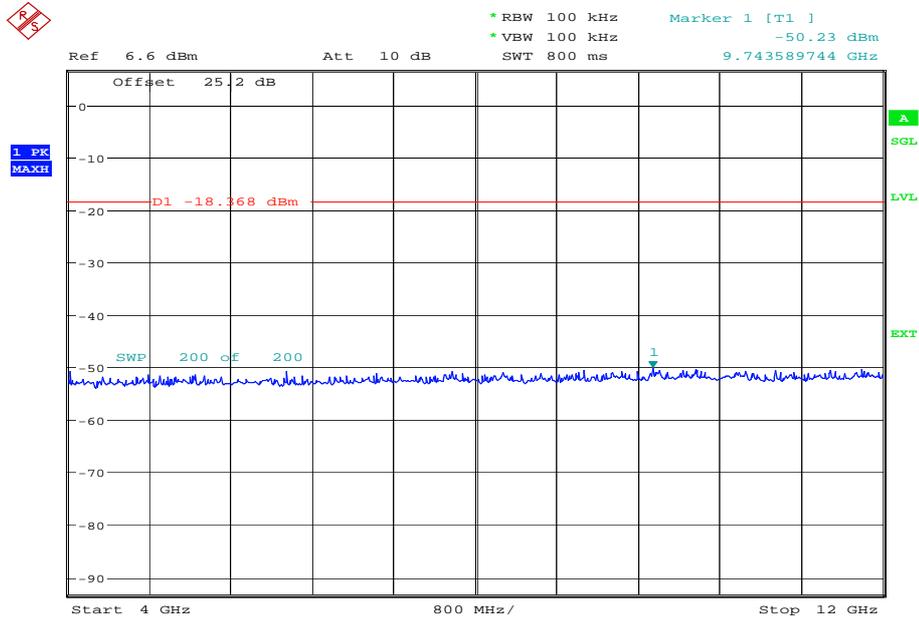

Date: 7.MAR.2013 09:47:07

### 12 GHz to 18 GHz

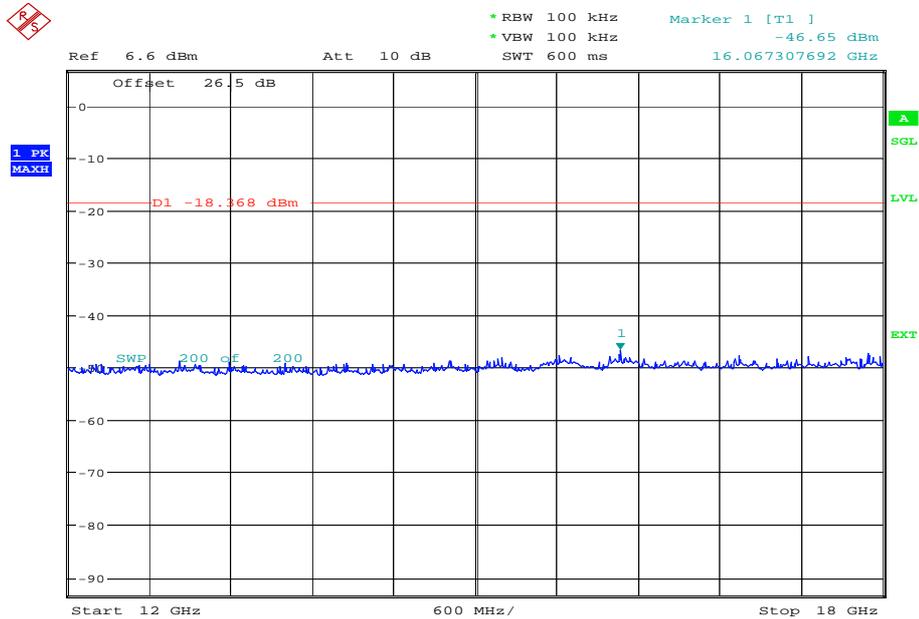


Date: 7.MAR.2013 09:49:34



Product Service


18 GHz to 25 GHz

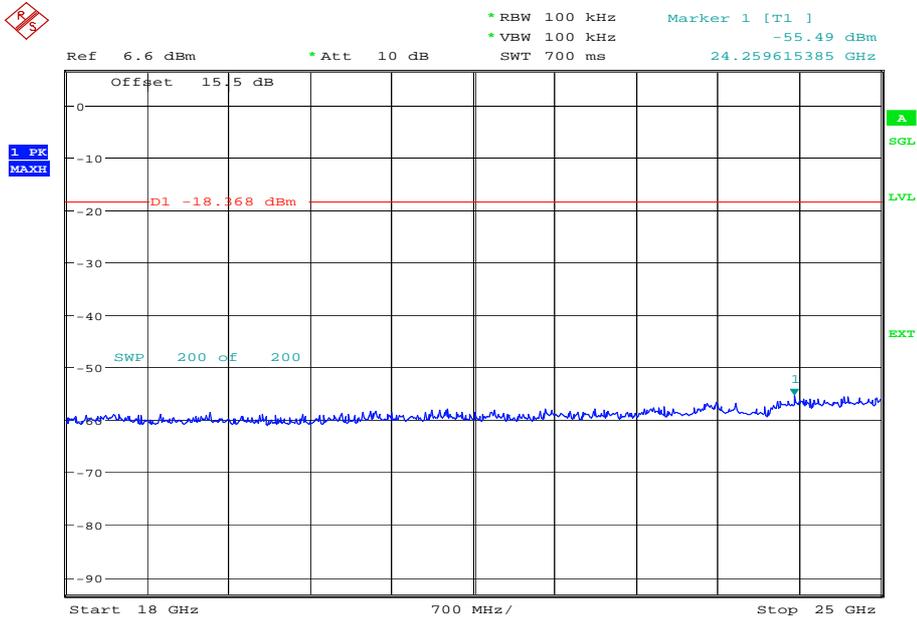

Date: 7.MAR.2013 11:26:36

2462 MHz


9 kHz to 4 GHz

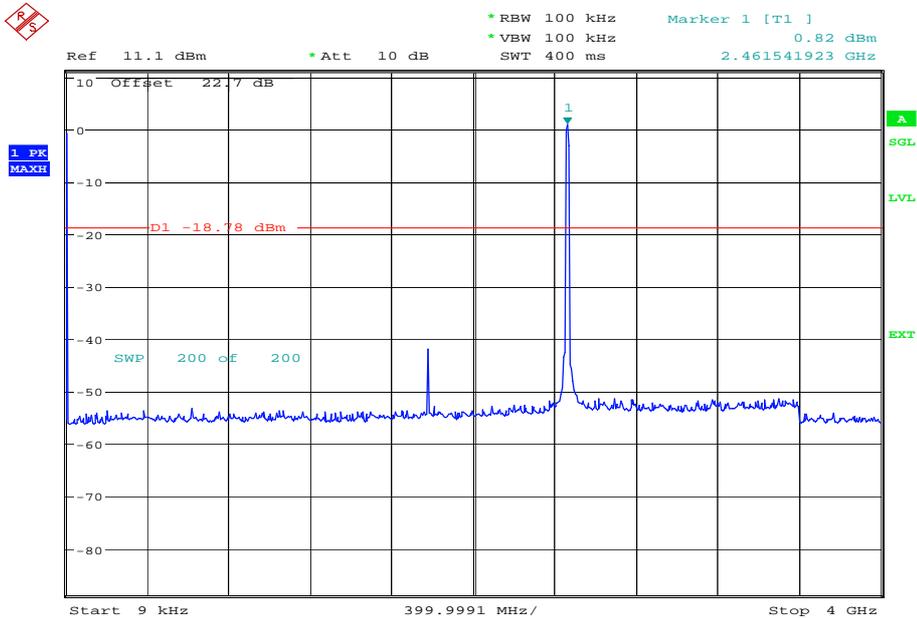

Date: 7.MAR.2013 09:30:12




4 GHz to 12 GHz

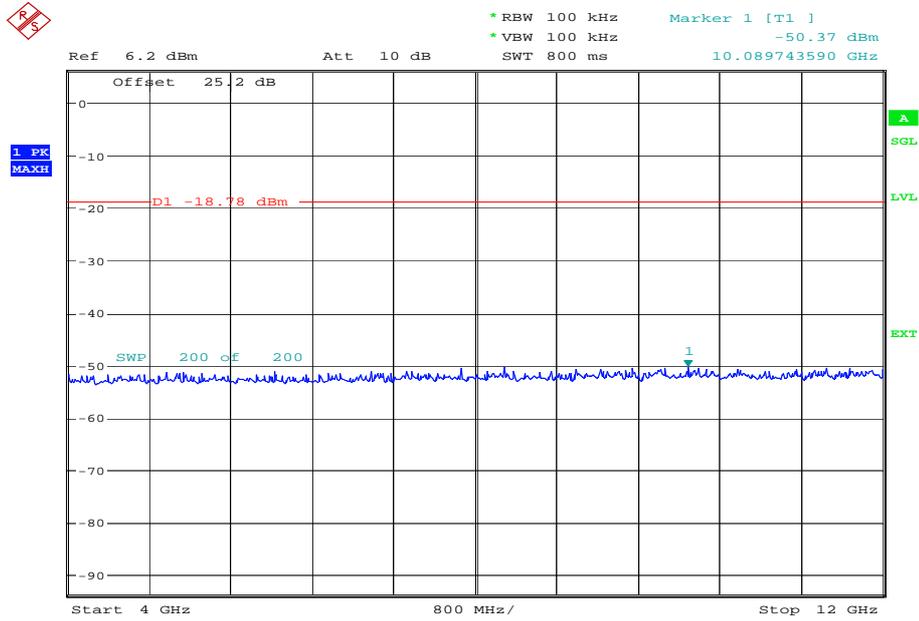

Date: 7.MAR.2013 09:59:41


12 GHz to 18 GHz

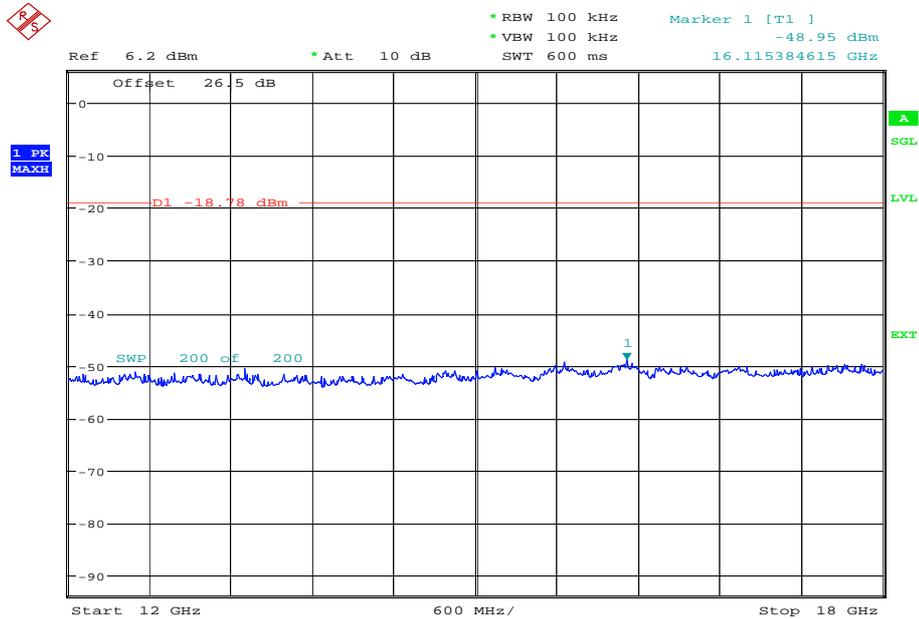

Date: 7.MAR.2013 10:02:23



18 GHz to 25 GHz

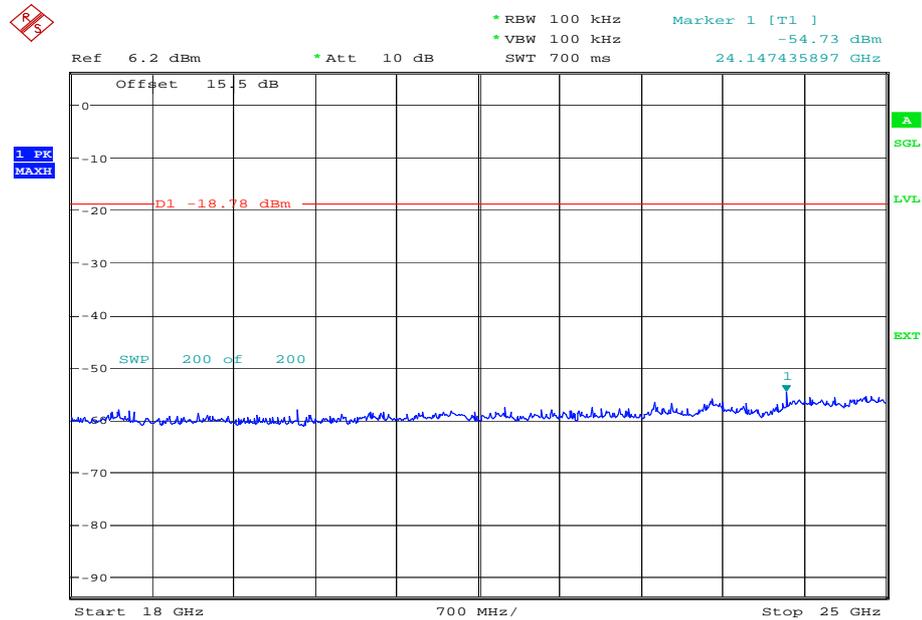

Date: 7.MAR.2013 11:43:52

Limit Clause

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval the attenuation required shall be 30 dB instead of 20 dB.



Spurious Radiated Emissions

2412 MHz

30 MHz to 1 GHz

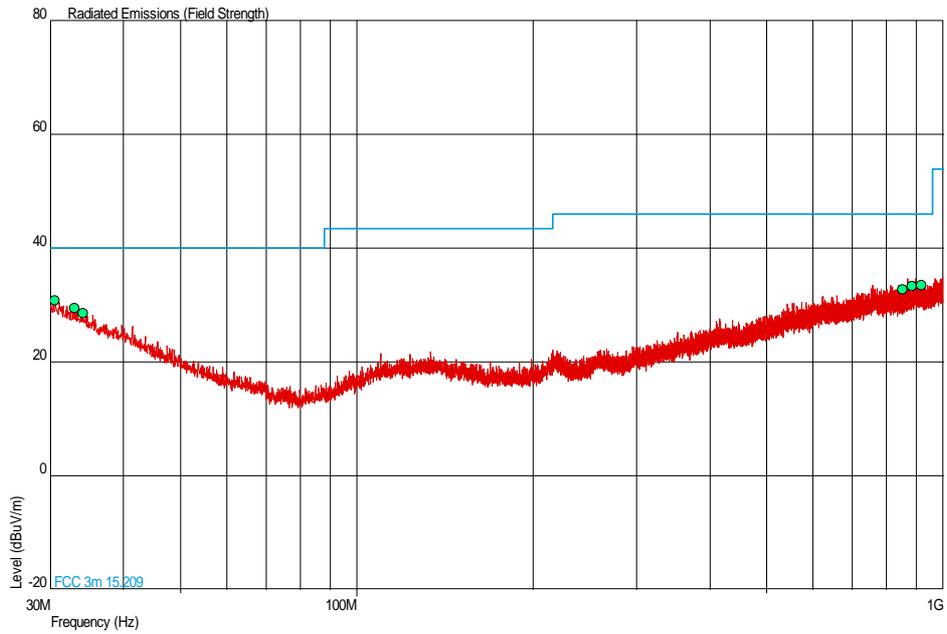


Frequency (MHz)	QP Level (dB $\mu$ V/m)	QP Level ( $\mu$ V/m)	QP Limit (dB $\mu$ V/m)	QP Limit ( $\mu$ V/m)	QP Margin (dB $\mu$ V/m)	QP Margin ( $\mu$ V/m)	Angle (Deg)	Height (m)	Polarity
30.579	30.8	34.7	40.0	100	-9.2	65.3	0	0.00	Horizontal
33.011	29.5	29.9	40.0	100	-10.5	70.1	0	0.00	Horizontal
34.123	28.6	26.9	40.0	100	-11.4	73.1	0	1.00	Vertical
852.754	32.7	43.2	46.0	200	-13.3	156.8	0	1.00	Horizontal
885.928	33.3	46.2	46.0	200	-12.7	153.8	0	1.00	Horizontal
917.017	33.6	47.9	46.0	200	-12.4	152.1	0	1.00	Horizontal




Product Service

1GHz to 3GHz

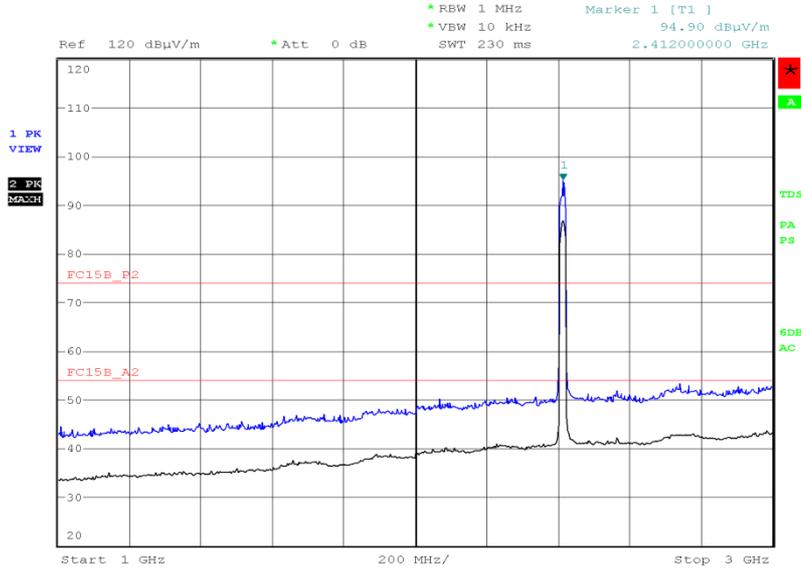

Date: 2.MAR.2013 19:26:07

3GHz to 8GHz

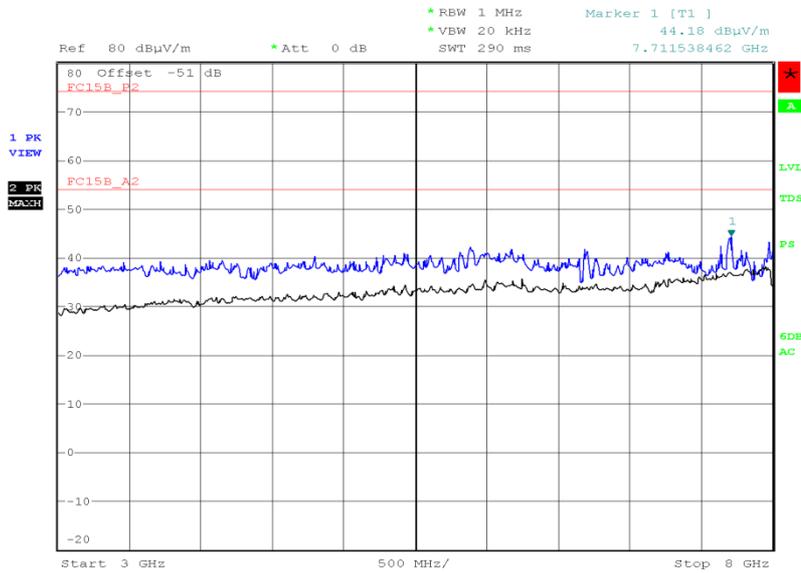


Date: 4.MAR.2013 21:15:06




Product Service

8GHz to 18GHz

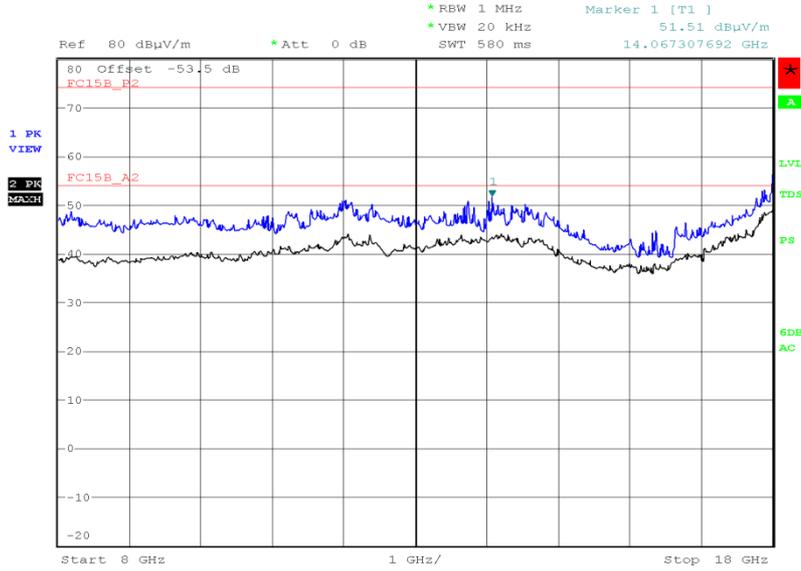

Date: 5.MAR.2013 18:44:11

18GHz to 25GHz

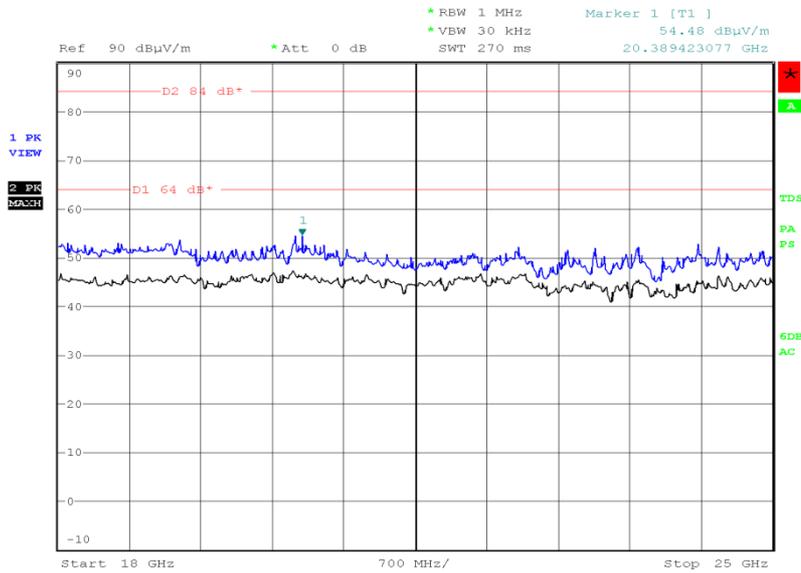


Date: 5.MAR.2013 21:54:15



2437 MHz

30 MHz to 1 GHz

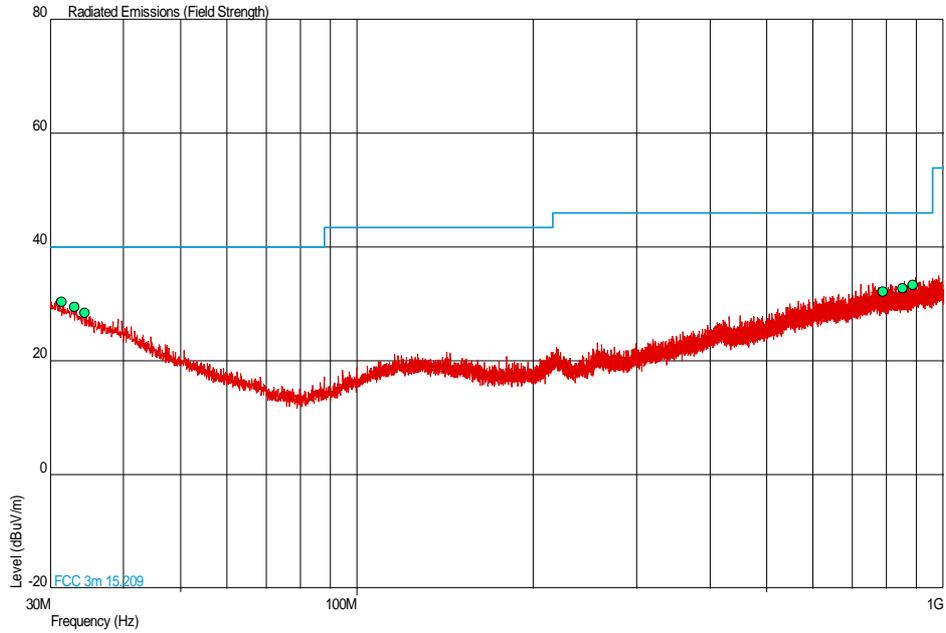


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
31.407	30.4	33.1	40.0	100	-9.6	66.9	0	1.00	Vertical
33.007	29.5	29.9	40.0	100	-10.5	70.1	180	1.00	Horizontal
34.317	28.5	26.6	40.0	100	-11.5	73.4	0	1.00	Vertical
790.432	32.2	40.7	46.0	200	-13.8	159.3	180	1.00	Horizontal
852.900	32.8	43.7	46.0	200	-13.2	156.3	0	1.00	Horizontal
888.790	33.3	46.2	46.0	200	-12.7	153.8	0	1.00	Vertical




Product Service

1GHz to 3GHz

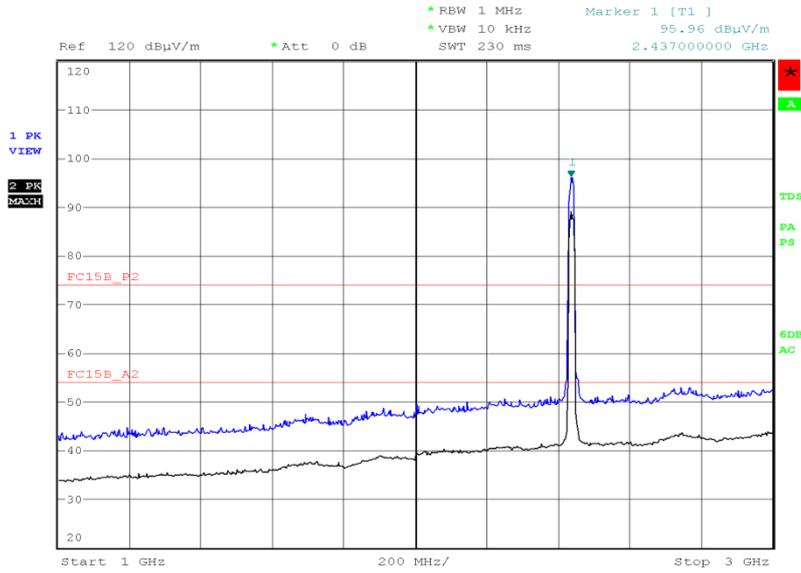

Date: 2.MAR.2013 19:39:31


3GHz to 8GHz

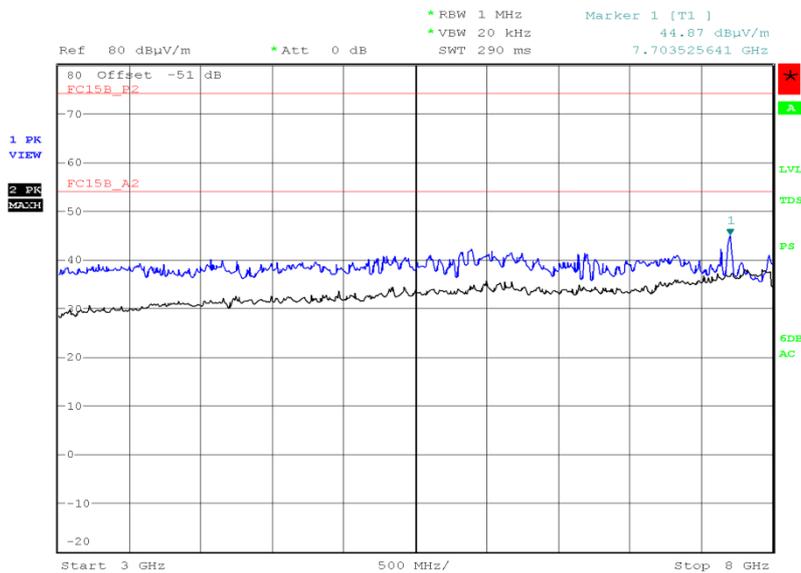

Date: 4.MAR.2013 21:10:18




8GHz to 18GHz

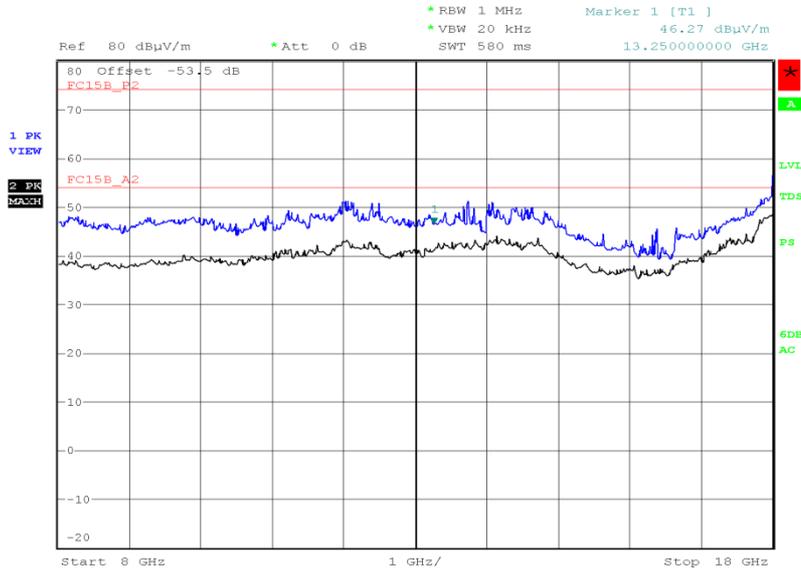

Date: 5.MAR.2013 18:53:04

18GHz to 25GHz

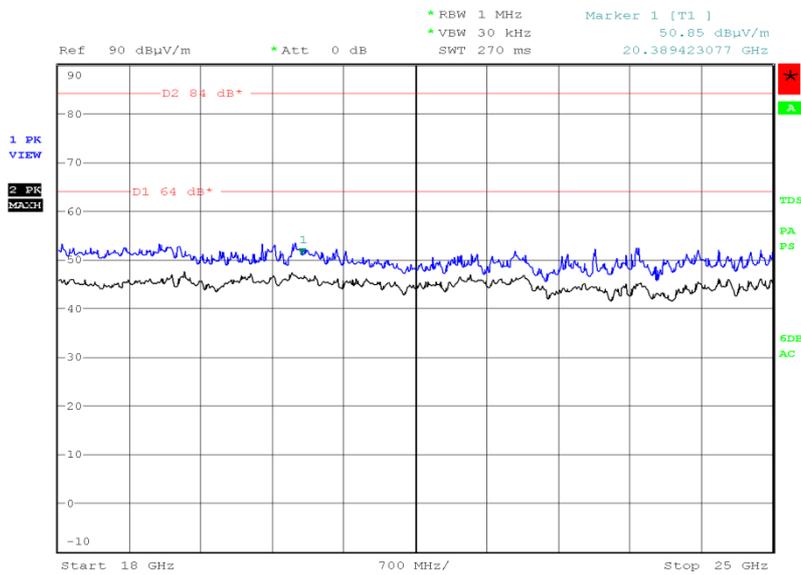


Date: 5.MAR.2013 21:57:52



2462 MHz

30 MHz to 1 GHz

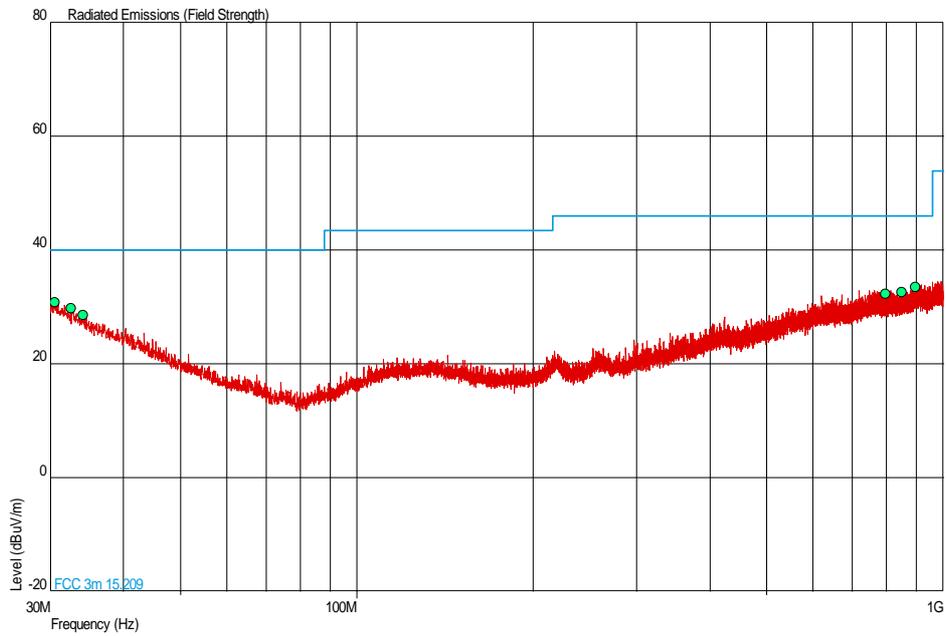


Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
30.579	30.8	34.7	40.0	100	-9.2	65.3	0	0.00	Horizontal
32.571	29.8	30.9	40.0	100	-10.2	69.1	180	1.00	Horizontal
34.123	28.6	26.9	40.0	100	-11.4	73.1	180	1.00	Horizontal
796.979	32.4	41.7	46.0	200	-13.6	158.3	180	1.00	Horizontal
849.068	32.7	43.2	46.0	200	-13.3	156.8	0	1.00	Vertical
896.356	33.5	47.3	46.0	200	-12.5	152.7	180	1.00	Horizontal




Product Service

1GHz to 3GHz

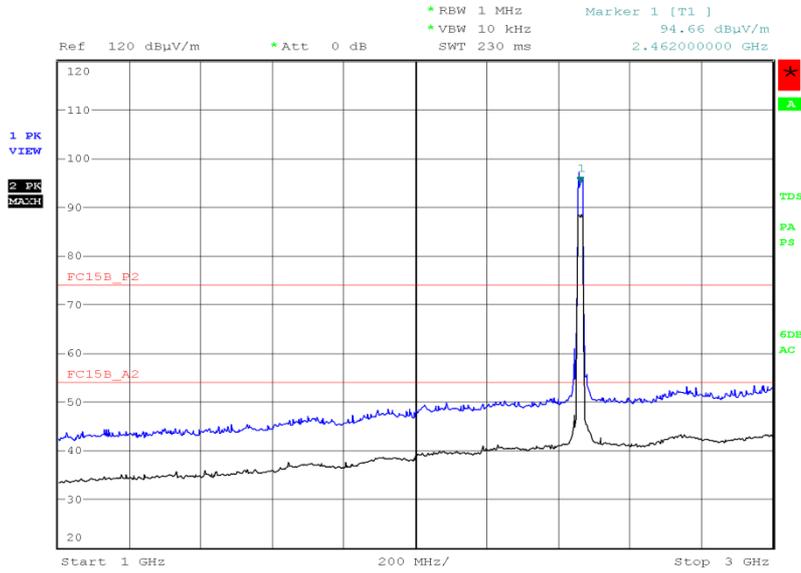

Date: 2.MAR.2013 20:08:09

3GHz to 8GHz

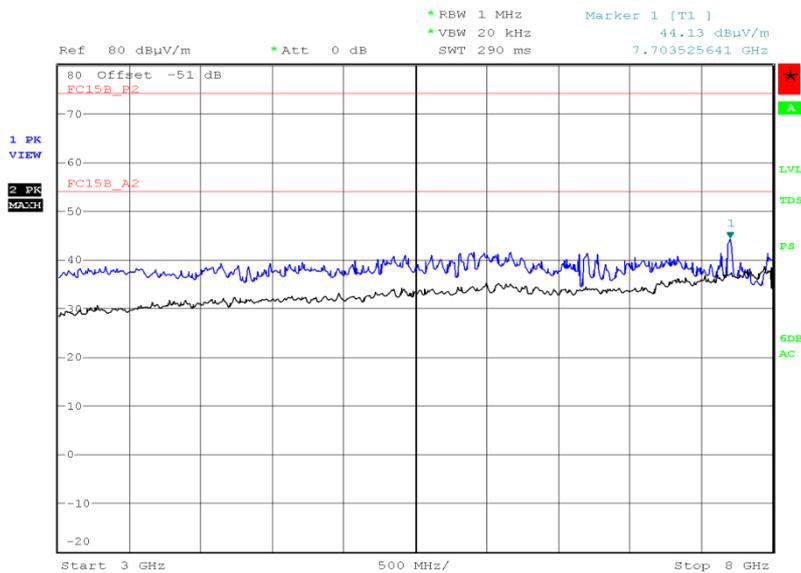


Date: 4.MAR.2013 21:04:50




Product Service

8GHz to 18GHz

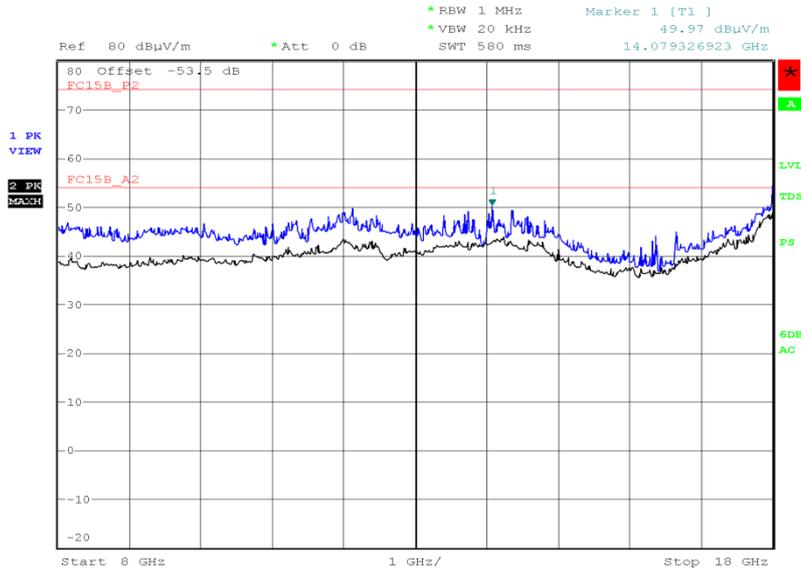

Date: 5.MAR.2013 19:16:04

18GHz to 25GHz

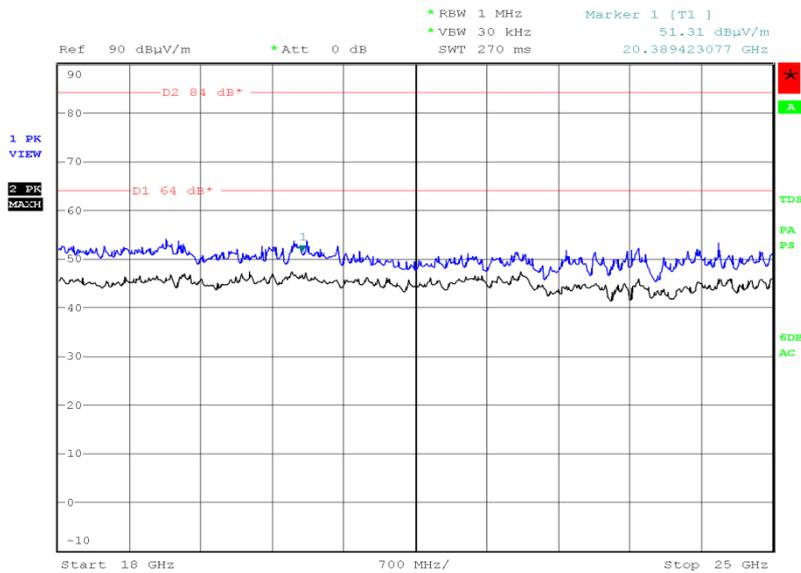

Date: 5.MAR.2013 22:01:21

Limit

Peak (dBuV/m)	Average (dBuV/m)
74.0	54.0




Product Service

Band Edge Emissions

2412 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	51.05	38.39

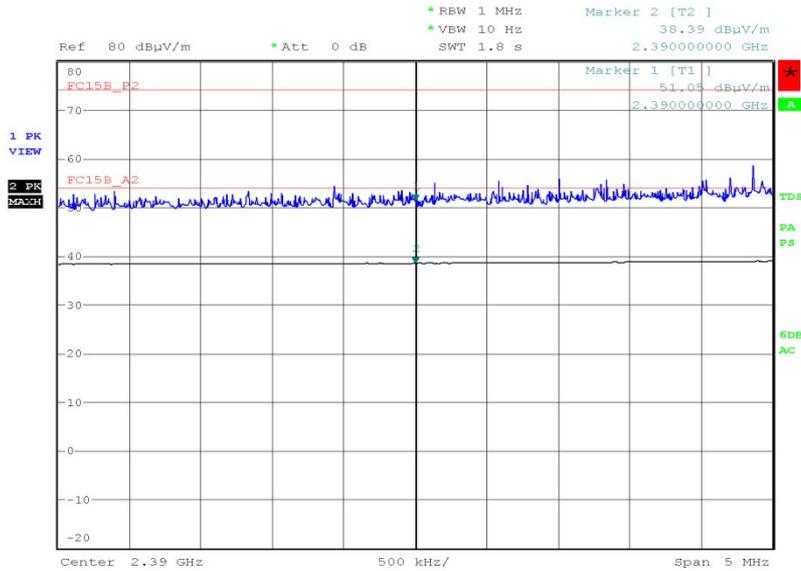


Date: 2.MAR.2013 19:14:04



2462 MHz

Polarisation	Final Peak (dBµV/m)	Final Average (dBµV/m)
Horizontal	57.14	40.68

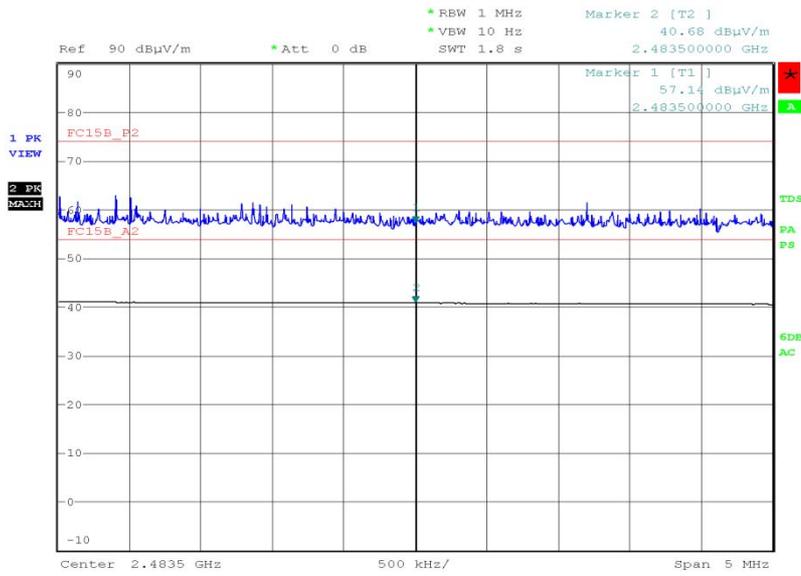

Date: 2.MAR.2013 20:01:17

Limit

Peak (dBµV/m)	Average (dBµV/m)
74.0	54.0



Product Service

**2.6 6dB BANDWIDTH****2.6.1 Specification Reference**

FCC CFR 47 Part 15C, Clause 15.247 (2)

**2.6.2 Equipment Under Test and Modification State**

204SH S/N: IMEI 004401114727023 - Modification State 0

**2.6.3 Date of Test**

5 March 2013 & 6 March 2013

**2.6.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

**2.6.5 Test Procedure**

The EUT was transmitted at maximum power via a cable to the Spectrum Analyser. The Analyser settings were adjusted to display the resultant trace on screen. The peak point of the trace was measured and the markers positioned to give the -6dBc points of the displayed spectrum.

**2.6.6 Environmental Conditions**

Ambient Temperature	24.8°C
Relative Humidity	29.1%



Product Service

**2.6.7 Test Results**

802.11(b)

4.0 V DC Supply


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412 MHz	1	6595.2
	2	7660.8
	5	7257.6
	11	7545.6
2437 MHz	1	6652.8
	2	7574.4
	5	6652.8
	11	7372.8
2462 MHz	1	7113.6
	2	6048.0
	5	6019.2
	11	6595.2



Product Service


2412 MHz

1 Mbps

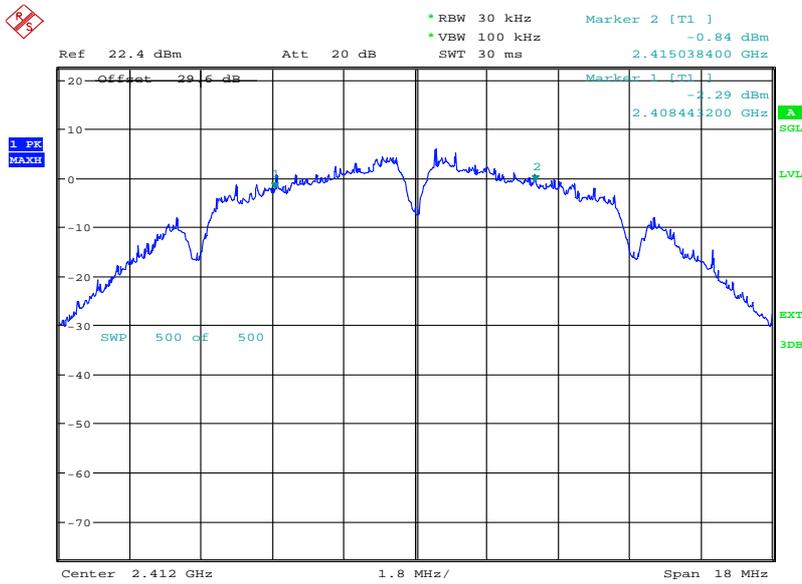

Date: 5.MAR.2013 12:28:35

2 Mbps

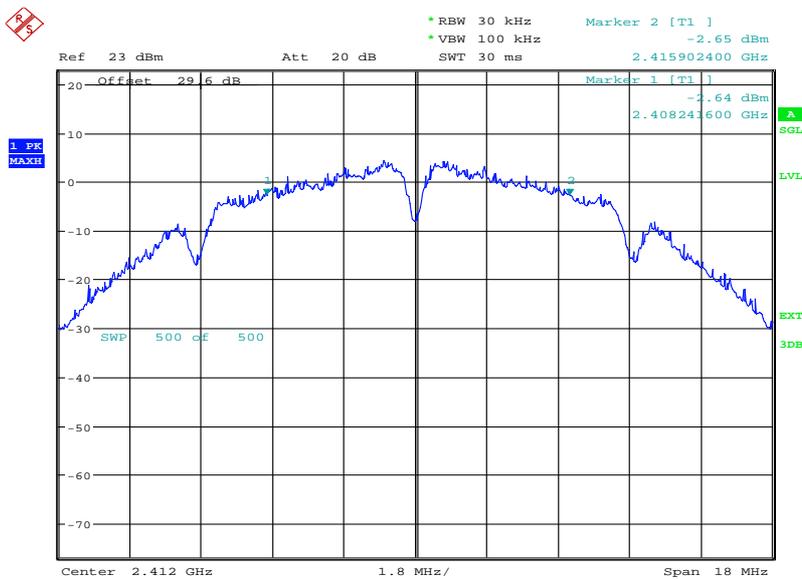


Date: 5.MAR.2013 12:46:49




Product Service

5.5 Mbps

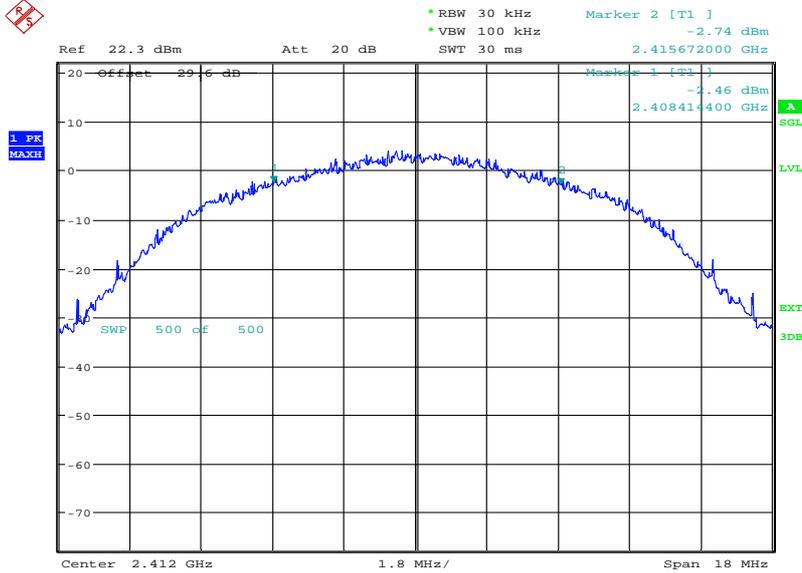

Date: 5.MAR.2013 13:00:14

11 Mbps

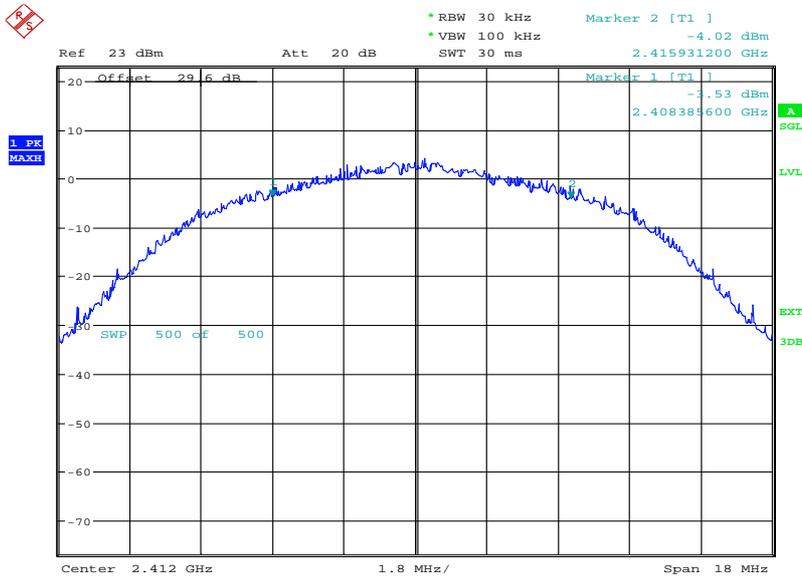


Date: 5.MAR.2013 13:13:22



Product Service


2437 MHz

1 Mbps

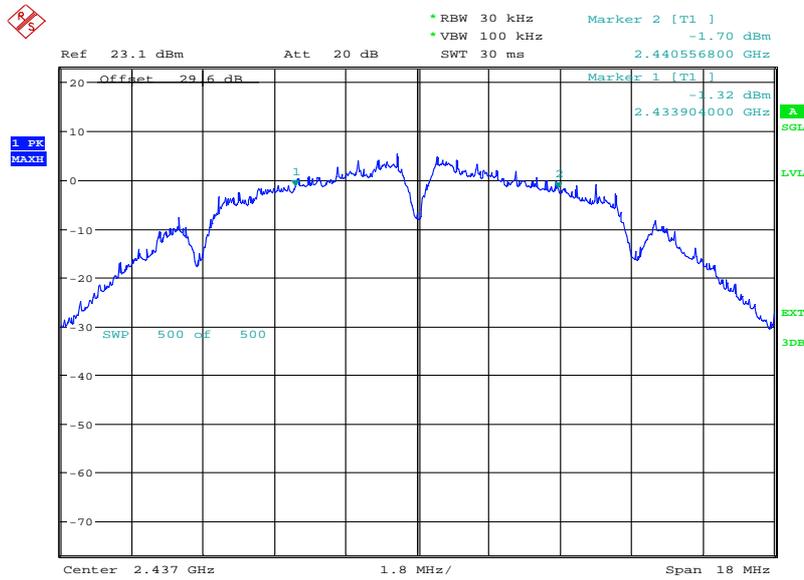

Date: 5.MAR.2013 12:34:10

2 Mbps

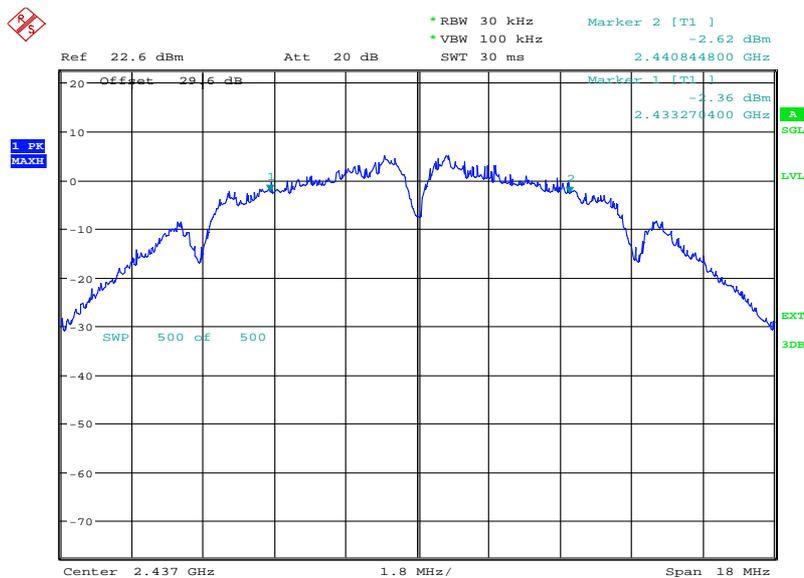


Date: 5.MAR.2013 12:50:45




Product Service

5.5 Mbps

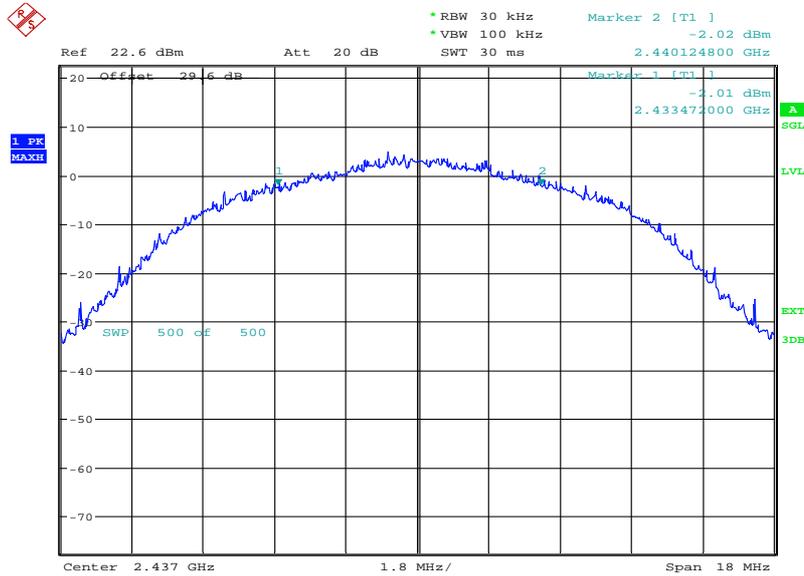

Date: 5.MAR.2013 13:04:34

11 Mbps

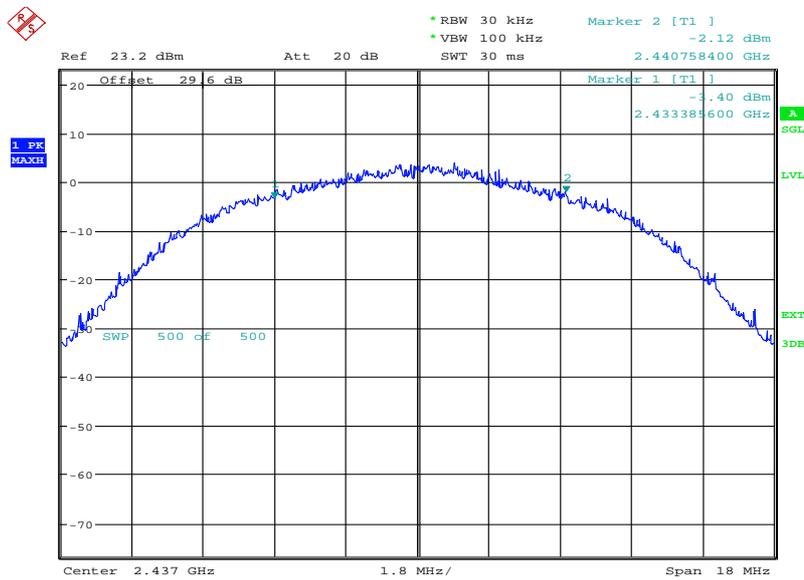


Date: 5.MAR.2013 13:18:05



Product Service


2462 MHz

1 Mbps

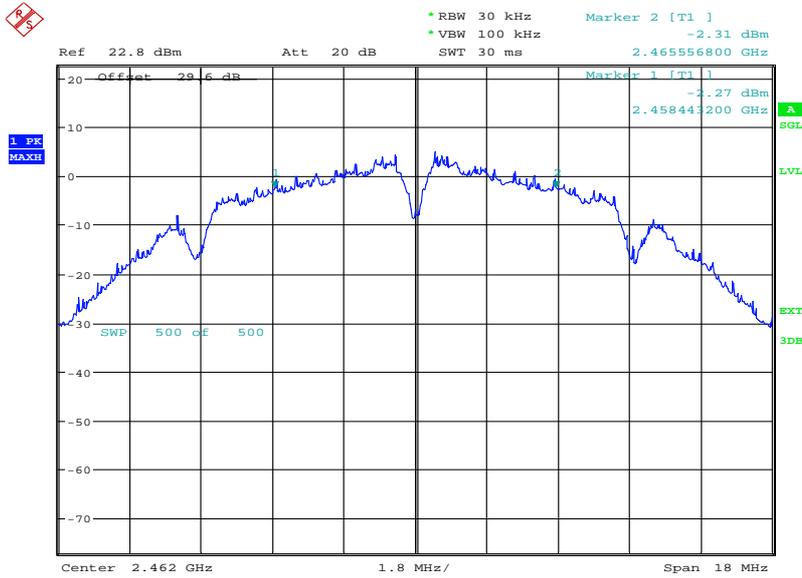

Date: 5.MAR.2013 12:41:20

2 Mbps

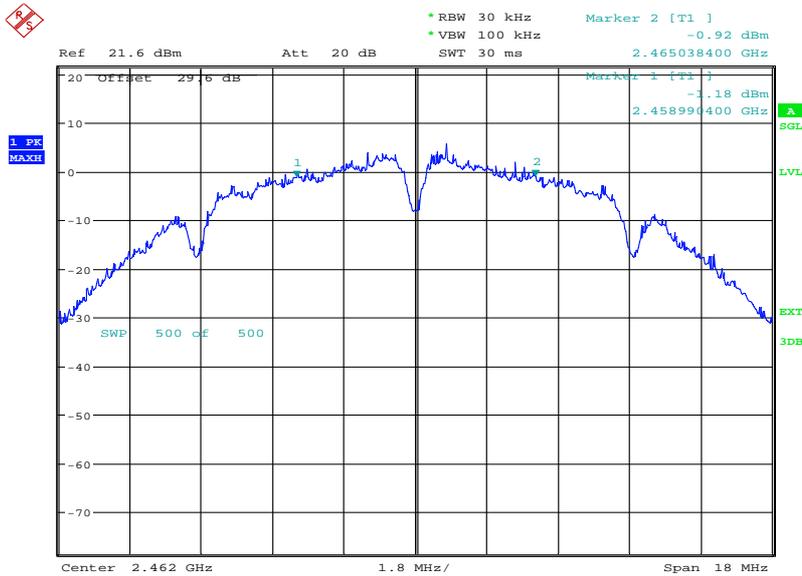


Date: 5.MAR.2013 12:55:26




Product Service

5.5 Mbps

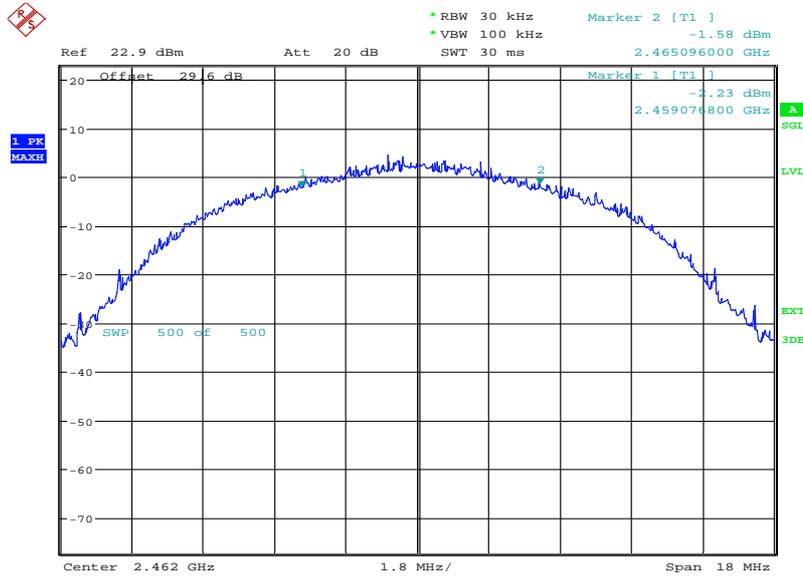

Date: 5.MAR.2013 13:08:32

11 Mbps

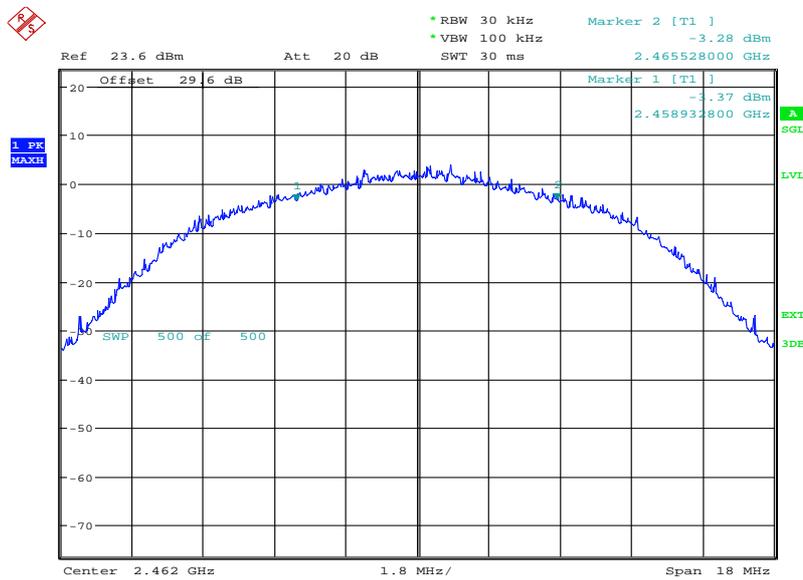

Date: 5.MAR.2013 13:22:26

Limit Clause

The minimum 6 dB Bandwidth shall be at least 500 kHz.



Product Service

802.11(g)

4.0 V DC Supply


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412 MHz	6	16352
	9	16352
	12	16416
	18	16416
	24	16416
	36	16448
	48	16320
	54	16352
2437 MHz	6	16384
	9	16384
	12	16416
	18	16448
	24	16384
	36	16480
	48	16000
	54	16416
2462 MHz	6	16352
	9	16352
	12	16416
	18	16416
	24	16448
	36	14646
	48	16320
	54	16384



Product Service


2412 MHz

6 Mbps

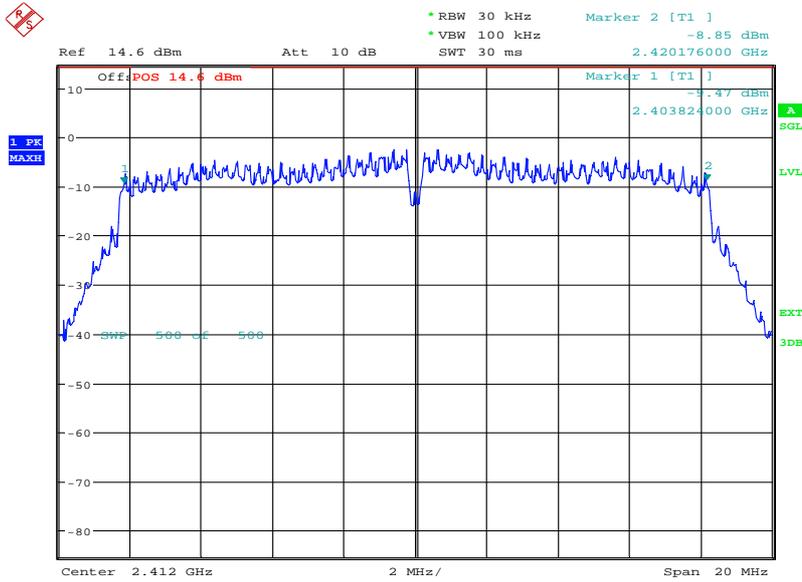

Date: 5.MAR.2013 13:27:40

9 Mbps

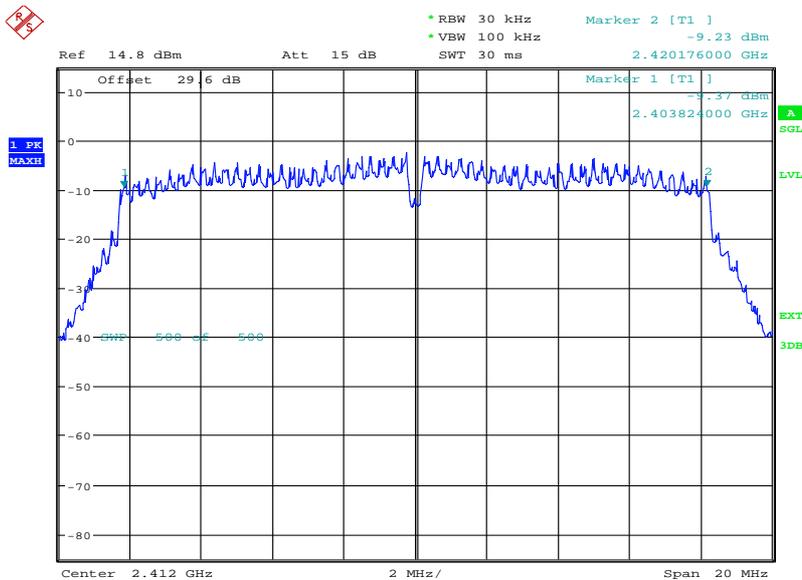


Date: 5.MAR.2013 13:53:08




Product Service

12 Mbps

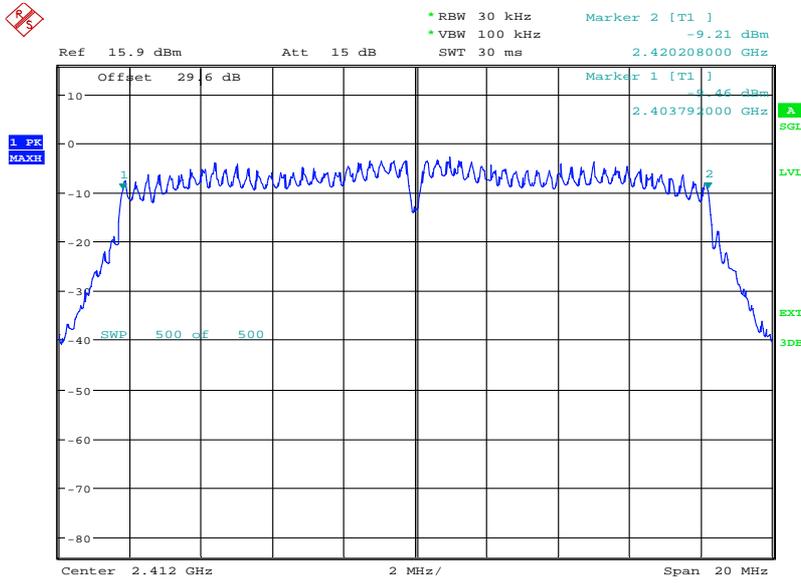

Date: 5.MAR.2013 14:07:31

18 Mbps

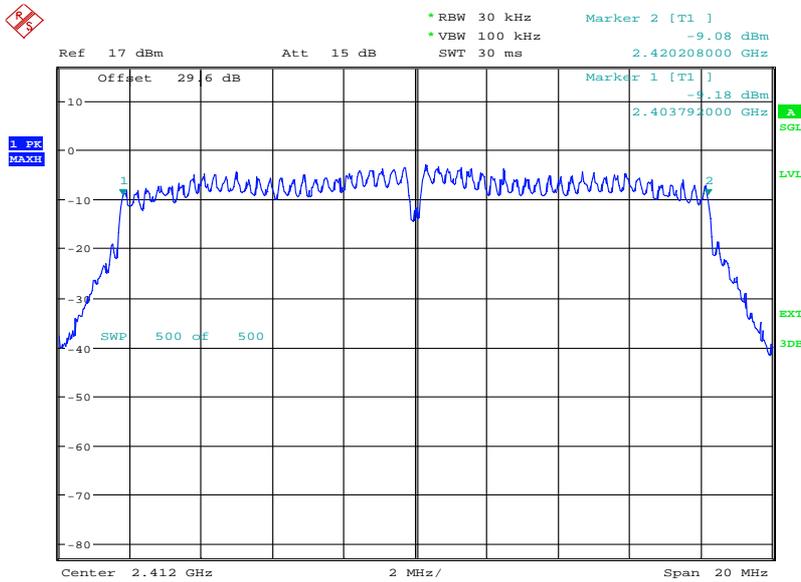


Date: 5.MAR.2013 14:20:31




Product Service

24 Mbps

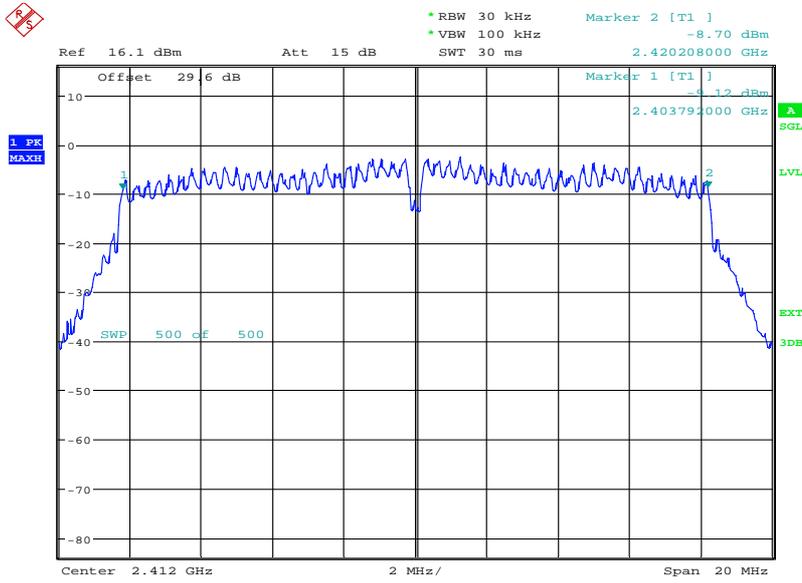


36 Mbps

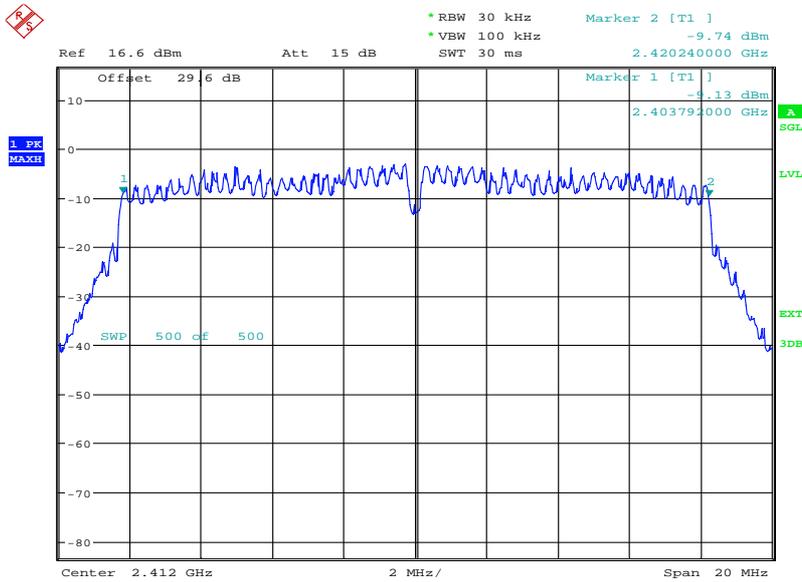




Product Service

48 Mbps

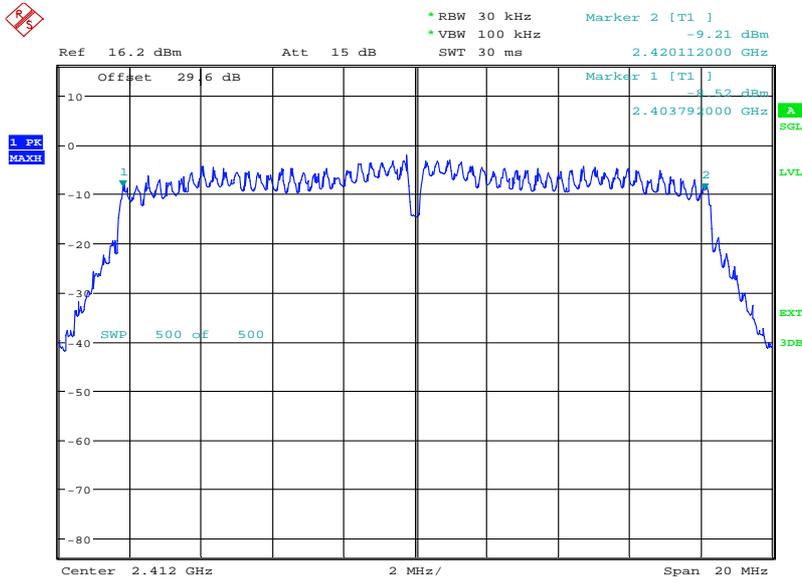

Date: 5.MAR.2013 15:00:33

54 Mbps

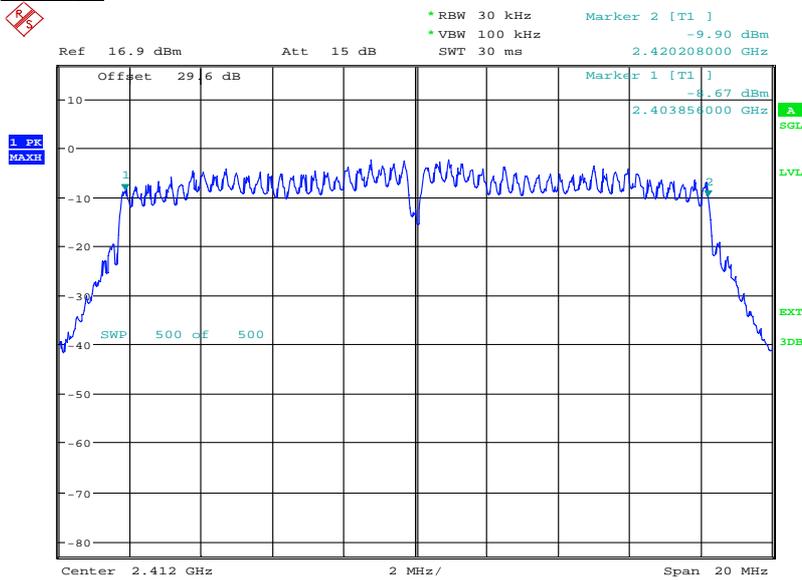


Date: 5.MAR.2013 15:17:58



Product Service


2437 MHz

6 Mbps

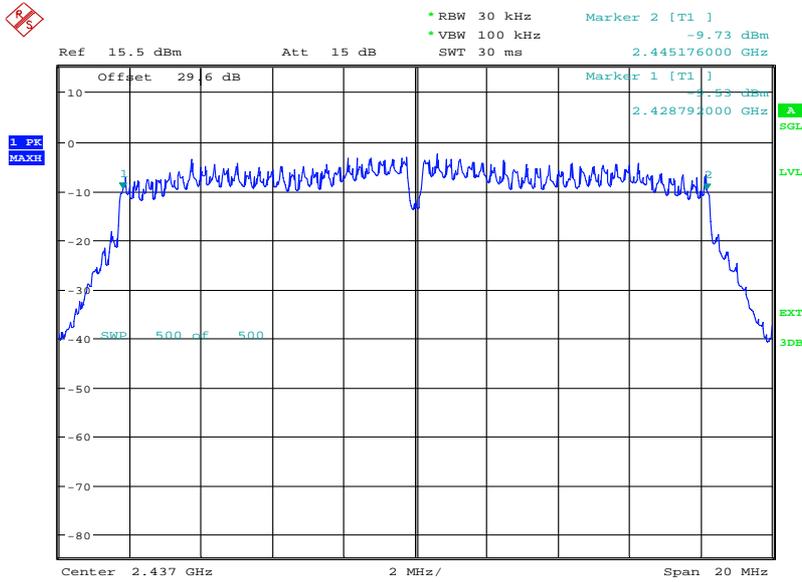

Date: 5.MAR.2013 13:31:41

9 Mbps

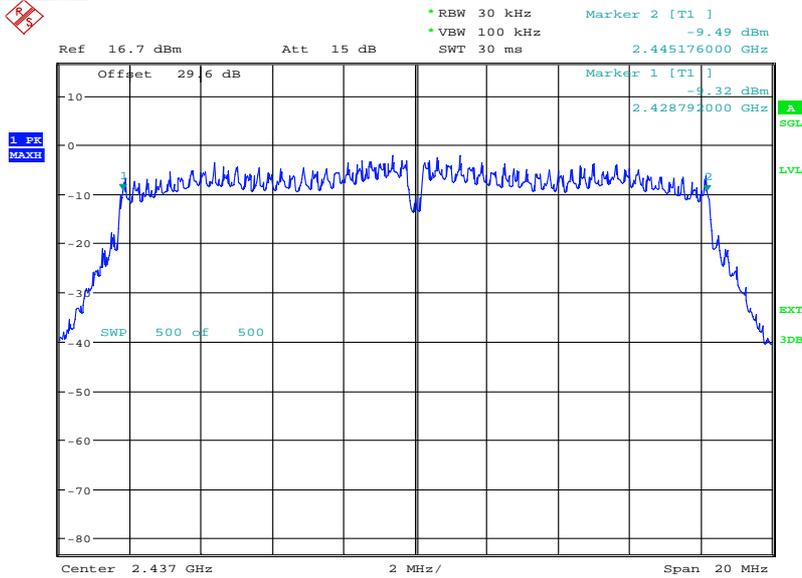


Date: 5.MAR.2013 13:56:59




Product Service

12 Mbps

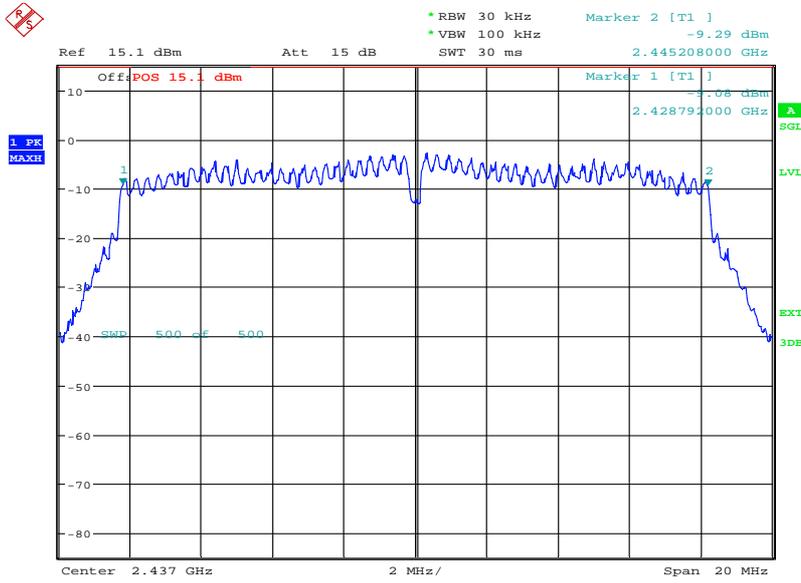

Date: 5.MAR.2013 14:11:24

18 Mbps

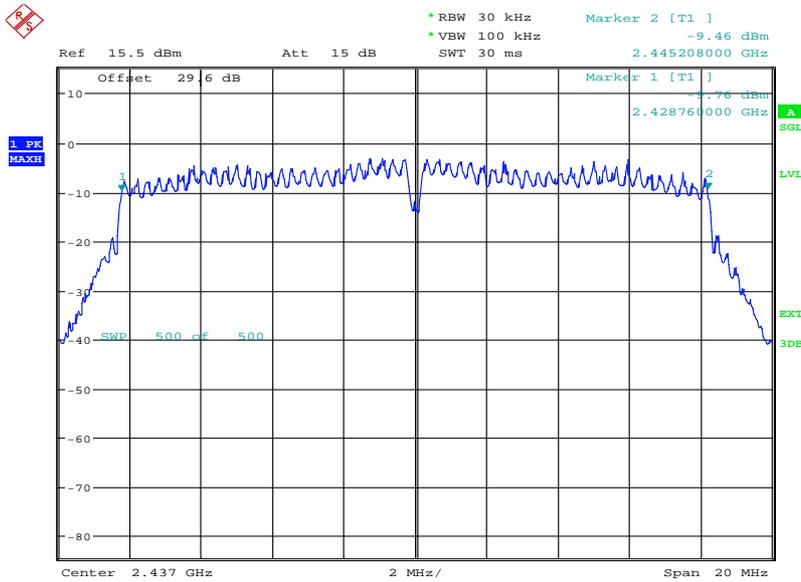


Date: 5.MAR.2013 14:24:18




Product Service

24 Mbps

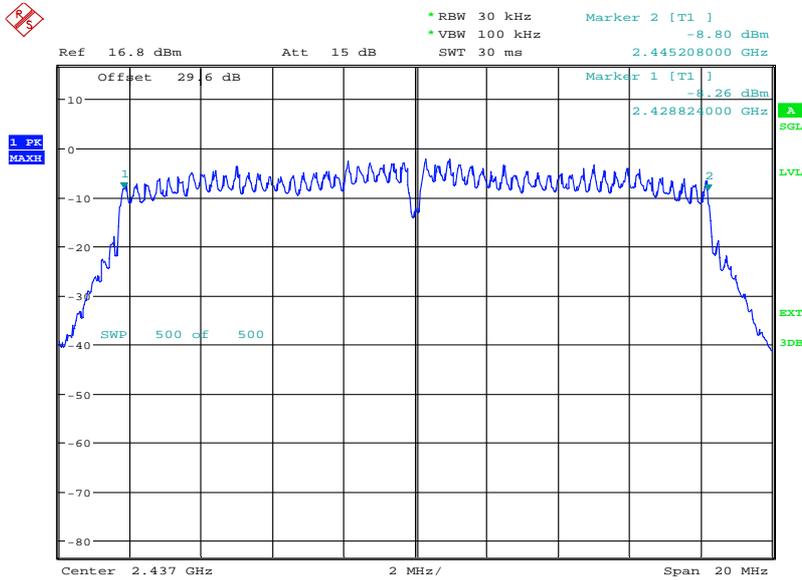

Date: 5.MAR.2013 14:38:08

36 Mbps

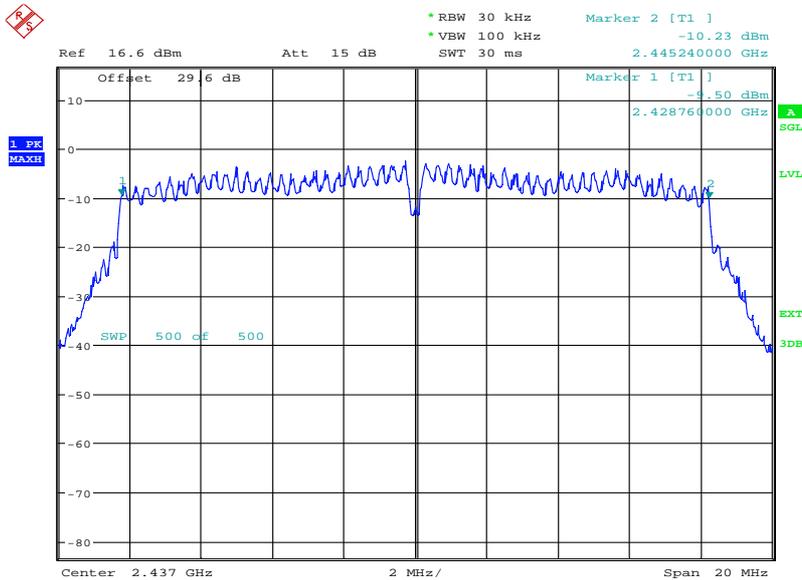


Date: 5.MAR.2013 14:51:47




Product Service

48 Mbps

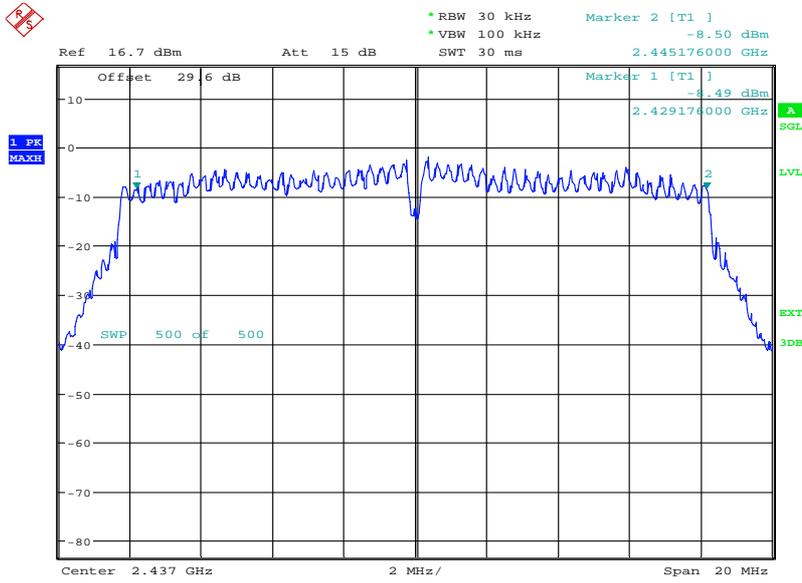

Date: 5.MAR.2013 15:07:00

54 Mbps

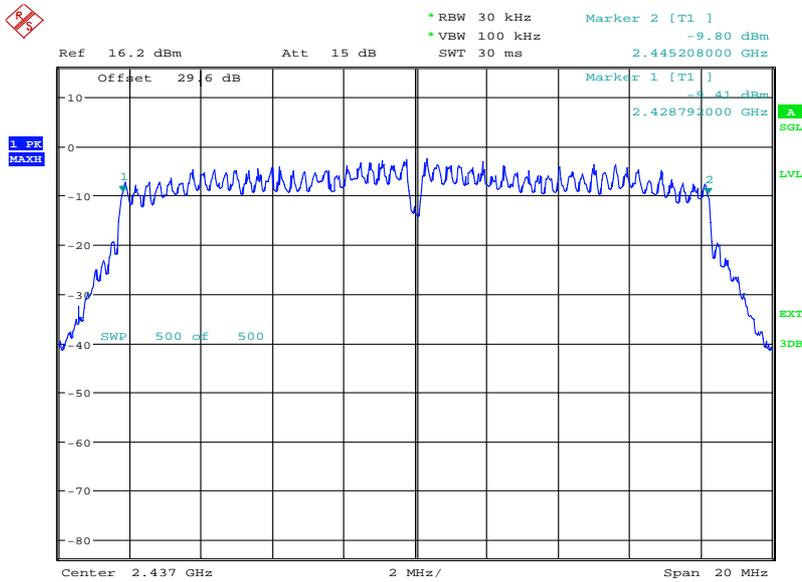


Date: 5.MAR.2013 15:21:45



Product Service


2462 MHz

6 Mbps

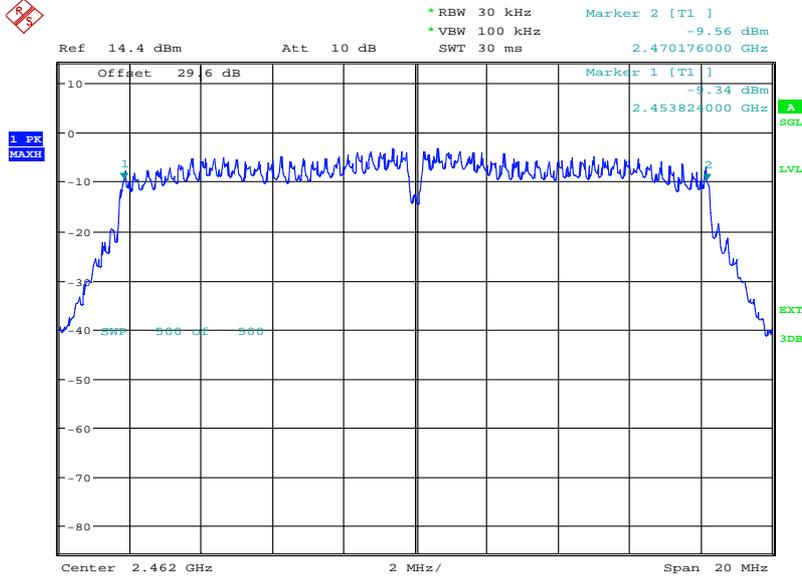

Date: 5.MAR.2013 13:36:29

9 Mbps

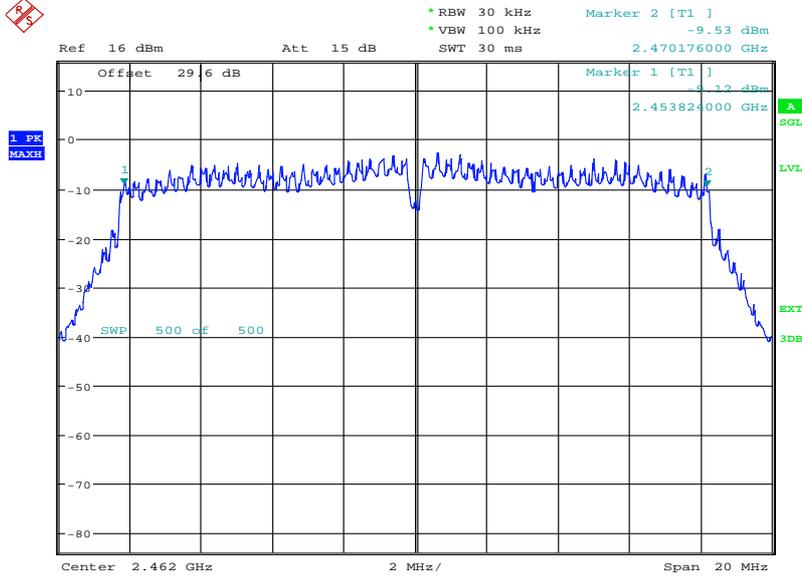


Date: 5.MAR.2013 14:01:17




Product Service

12 Mbps

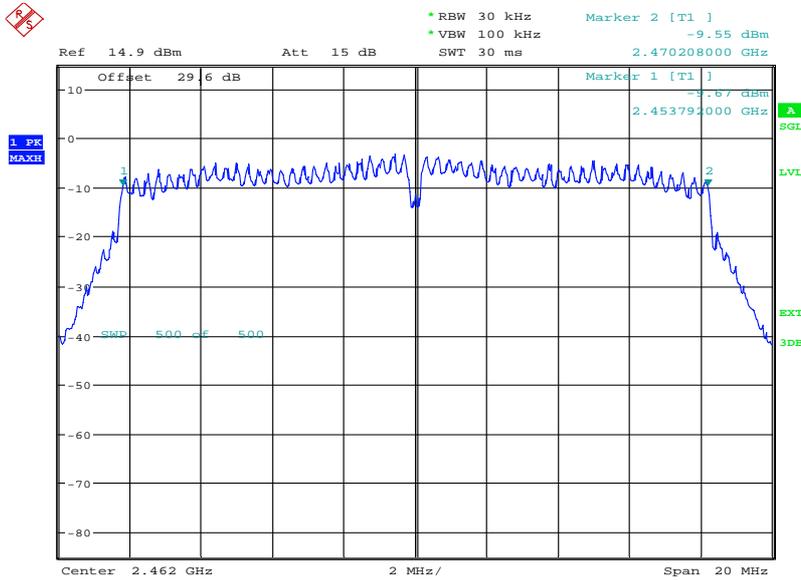

Date: 5.MAR.2013 14:15:34

18 Mbps

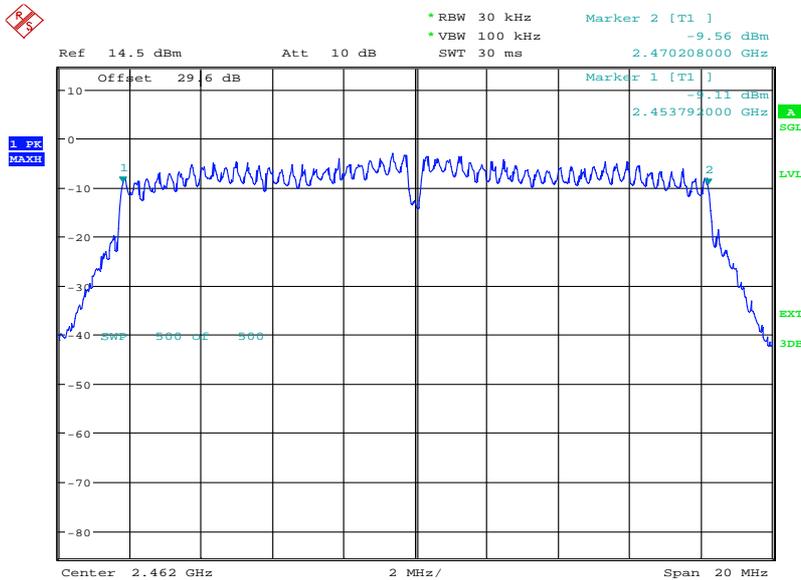


Date: 5.MAR.2013 14:28:49




Product Service

24 Mbps

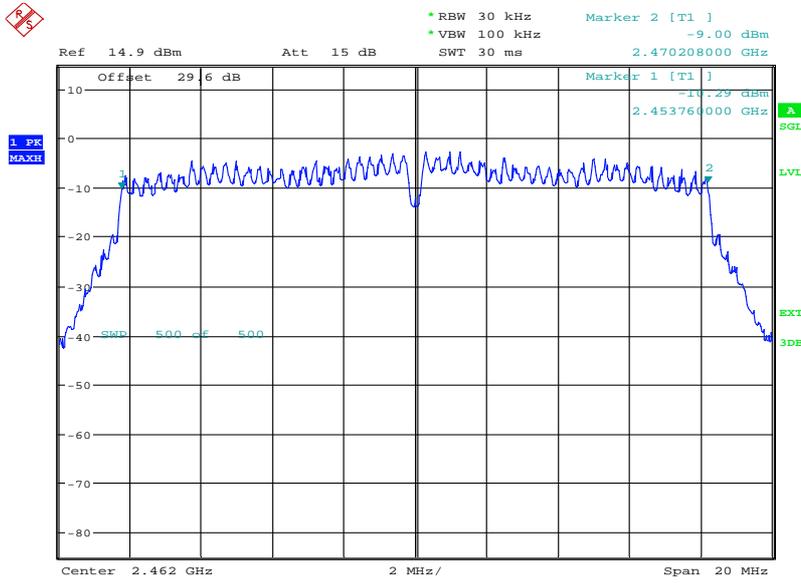

Date: 5.MAR.2013 14:42:11

36 Mbps

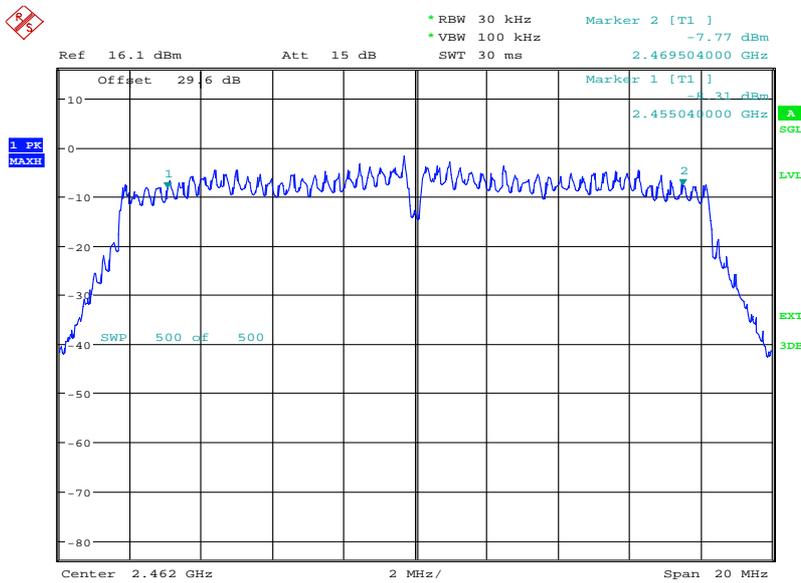


Date: 5.MAR.2013 14:55:57




Product Service

### 48 Mbps

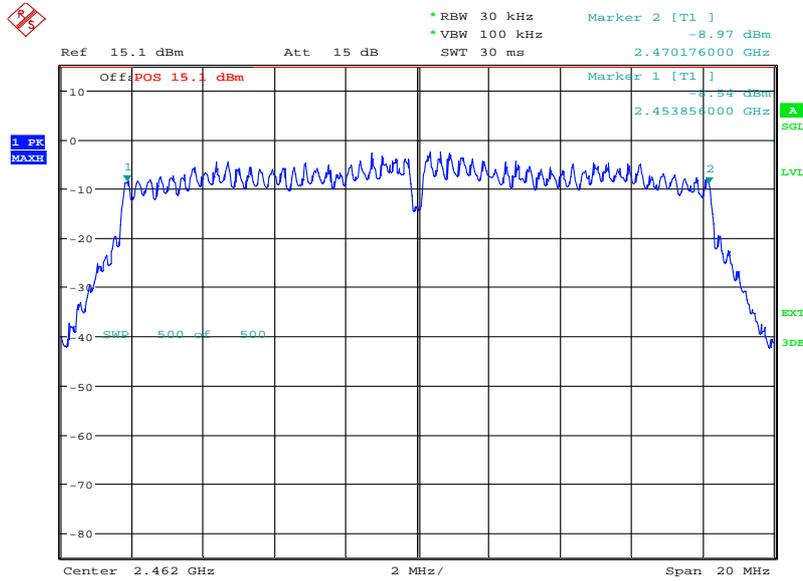

Date: 5.MAR.2013 15:10:57

### 54 Mbps

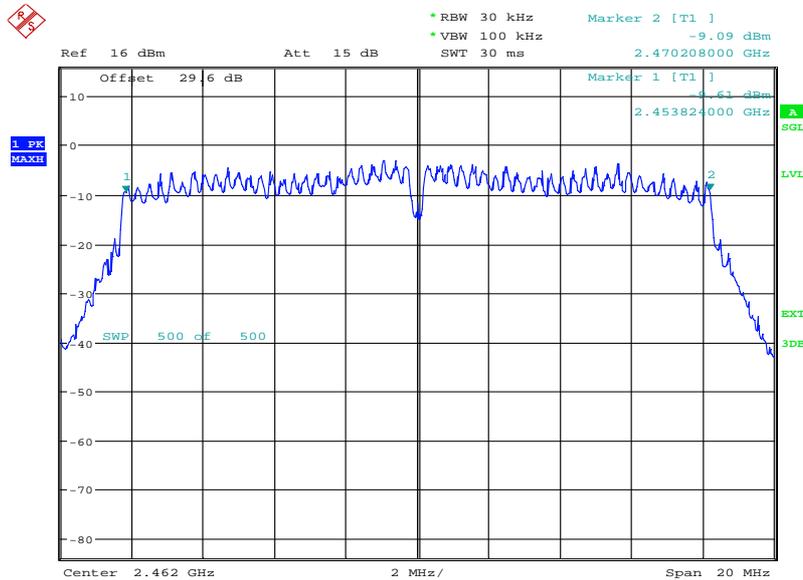

Date: 5.MAR.2013 15:27:53

### Limit Clause

The minimum 6 dB Bandwidth shall be at least 500 kHz.



Product Service

802.11(n)

4.0 V DC Supply


Frequency (MHz)	Data Rate (Mbps)	6dB Bandwidth (kHz)
2412 MHz	6.5	17632
	13	17664
	19.5	17632
	26	17632
	39	17696
	52	17600
	58.5	17664
	65	17600
2437 MHz	6.5	17632
	13	17664
	19.5	17280
	26	17664
	39	16960
	52	17536
	58.5	17696
	65	17632
2462 MHz	6.5	17632
	13	17696
	19.5	17696
	26	17536
	39	17664
	52	17632
	58.5	17600
	65	17504



Product Service


2412 MHz

6.5 Mbps

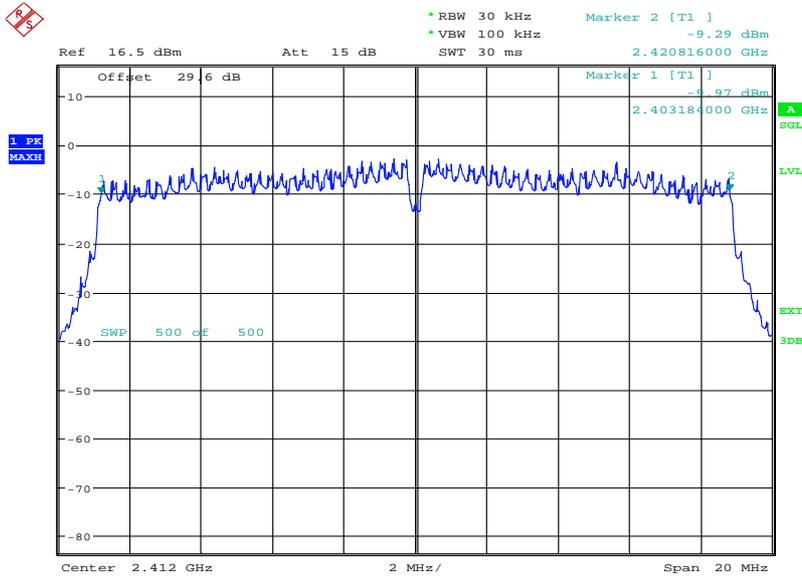

Date: 6.MAR.2013 09:39:19

13 Mbps

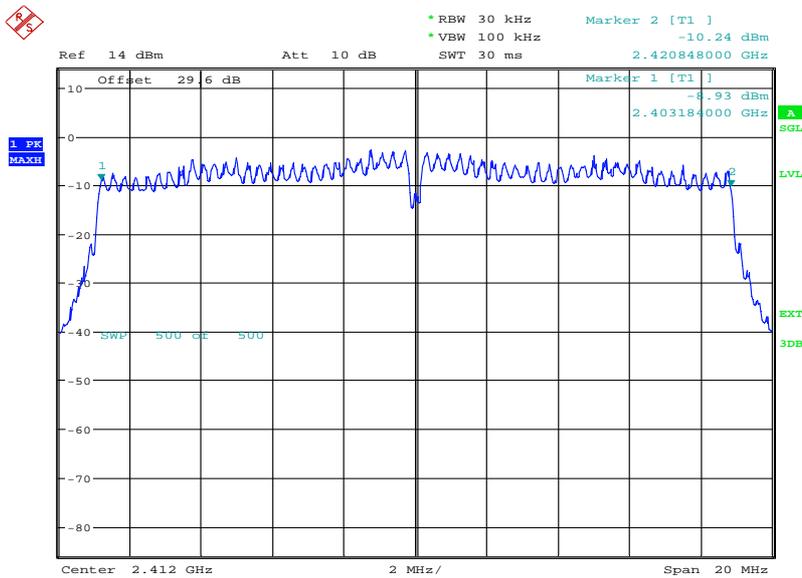


Date: 6.MAR.2013 09:52:21




Product Service

19.5 Mbps

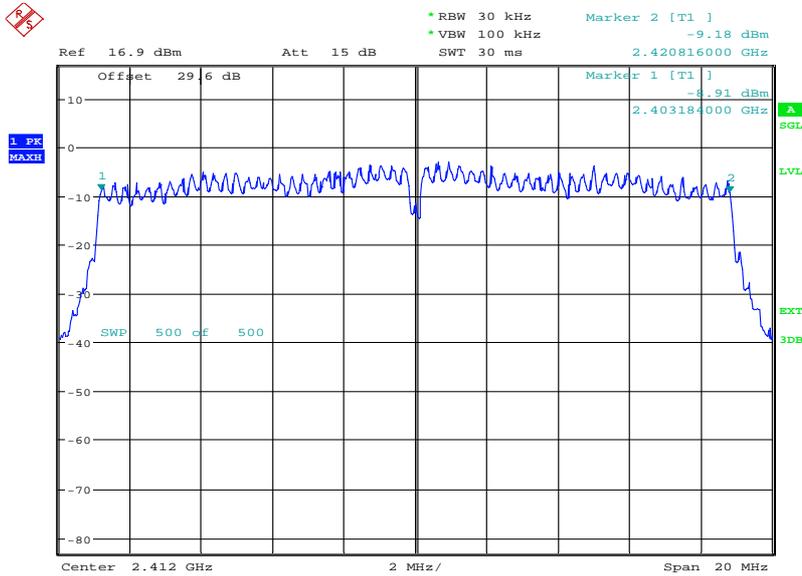

Date: 6.MAR.2013 10:05:16

26 Mbps

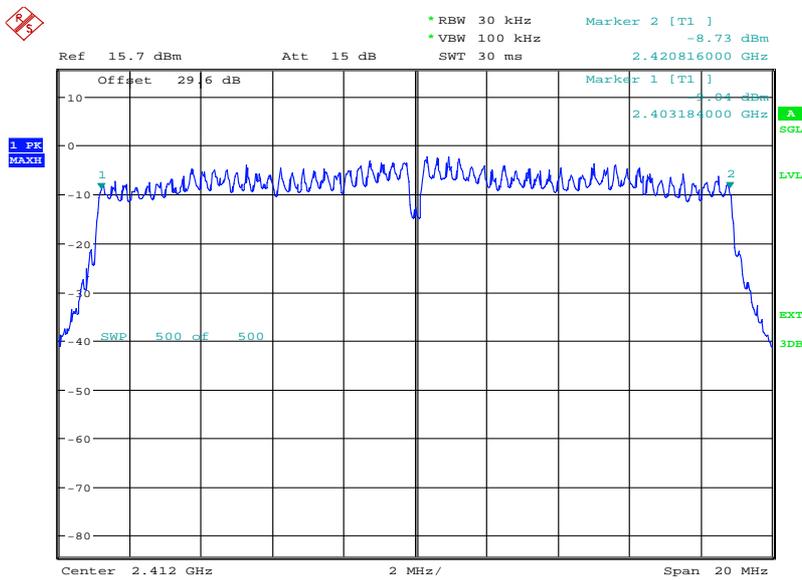


Date: 6.MAR.2013 10:20:32




Product Service

39 Mbps

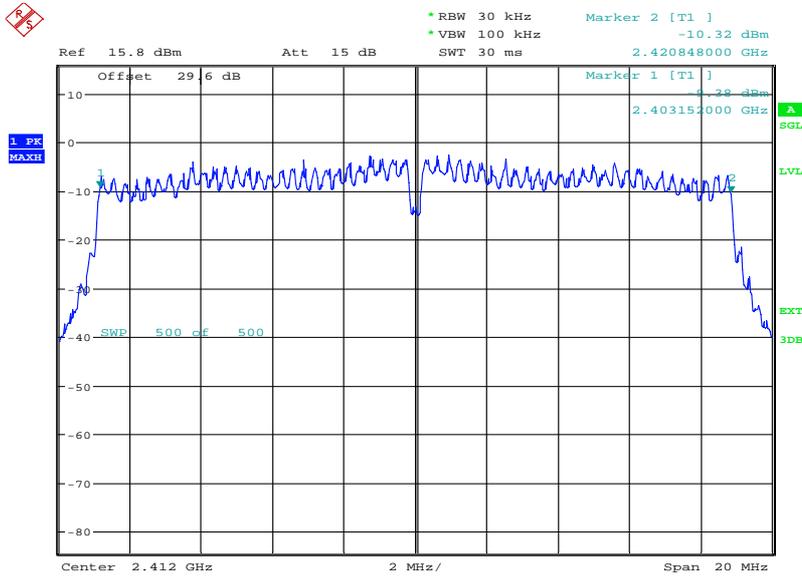

Date: 6.MAR.2013 10:36:19

52 Mbps

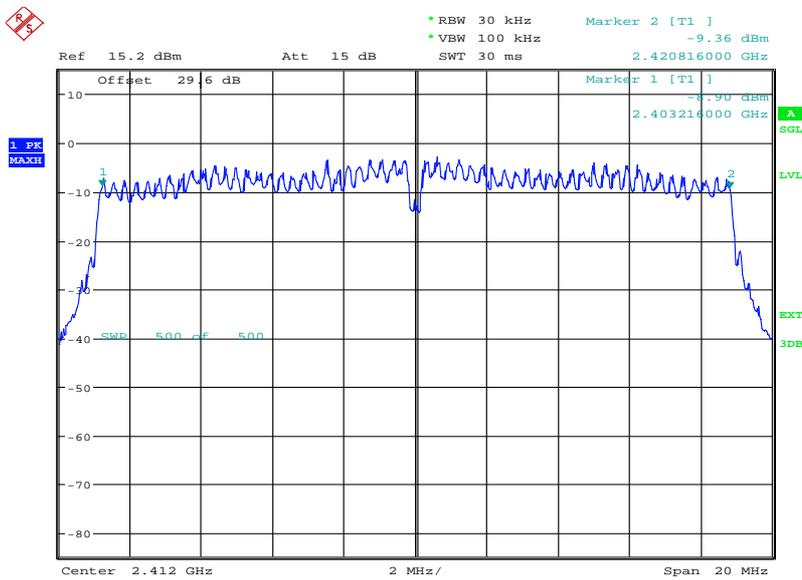


Date: 6.MAR.2013 10:48:58




Product Service

58.5 Mbps

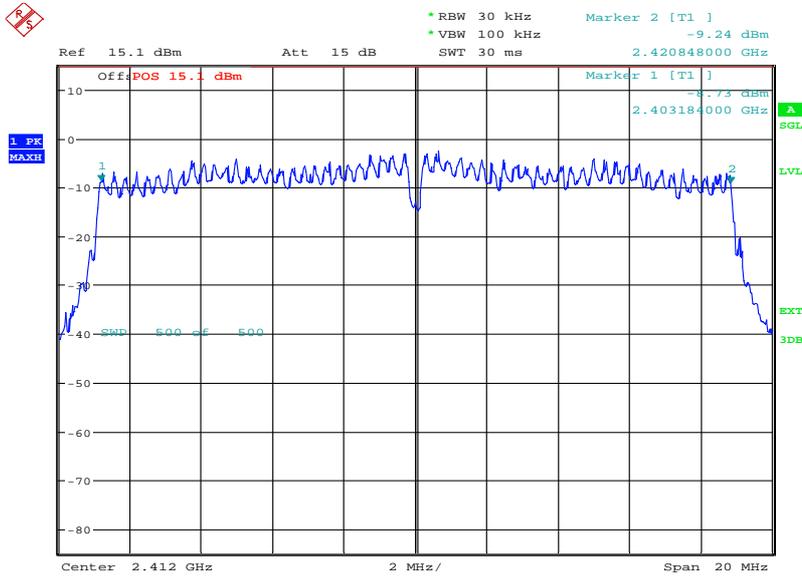

Date: 6.MAR.2013 11:09:21

65 Mbps

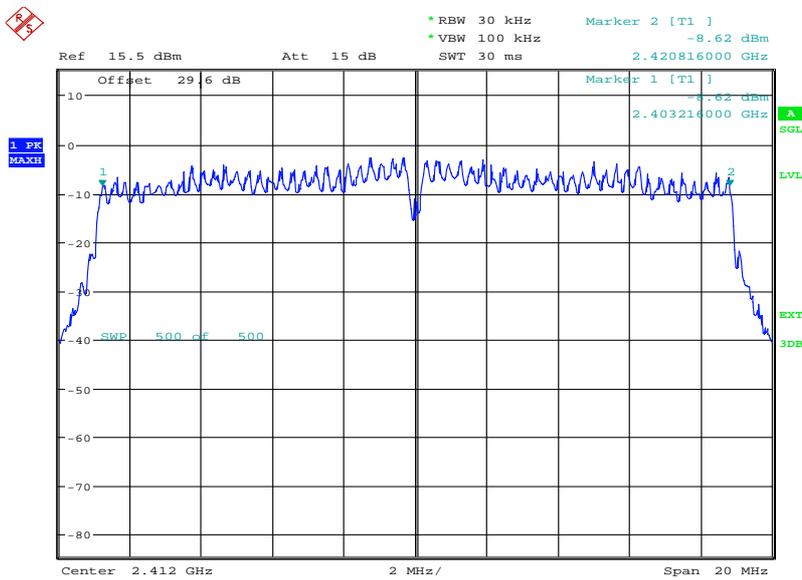


Date: 6.MAR.2013 11:24:16



Product Service


2437 MHz

6.5 Mbps

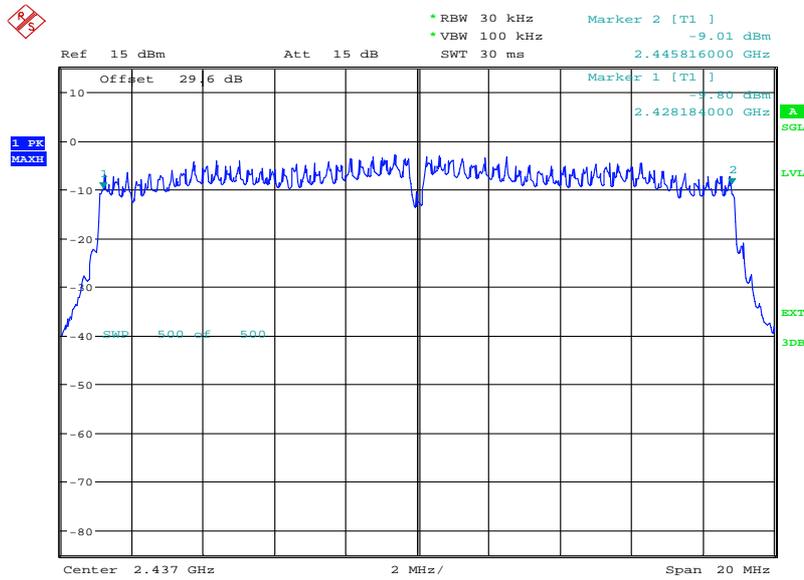

Date: 6.MAR.2013 09:43:15

13 Mbps

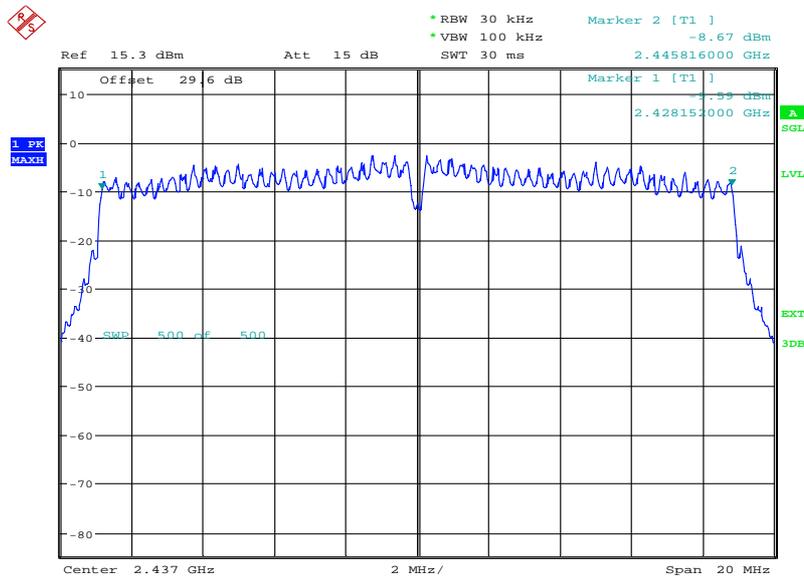


Date: 6.MAR.2013 09:56:12




Product Service

19.5 Mbps

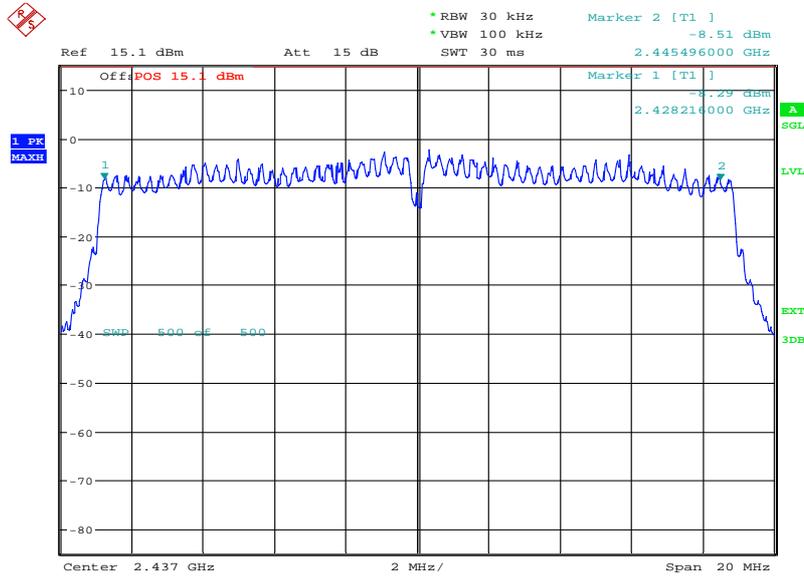

Date: 6.MAR.2013 10:11:38

26 Mbps

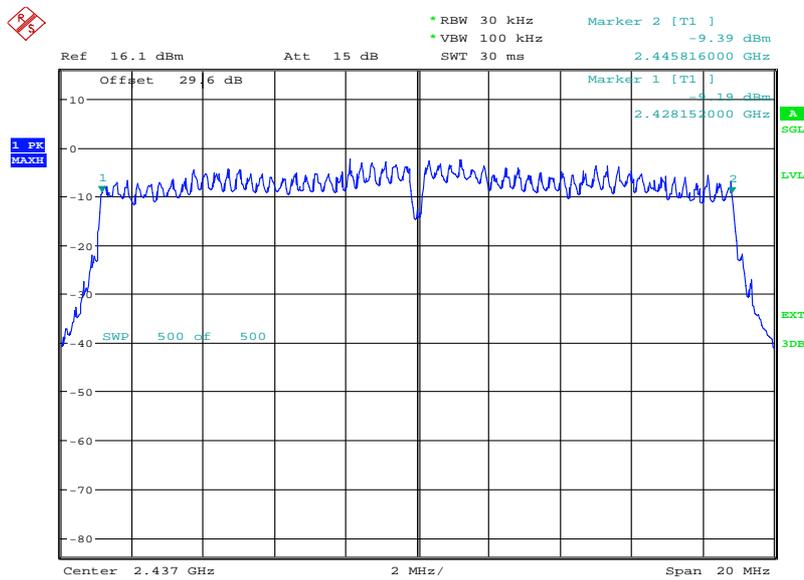


Date: 6.MAR.2013 10:24:20




Product Service

39 Mbps

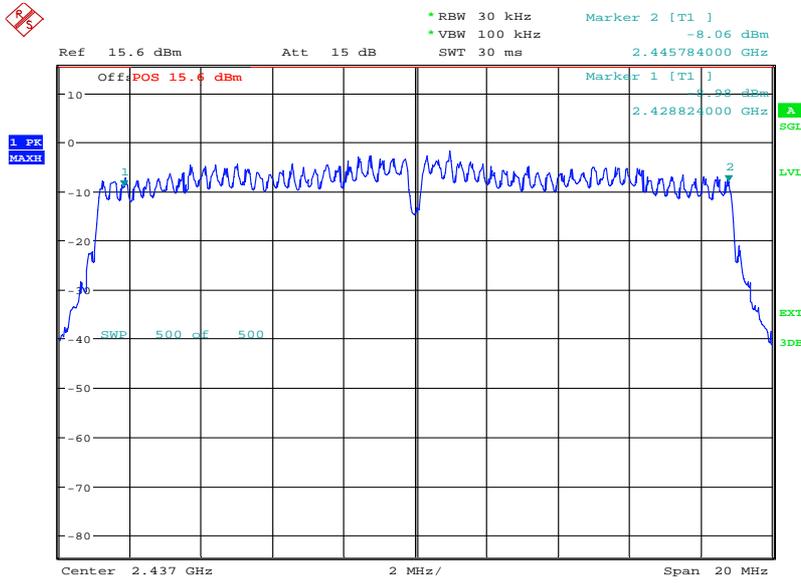

Date: 6.MAR.2013 10:40:16

52 Mbps

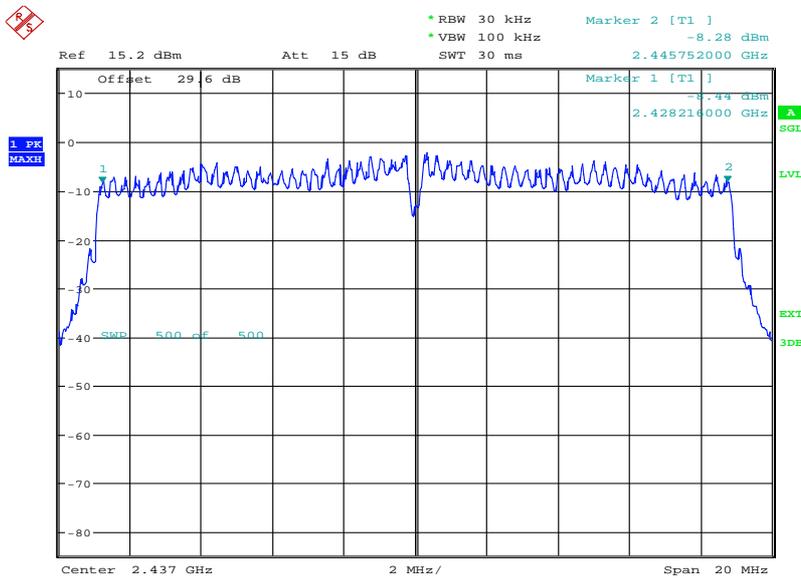


Date: 6.MAR.2013 10:52:41




Product Service

58.5 Mbps

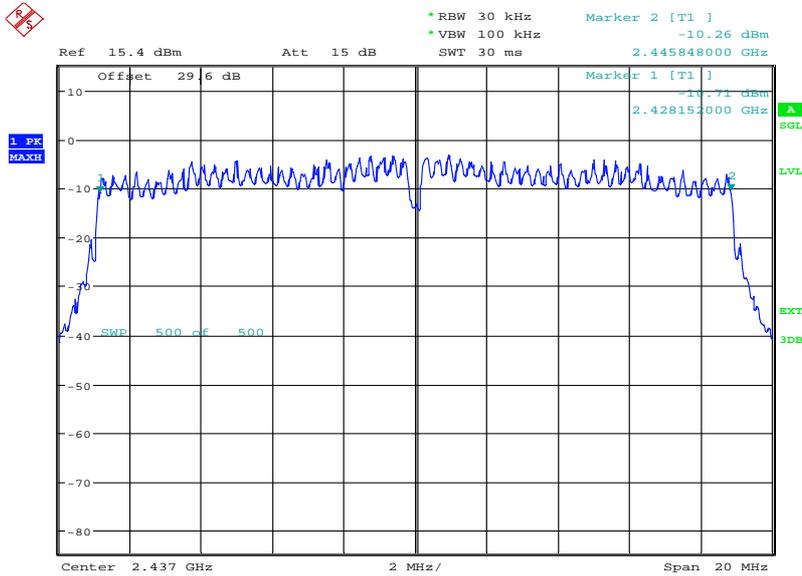

Date: 6.MAR.2013 11:13:06

65 Mbps

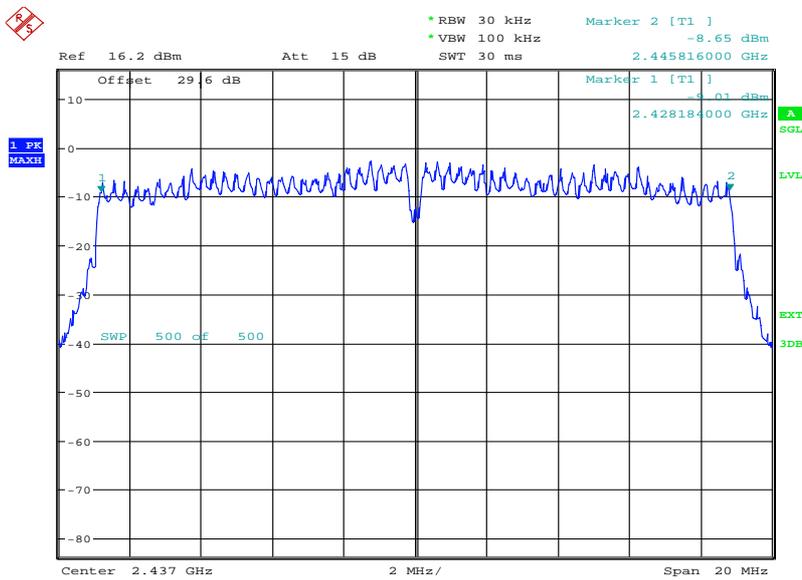


Date: 6.MAR.2013 11:28:54



Product Service


2462 MHz

6.5 Mbps

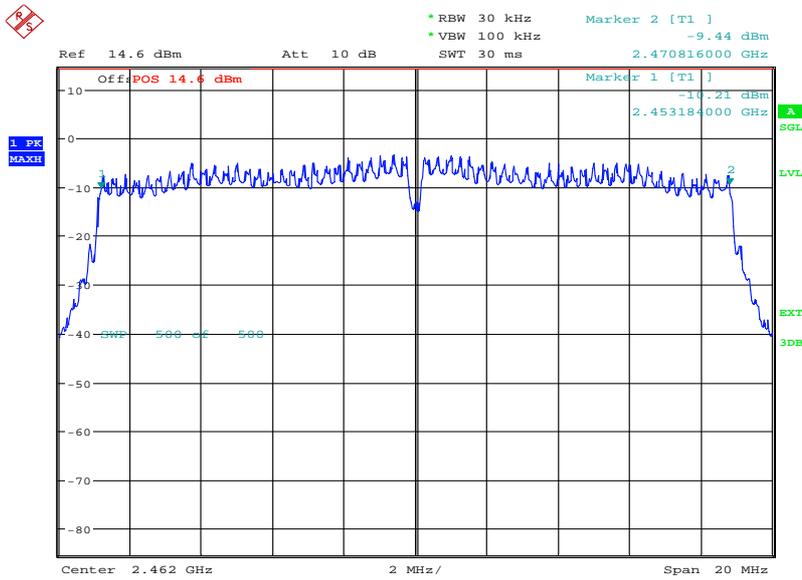

Date: 6.MAR.2013 09:47:14

13 Mbps

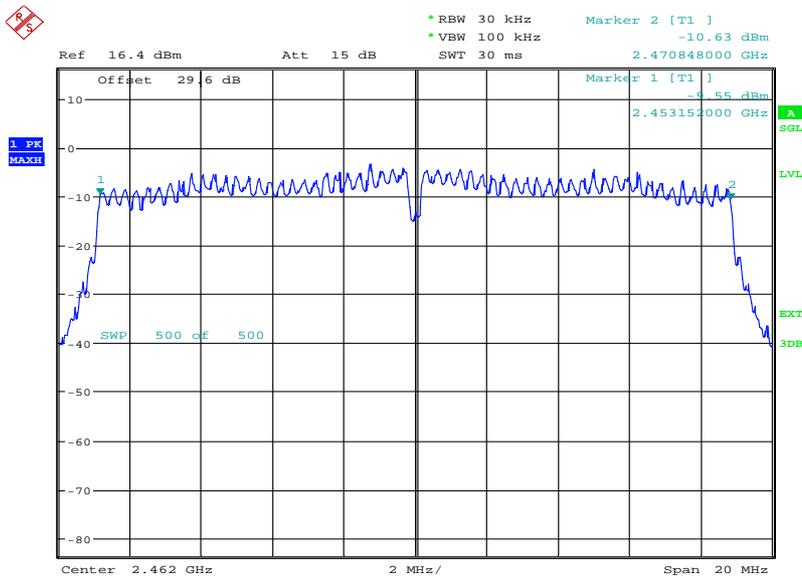


Date: 6.MAR.2013 10:00:12




Product Service

19.5 Mbps

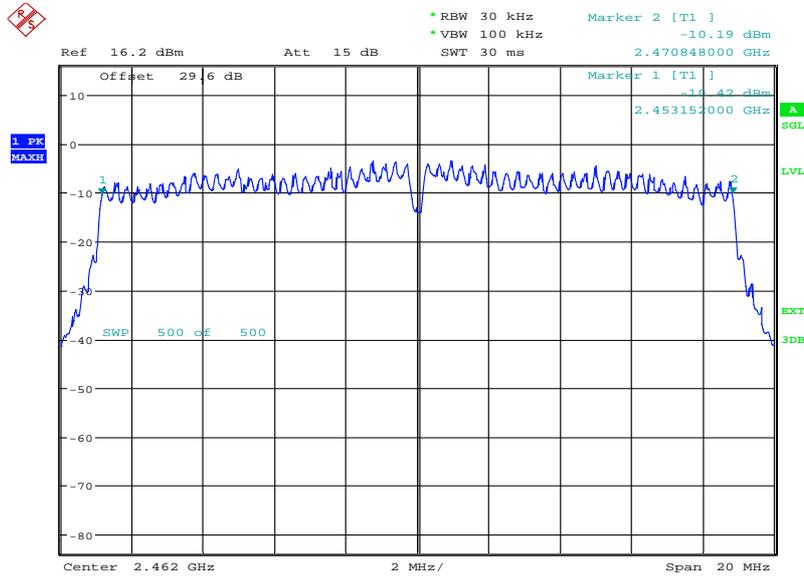

Date: 6.MAR.2013 10:15:38

26 Mbps

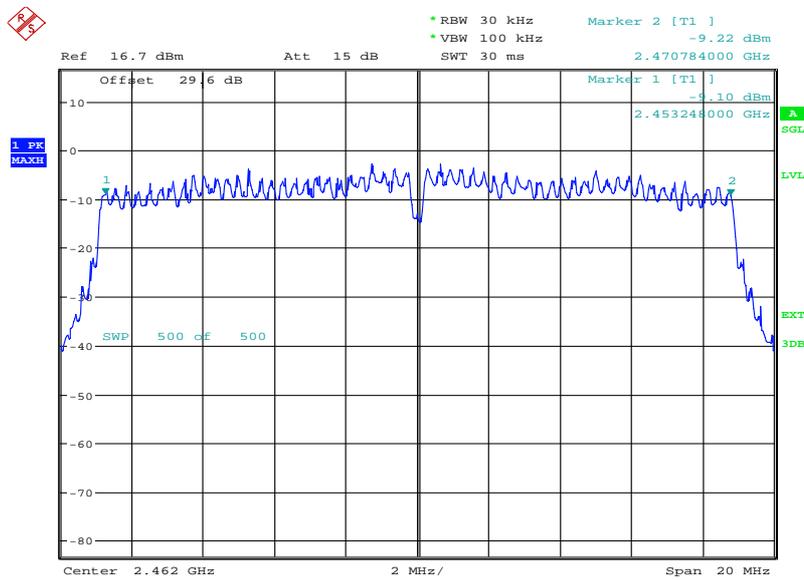


Date: 6.MAR.2013 10:30:23




Product Service

39 Mbps

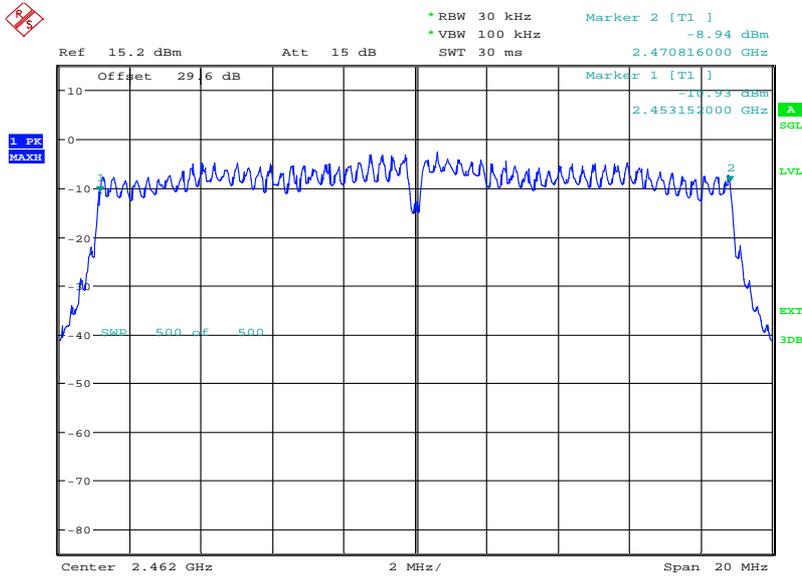

Date: 6.MAR.2013 10:44:27

52 Mbps

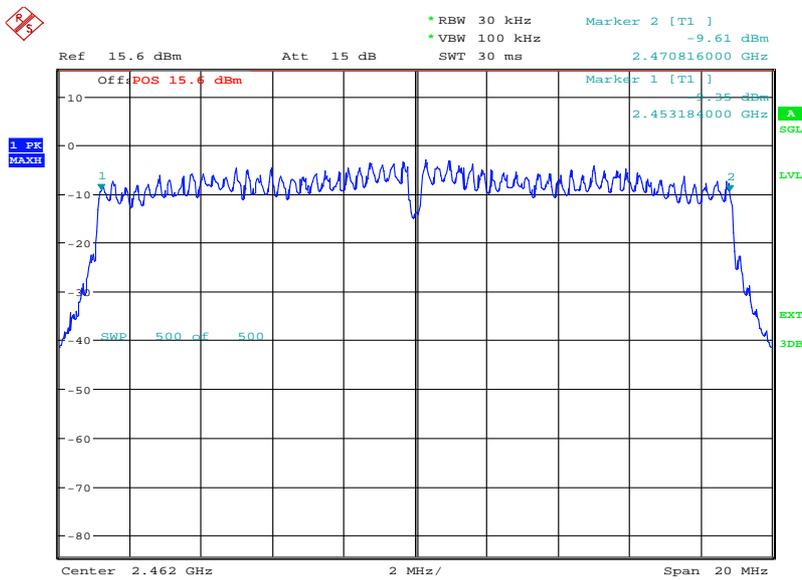


Date: 6.MAR.2013 11:04:37




Product Service

58.5 Mbps

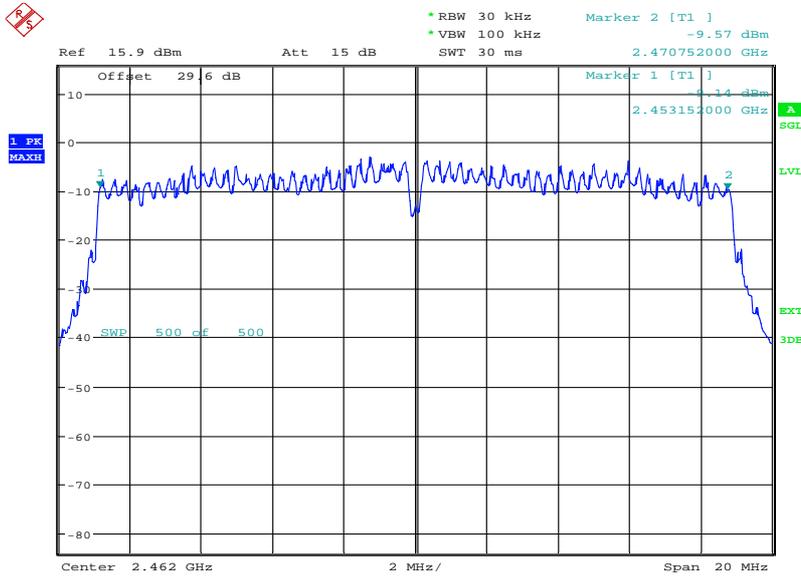

Date: 6.MAR.2013 11:17:46

65 Mbps

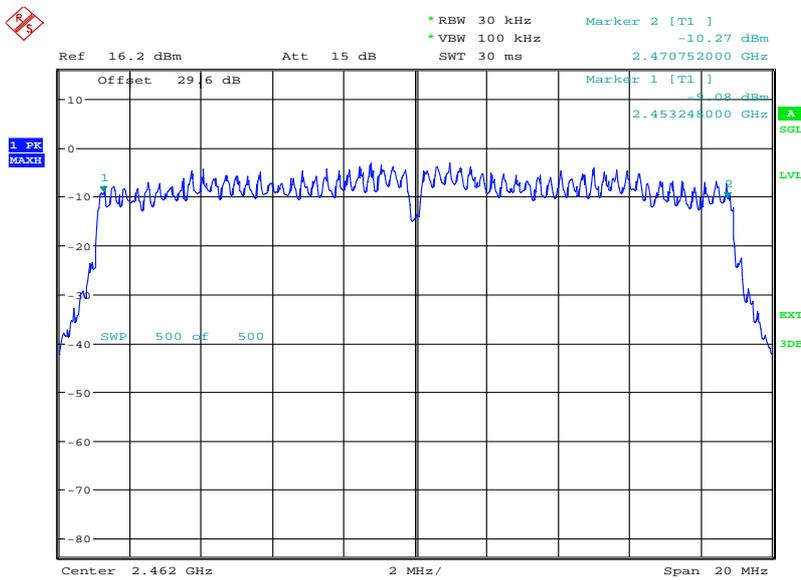

Date: 6.MAR.2013 11:32:49

Limit Clause

The minimum 6 dB Bandwidth shall be at least 500 kHz.



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 – AC Line Conducted Emissions</b>					
LISN (1 Phase)	Chase	MN 2050	336	12	23-Mar-2013
Transient Limiter	Hewlett Packard	11947A	1032	12	28-Jun-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
<b>Section 2.2 - Maximum Peak Conducted Output Power</b>					
Multimeter	White Gold	WG022	190	12	30-Oct-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	18-Oct-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	23-Jul-2013
Programmable Power Supply	Iso-tech	IPS 2010	2436	-	TU
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Power Divider	Weinschel	1506A	3345	12	8-May-2013
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	9-May-2013
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	31-Aug-2013
P-Series Power Meter	Agilent	N1911A	3980	12	17-Sep-2013
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	17-Sep-2013
1 Metre K Type Cable	Rhophase	KPS-1501A-1000- KPS	4106	12	25-Oct-2013
2 Metre N Type Cable	Rhophase	NPS-1601A-2000- NPS	4110	12	1-Jun-2013
<b>Section 2.3 - Spurious and Band Edge Emissions</b>					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	9-Nov-2013
Communications Tester	Rohde & Schwarz	CMU 200	442	12	1-Nov-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	24-May-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	1-Feb-2014
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	24-Aug-2013
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
9m RF Cable (N Type)	Rhophase	NPS-2303-9000- NPS	3791	-	TU
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.4 - Power Spectral Density</b>					
Multimeter	White Gold	WG022	190	12	30-Oct-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	18-Oct-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	23-Jul-2013
Programmable Power Supply	Iso-tech	IPS 2010	2436	-	TU
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Power Divider	Weinschel	1506A	3345	12	8-May-2013
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	9-May-2013
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	31-Aug-2013
P-Series Power Meter	Agilent	N1911A	3980	12	17-Sep-2013
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	17-Sep-2013
1 Metre K Type Cable	Rhophase	KPS-1501A-1000-KPS	4106	12	25-Oct-2013
2 Metre N Type Cable	Rhophase	NPS-1601A-2000-NPS	4110	12	1-Jun-2013
<b>Section 2.5 - Spurious and Band Edge Emissions</b>					
Antenna (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	13-Sep-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	9-Nov-2013
Communications Tester	Rohde & Schwarz	CMU 200	442	12	1-Nov-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	18-Oct-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	23-Jul-2013
Pre-Amplifier	Phase One	PSO4-0087	1534	12	28-Sep-2013
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	30-Nov-2013
High Pass Filter (4GHz)	RLC Electronics	F-100-4000-5-R	2773	12	1-Feb-2014
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
Amplifier (1 - 8GHz)	Phase One	PS06-0060	3175	12	10-Jul-2013
Amplifier (8 - 18GHz)	Phase One	PS06-0061	3176	12	10-Jul-2013
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
High Pass Filter (3GHz)	RLC Electronics	F-100-3000-5-R	3349	12	29-May-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	1-Feb-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	11-Oct-2013
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	31-Aug-2013
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	1-Feb-2014
'2.92mm' - '2.92mm' RF Cable (2m)	Rhophase	KPS-1503-2000-KPS	3694	12	25-Oct-2013
'2.92mm' - '2.92mm' RF Cable (2m)	Rhophase	KPS-1503-2000-KPS	3695	12	15-Oct-2013
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	mature GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	mature GmbH	NCD	3917	-	TU
1 metre, SMA to SMA	Suhner	Sucoflex armoured cable	4048	-	O/P Mon
1 Metre K Type Cable	Rhophase	KPS-1501A-1000-KPS	4106	12	25-Oct-2013



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.6 - 6dB Bandwidth</b>					
Multimeter	White Gold	WG022	190	12	30-Oct-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	18-Oct-2013
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	23-Jul-2013
Programmable Power Supply	Iso-tech	IPS 2010	2436	-	TU
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
Power Divider	Weinschel	1506A	3345	12	8-May-2013
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	9-May-2013
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	31-Aug-2013
P-Series Power Meter	Agilent	N1911A	3980	12	17-Sep-2013
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	17-Sep-2013
1 Metre K Type Cable	Rhophase	KPS-1501A-1000-KPS	4106	12	25-Oct-2013
2 Metre N Type Cable	Rhophase	NPS-1601A-2000-NPS	4110	12	1-Jun-2013

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



Product Service

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
6dB Bandwidth	$\pm 212.114$ kHz
EIRP Peak Power	30MHz to 1GHz: $\pm 5.1$ dB 1GHz to 40GHz: $\pm 6.3$ dB
Maximum Peak Conducted Output Power	$\pm 0.70$ dB
Spurious and Band Edge Emissions	30MHz to 1GHz: $\pm 5.1$ dB 1GHz to 40GHz: $\pm 6.3$ dB
Power Spectral Density	$\pm 3.0$ dB
AC Line Conducted Emissions	$\pm 3.2$ dB



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2013 TÜV SÜD Product Service