

TEST REPORT

Applicant : Sharp Corporation, Communication Systems Division
Address : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN

Products : Cellular Phone
Model No. : 206SH
SERIAL NO. : 004401/11/482614/8
004401/11/482888/8
004401/11/482637/9

FCC ID : APYHRO00194

Test Standard : CFR 47 FCC Rules and Regulations Part 15

Test Results : **Passed**

Date of Test : April 30 ~ May 10, 2013



Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test.....	3
2 Summary of Test Results.....	4
3 Test Procedure.....	5
4 Test Location.....	5
5 Recognition of Test Laboratory.....	5
6 Details of the Equipment Under Test.....	6
7 Details of the Test Item.....	10

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT**EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility - indicates that the listed condition, standard or equipment is applicable for this report. - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Division
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : 206SH
4. Serial No. : 004401/11/482614/8
004401/11/482888/8
004401/11/482637/9
5. Product Type : Pre-production
6. Date of Manufacture : March, 2013
7. Power Rating : 4.0VDC (Internal Lithium-ion Battery
8. CBATIA225AFN3 3080mAh))
9. EUT Grounding : None
10. Operating Frequency : 5180.0 MHz(36CH) –5700.0MHz(140CH): IEEE802.11a/n/ac(20MHz)
5190.0 MHz(38CH) –5670.0MHz(134CH): IEEE802.11n/ac(40MHz)
5210.0 MHz(42CH) –5530.0MHz(106CH): IEEE802.11n/ac(80MHz)
11. Modulation : OFDM
12. Antenna type : Inverted-L Type Antenna
13. Category : Spread Spectrum Transmitter(OFDM)/UNII*
14. EUT Authorization : Certification
15. Received Date of EUT : April 22, 2013

*The EUT does not apply any emission testing as specified in FCC KDB 644545 (D02 and D01),
Because it has no function shown in the(KDB) guidance.

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15 – Radio Frequency Devices
Subpart E – Unlicensed National Information Infrastructure Devices

The EUT described in clause 1 was tested according to the applied standard shown above.
Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- The test result was **passed** for the test requirements of the applied standard.
- The test result was **failed** for the test requirements of the applied standard.
- The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch



Shigeru Osawa
Deputy Manager
JQA KITA-KANSAI Testing Center
SAITO EMC Branch

3 Test Procedure

The tests documented in this report were performed in accordance with
CFR 47 FCC Rules and Regulations Part 15
Subpart E – Unlicensed National Information Infrastructure Devices

ANSI C63.4–2003

The test set-up was made in accordance to the general provisions of ANSI C63.4-2003.

ANSI C63.10–2009

Testing unlicensed wireless devices.

KDB 789033 D01

General UNII Test Procedures v01r03: April 8, 2013

FCC 06-96

Compliance measurement procedures for Unlicensed National Information Infrastructure Devices

4 Test Location

Japan Quality Assurance Organization (JQA)

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2014)

VCCI Registration No. : A-0002 (Expiry date : March 30, 2014)

BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006
(Expiry date : September 14, 2013)

IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2016)

6 Details of the Equipment Under Test

6.1 Operating Condition

Test Voltage : 4.0VDC (Internal Lithium-ion Battery CBATIA225AFN3 3080mAh)

Operation Mode :

The EUT is set with the test mode, the specification of the test mode is as followings.

Transmitting frequency : 5180.0 MHz(36CH) – 5700.0MHz(140CH): IEEE802.11a/n/ac(20MHz)
: 5190.0 MHz(38CH) – 5670.0MHz(134CH): IEEE802.11n/ac(40MHz)
: 5210.0 MHz(42CH) – 5530.0MHz(106CH): IEEE802.11ac(80MHz)

Receiver frequency : 5180.0 MHz(36CH) – 5700.0 MHz(140CH)

Modulation Type

1. 802.11a : OFDM
2. 802.11n/ac(20MHz) : OFDM
3. 802.11n/ac(40MHz) : OFDM
3. 802.11ac(80MHz) : OFDM

Other Clock Frequency

32.768 kHz, 19.2 MHz, 27 MHz, 27.12 MHz, 37.4 MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

The EUT with temporary antenna port was used in conducted measurement.

6.2 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	206SH	004401/11/4 82614/8*1) 004401/11/4 82888/8*2) 004401/11/4 82637/9*3)	APYHRO00194
B	AC Adapter	Sharp	SHCEJ1	--	N/A
C	Headset	Softbank Mobile	ZTCAA1	--	N/A

*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

*2) Used for Antenna Conducted Emission

*3) Used for DFS Measurement

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Power Cord	--	--	NO	NO	1.5
2	Headset Cable	--	--	NO	NO	0.5

6.3 Test Arrangement (Drawings)


a) Single Unit



b) AC Adapter used

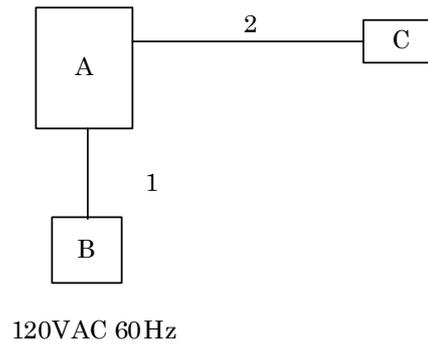

c) Headset used



6.4 Maximum Output Power

The preliminary maximum peak conducted output power measurements were performed each TX rate and maximum value are listed as followings.

802.11a

Channel	36	44	48	52	56	64	100	116	140
Frequency(MHz)	5180	5220	5240	5260	5280	5320	5500	5580	5700
Power(dBm)	12.71	12.72	12.61	13.20	13.19	13.00	12.88	12.78	12.52

The TX rate 6Mbps was maximum case.(MCS0)

802.11n (20MHz)

Channel	36	44	48	52	56	64	100	116	140
Frequency(MHz)	5180	5220	5240	5260	5280	5320	5500	5580	5700
Power(dBm)	12.68	12.71	12.65	13.12	13.07	13.06	13.03	12.77	12.51

The TX rate 6.5Mbps was maximum case.(MCS0)

802.11n (40MHz)

Channel	38	46	54	62	102	134
Frequency(MHz)	5190	5230	5270	5310	5510	5670
Power(dBm)	13.21	13.23	12.56	12.24	13.14	12.90

The TX rate 13.5Mbps was maximum case.(MCS0)

802.11ac(80MHz)

Channel	42	58	106
Frequency(MHz)	5210	5290	5530
Power(dBm)	12.99	13.09	13.46

The TX rate 29.3Mbps was maximum case.(MCS0)

All test cases were performed to the highest RF output power data rate listed above.

7 Details of the Test Item**7.1 26dB Bandwidth**

For the requirements, - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

For the limits, - Passed - Failed - Not judged

7.1.1 Worst Point and Measurement Uncertainty

Reporting Purpose (No limitation applied)

Uncertainty of Measurement Results +/- 0.9 %

Remarks : _____

7.1.2 Test Site

KITA-KANSAI Testing Center

Test site : SAITO - Anechoic chamber (A1) - Measurement room (M1)
 - Measurement room (M2) - Measurement room (M3)
 - Shielded room (S1) - Shielded room (S2)
 - Shielded room (S3) - Shielded room (S4)


7.1.3 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
RF Cable	SUCOFLEX102	SUHNER	C-52	2012/7	1 Year
Spectrum Analyzer	E4446A	Agilent	A-39	2012/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2012/9	1 Year

7.1.4 Test Method and Test Setup (Diagrammatic illustration)

The occupied bandwidth measurements were carried out connecting to the spectrum analyzer. The spectrum analyzer was set in accordance with KDB 789033 D01 as follows:
 The RBW was set approximately 1% of the emission bandwidth.
 Set the VBW > RBW., Detector = Peak, and Trace mode = max hold.
 The bandwidth function in the analyzer was used.

(referred documentation is No. G70364M)

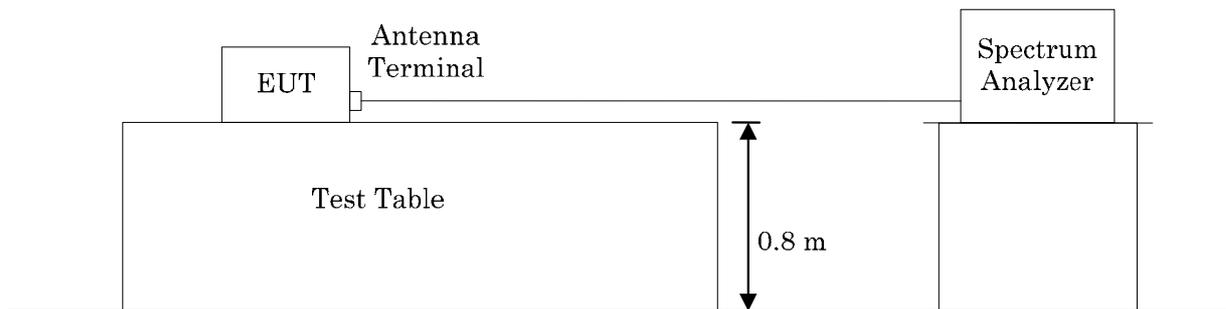

7.1.5 Test Data

7.1.5.1 802.11a 26dB/ 99% OBW data

Test Date : May 2, 2013


Temp.: 19°C, Humi: 38%

Mode of EUT: TX 802.11a


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
36	5180	20.384	16.669
44	5220	20.431	16.670
48	5240	20.305	16.645
52	5260	20.274	16.667
56	5280	20.429	16.673
64	5320	20.372	16.662
100	5500	20.311	16.674
116	5580	20.433	16.660
140	5700	20.337	16.648

802.11a 36ch (5180 MHz)

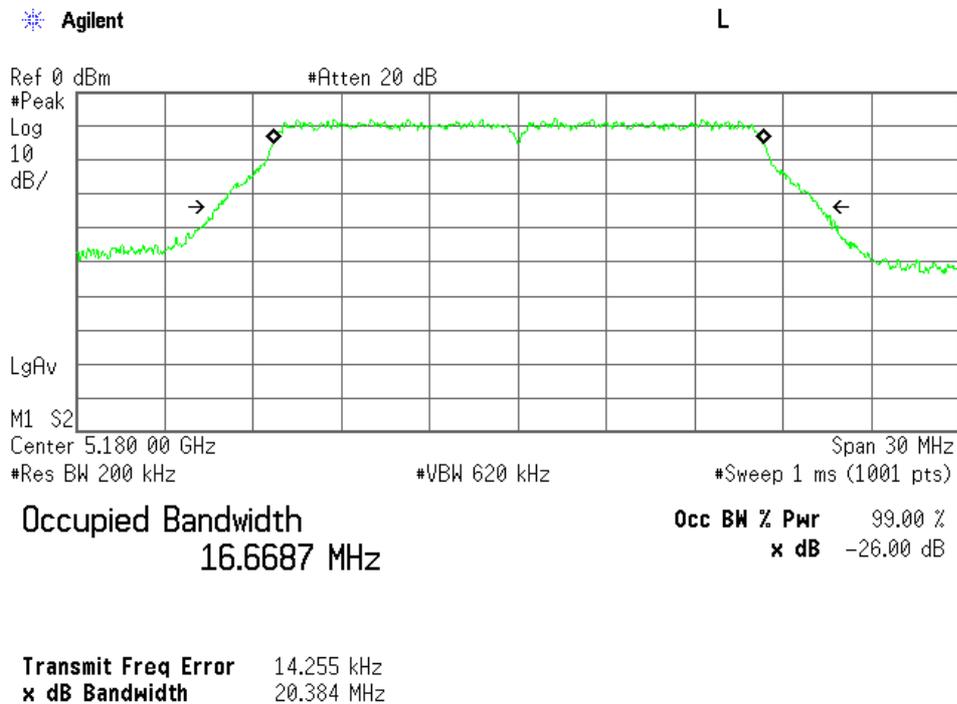


802.11a 44ch (5220 MHz)

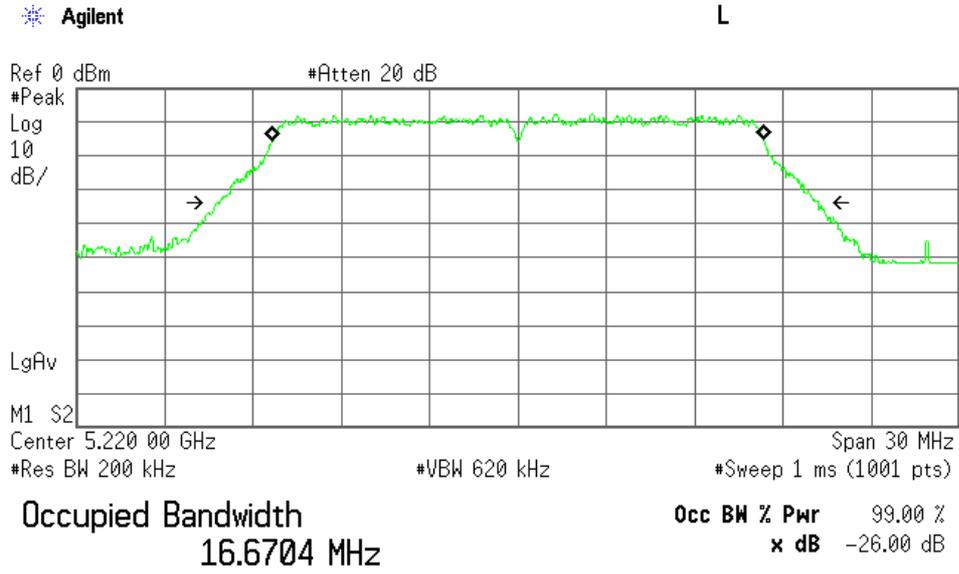


Transmit Freq Error 10.138 kHz
x dB Bandwidth 20.431 MHz

802.11a 48ch (5240 MHz)

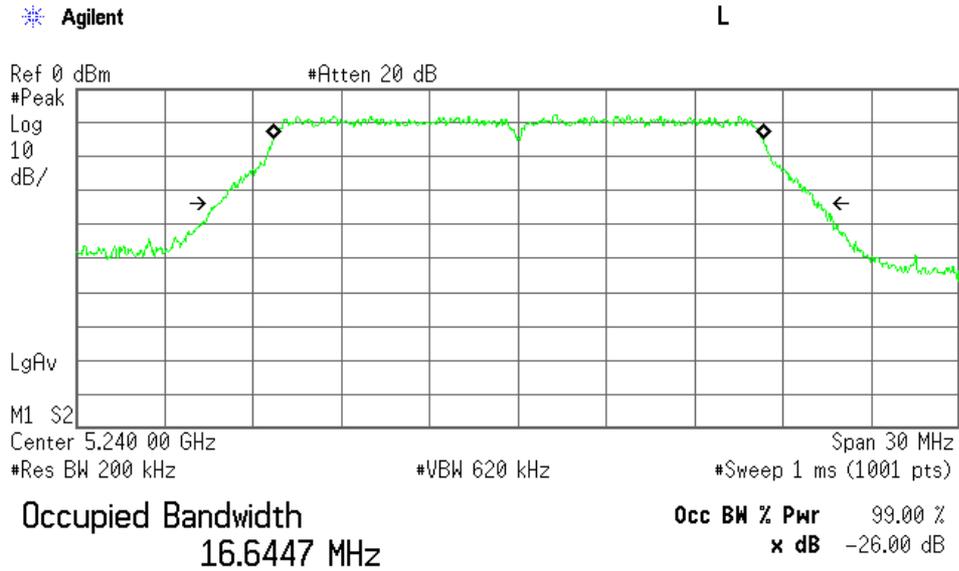


Transmit Freq Error 14.042 kHz
x dB Bandwidth 20.305 MHz

802.11a 52ch (5260 MHz)

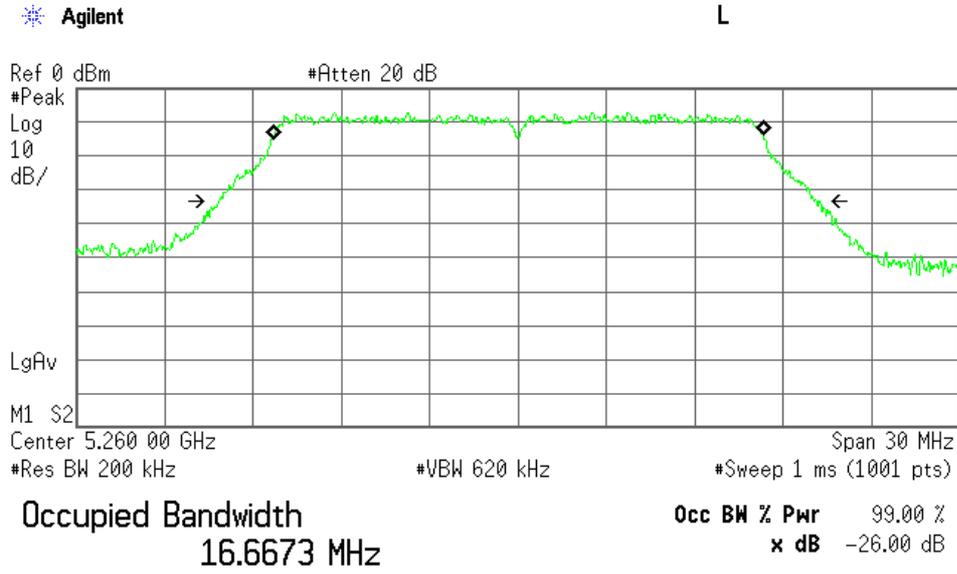


Transmit Freq Error 10.250 kHz
x dB Bandwidth 20.274 MHz

802.11a 56ch (5280 MHz)

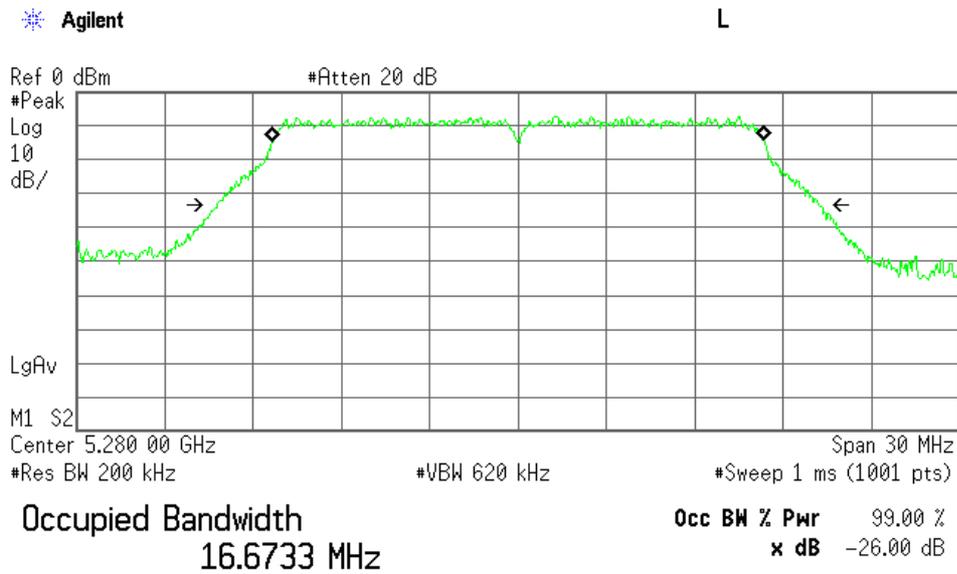


Transmit Freq Error 8.113 kHz
x dB Bandwidth 20.429 MHz

802.11a 64ch (5320 MHz)

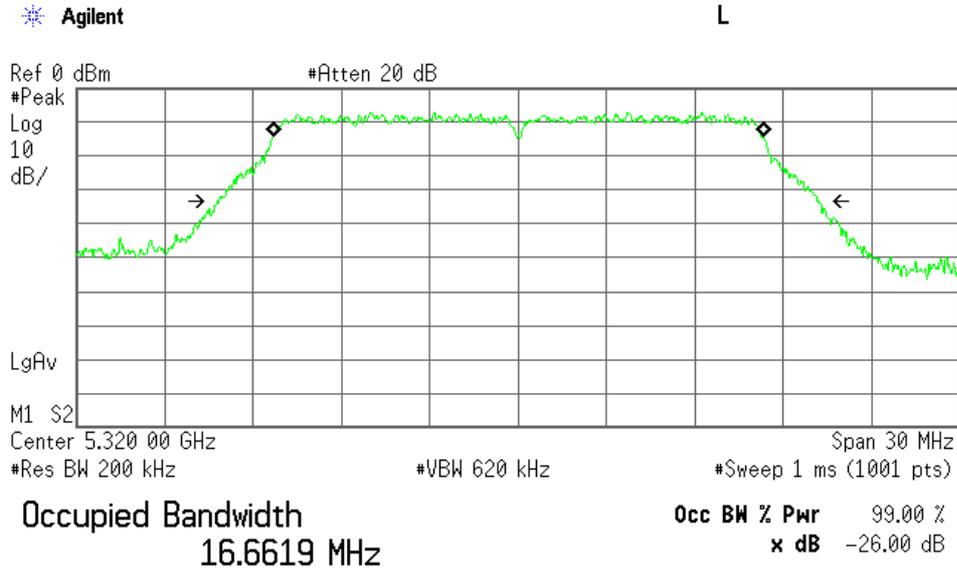


Transmit Freq Error 8.267 kHz
x dB Bandwidth 20.372 MHz

802.11a 100ch (5500 MHz)

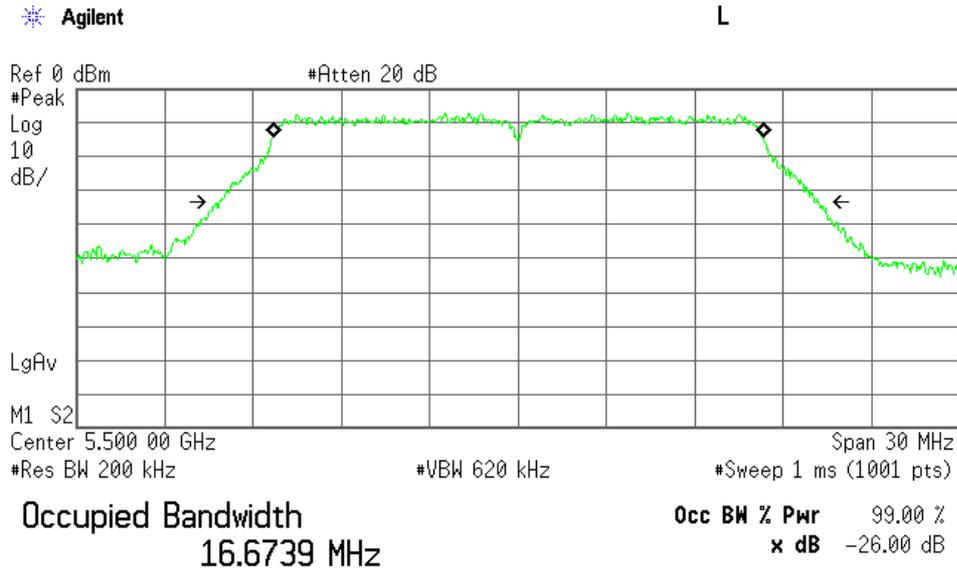


Transmit Freq Error 17.198 kHz
x dB Bandwidth 20.311 MHz

802.11a 116ch (5580 MHz)

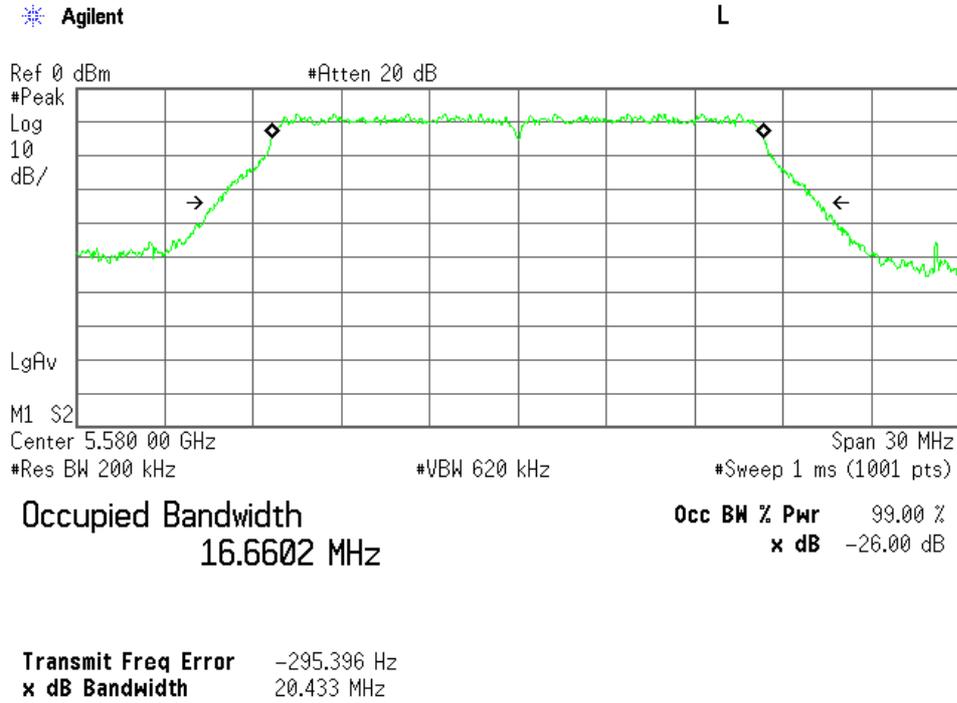

802.11a 140ch (5700 MHz)

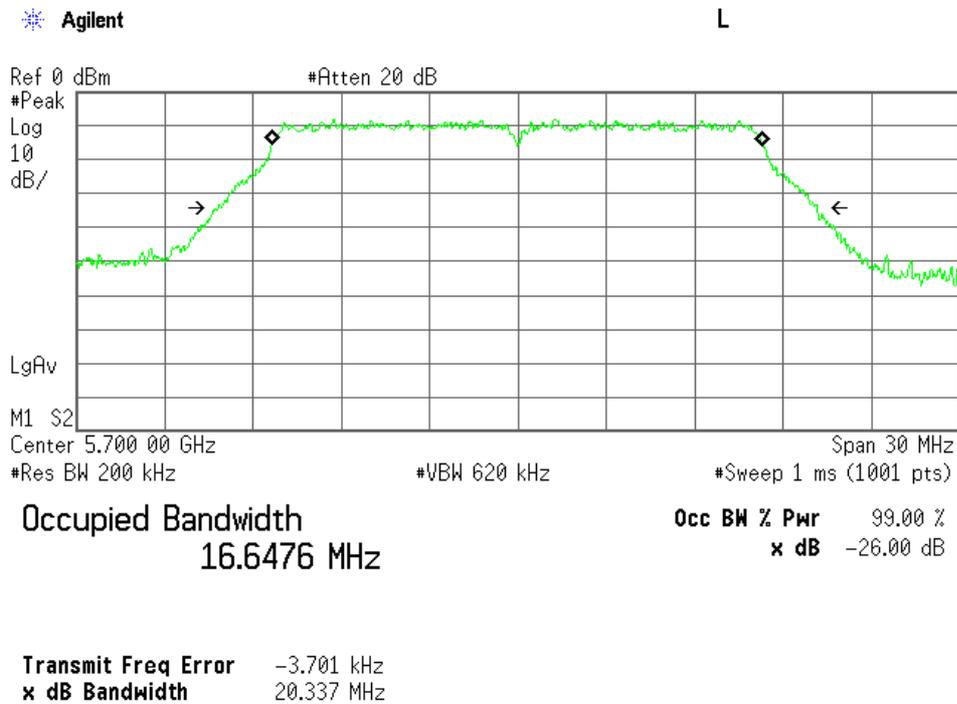


7.1.5.2 802.11n (20 MHz) 26dB/ 99% OBW data


Mode of EUT: Tx 802.11n(20 MHz)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
36	5180	20.716	17.771
44	5220	20.740	17.793
48	5240	20.612	17.769
52	5260	20.669	17.767
56	5280	20.675	17.799
64	5320	20.673	17.777
100	5500	20.697	17.772
116	5580	20.800	17.793
140	5700	20.735	17.802

802.11n (20 MHz) 36ch (5180 MHz)

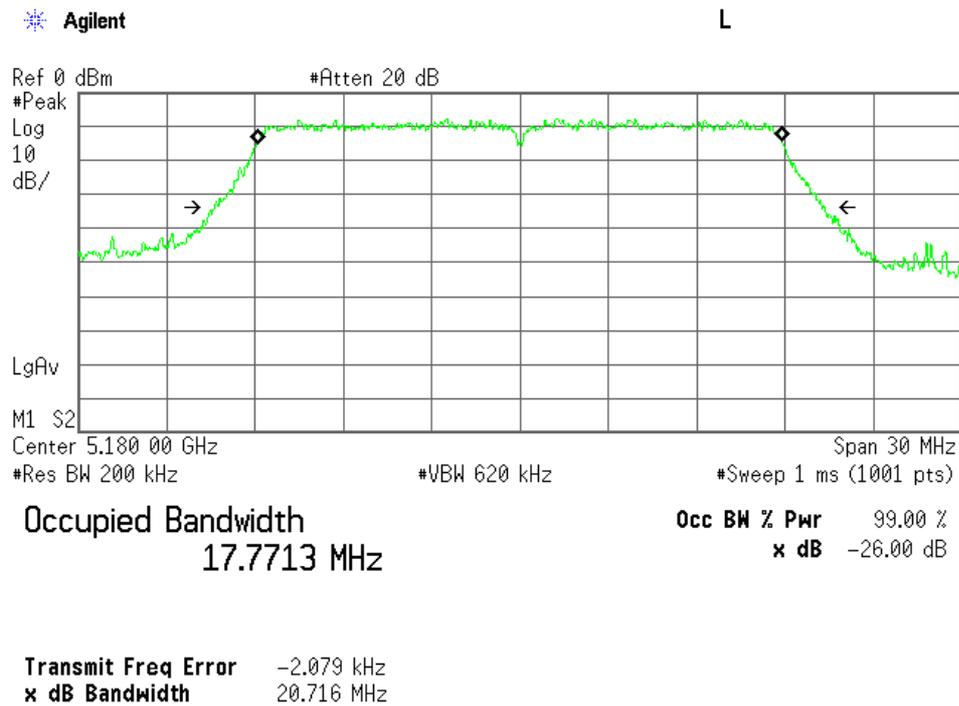


802.11n (20 MHz) 44ch (5220 MHz)

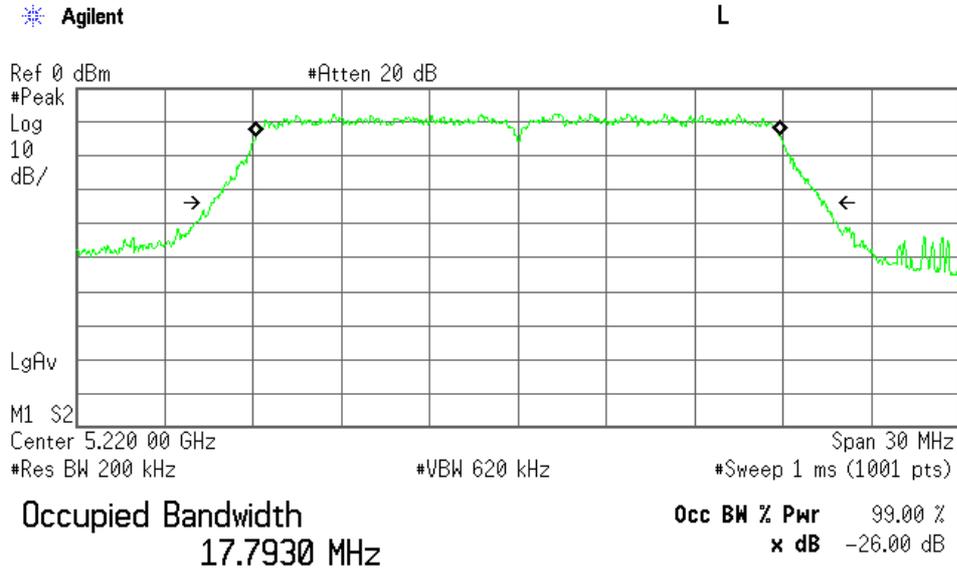


Transmit Freq Error 7.169 kHz
x dB Bandwidth 20.740 MHz

802.11n (20 MHz) 48ch (5240 MHz)

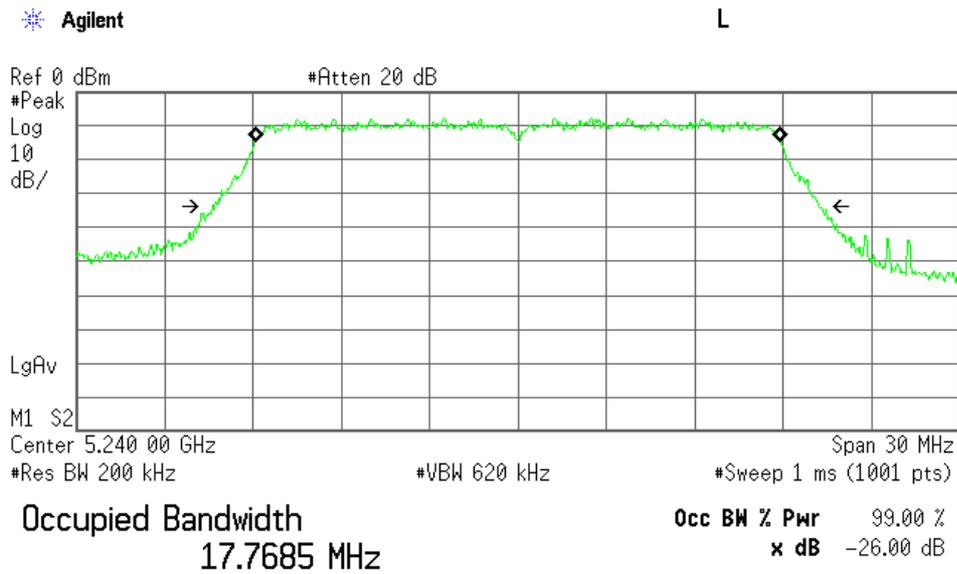


Transmit Freq Error -431.806 Hz
x dB Bandwidth 20.612 MHz

802.11n (20 MHz) 52ch (5260 MHz)

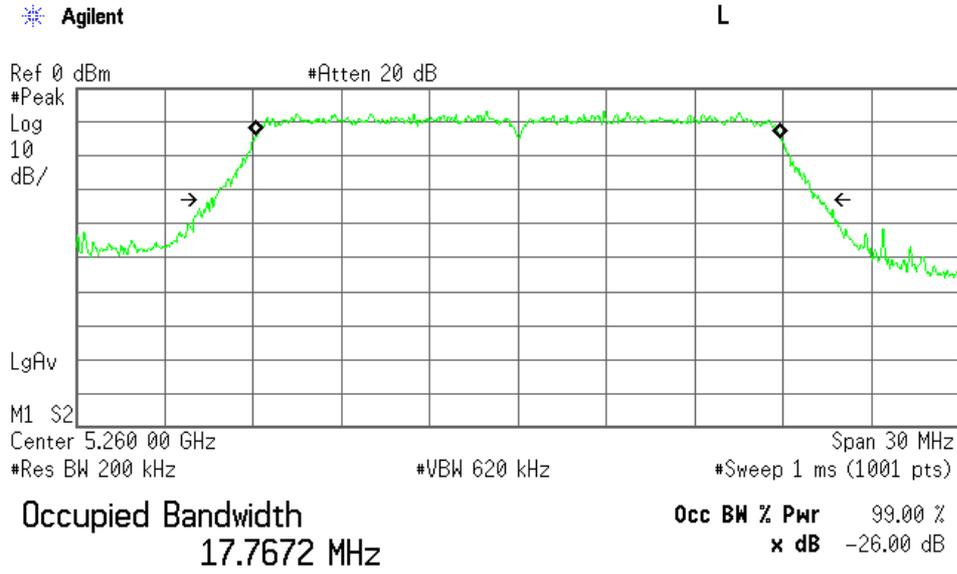


Transmit Freq Error -3.246 kHz
x dB Bandwidth 20.669 MHz

802.11n (20 MHz) 56ch (5280 MHz)

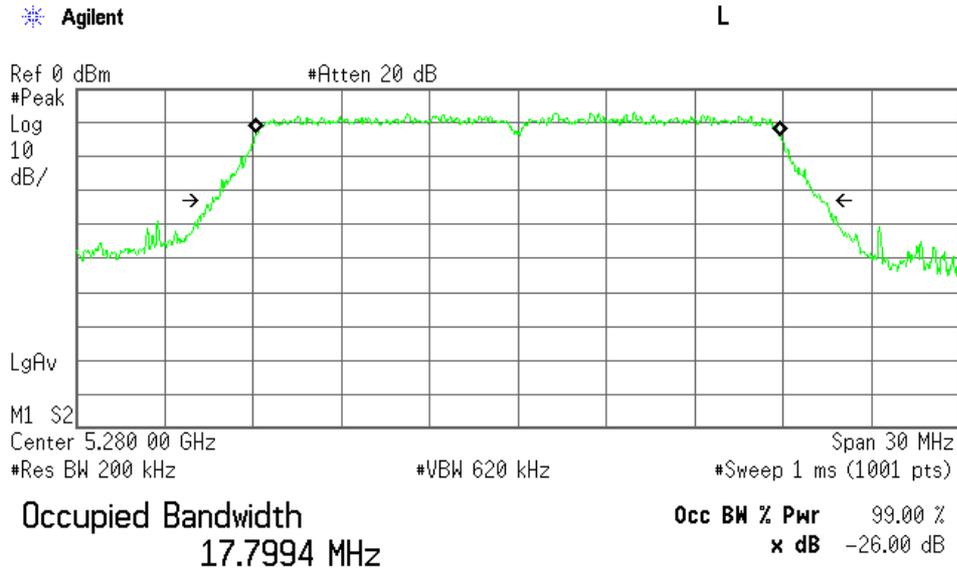


Transmit Freq Error 2.444 kHz
x dB Bandwidth 20.675 MHz


802.11n (20 MHz) 64ch (5320 MHz)

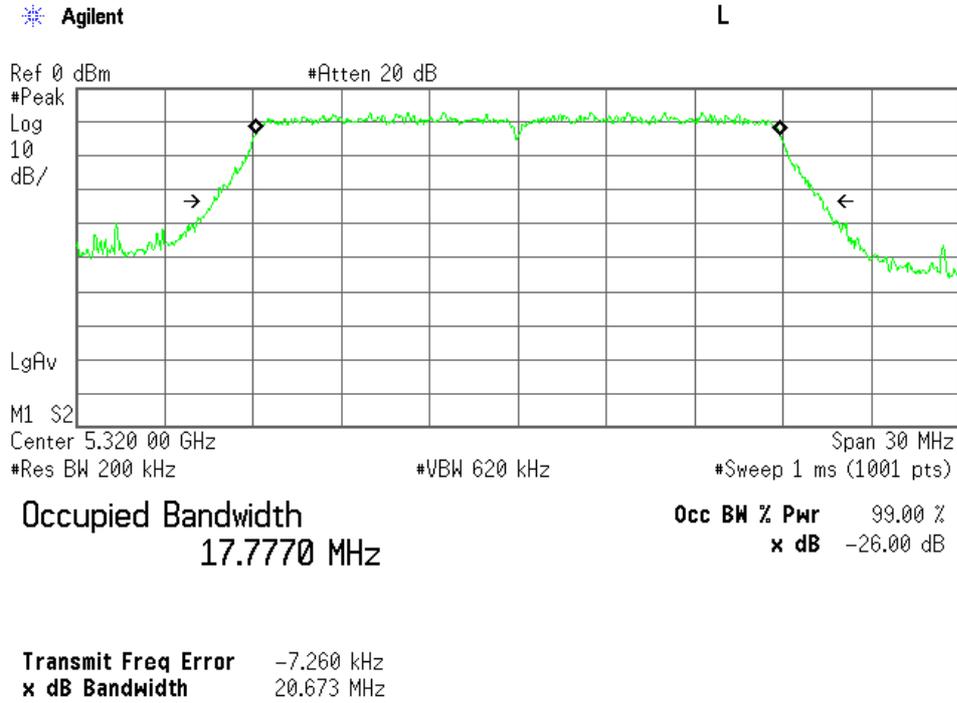


802.11n (20 MHz) 100ch (5500 MHz)

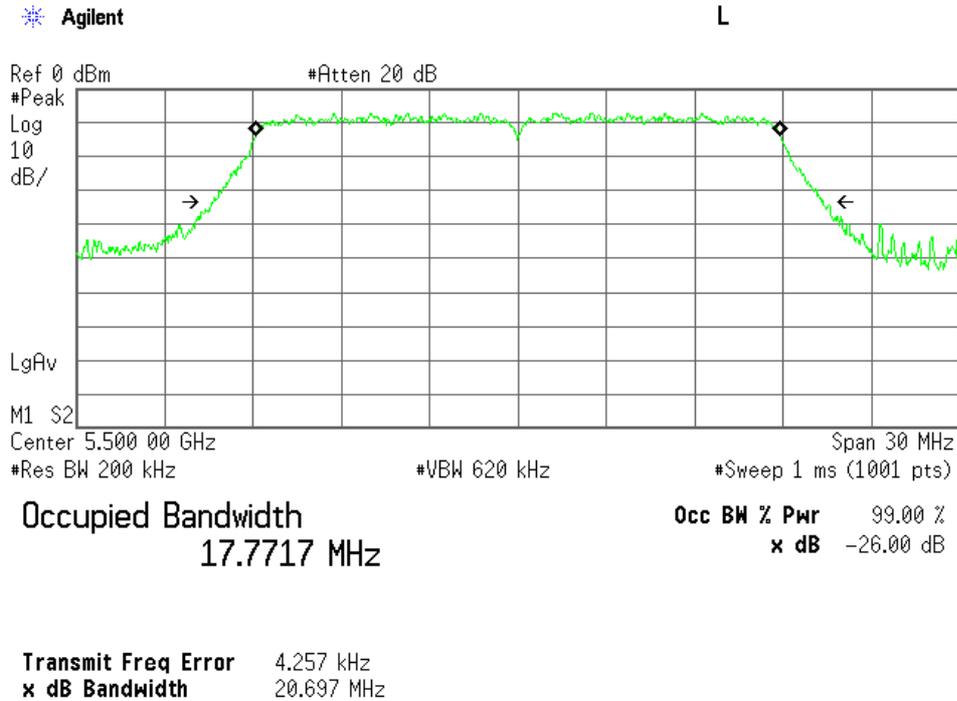

802.11n (20 MHz) 116ch (5580 MHz)

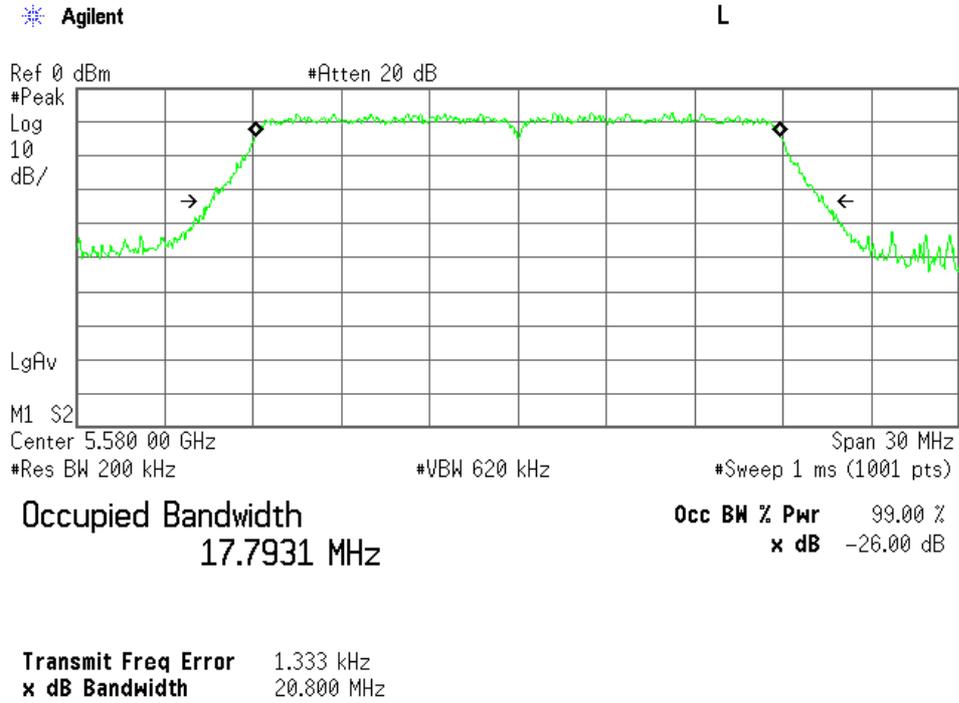

802.11n (20 MHz) 140ch (5700 MHz)

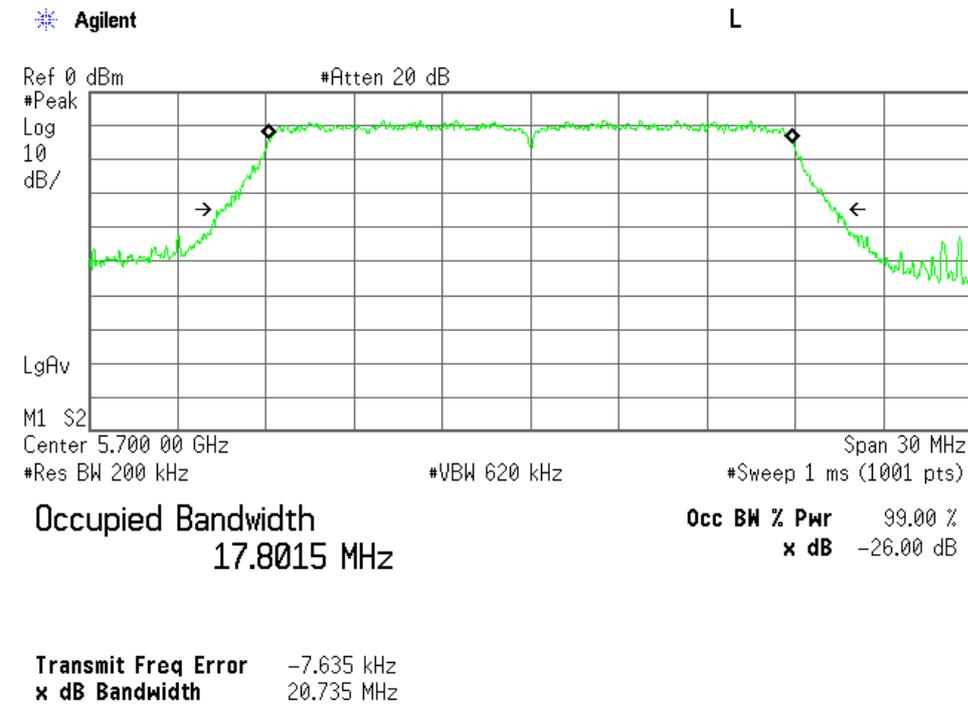


7.1.5.3 802.11n (40 MHz) 26dB/ 99% OBW data


Mode of EUT: Tx 802.11n(40 MHz)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
38	5190	39.678	36.258
46	5230	39.748	36.216
54	5270	39.724	36.242
62	5310	39.944	36.245
102	5510	39.407	36.242
134	5670	39.670	36.251

802.11n (40 MHz) 38ch (5190 MHz)

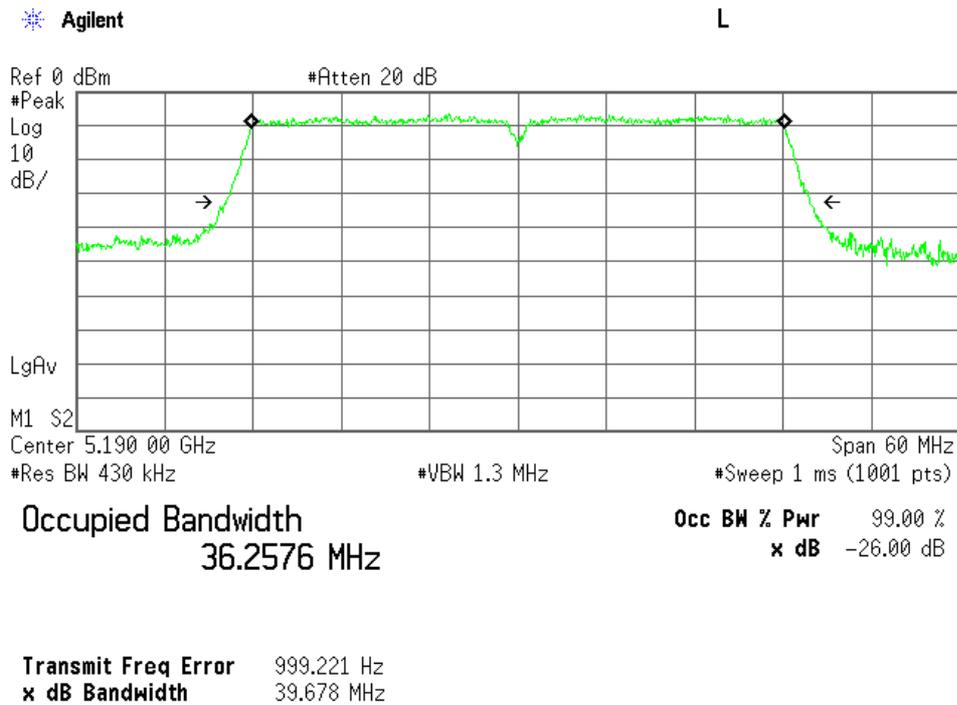


802.11n (40 MHz) 46ch (5230 MHz)

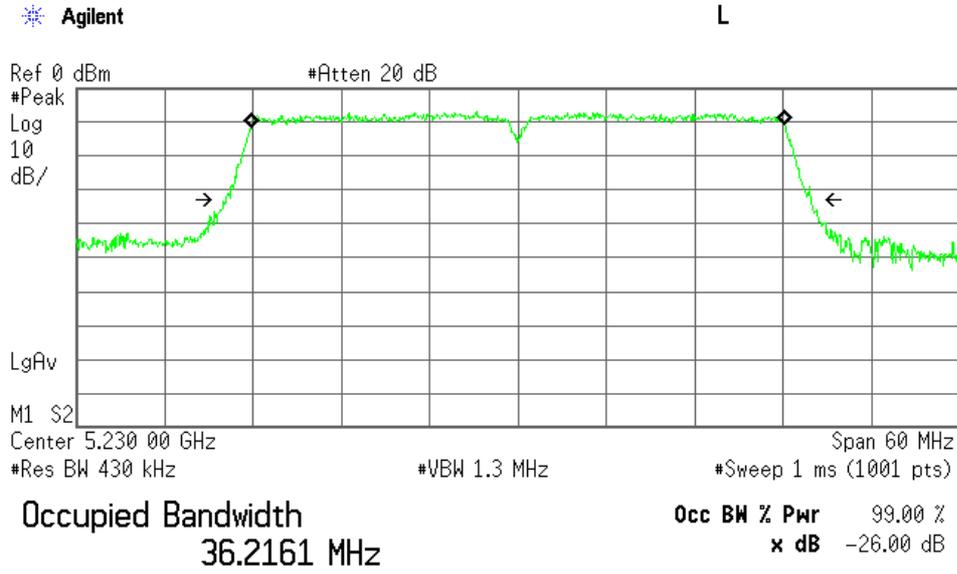


Transmit Freq Error 11.513 kHz
x dB Bandwidth 39.748 MHz

802.11n (40 MHz) 54ch (5270 MHz)

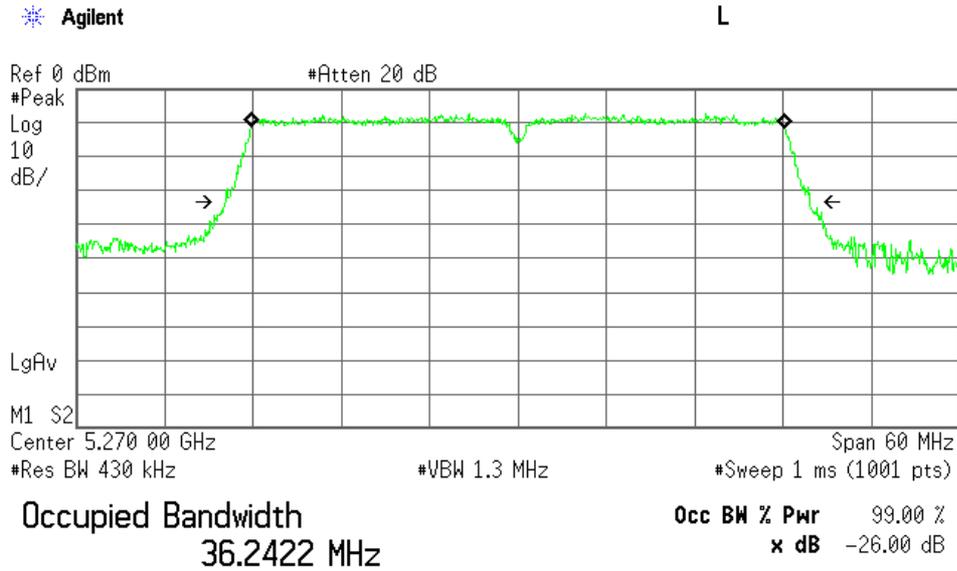


Transmit Freq Error 19.438 kHz
x dB Bandwidth 39.724 MHz


802.11n (40 MHz) 62ch (5310 MHz)

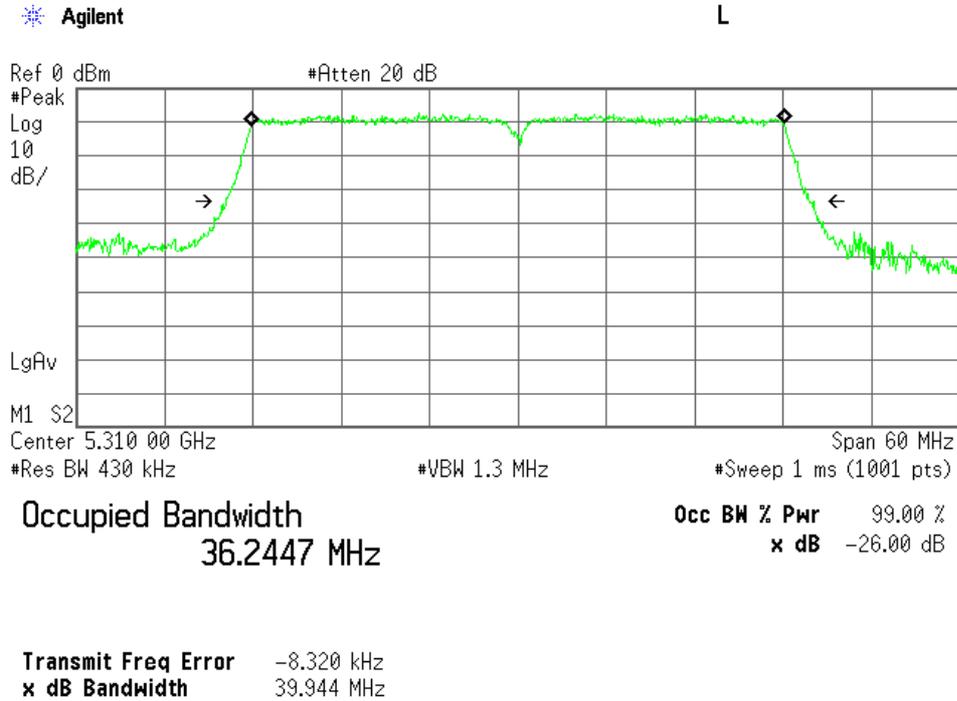

802.11n (40 MHz) 102ch (5510 MHz)

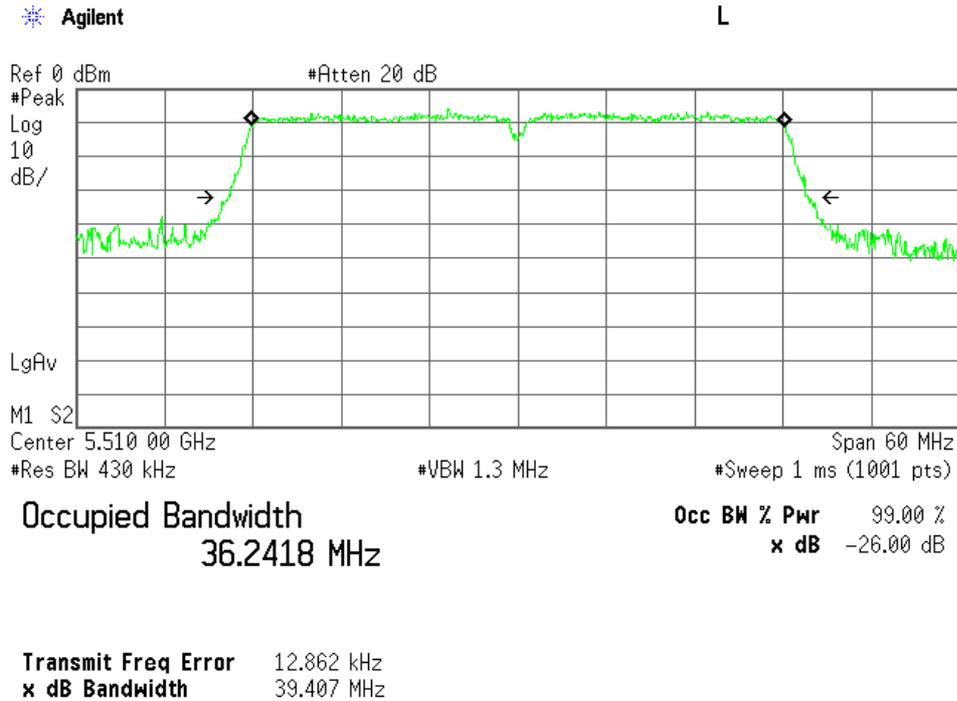

802.11n (40 MHz) 134ch (5670 MHz)

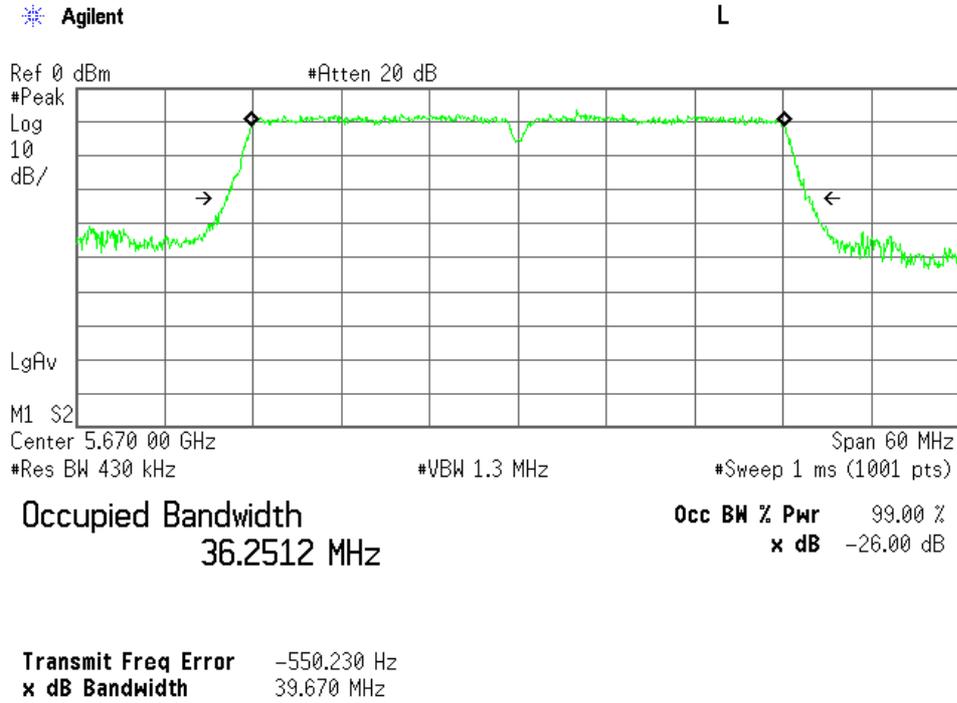


7.1.5.4 802.11ac (80 MHz) 26dB/ 99% OBW data


Mode of EUT: Tx 802.11ac(80 MHz)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	26dB OBW (MHz)	99% OBW (MHz)
42	5210	81.386	75.643
58	5290	81.419	75.577
106	5530	81.028	75.653


802.11ac (80 MHz) 42ch (5210 MHz)

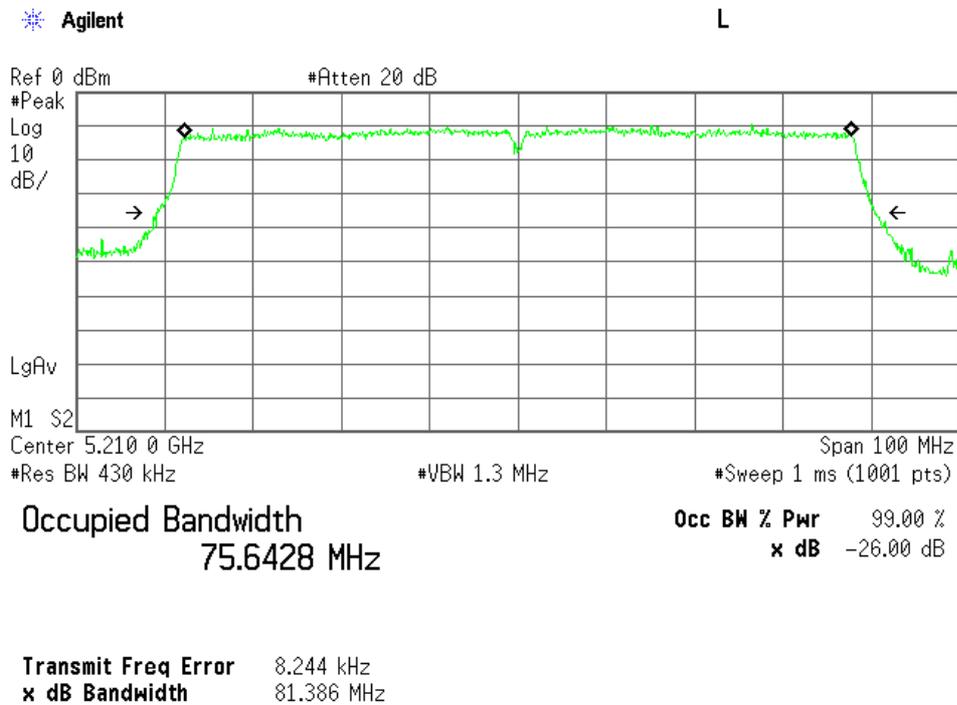

802.11ac (80 MHz) 58ch (5290 MHz)

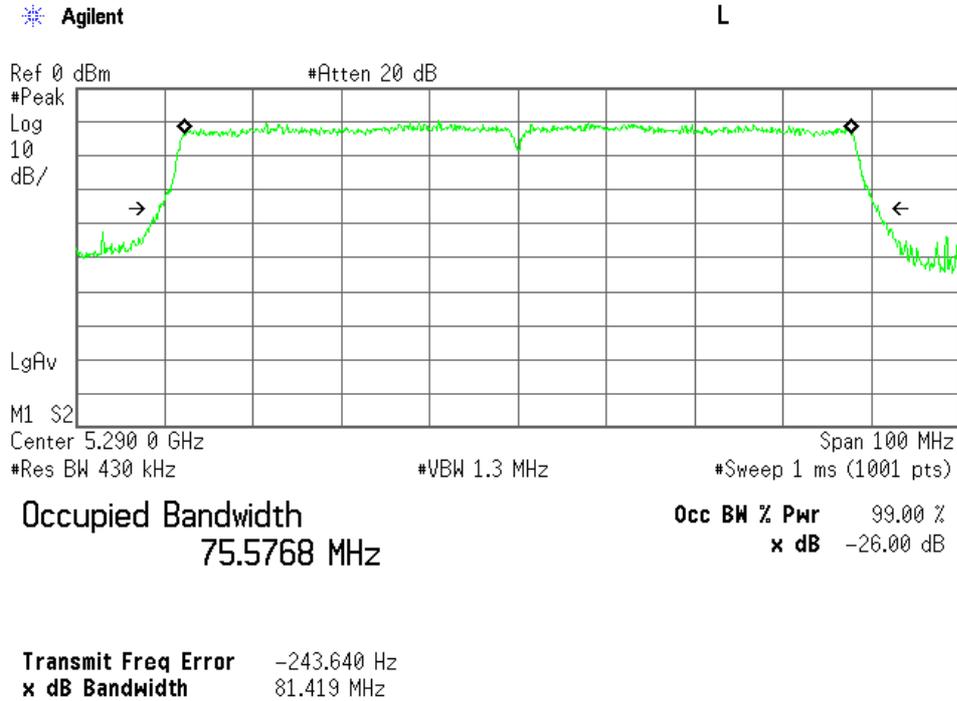

802.11ac (80 MHz) 106ch (5530 MHz)

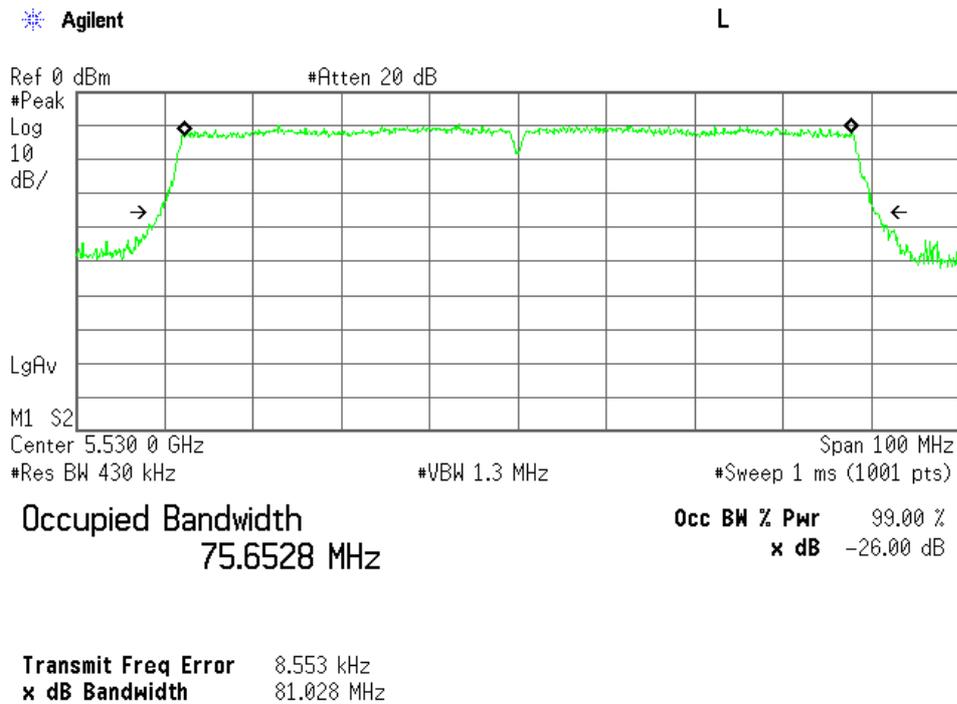

7.2 Maximum conducted output power

For the requirements, - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

For the limits, - Passed - Failed - Not judged

7.2.1 Worst Point and Measurement Uncertainty

Min. Limit Margin 3.77 dB at 5230.0 MHz

Uncertainty of Measurement Results +/- 0.8 dB

Remarks : Worst case is 802.11n (40MHz BW) channel 46.

7.2.2 Test Site

KITA-KANSAI Testing Center

Test site : SAITO - Anechoic chamber (A1) - Measurement room (M1)
 - Measurement room (M2) - Measurement room (M3)
 - Shielded room (S1) - Shielded room (S2)
 - Shielded room (S3) - Shielded room (S4)

7.2.3 Test Instruments


Type	Model	Manufacturer	ID No.	Last Cal.	Interval
RF Cable	SUCOFLEX102	SUHNER	C-52	2012/7	1 Year
Power Meter	ML2495A	Anritsu	210	2012/12	1 Year
Pulse Power Sensor	MA2411B	Anritsu	212	2012/12	1 Year
Attenuator	54A-10	Weinschel	D-28	2012/9	1 Year
Spectrum Analyzer	E4446A	Agilent	A-39	2012/9	1 Year

7.2.4 Test Method and Test Setup (Diagrammatic illustration)

The maximum conducted output power measurements were carried out connecting to the power meter and the pulse power sensor listed above in accordance with KDB 789033 D01 Method (C) (4) “Measurement using an RF average power meter”.

The EUT transmits non-continuously therefore the duty cycle measurements were performed. The measurements of duty cycle and transmission duration were performed connecting to the spectrum analyzer in accordance with KDB 789033 D01 Method B) (2) as follows;
 Span: Zero/ RBW: 5 MHz/ VBW ≥ 5 MHz/ Sweep: Auto/ Detector: Peak

(referred documentation is No. G70364M)

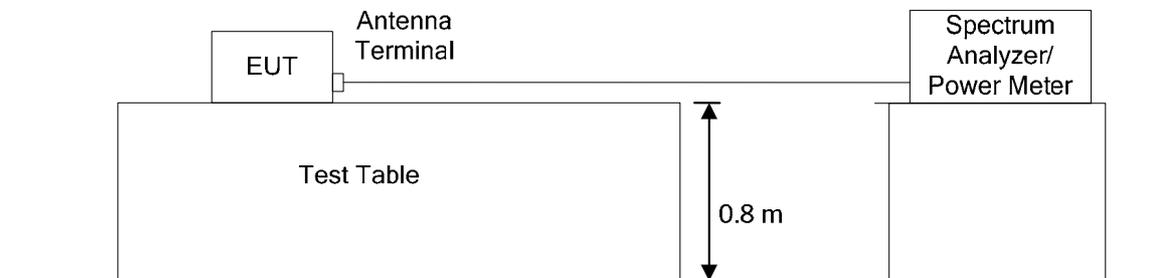

7.2.5 Test Data

7.2.5.1 802.11a Maximum conducted output power data

Test Date : May 1, 2013

Temp.: 20°C, Humi: 50%

Mode of EUT: Tx Mode (802.11a)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
36	5180	10.50	2.21	12.71	20.384	17.00	4.29
44	5220	10.50	2.22	12.72	20.431	17.00	4.28
48	5240	10.50	2.11	12.61	20.305	17.00	4.39
52	5260	10.50	2.70	13.20	20.274	24.00	10.80
56	5280	10.50	2.69	13.19	20.429	24.00	10.81
64	5320	10.50	2.50	13.00	20.372	24.00	11.00
100	5500	10.52	2.36	12.88	20.311	24.00	11.12
116	5580	10.52	2.26	12.78	20.433	24.00	11.22
140	5700	10.52	2.00	12.52	20.337	24.00	11.48

The test results (Power) is calculated as follows:

For 36 channel (5180 MHz)

$$\text{Power} = \text{Correction Factor} + \text{Meter Reading} = 10.50 + 2.21 = 12.71 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator} + \text{Duty Factor}$$

$$\text{Duty Factor at 802.11a/ TX rate 6 Mbps is 0.09 dB}$$

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 17 dBm(50 mW) or 4 dBm + 10log EBW.

Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.

7.2.5.2 802.11n (20 MHz) Maximum conducted output power data

Mode of EUT: Tx Mode (802.11n: 20 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
36	5180	10.51	2.17	12.68	20.716	17.00	4.32
44	5220	10.51	2.20	12.71	20.740	17.00	4.29
48	5240	10.51	2.14	12.65	20.612	17.00	4.35
52	5260	10.51	2.61	13.12	20.669	24.00	10.88
56	5280	10.51	2.56	13.07	20.675	24.00	10.93
64	5320	10.51	2.55	13.06	20.673	24.00	10.94
100	5500	10.53	2.50	13.03	20.697	24.00	10.97
116	5580	10.53	2.24	12.77	20.800	24.00	11.23
140	5700	10.53	1.98	12.51	20.735	24.00	11.49

The test results (Power) is calculated as follows:

For 36 channel (5180 MHz)

$$\text{Power} = \text{Correction Factor} + \text{Meter Reading} = 10.51 + 2.17 = 12.68 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator} + \text{Duty Factor}$$

$$\text{Duty Factor at 802.11n(20 MHz) / TX rate 6.5 Mbps is 0.10 dB}$$

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 17 dBm(50 mW) or 4 dBm + 10log EBW.

Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.

7.2.5.3 802.11n (40 MHz) Maximum conducted output power data

Mode of EUT: Tx Mode (802.11n: 40 MHz)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
38	5190	10.51	2.70	13.21	39.678	17.00	3.79
46	5230	10.51	2.72	13.23	39.748	17.00	3.77
54	5270	10.51	2.05	12.56	39.724	24.00	11.44
62	5310	10.51	1.73	12.24	39.944	24.00	11.76
102	5510	10.53	2.61	13.14	39.407	24.00	10.86
134	5670	10.53	2.37	12.90	39.670	24.00	11.10

The test results (Power) is calculated as follows;

For 38 channel (5190 MHz)

$$\text{Power} = \text{Correction Factor} + \text{Meter Reading} = 10.51 + 2.70 = 13.21 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator} + \text{Duty Factor}$$

$$\text{Duty Factor at 802.11n(40 MHz) / TX rate 13.5 Mbps is 0.10 dB}$$

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 17 dBm(50 mW) or 4 dBm + 10log EBW.

Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.

7.2.5.4 802.11ac (80 MHz) Maximum conducted output power data

Mode of EUT: Tx Mode (802.11ac: 80 MHz)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	Power (dBm)	EBW (MHz)	Limit (dBm)	Margin (dB)
42	5210	10.79	2.20	12.99	81.386	17.00	4.01
58	5290	10.79	2.30	13.09	81.419	24.00	10.91
106	5530	10.81	2.65	13.46	81.028	24.00	10.54

The test results (Power) is calculated as follows;

For 38 channel (5210 MHz)

$$\text{Power} = \text{Correction Factor} + \text{Meter Reading} = 10.79 + 2.20 = 12.99 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator} + \text{Duty Factor}$$

$$\text{Duty Factor at 802.11n(40 MHz) / TX rate 13.5 Mbps is 0.38 dB}$$

Frequency range 5150 MHz to 5250 MHz Limitation is lesser of 17 dBm(50 mW) or 4 dBm + 10log EBW.

Frequency range 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz Limitation is lesser of 24 dBm(250 mW) or 11 dBm + 10log EBW.

7.3 Peak power spectral density

For the requirements, - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

For the limits, - Passed - Failed - Not judged

7.3.1 Worst Point and Measurement Uncertainty

Min. Limit Margin 2.09 dB at 5220.0 MHz

Uncertainty of Measurement Results +/- 1.2 dB

Remarks : Worst case is 802.11a channel 44.

7.3.2 Test Site

KITA-KANSAI Testing Center

Test site : SAITO

<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

7.3.3 Test Instruments


Type	Model	Manufacturer	ID No.	Last Cal.	Interval
RF Cable	SUCOFLEX102	SUHNER	C-52	2012/7	1 Year
Spectrum Analyzer	E4446A	Agilent	A-39	2012/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2012/9	1 Year

7.3.4 Test Method and Test Setup (Diagrammatic illustration)

The peak power spectral density measurements were carried out connecting to the spectrum analyzer. The EUT transmits non-continuously therefore the spectrum analyzer was set in accordance with KDB 789033 D01 Method SA-3 as follows:

Span: encompass the EBW/ RBW: 1 MHz/ VBW \geq 3 MHz/ Sweep: Time: 100 msec.(enough to be short)/
 Number Sweep Points: 1001 pts ($\geq 2 * \text{Span} / \text{RBW}$)/
 Detector: RMS(power averaging)/ Trace Mode: Max. Hold
 The peak marker function in the analyzer was use for finding the peak point.

(referred documentation is No. G70364M)

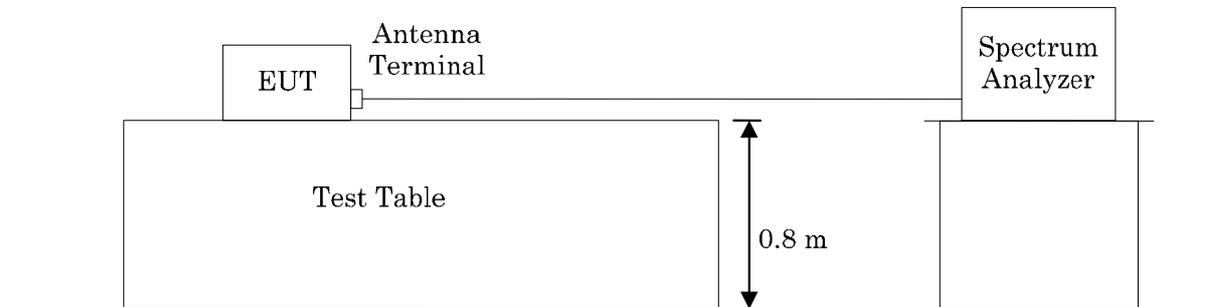

7.3.5 Test Data

7.3.5.1 802.11a Peak power spectral density data

Test Date : May 7, 2013
Temp.: 19°C, Humi: 36%

Mode of EUT: Tx Mode (802.11a)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	PPSD (dBm)	Limit (dBm)	Margin (dB)
36	5180	10.41	-8.84	1.57	4.00	2.43
44	5220	10.41	-8.50	1.91	4.00	2.09
48	5240	10.41	-8.57	1.84	4.00	2.16
52	5260	10.41	-8.06	2.35	11.00	8.65
56	5280	10.41	-7.78	2.63	11.00	8.37
64	5320	10.41	-7.74	2.67	11.00	8.33
100	5500	10.43	-7.65	2.78	11.00	8.22
116	5580	10.43	-8.45	1.98	11.00	9.02
140	5700	10.43	-9.27	1.16	11.00	9.84


The test results (PPSD) is calculated as follows:

For 36 channel (5180 MHz)


$$\text{PPSD} = \text{Correction Factor} + \text{Meter Reading} = 10.41 + (-8.84) = 1.57 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator}$$


802.11a 36ch (5180 MHz)

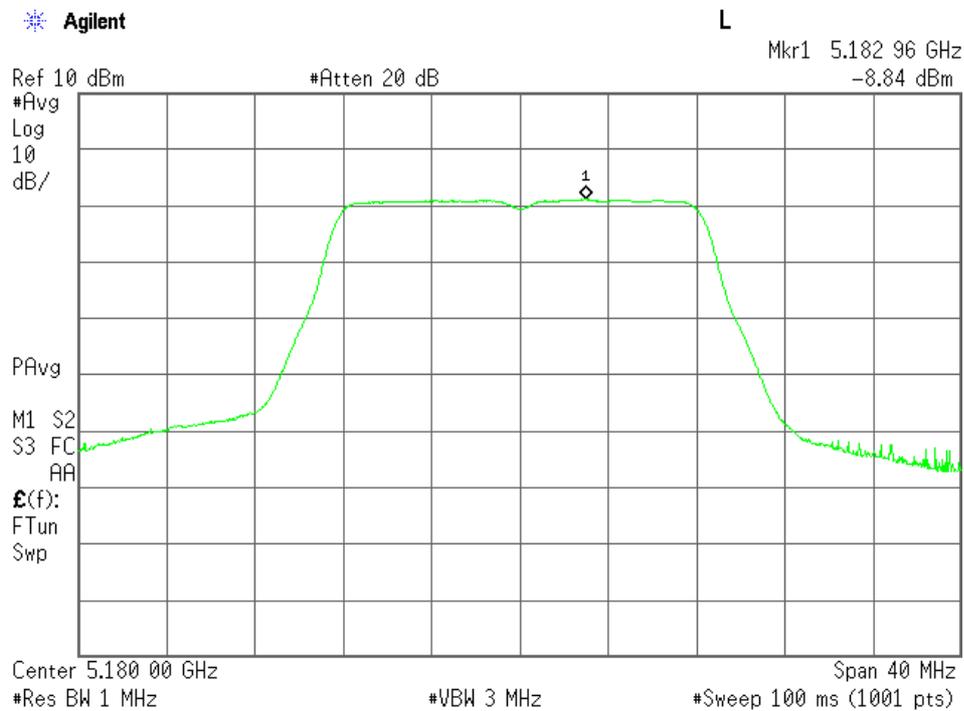


802.11a 44ch (5220 MHz)

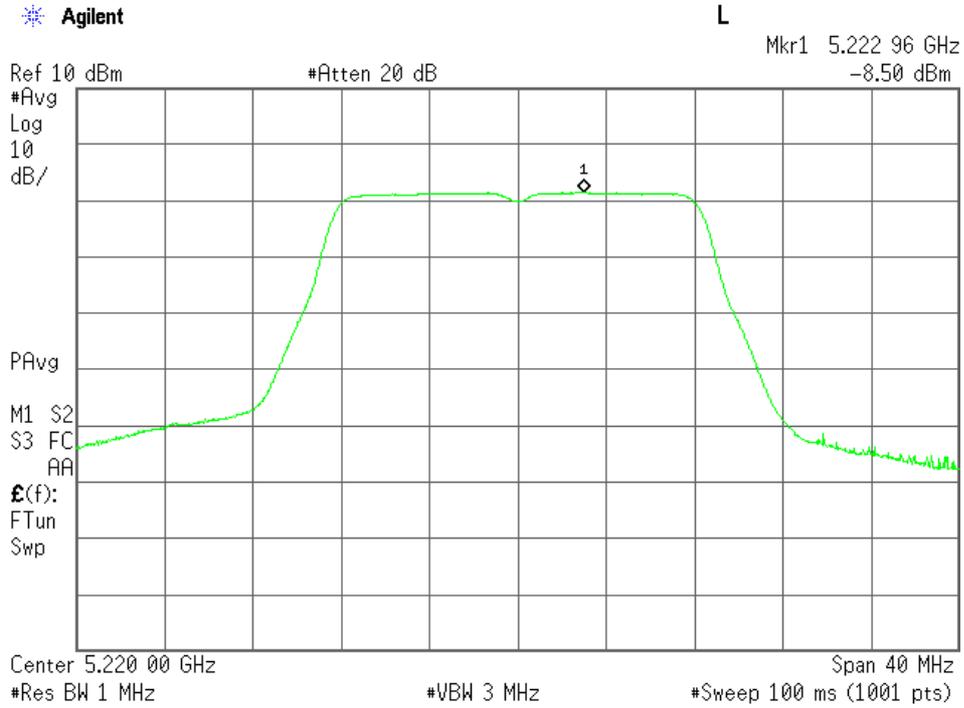


802.11a 48ch (5240 MHz)

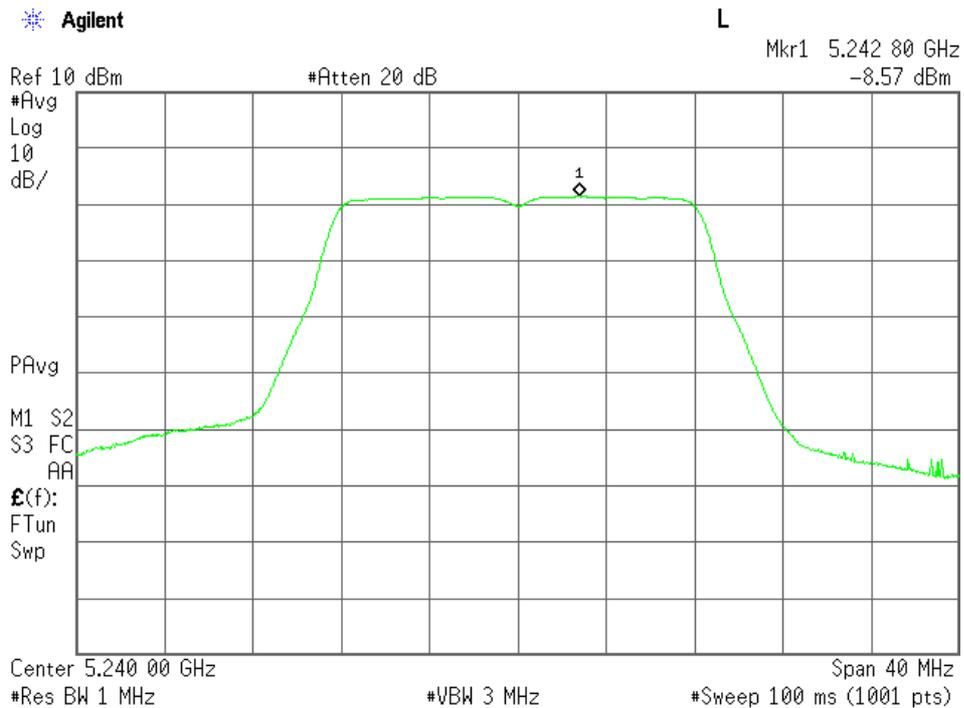


802.11a 52ch (5260 MHz)

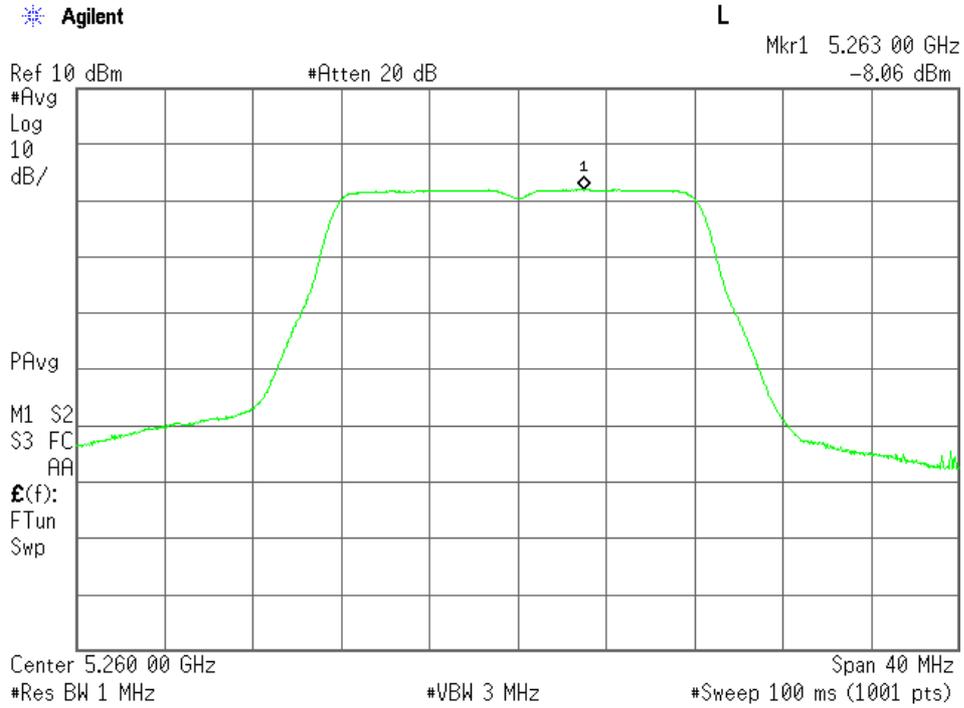


802.11a 56ch (5280 MHz)

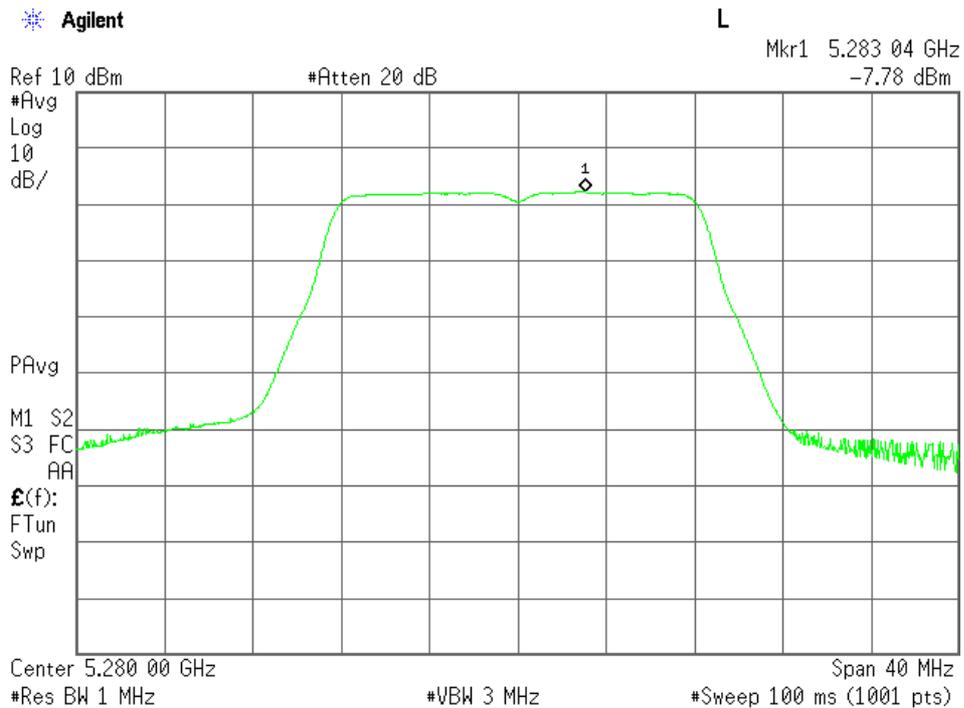


802.11a 64ch (5320 MHz)

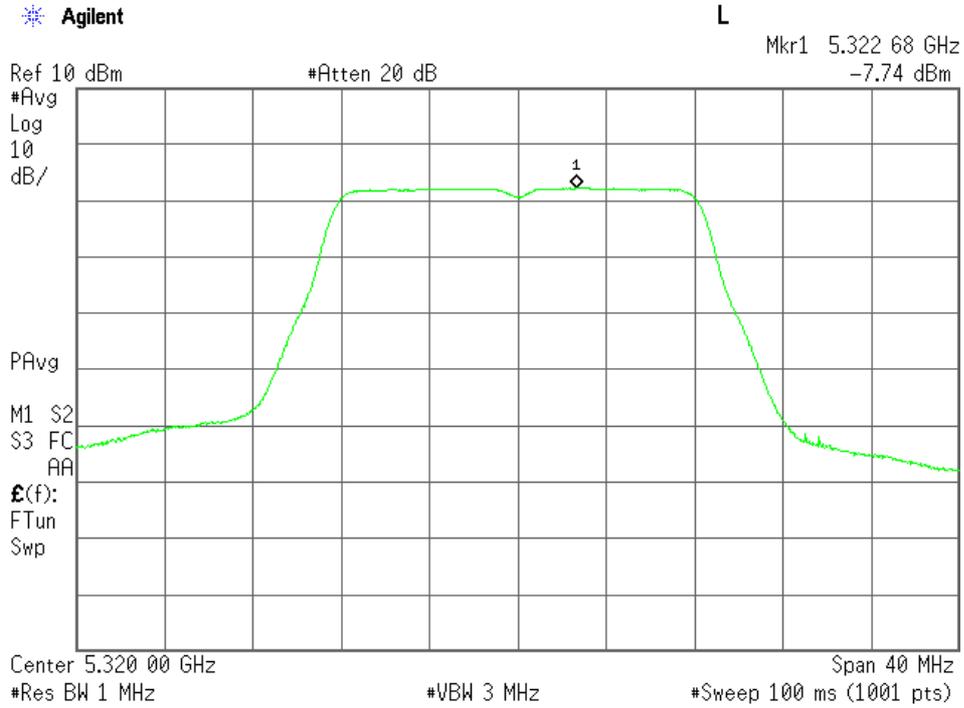


802.11a 100ch (5500 MHz)

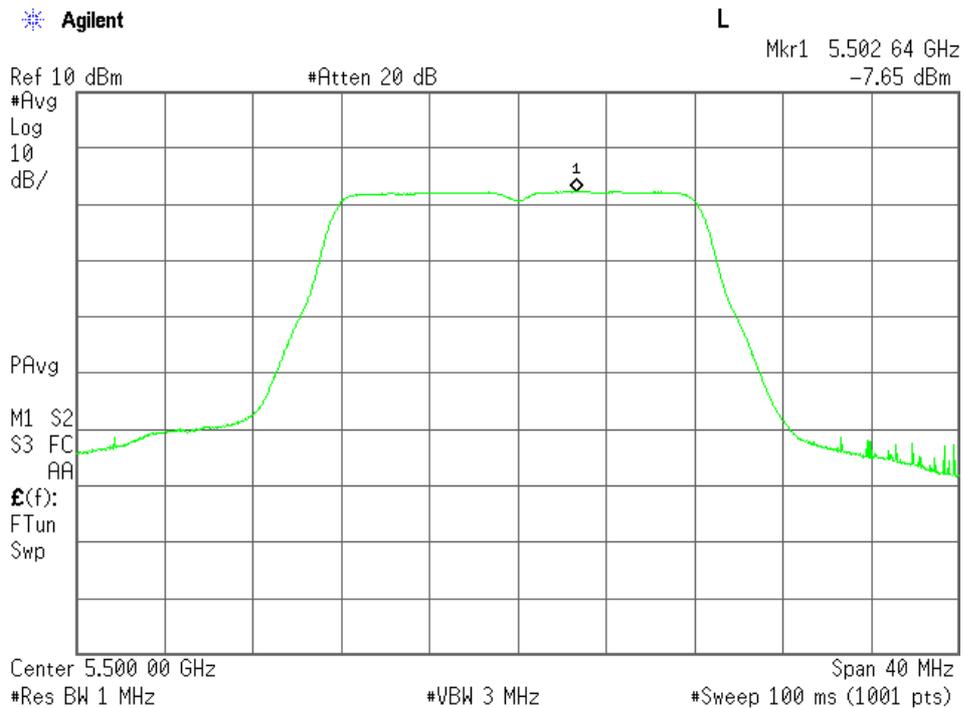

802.11a 116ch (5580 MHz)

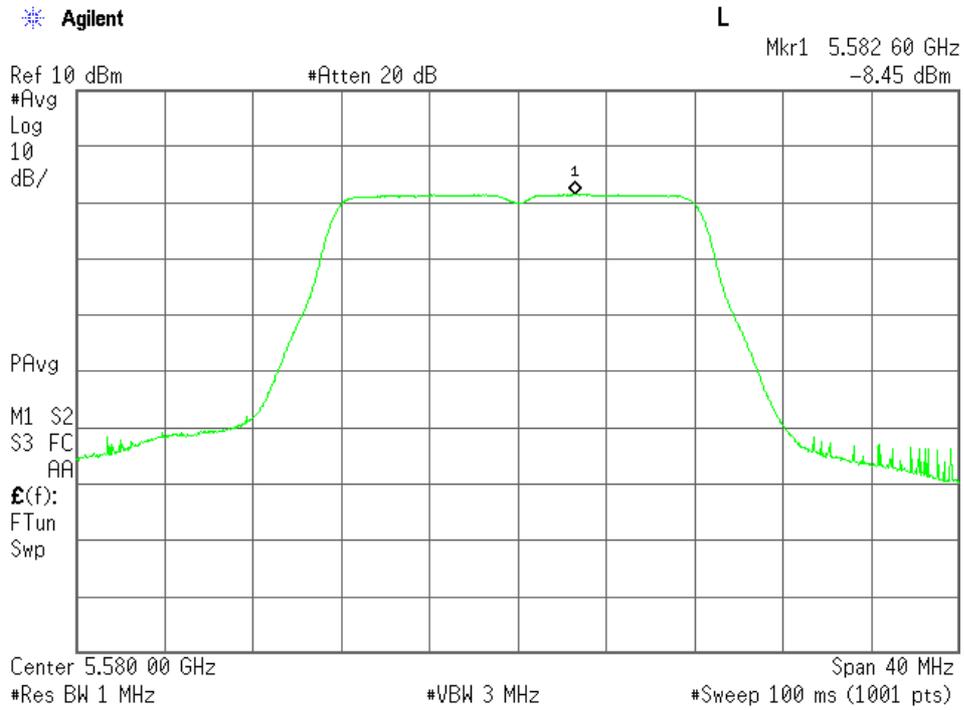

802.11a 140ch (5700 MHz)

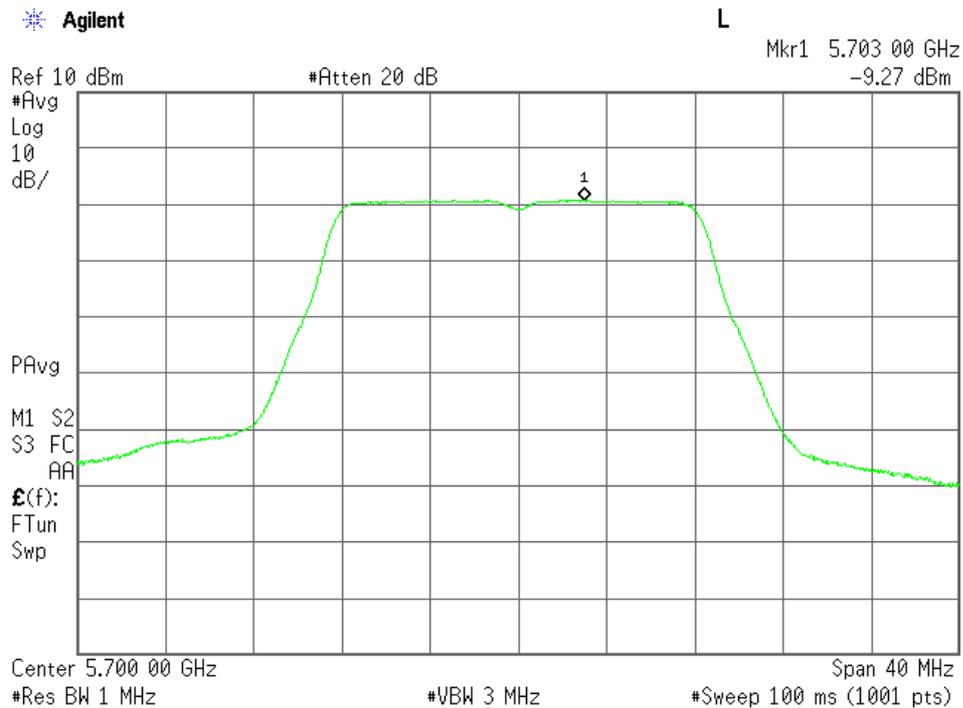

7.3.5.2 802.11n (20 MHz) Peak power spectral density data

Mode of EUT: Tx Mode (802.11n: 20 MHz)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	PPSD (dBm)	Limit (dBm)	Margin (dB)
36	5180	10.41	-9.10	1.31	4.00	2.69
44	5220	10.41	-8.90	1.51	4.00	2.49
48	5240	10.41	-8.76	1.65	4.00	2.35
52	5260	10.41	-8.43	1.98	11.00	9.02
56	5280	10.41	-8.19	2.22	11.00	8.78
64	5320	10.41	-8.09	2.32	11.00	8.68
100	5500	10.43	-8.04	2.39	11.00	8.61
116	5580	10.43	-8.85	1.58	11.00	9.42
140	5700	10.43	-9.63	0.80	11.00	10.20


The test results (PPSD) is calculated as follows:

For 36 channel (5180 MHz)


$$PPSD = \text{Correction Factor} + \text{Meter Reading} = 10.41 + (-9.10) = 1.31 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator}$$


802.11n (20 MHz) 36ch (5180 MHz)

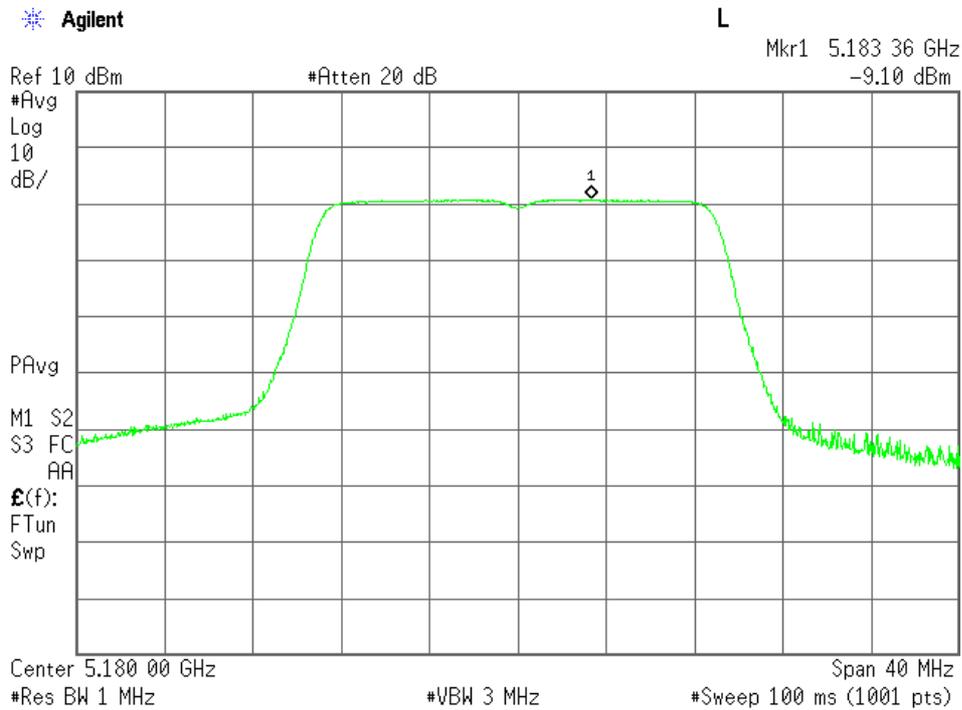


802.11n (20 MHz) 44ch (5220 MHz)

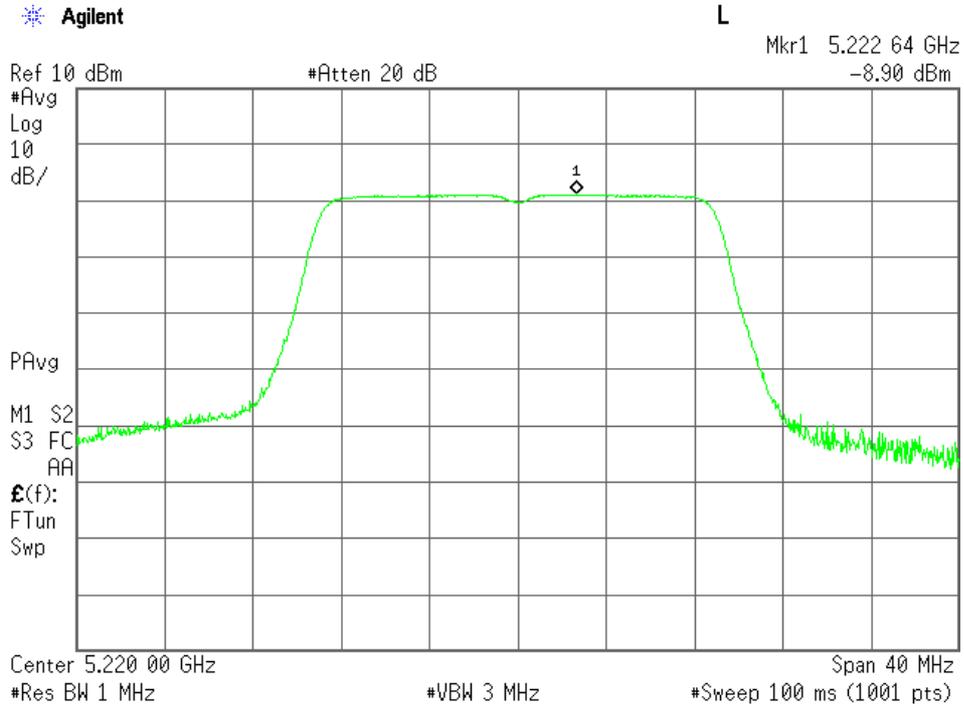


802.11n (20 MHz) 48ch (5240 MHz)

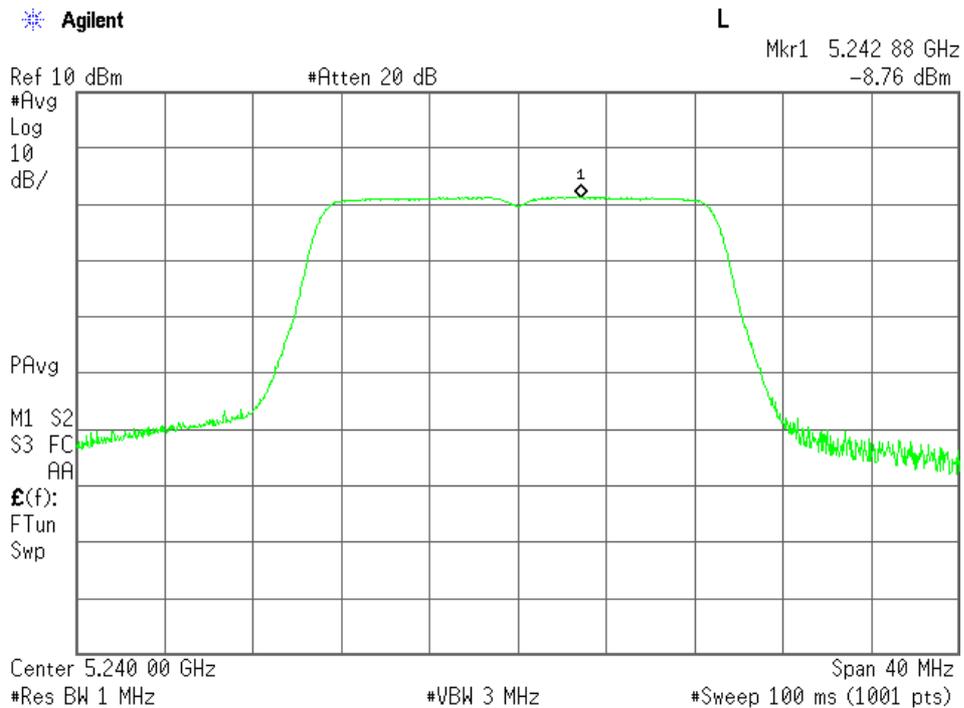


802.11n (20 MHz) 52ch (5260 MHz)

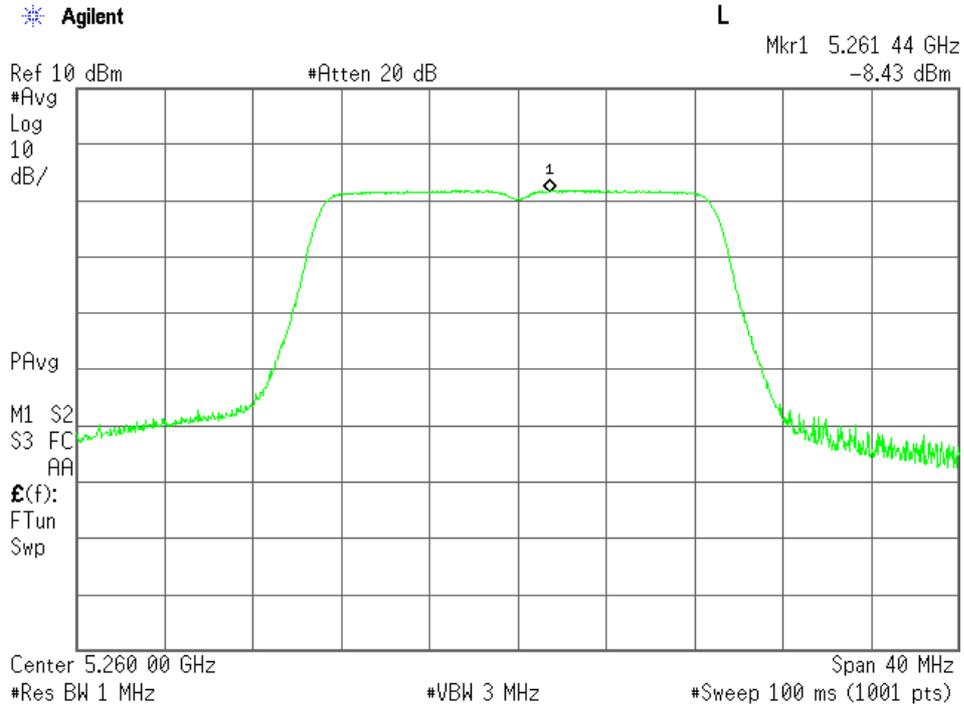


802.11n (20 MHz) 56ch (5280 MHz)

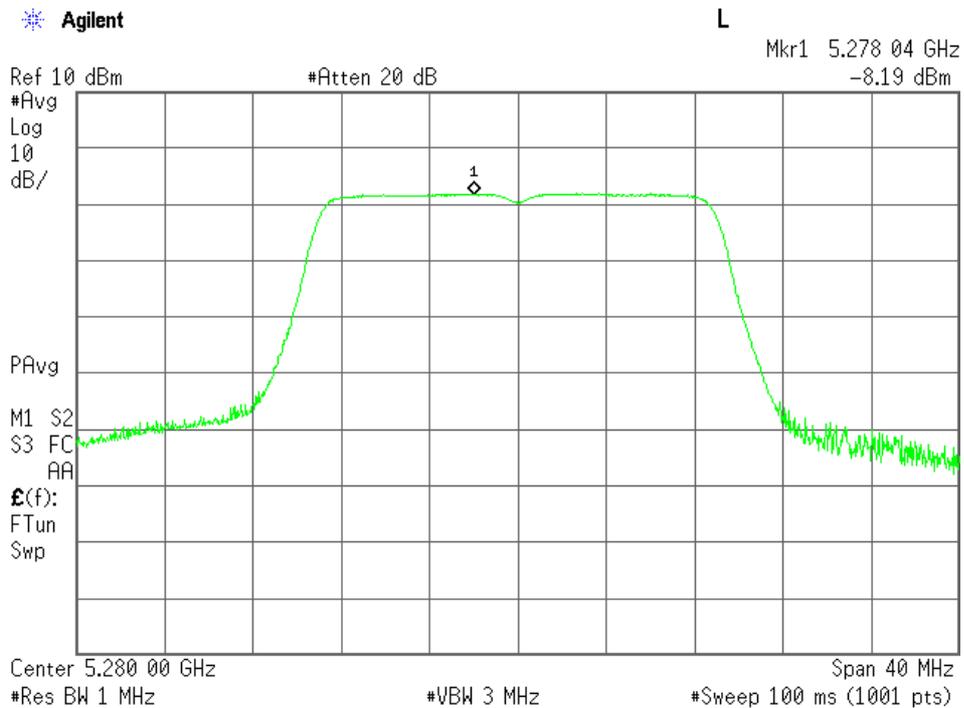


802.11n (20 MHz) 64ch (5320 MHz)

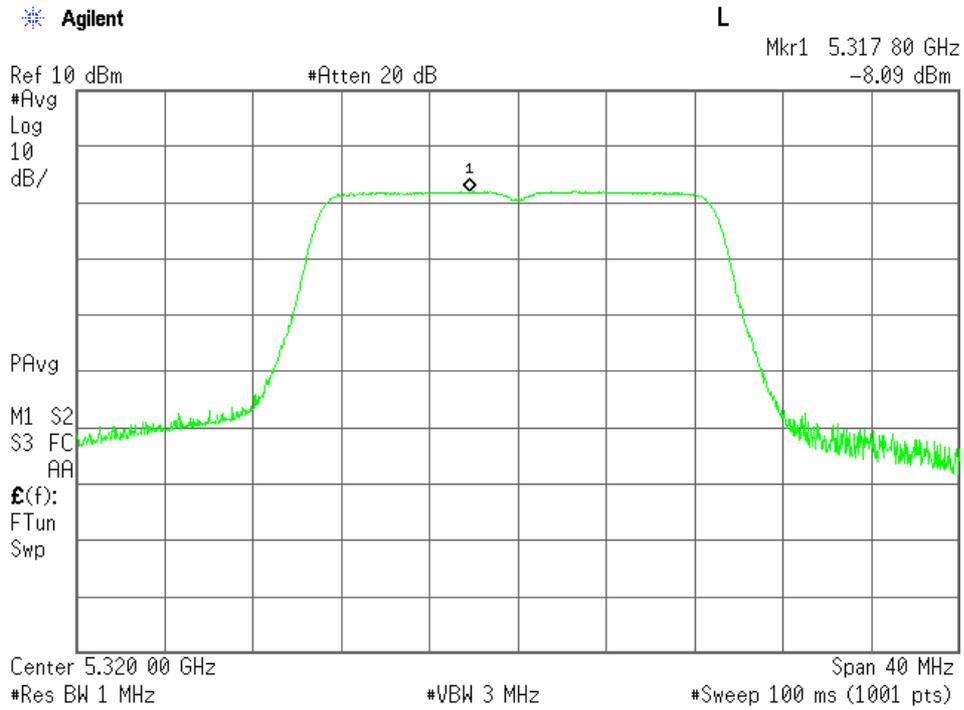


802.11n (20 MHz) 100ch (5500 MHz)

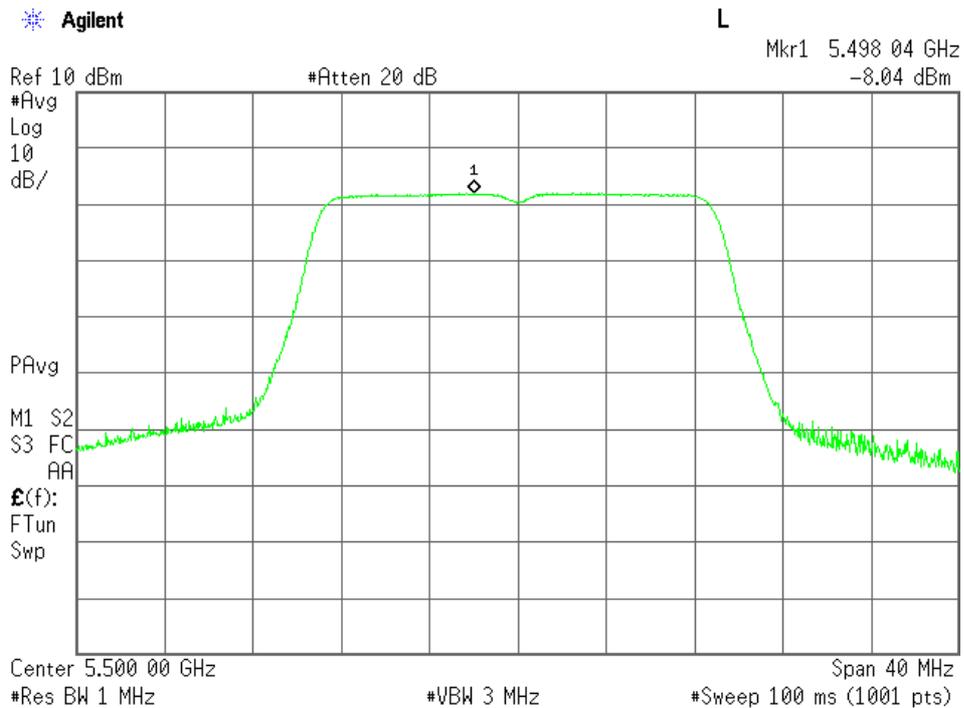

802.11n (20 MHz) 116ch (5580 MHz)

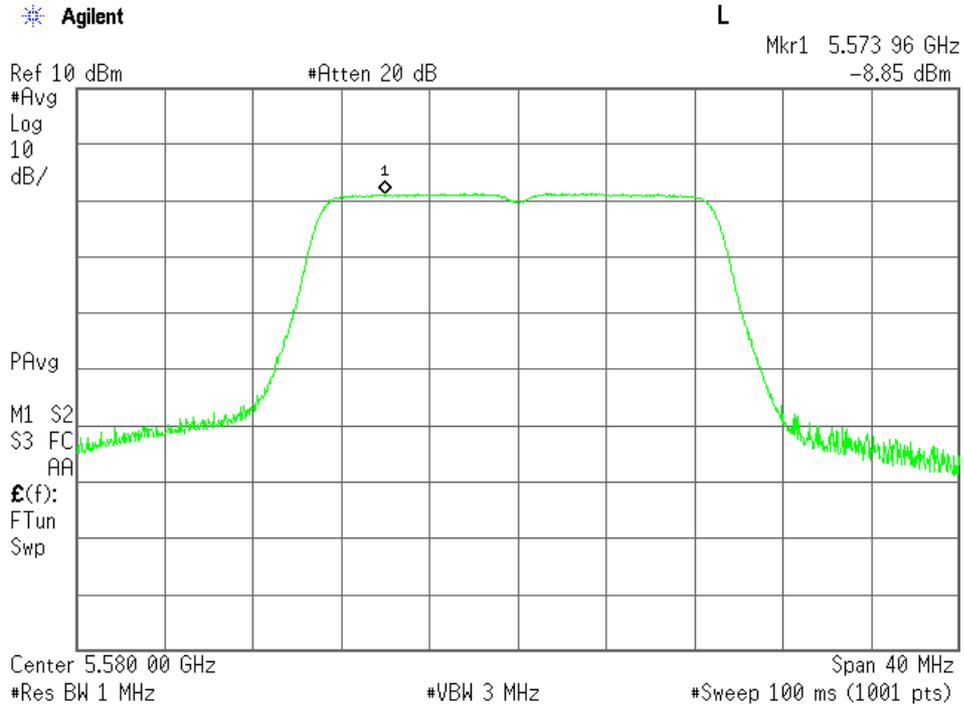

802.11n (20 MHz) 140ch (5700 MHz)

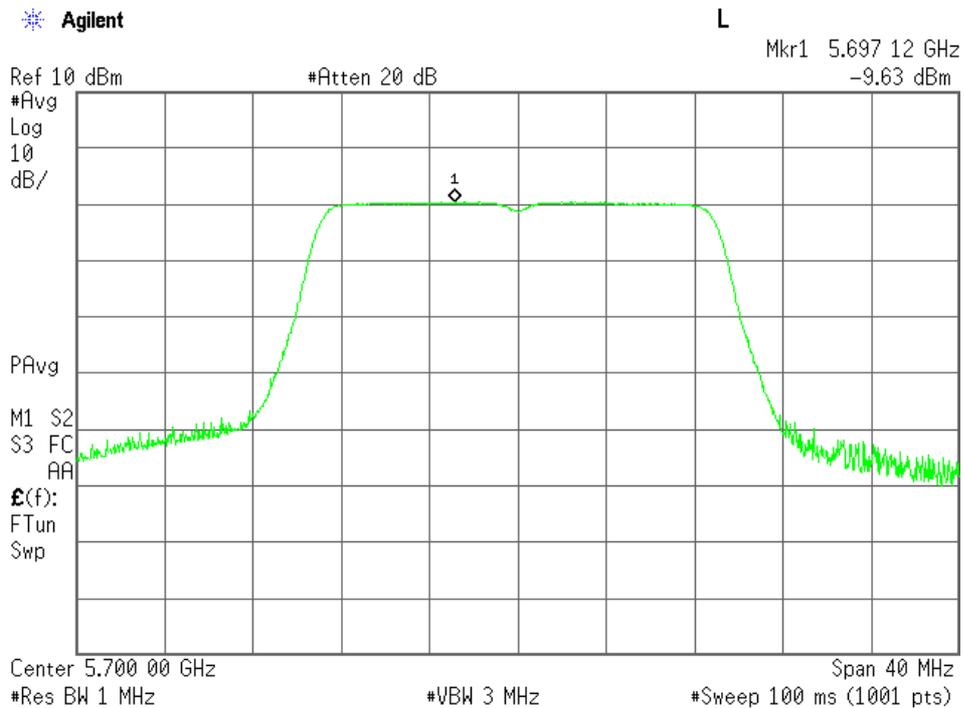

7.3.5.3 802.11n (40 MHz) Peak power spectral density data

Mode of EUT: Tx Mode (802.11n: 40 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	PPSD (dBm)	Limit (dBm)	Margin (dB)
38	5190	10.41	-10.93	-0.52	4.00	4.52
46	5230	10.41	-10.81	-0.40	4.00	4.40
54	5270	10.41	-11.27	-0.86	11.00	11.86
62	5310	10.41	-11.01	-0.60	11.00	11.60
102	5510	10.43	-10.42	0.01	11.00	10.99
134	5670	10.43	-11.61	-1.18	11.00	12.18


The test results (PPSD) is calculated as follows:

For 38 channel (5190 MHz)


$$PPSD = \text{Correction Factor} + \text{Meter Reading} = 10.41 + (-10.93) = -0.52 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator}$$


802.11n (40 MHz) 38ch (5190 MHz)

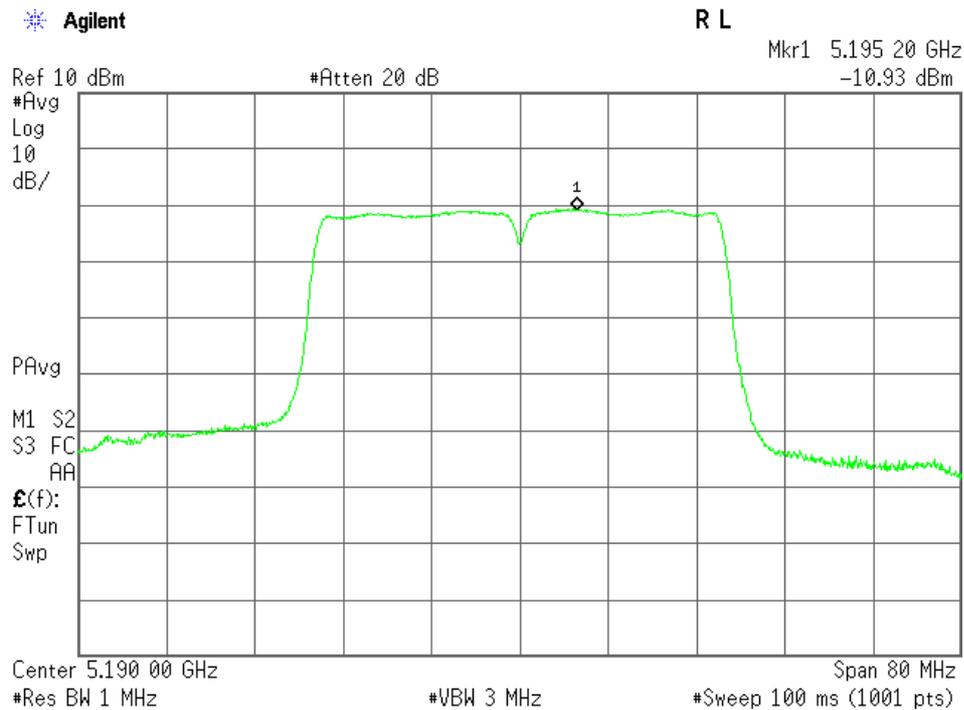


802.11n (40 MHz) 46ch (5230 MHz)

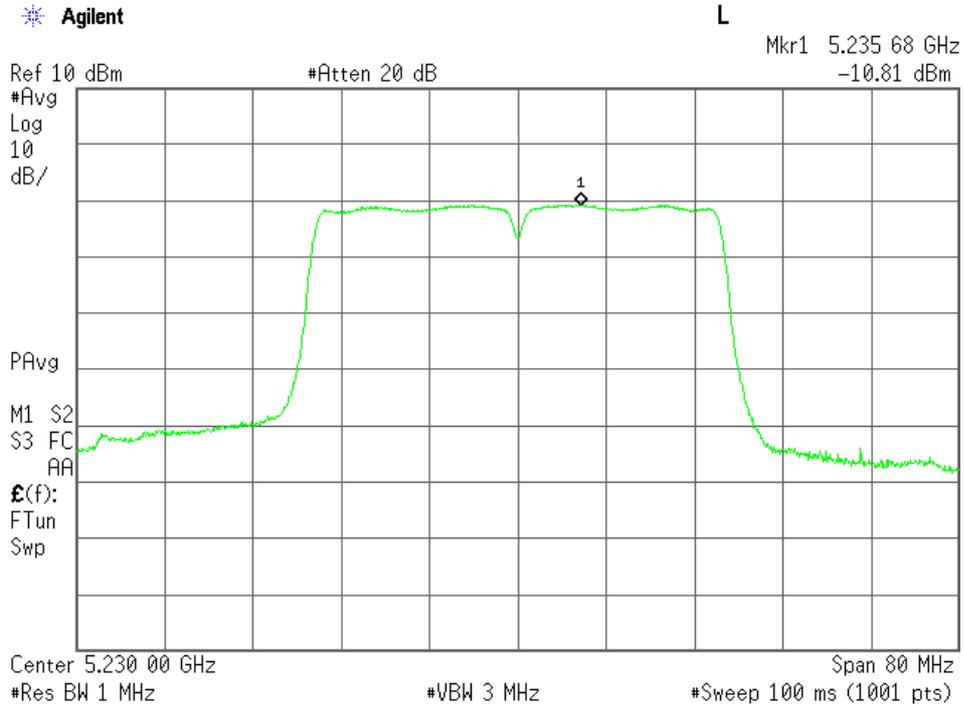


802.11n (40 MHz) 54ch (5270 MHz)

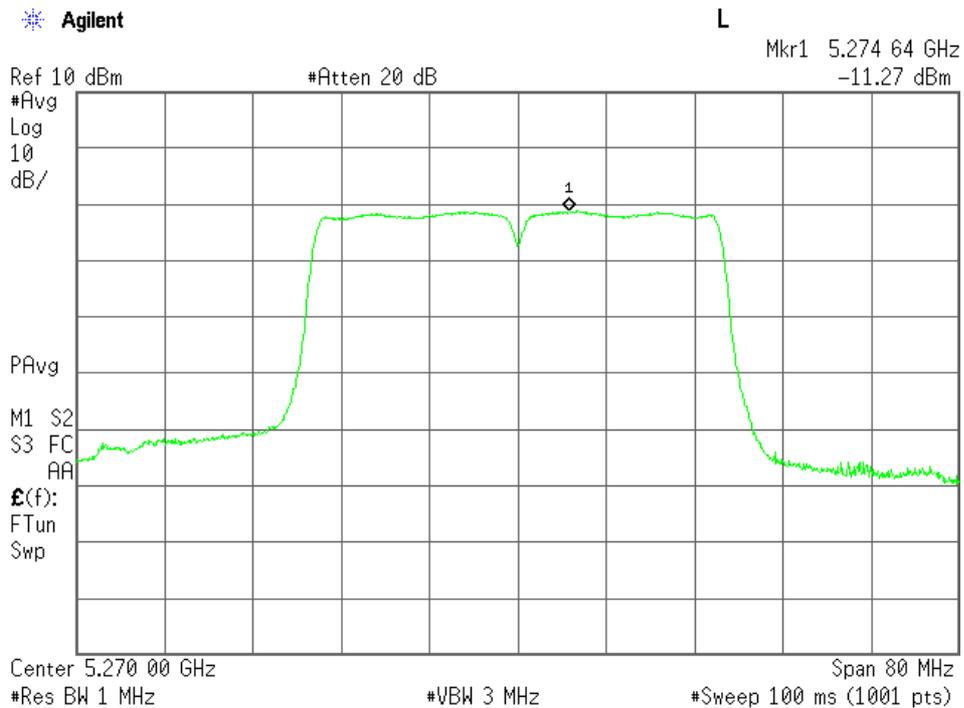


802.11n (40 MHz) 62ch (5310 MHz)

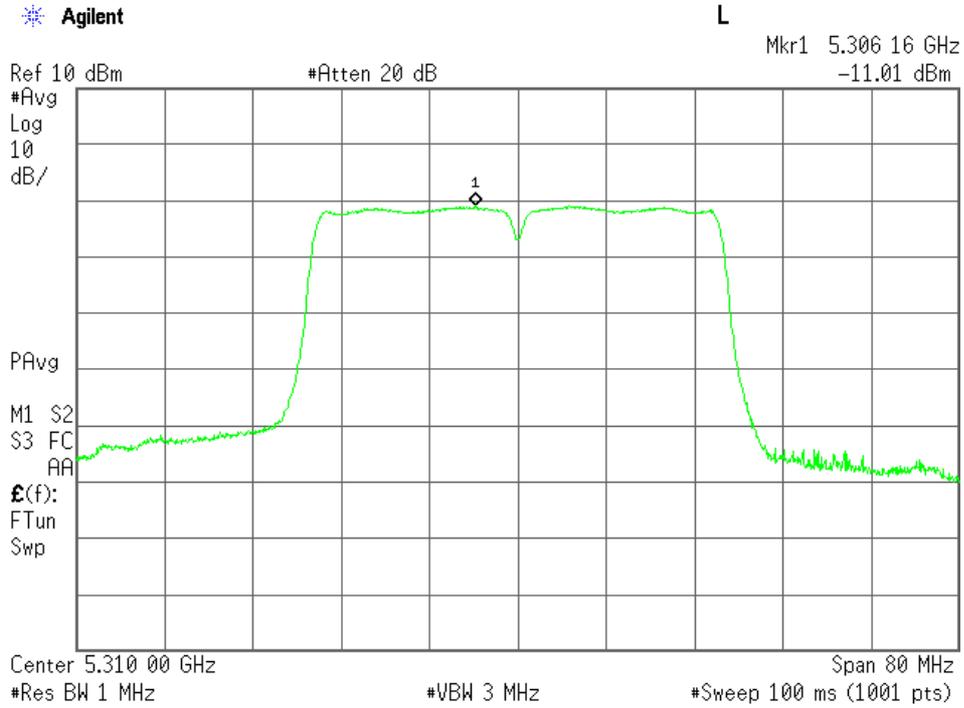

802.11n (40 MHz) 102ch (5510 MHz)

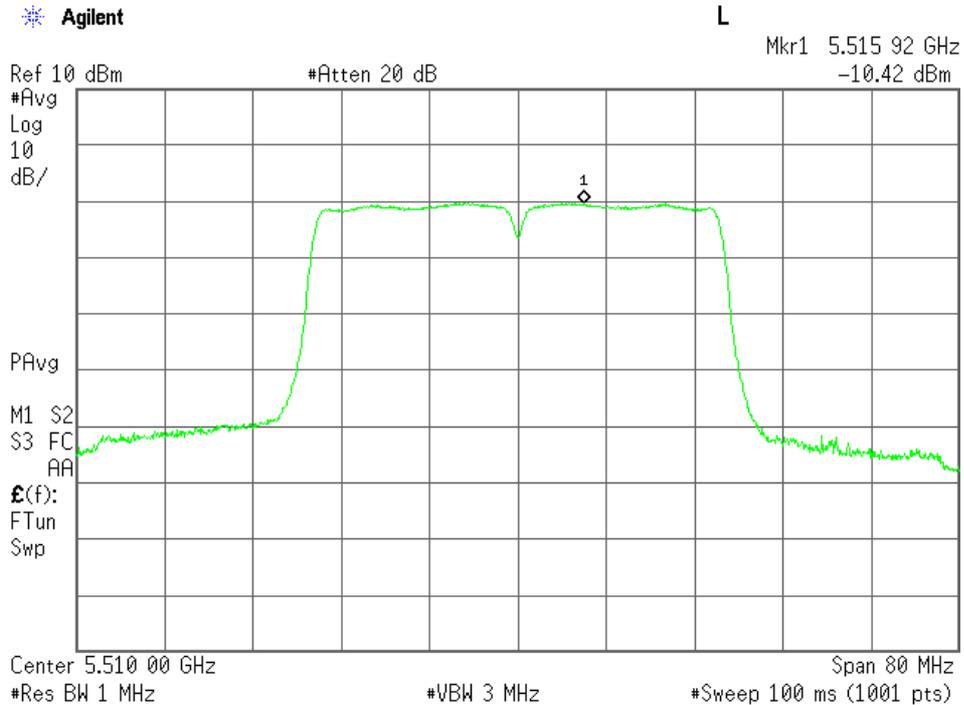

802.11n (40 MHz) 134ch (5670 MHz)

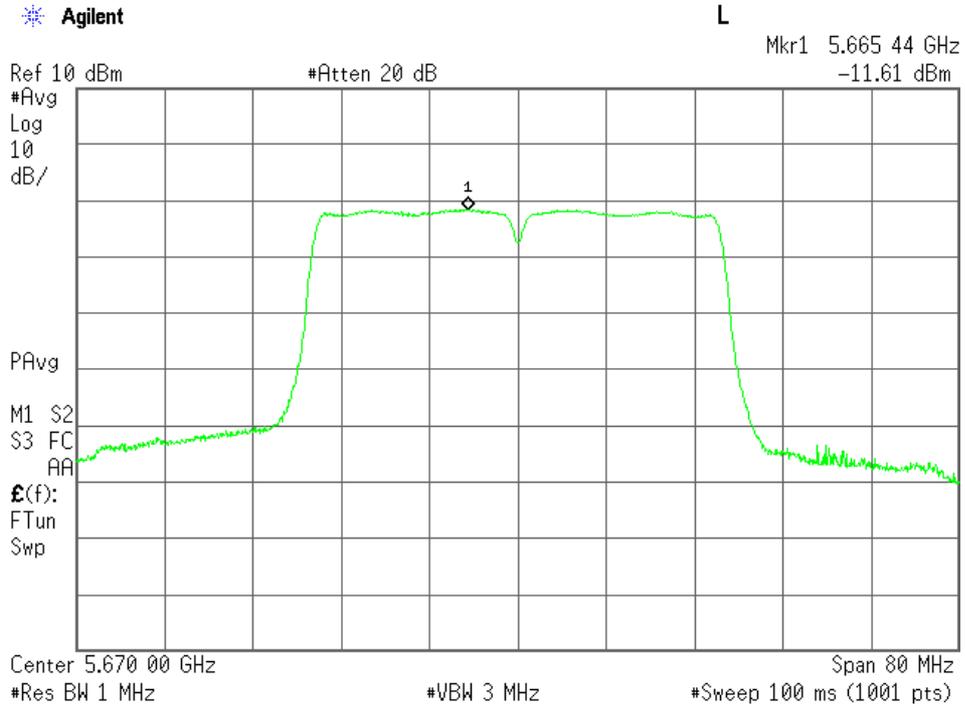

7.3.5.4 802.11ac (80 MHz) Peak power spectral density data

Mode of EUT: Tx Mode (802.11ac: 80 MHz)

Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Correction Factor(dB)	Meter Reading(dBm)	PPSD (dBm)	Limit (dBm)	Margin (dB)
42	5210	10.41	-14.37	-3.96	4.00	7.96
58	5290	10.41	-14.06	-3.65	11.00	14.65
106	5530	10.43	-13.54	-3.11	11.00	14.11


The test results (PPSD) is calculated as follows:

For 38 channel (5210 MHz)


$$PPSD = \text{Correction Factor} + \text{Meter Reading} = 10.41 + (-14.37) = -3.96 \text{ dBm}$$

$$\text{Correction Factor} = \text{cable loss} + 10 \text{ dB attenuator}$$


802.11ac (80 MHz) 42ch (5210 MHz)

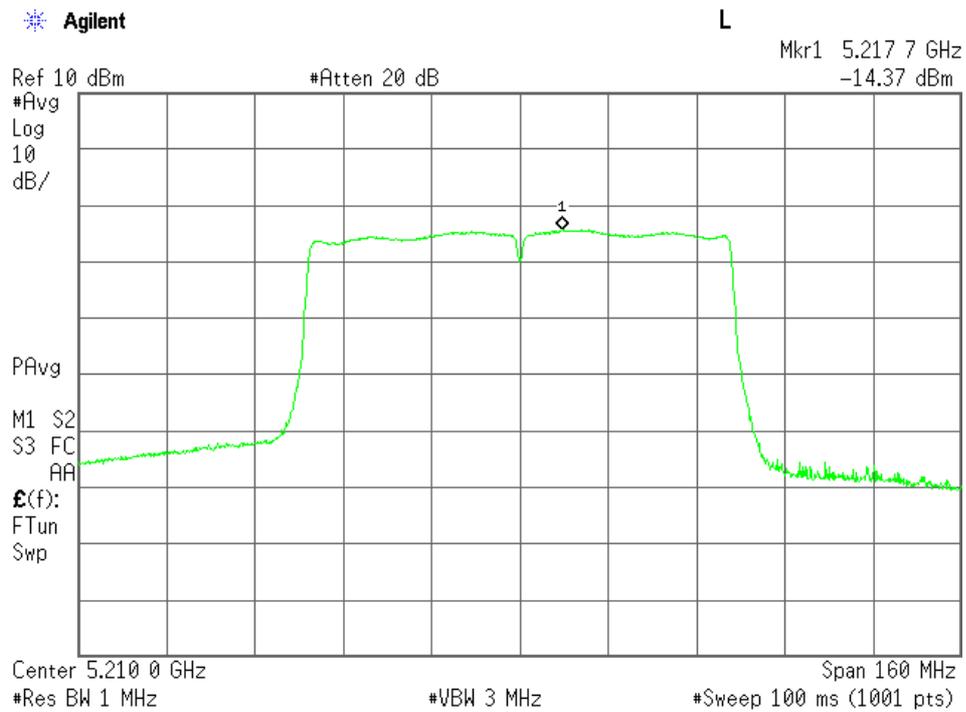

802.11ac (80 MHz) 58ch (5290 MHz)

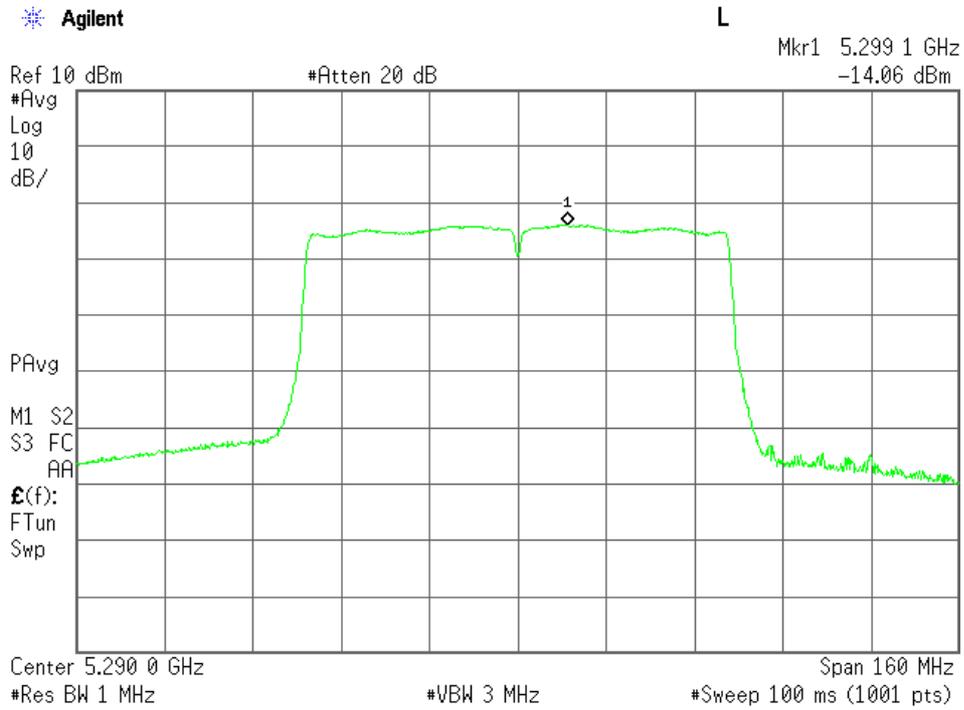

802.11ac (80 MHz) 106ch (5530 MHz)

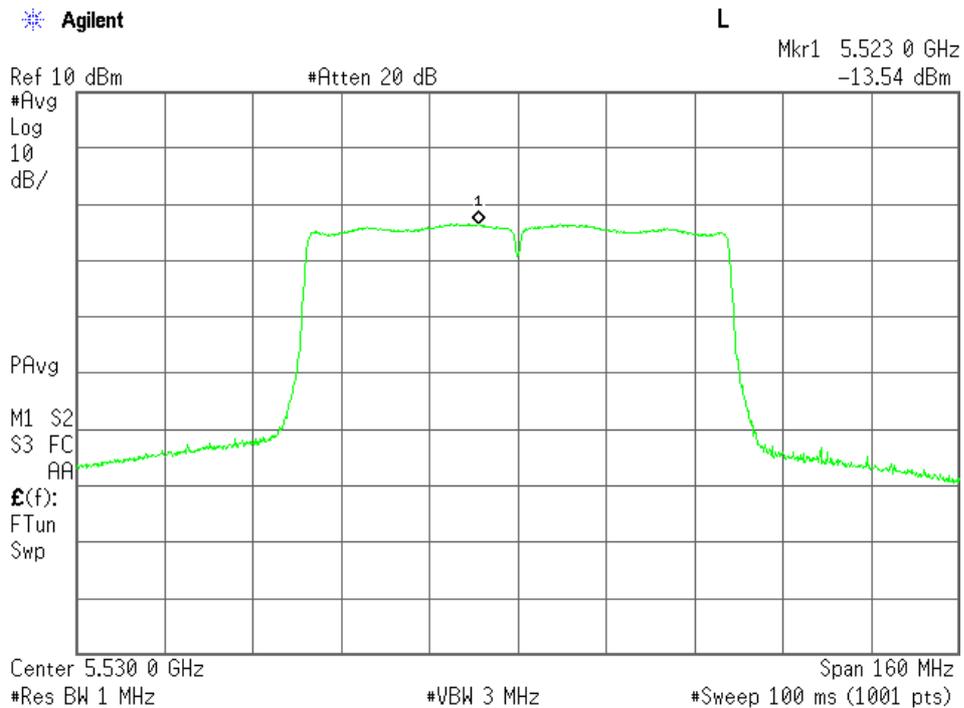

7.4 Peak excursion

For the requirements, - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

For the limits, - Passed - Failed - Not judged

7.4.1 Worst Point and Measurement Uncertainty

Min. Limit Margin 2.58 dB at 5280.0 MHz

Uncertainty of Measurement Results +/- 1.2 dB

Remarks : Worst case is 802.11n/ac(20MHz) QPSK.

7.4.2 Test Site

KITA-KANSAI Testing Center

Test site : SAITO - Anechoic chamber (A1) - Measurement room (M1)
 - Measurement room (M2) - Measurement room (M3)
 - Shielded room (S1) - Shielded room (S2)
 - Shielded room (S3) - Shielded room (S4)

7.4.3 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
RF Cable	SUCOFLEX102	SUHNER	C-52	2012/7	1 Year
Spectrum Analyzer	E4446A	Agilent	A-39	2012/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2012/9	1 Year

7.4.4 Test Method and Test Setup (Diagrammatic illustration)

The peak excursion measurements were carried out connecting to the spectrum analyzer. The test was performed in accordance with KDB 789033 D01 as follows;

Sweep 1)

Span: encompass the EBW/ RBW: 1 MHz/ VBW ≥ 3 MHz/ Sweep: Auto/

Detector: Peak/ Trace: Max Hold until trace stabilizes

The peak marker function in the analyzer was use for finding the peak point(1)

Sweep 2) Same PPSD measurement

Span: encompass the EBW/ RBW: 1 MHz/ VBW ≥ 3 MHz/ Sweep: Time: 100 msec.(enough to be short)/


Number Sweep Points: 1001 pts (≥2*Span/RBW)/

Detector: RMS(power averaging)/ Trace Mode: Max. Hold

The peak marker function in the analyzer was use for finding the peak point(2).

(Peak excursion) = peak point(1) - peak point(2)

(referred documentation is No. G70364M)

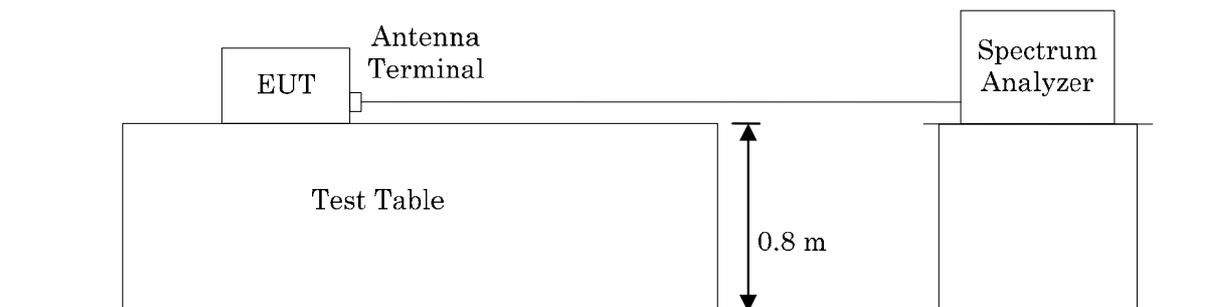

7.4.5 Test Data


7.4.5.1 802.11a Peak excursion data

Test Date : May 7, 2013
Temp.: 19°C, Humi: 36%


Mode of EUT: Tx Mode (802.11a)
 Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Modulation Type	Peak Excursion (dB)	Limit (dB)	Margin (dB)
56	5280	BPSK	7.89	13	5.11
56	5280	QPSK	8.27	13	4.73
56	5280	16-QAM	8.26	13	4.74
56	5280	64-QAM	8.08	13	4.92


802.11a 56ch (5280 MHz) BPSK

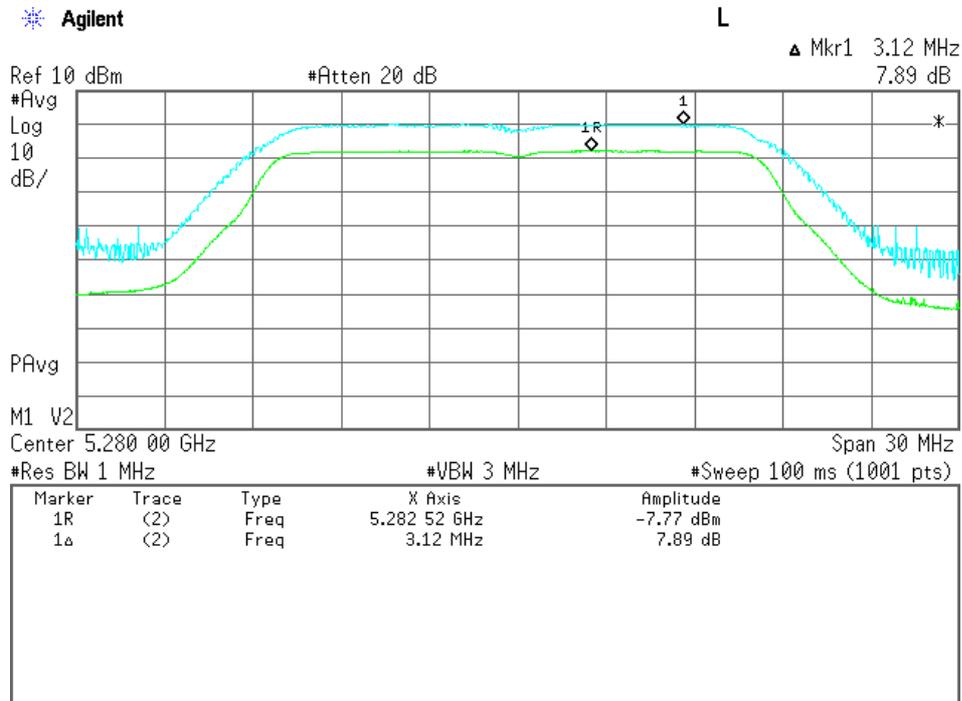


802.11a 56ch (5280 MHz) QPSK

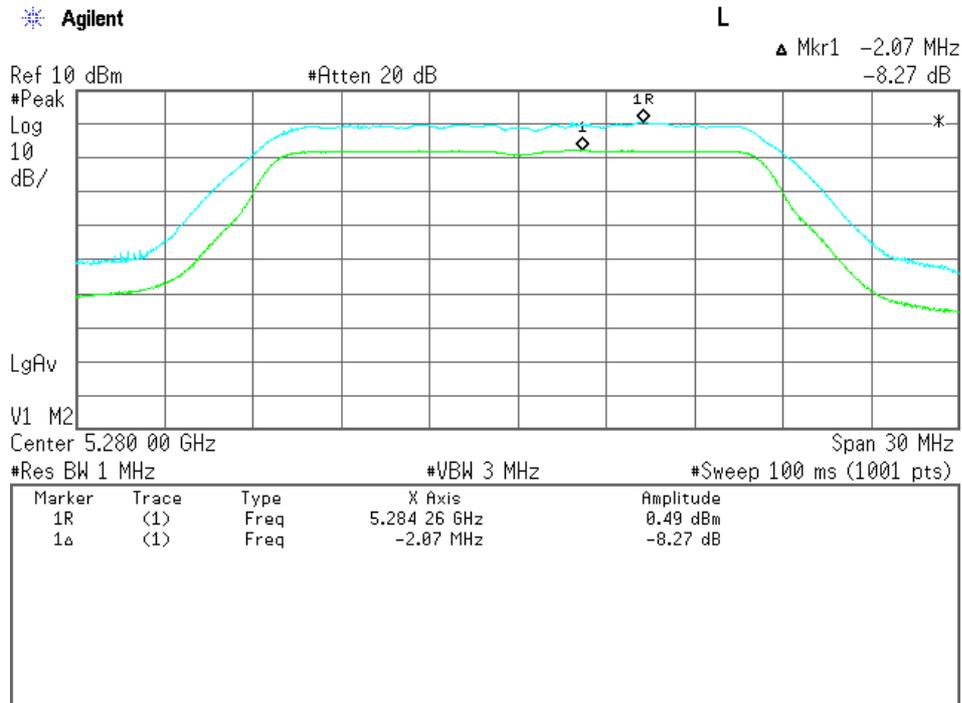

802.11a 56ch (5280 MHz) 16-QAM

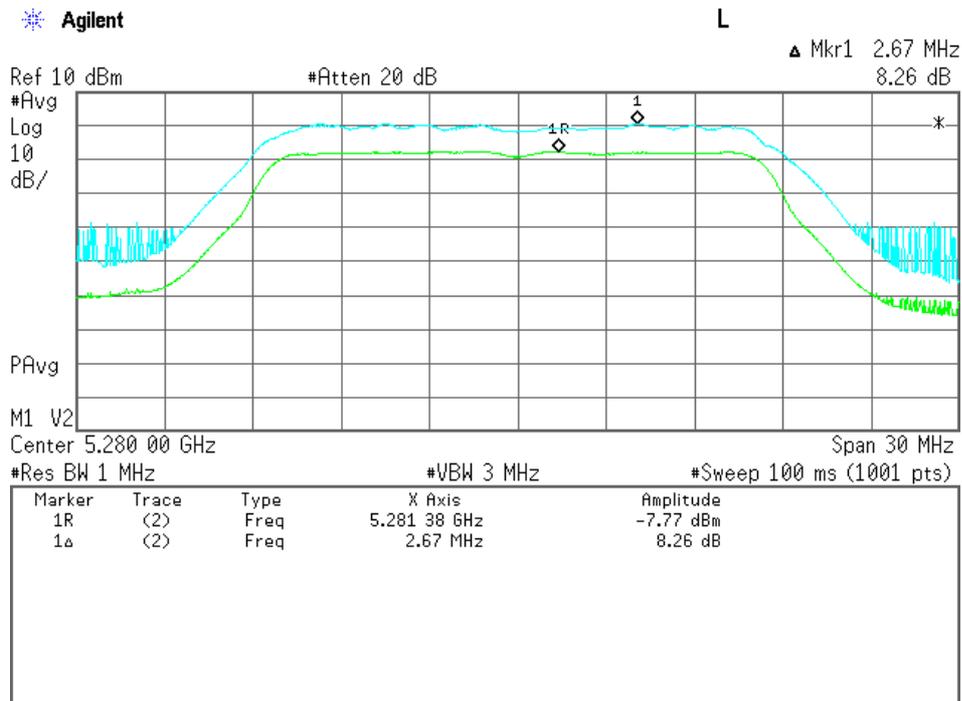

802.11a 56ch (5280 MHz) 64-QAM

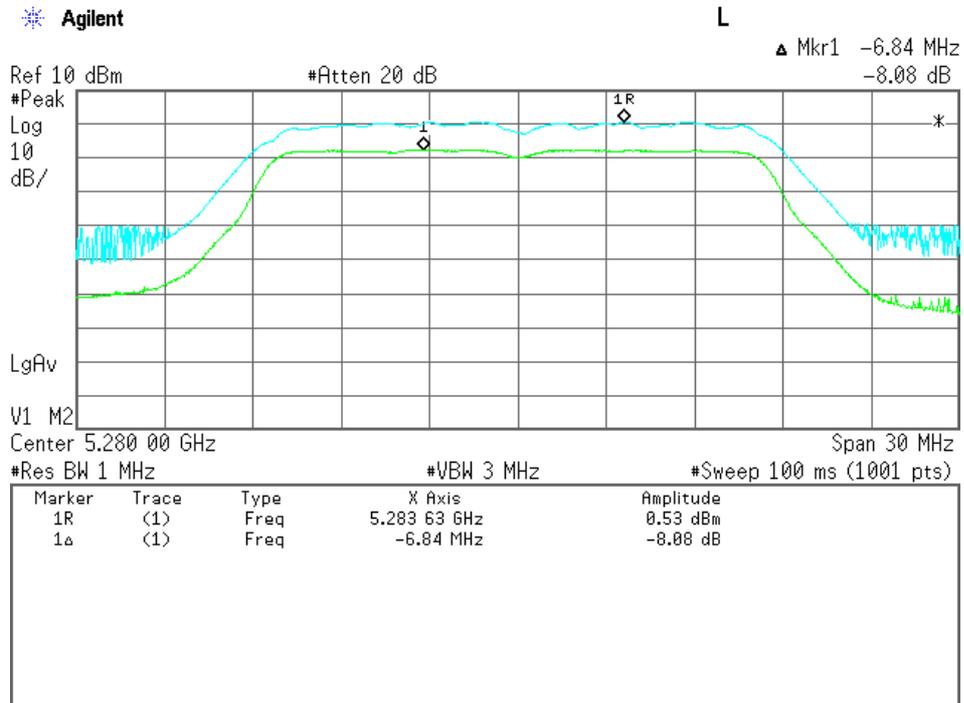


7.4.5.2 802.11n/ac (20 MHz) Peak excursion data

Mode of EUT: Tx Mode (802.11n/ac: 20 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Modulation Type	Peak Excursion (dB)	Limit (dB)	Margin (dB)
56	5280	BPSK	10.26	13	2.74
56	5280	QPSK	10.42	13	2.58
56	5280	16-QAM	9.42	13	3.58
56	5280	64-QAM	9.36	13	3.64
56	5280	256-QAM	9.18	13	3.82


802.11n/ac 56ch (5280 MHz) BPSK

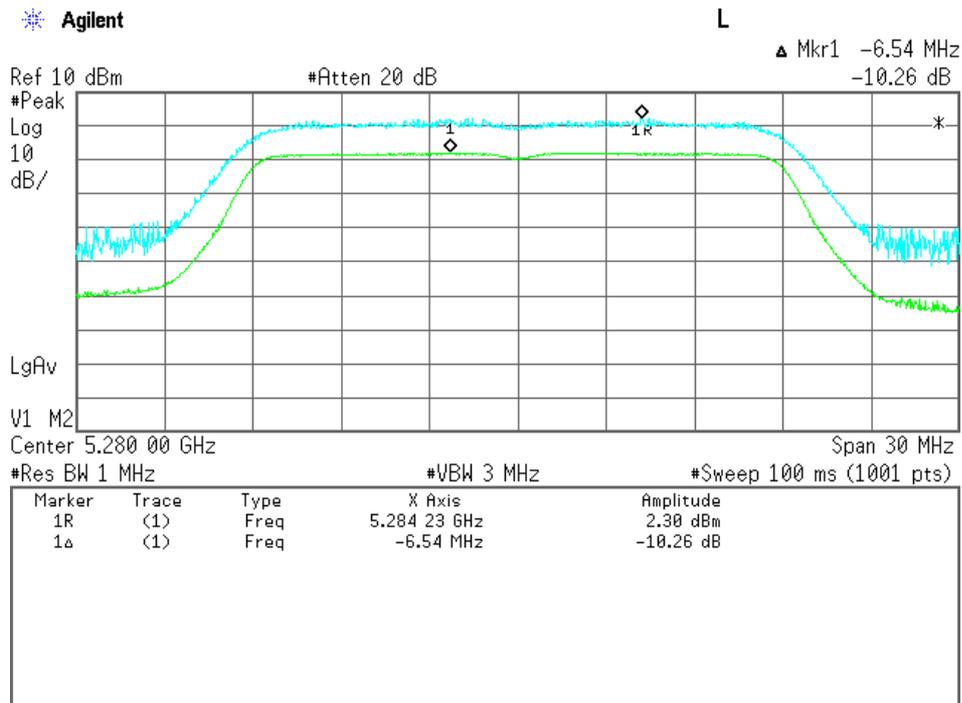


802.11n/ac 56ch (5280 MHz) QPSK

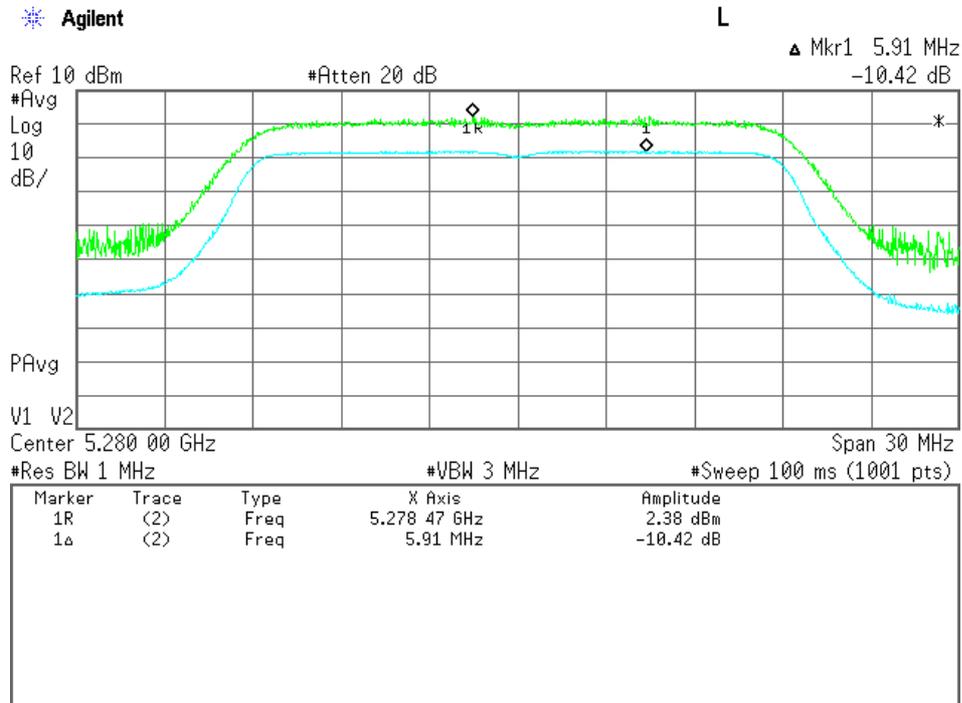


802.11n/ac 56ch (5280 MHz) 16-QAM

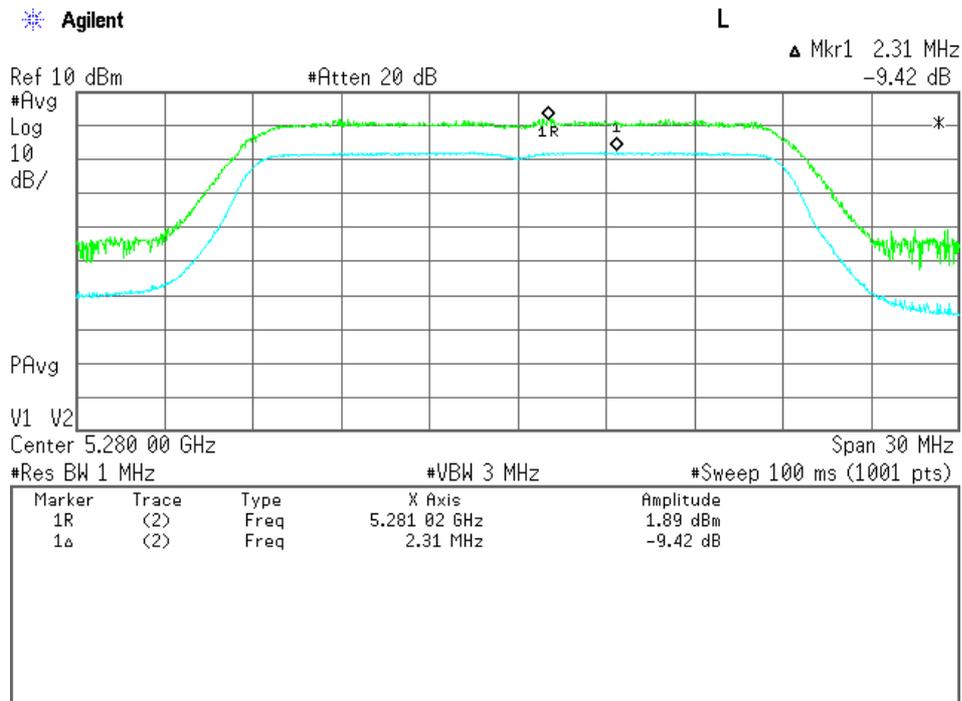

802.11n/ac 56ch (5280 MHz) 64-QAM

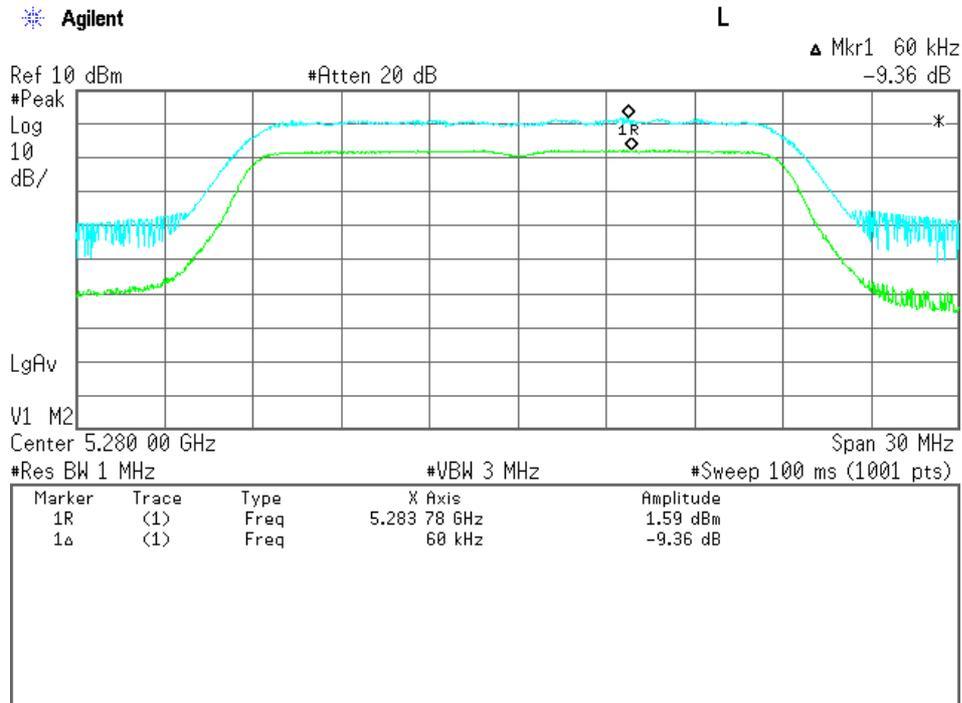

802.11ac 56ch (5280 MHz) 256-QAM

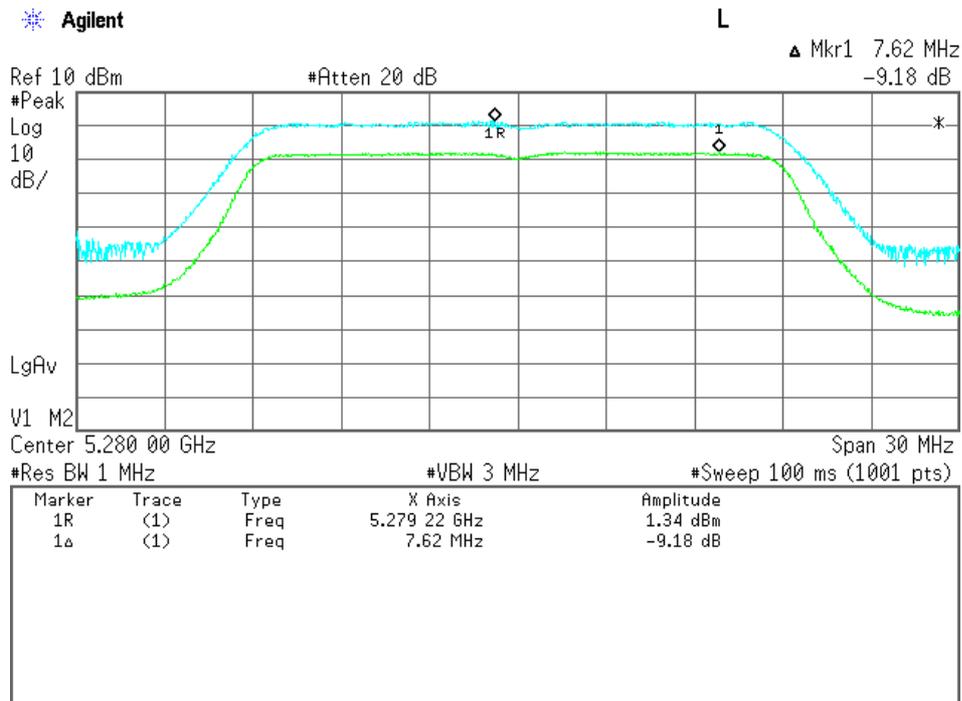


7.4.5.3 802.11n/ac (40 MHz) Peak excursion data

Mode of EUT: Tx Mode (802.11n/ac: 40 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Modulation Type	Peak Excursion (dB)	Limit (dB)	Margin (dB)
62	5310	BPSK	8.89	13	4.11
62	5310	QPSK	9.41	13	3.59
62	5310	16-QAM	10.00	13	3.00
62	5310	64-QAM	9.51	13	3.49
62	5310	256-QAM	8.24	13	4.76


802.11n/ac 62ch (5310 MHz) BPSK

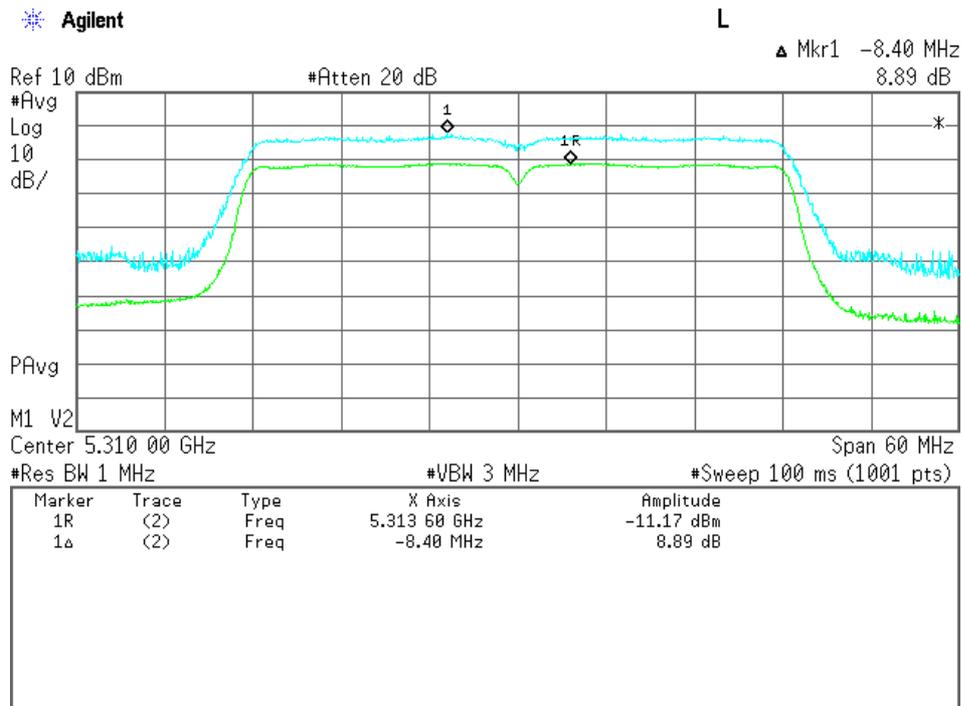


802.11n/ac 62ch (5310 MHz) QPSK

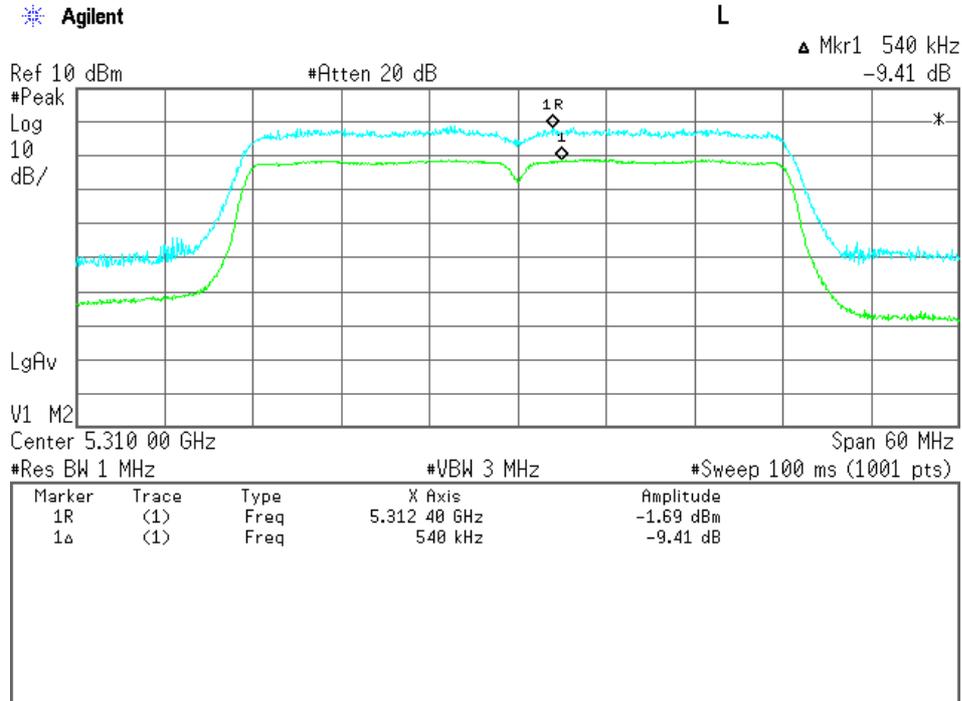


802.11n/ac 62ch (5310 MHz) 16-QAM

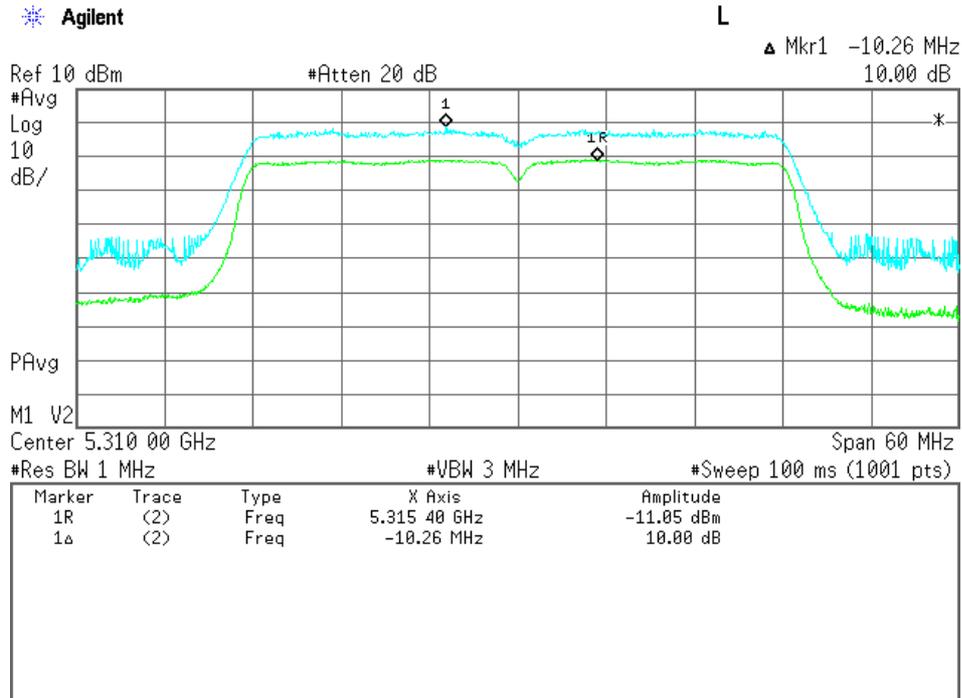

802.11n/ac 62ch (5310 MHz) 64-QAM

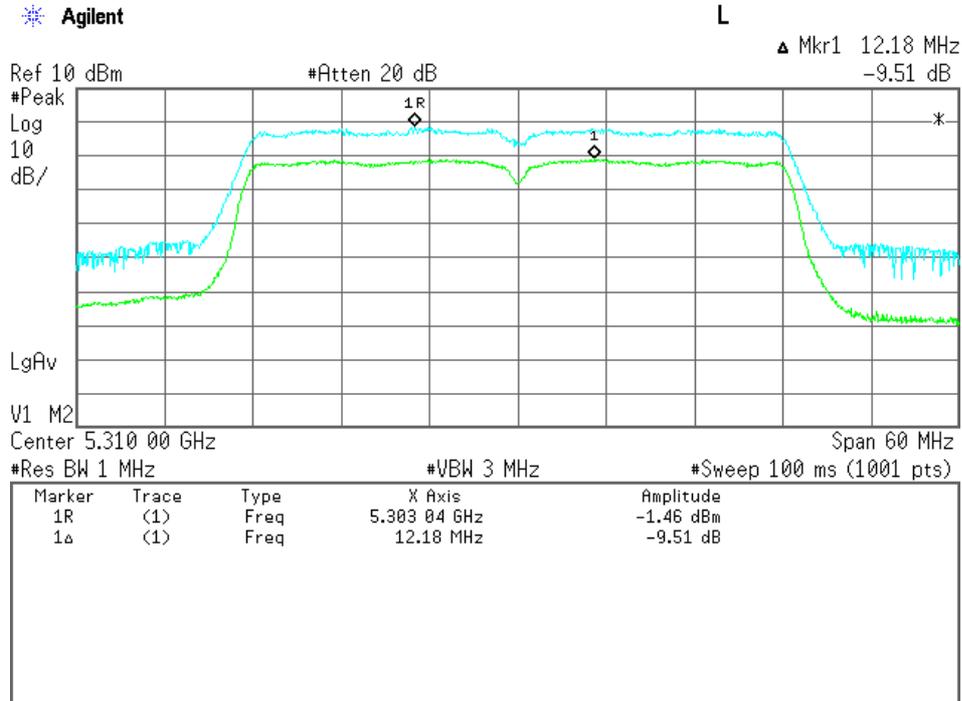

802.11ac 62ch (5310 MHz) 256-QAM

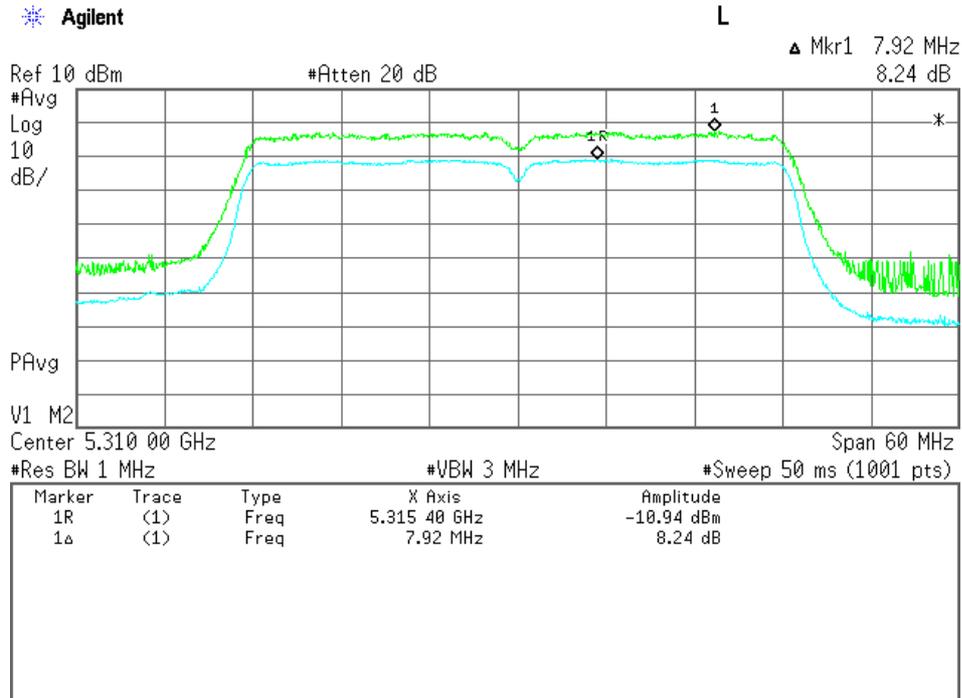


7.4.5.4 802.11ac (80 MHz) Peak excursion data

Mode of EUT: Tx Mode (802.11ac: 80 MHz)


Test Port: Temporary antenna connector

Channel	Frequency (MHz)	Modulation Type	Peak Excursion (dB)	Limit (dB)	Margin (dB)
58	5290	BPSK	8.86	13	4.14
58	5290	QPSK	9.45	13	3.55
58	5290	16-QAM	9.74	13	3.26
58	5290	64-QAM	8.97	13	4.03
58	5290	256-QAM	9.31	13	3.69


802.11ac 58ch (5290 MHz) BPSK

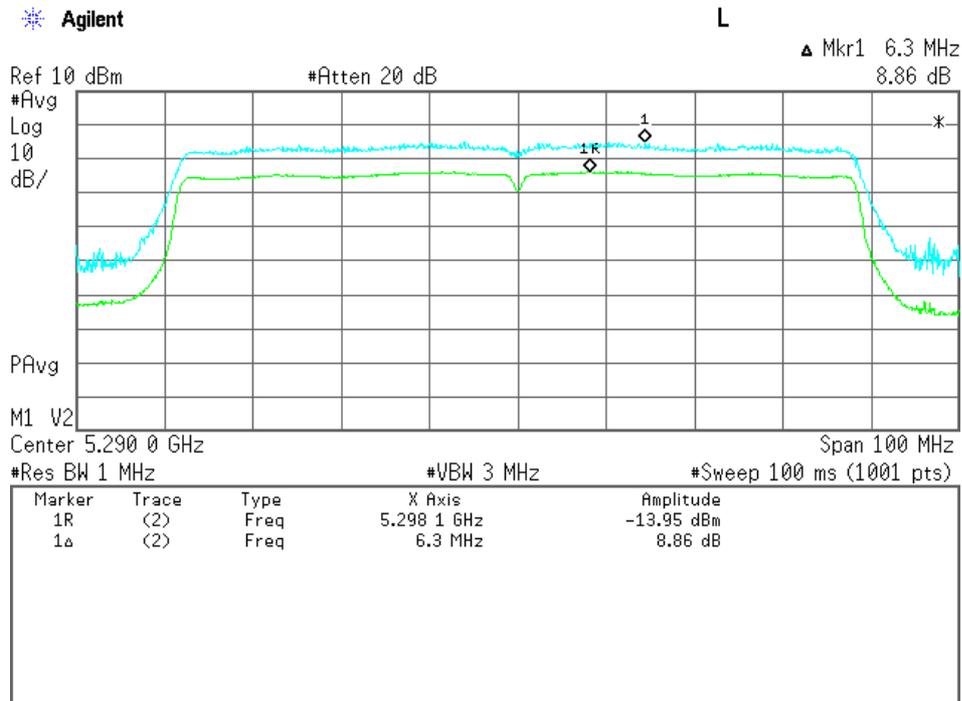


802.11ac 58ch (5290 MHz) QPSK

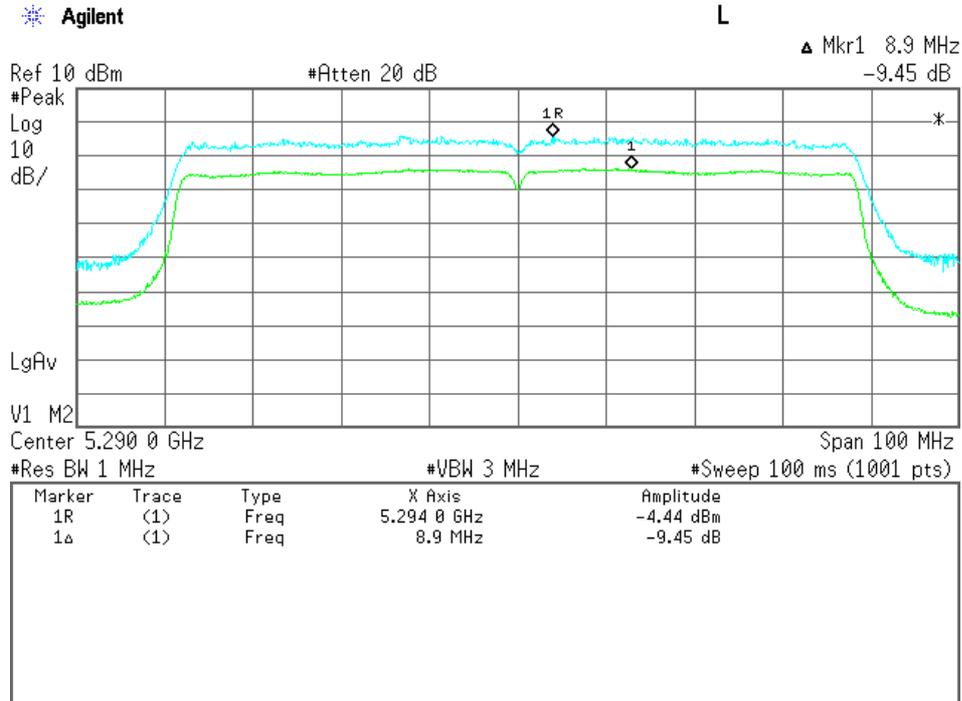


802.11ac 58ch (5290 MHz) 16-QAM

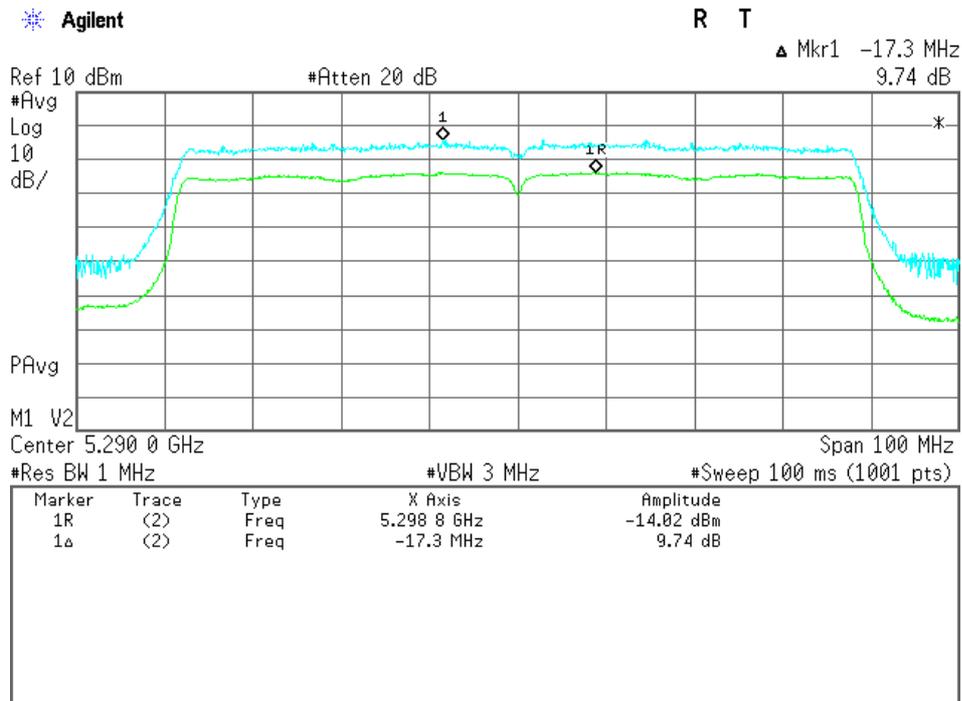

802.11ac 58ch (5290 MHz) 64-QAM

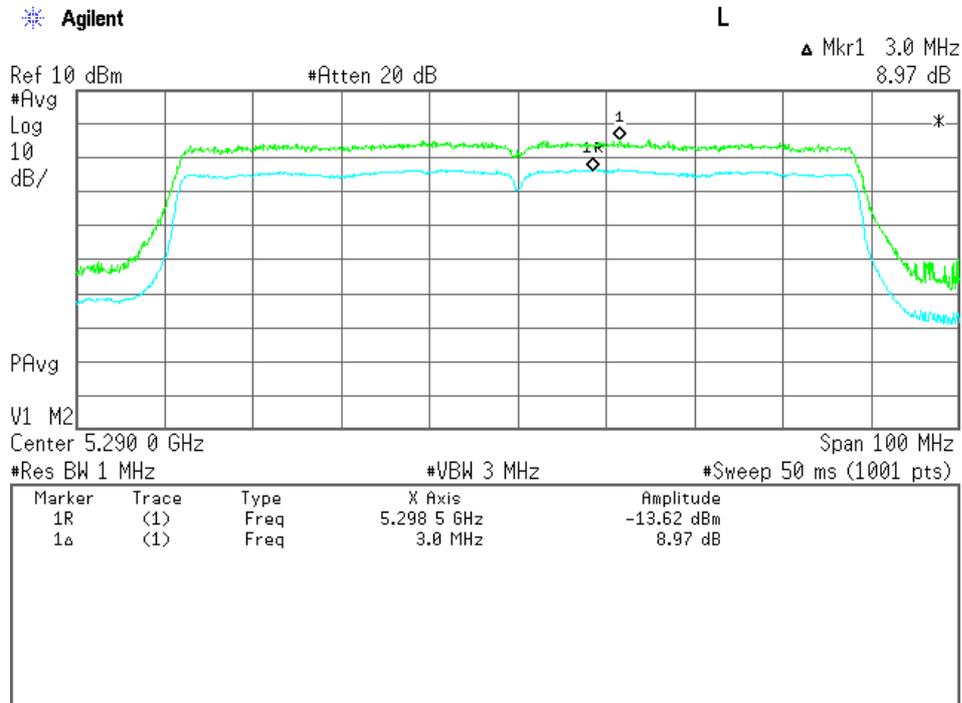

802.11ac 58ch (5290 MHz) 256-QAM

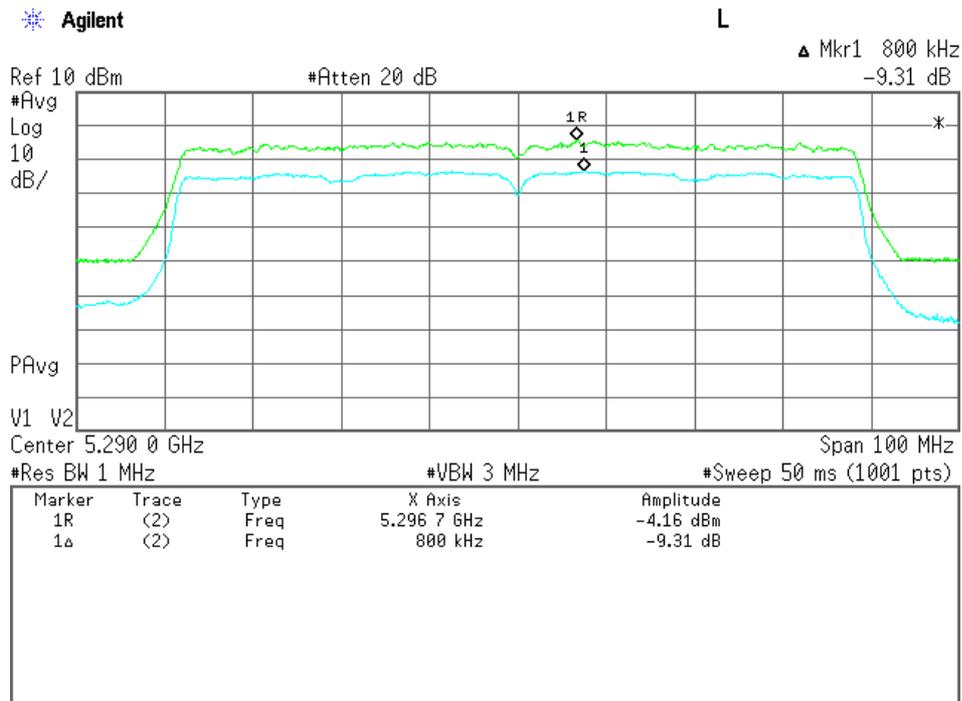

7.5 AC Powerline Conducted Emission

For the requirements, - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

For the limits, - Passed - Failed - Not judged

7.5.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Quasi-Peak) 20.6 dB at 0.78 MHz

Uncertainty of Measurement Results +/-2.7 dB(2σ)

Remarks : _____

7.5.2 Test Site

KITA-KANSAI Testing Center SAITO EMC Branch

- | | |
|---|---|
| <input type="checkbox"/> - Anechoic chamber A1 | <input type="checkbox"/> - Measurement room M1 |
| <input checked="" type="checkbox"/> - Measurement room M2 | <input type="checkbox"/> - Measurement room M3 |
| <input type="checkbox"/> - Shielded room S1 | <input type="checkbox"/> - Shielded room S2 |
| <input type="checkbox"/> - KITA-KANSAI Shielded room | <input type="checkbox"/> - KITA-KANSAI Anechoic chamber |

7.5.3 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2013/4	1 Year
AMN (main)	ESH3-Z5	Rohde & Schwarz	D-12	2012/8	1 Year
RF Cable	RG223/U	SUHNER	H-9	2012/7	1 Year


7.5.4 Test Method and Test Setup (Diagrammatic illustration)

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

(Reference divisional instruction No. G703649)

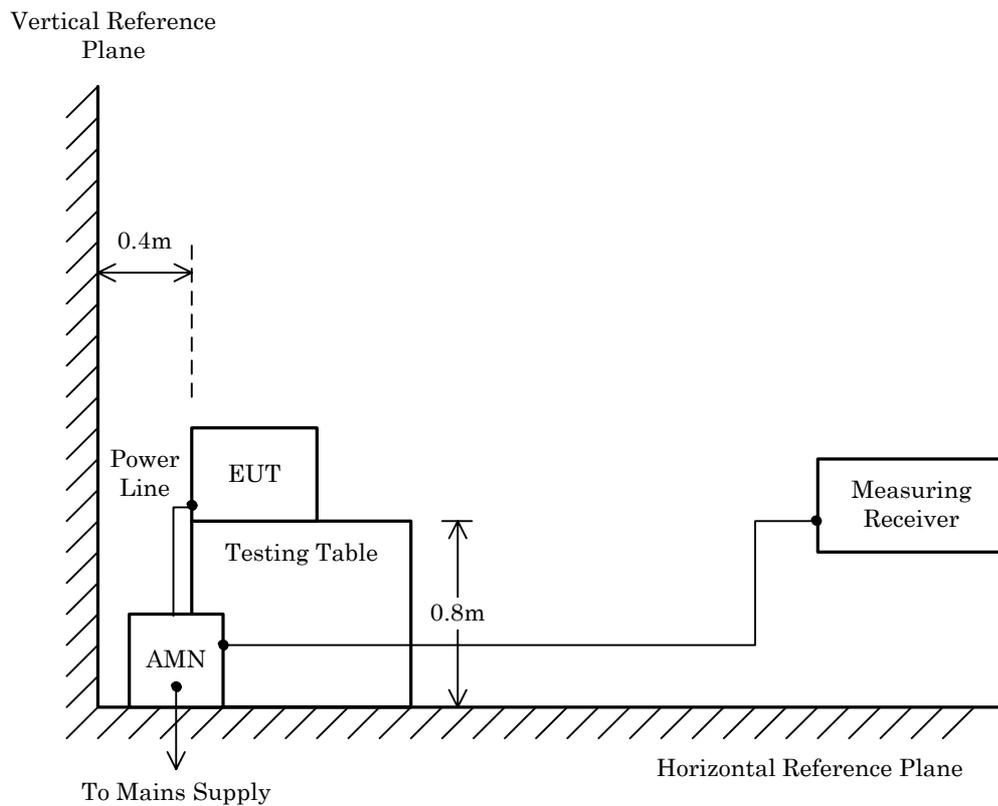

NOTE


AMN : Artificial Mains Network

7.5.5 Test Data

Mode of EUT : All modes have been investigated and the worst case mode for channel (36ch: 5180MHz / IEEE 802.11a) has been listed.

Test Date: April 30, 2013
Temp.: 24 °C, Humi.: 52 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]	Remarks
		VA QP	VA AVE	VB QP	VB AVE	QP	AVE	QP	AVE		
0.41	10.2	14.2	--	25.5	--	57.6	47.6	35.7	--	+21.9	-
0.78	10.3	16.7	--	25.1	--	56.0	46.0	35.4	--	+20.6	-
2.70	10.4	21.2	--	21.8	--	56.0	46.0	32.2	--	+23.8	-
3.80	10.4	24.0	--	22.6	--	56.0	46.0	34.4	--	+21.6	-
7.13	10.7	22.3	--	28.1	--	60.0	50.0	38.8	--	+21.2	-
10.09	10.9	24.0	--	27.7	--	60.0	50.0	38.6	--	+21.4	-

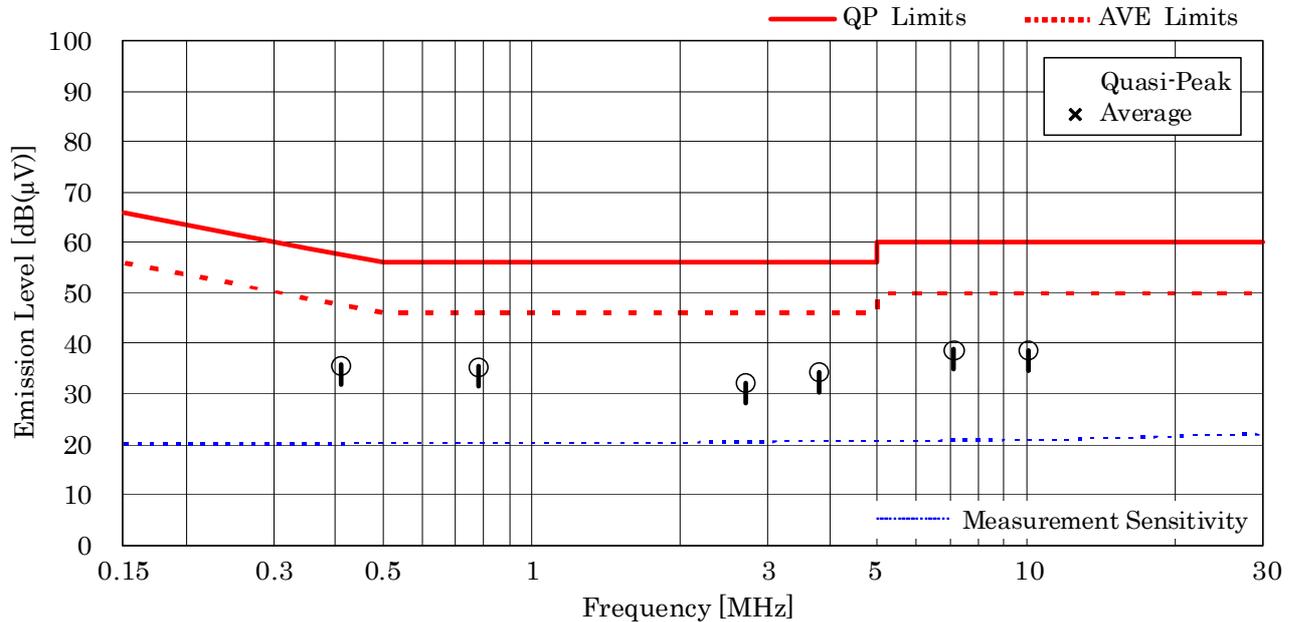

NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 0.78 MHz, as the worst point shown on underline:
 Correction Factor + Meter Reading = 10.3 + 25.1 = 35.4 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

7.6 Unwanted Radiated Emission

For the requirements, - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

For the limits, - Passed - Failed - Not judged

7.6.1 Worst Point and Measurement Uncertainty

Min. Limit Margin (Average)	<u> >4.3 </u> dB	at	<u> 39060.0 </u> MHz
Uncertainty of Measurement Results	9 kHz – 30 MHz	<u> +/-1.9 </u>	dB(2σ)
	30 MHz – 300 MHz	<u> +/-4.3 </u>	dB(2σ)
	300 MHz – 1000 MHz	<u> +/-5.4 </u>	dB(2σ)
	1 GHz – 6 GHz	<u> +/-4.6 </u>	dB(2σ)
	6 GHz – 18 GHz	<u> +/-5.2 </u>	dB(2σ)
	18 GHz – 40 GHz	<u> +/-5.4 </u>	dB(2σ)
Test Distance	9 kHz – 26 GHz	<u> 3 </u>	m
Test Distance	26 GHz – 40 GHz	<u> 1 </u>	m

Remarks : Remarks : Worst case is 802.11a/n channel 116. The measurement result is within the range of measurement uncertainty.

7.6.2 Test Site

KITA-KANSAI Testing Center SAITO EMC Branch

- Anechoic chamber A1 - Anechoic chamber A2

7.6.3 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2013/4	1 Year
AMN (main)	HFH2-Z2	Rohde & Schwarz	C-2	2012/8	1 Year
RF Cable	RG213/U	SUHNER	H-28	2012/8	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2012/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2012/5	1 Year
RF Cable	S 10162 B-11 etc.	SUHNER	H-4	2013/4	1 Year
Site Attenuation	--	----	H-15	2013/2	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2013/2	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2013/2	1 Year
Pre-Amplifier	BZ1840LD1	B&Z	A-29	2013/2	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2013/2	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2012/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2012/6	1 Year
Horn Antenna	3160-04	EMCO	C-55	2011/6	2 Years
Horn Antenna	3160-05	EMCO	C-56	2011/6	2 Years
Horn Antenna	3160-06	EMCO	C-57	2011/6	2 Years
Horn Antenna	3160-07	EMCO	C-58	2011/6	2 Years
Horn Antenna	3160-08	EMCO	C-59	2011/6	2 Years
Horn Antenna	3160-09	EMCO	C-48	2011/6	2 Years
Horn Antenna	3160-10	EMCO	C-49	2011/6	2 Years
Attenuator	54A-10	Weinschel	D-29	2012/9	1 Year
Attenuator	2-10	Weinschel	D-79	2012/11	1 Year
Band Rejection Filter	BRM50701	MICRO-TRONICS	D-93	2013/2	1 Year
RF Cable	SUCOFLEX102E	SUHNER	C-75	2013/2	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-66	2013/2	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-67	2013/2	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2013/2	1 Year
SVSWR	--	----	H-19	2013/2	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2013/2	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2013/2	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2012/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2012/6	1 Year
Attenuator	54A-10	Weinschel	D-29	2012/9	1 Year
Attenuator	2-10	Weinschel	D-79	2012/11	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-66	2013/2	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-67	2013/2	1 Year
SVSWR	--	----	H-19	2013/2	1 Year
High Pass Filter	HPM13900	MICRO-TRONICS	D-95	2013/2	1 Year
Pre-Amplifier	310N	SONOMA	A-17	2013/4	1 Year

7.6.4 Test Method and Test Setup (Diagrammatic illustration)


7.5.4.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

(Reference divisional instruction No. G70364B)

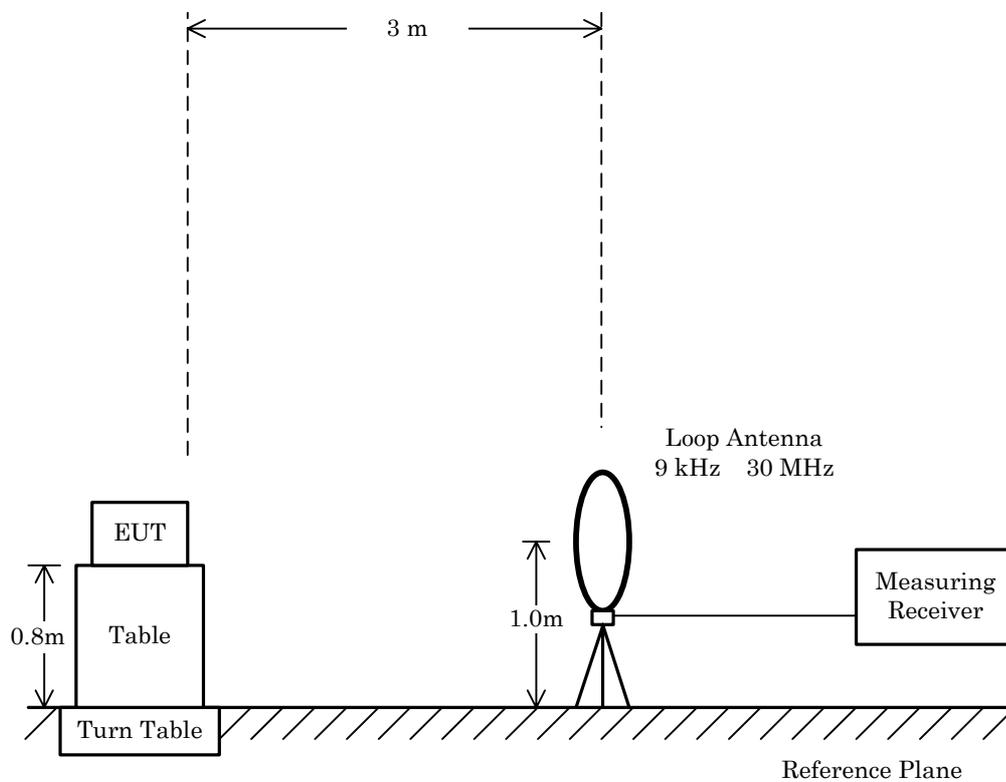


7.5.4.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

(Reference divisional instruction No. G70364B)

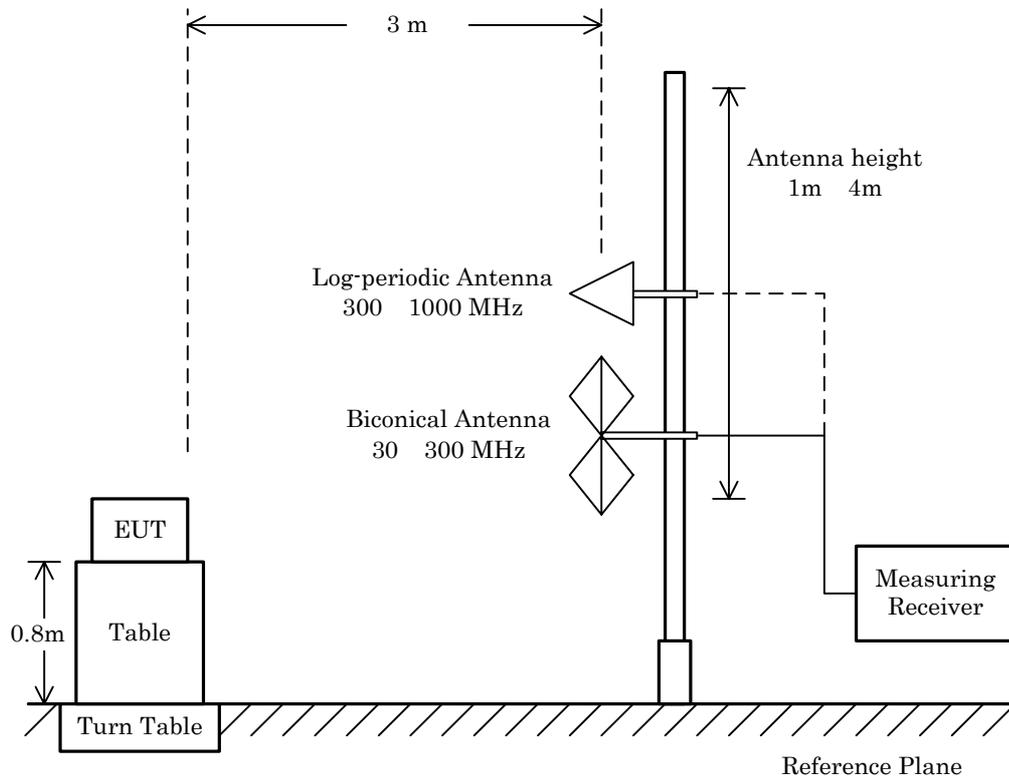

7.5.4.3 Radiated Emission Above 1000 MHz


The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

The average unwanted emissions measurements were performed in accordance with KDB 789033 D01 Method AD described in (G) (6) in this document.

(Reference divisional instruction No. G70364C)

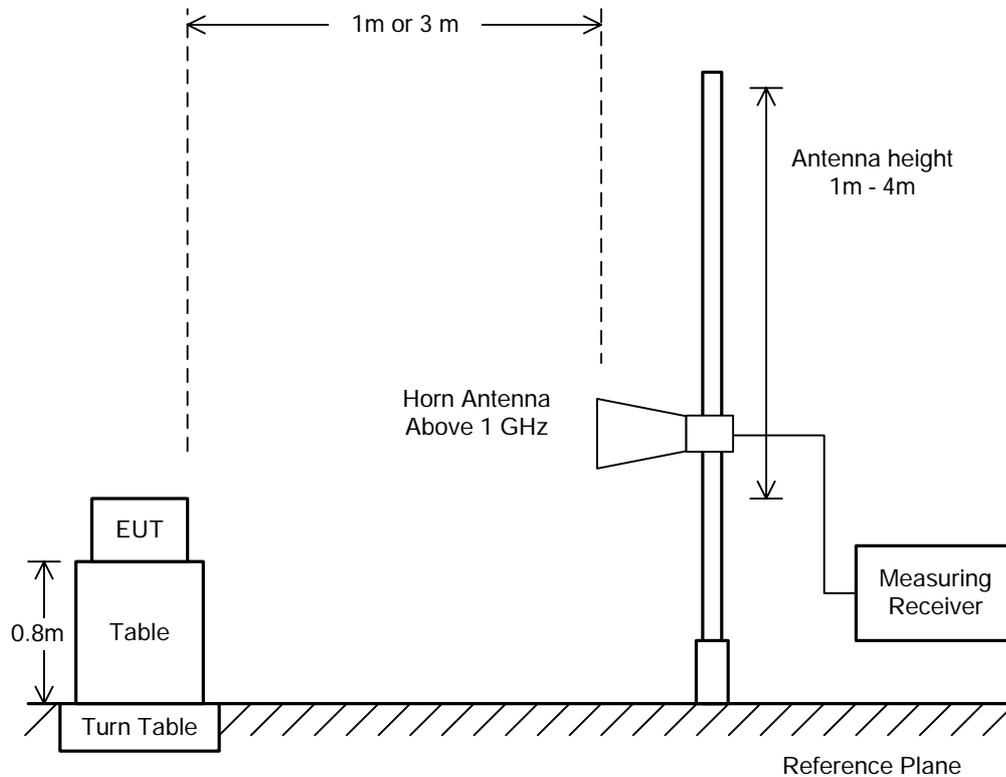

NOTE


The antenna height is scanned depending on the EUT's size and mounting height.

7.6.5 Test Data

7.6.5.1 Radiated Band Edge

Test Date : May 2, 2013
 Temp.:25°C, Humi:44%


Mode of EUT : TX mode (802.11a, 36ch: 5180 MHz)
 Antenna Polarization : Horizontal

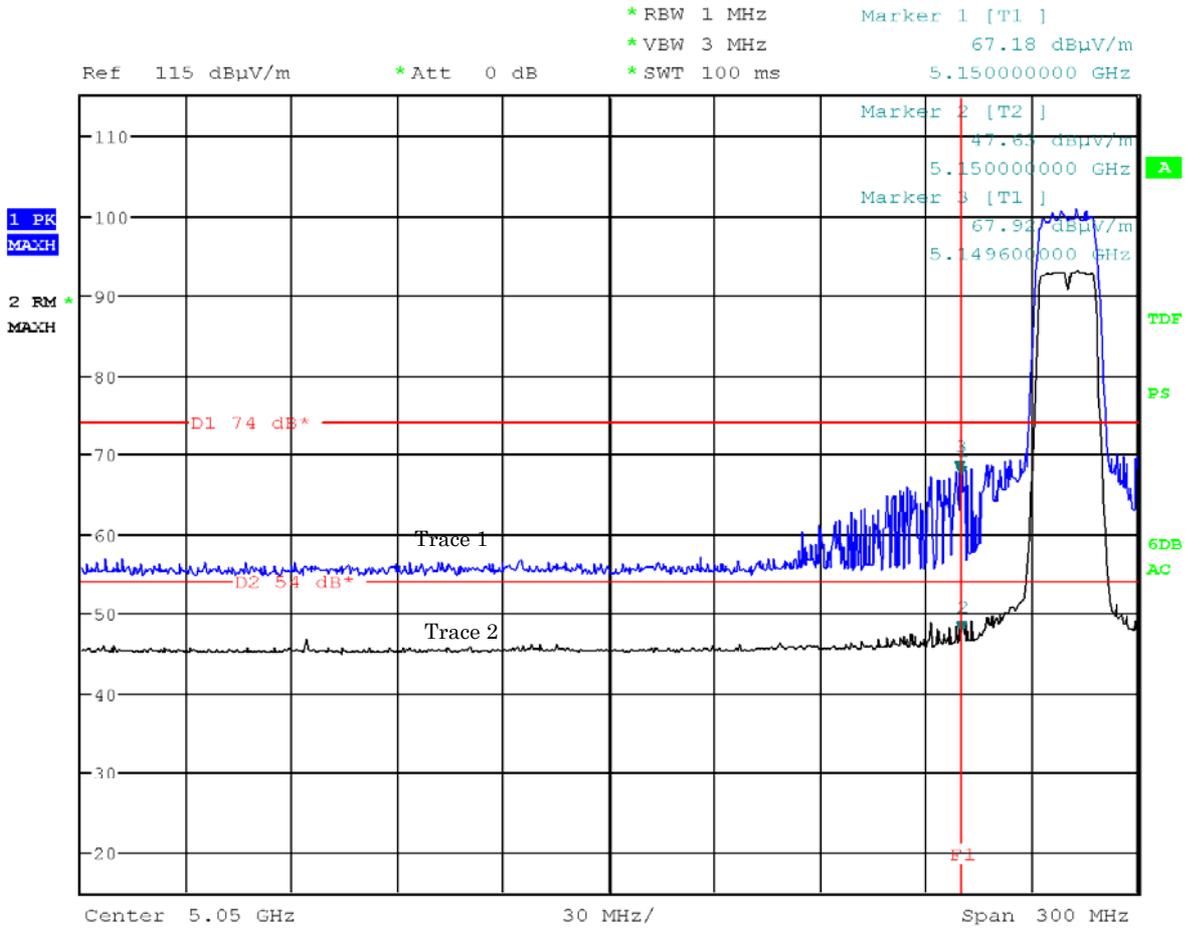

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11a, 36ch: 5180 MHz)


Antenna Polarization : Vertical

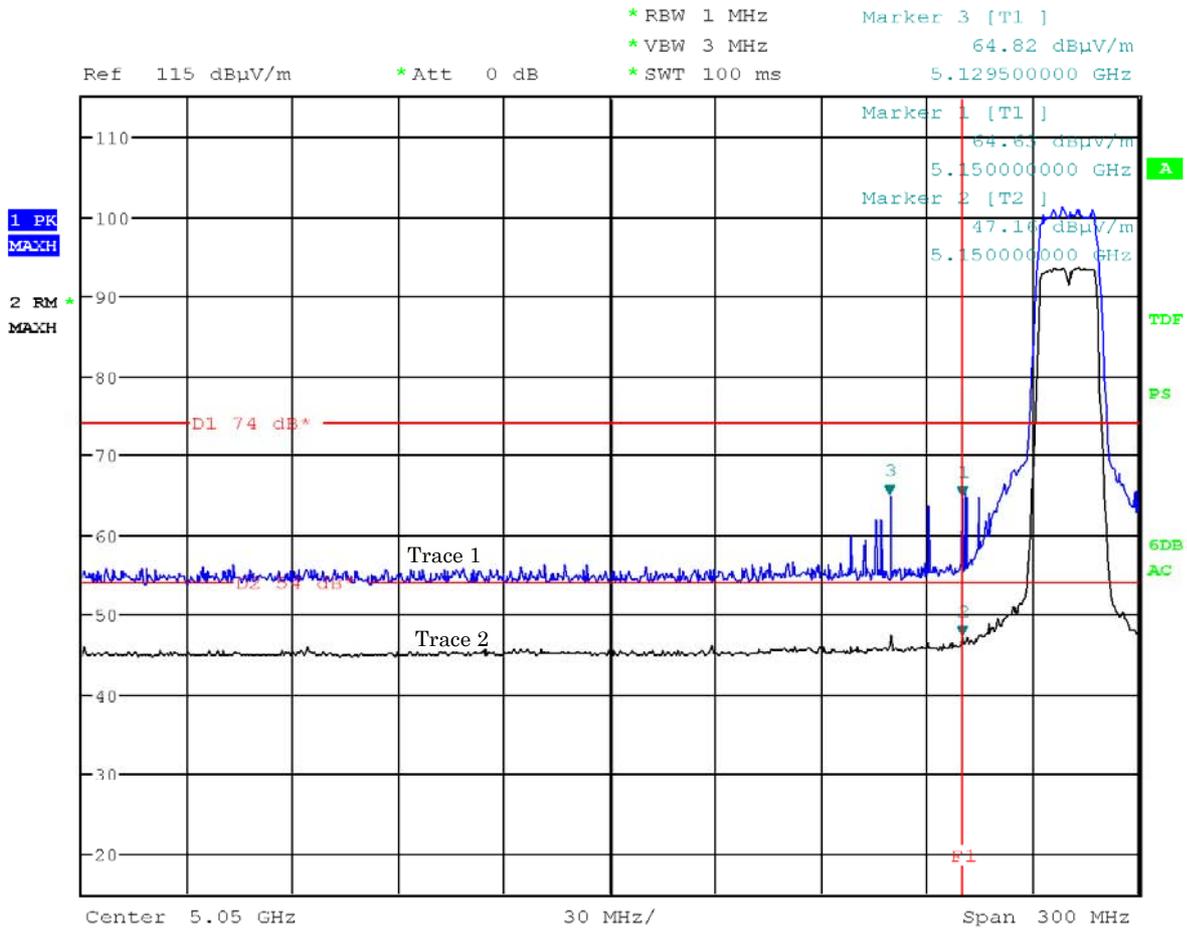

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11a, 64ch: 5320 MHz)


Antenna Polarization : Horizontal

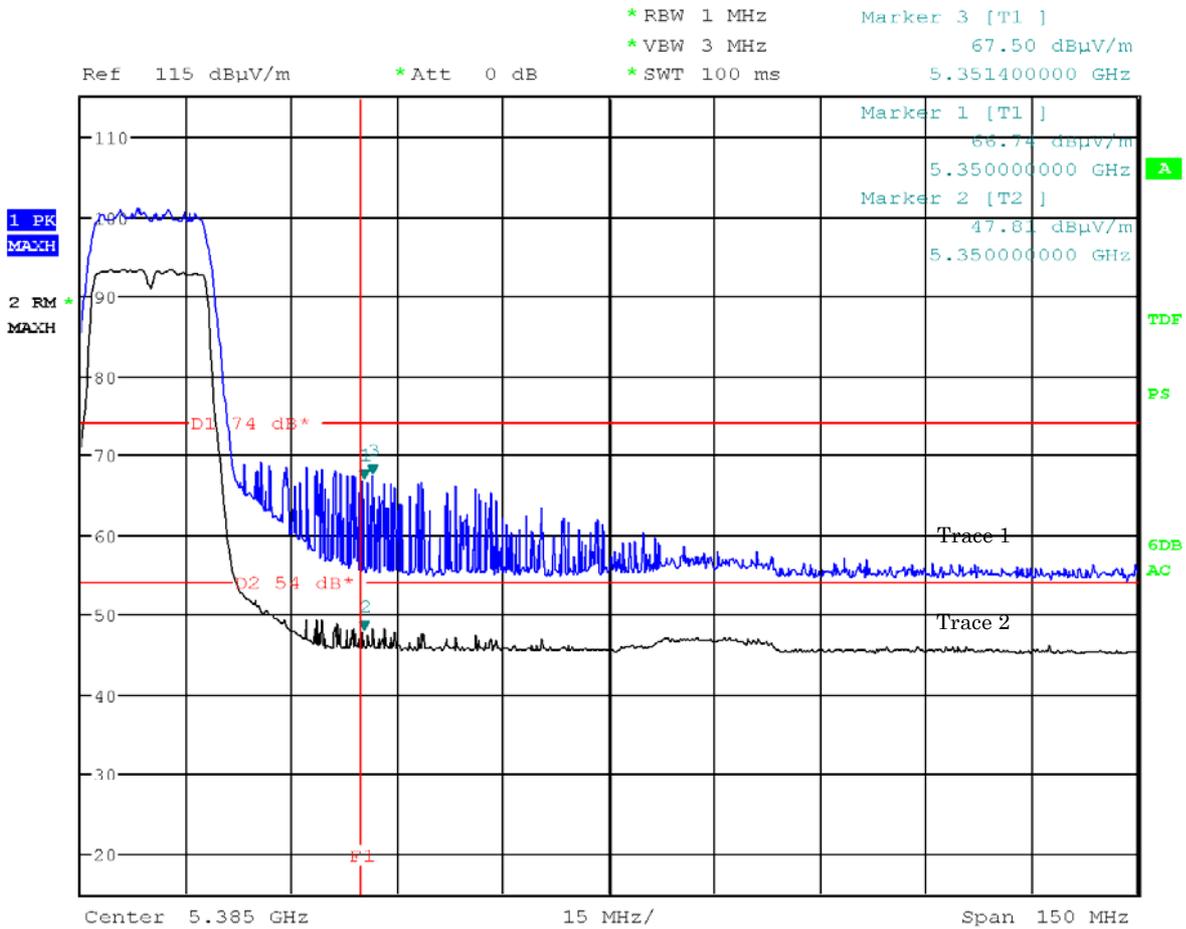

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11a, 64ch: 5320 MHz)


Antenna Polarization : Vertical

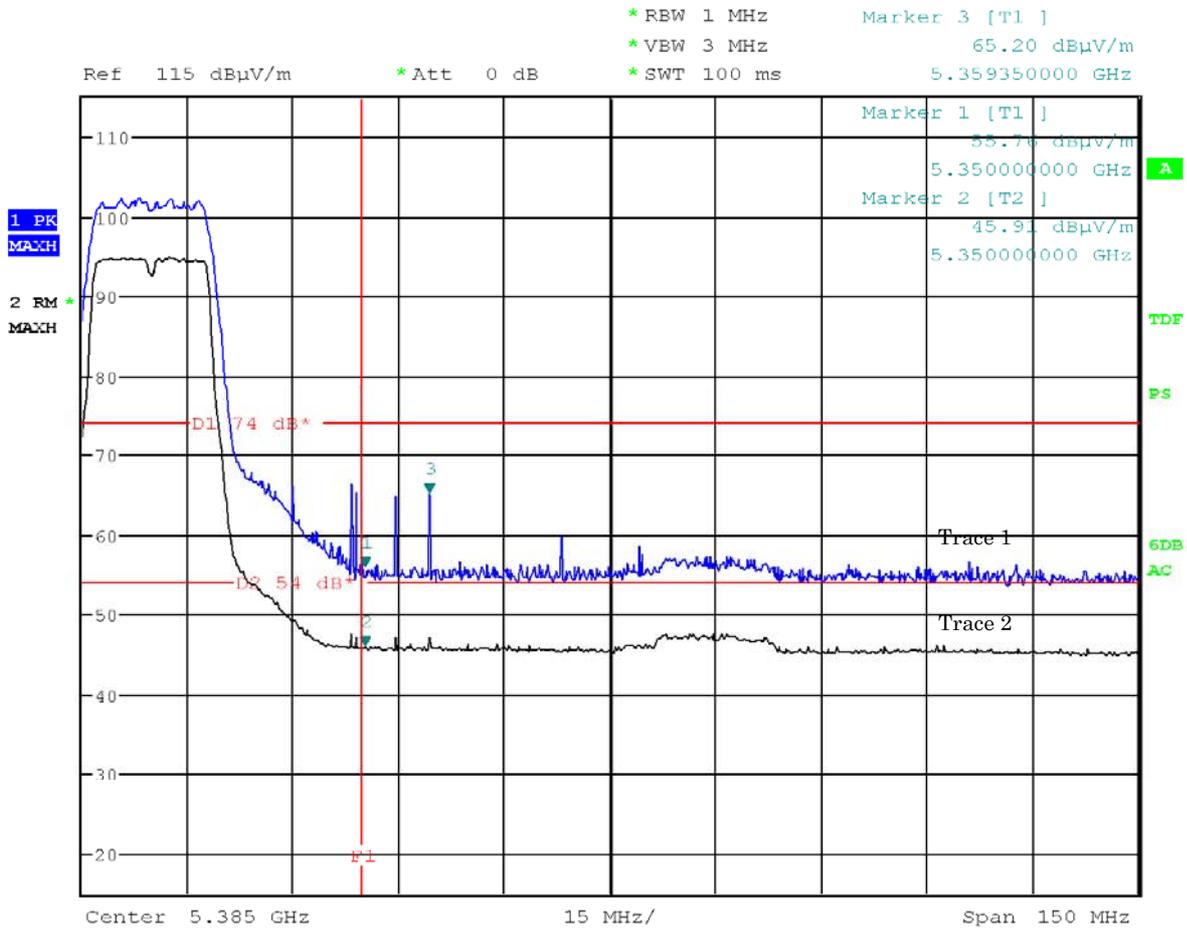

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11a, 100ch: 5500 MHz)


Antenna Polarization : Horizontal

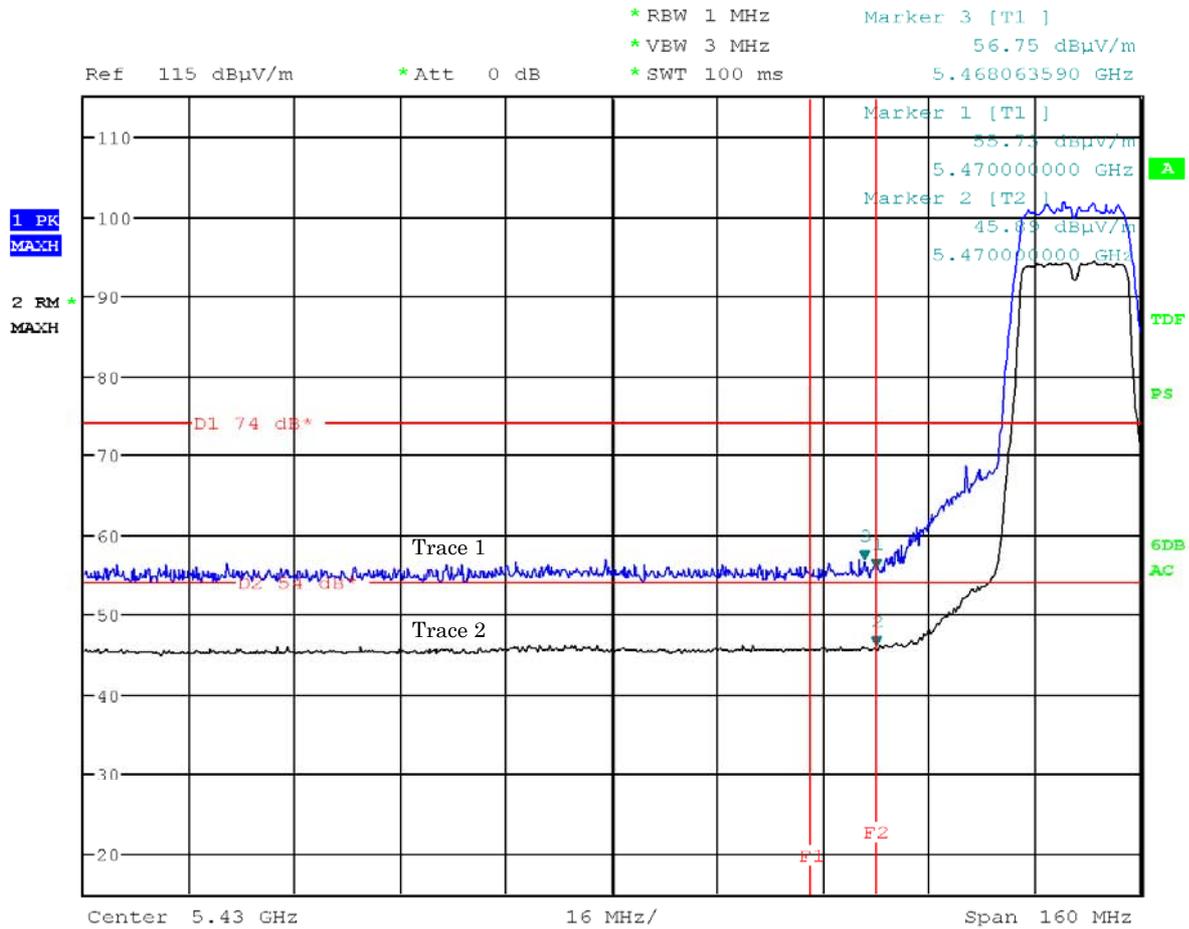

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11a, 100ch: 5500 MHz)


Antenna Polarization : Vertical

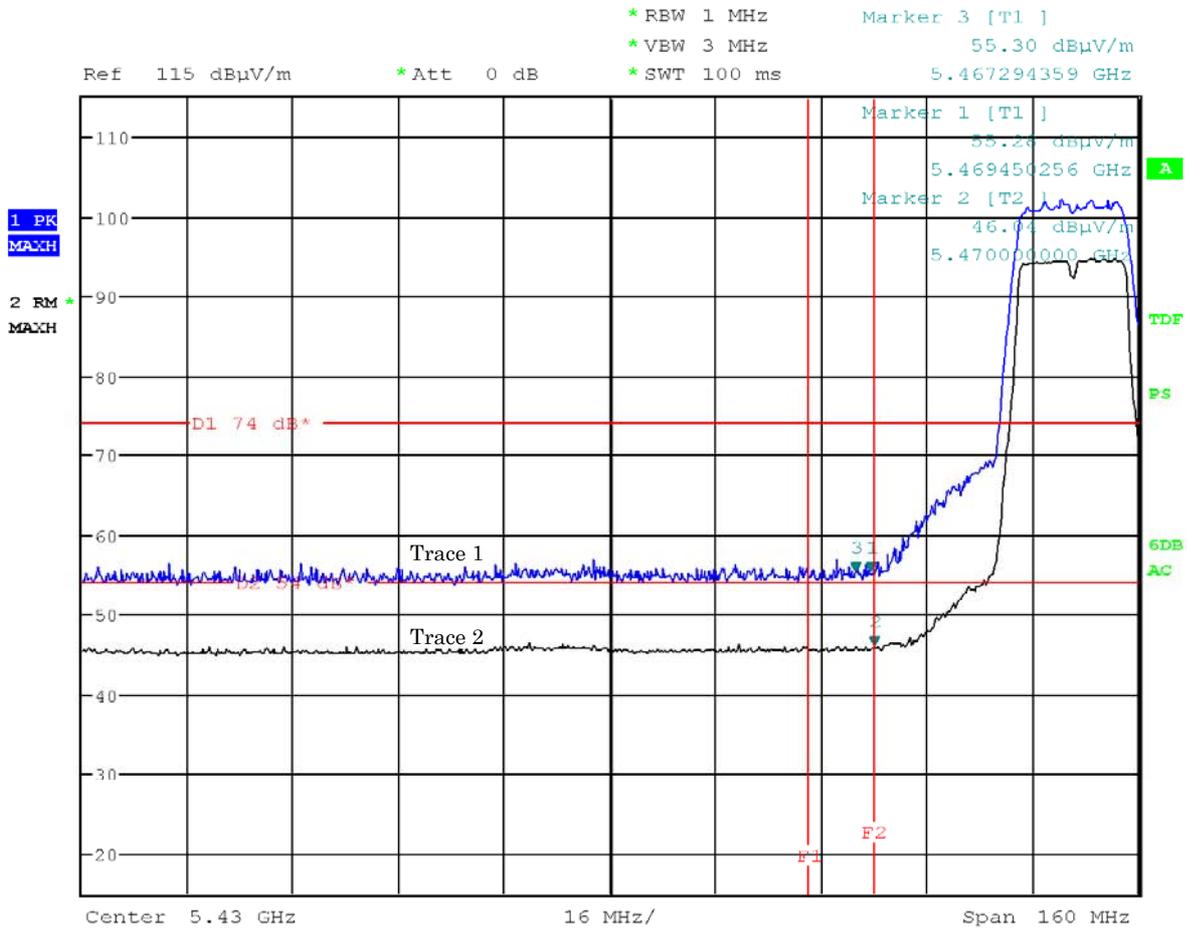

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11a, 140ch: 5700 MHz)


Antenna Polarization : Horizontal

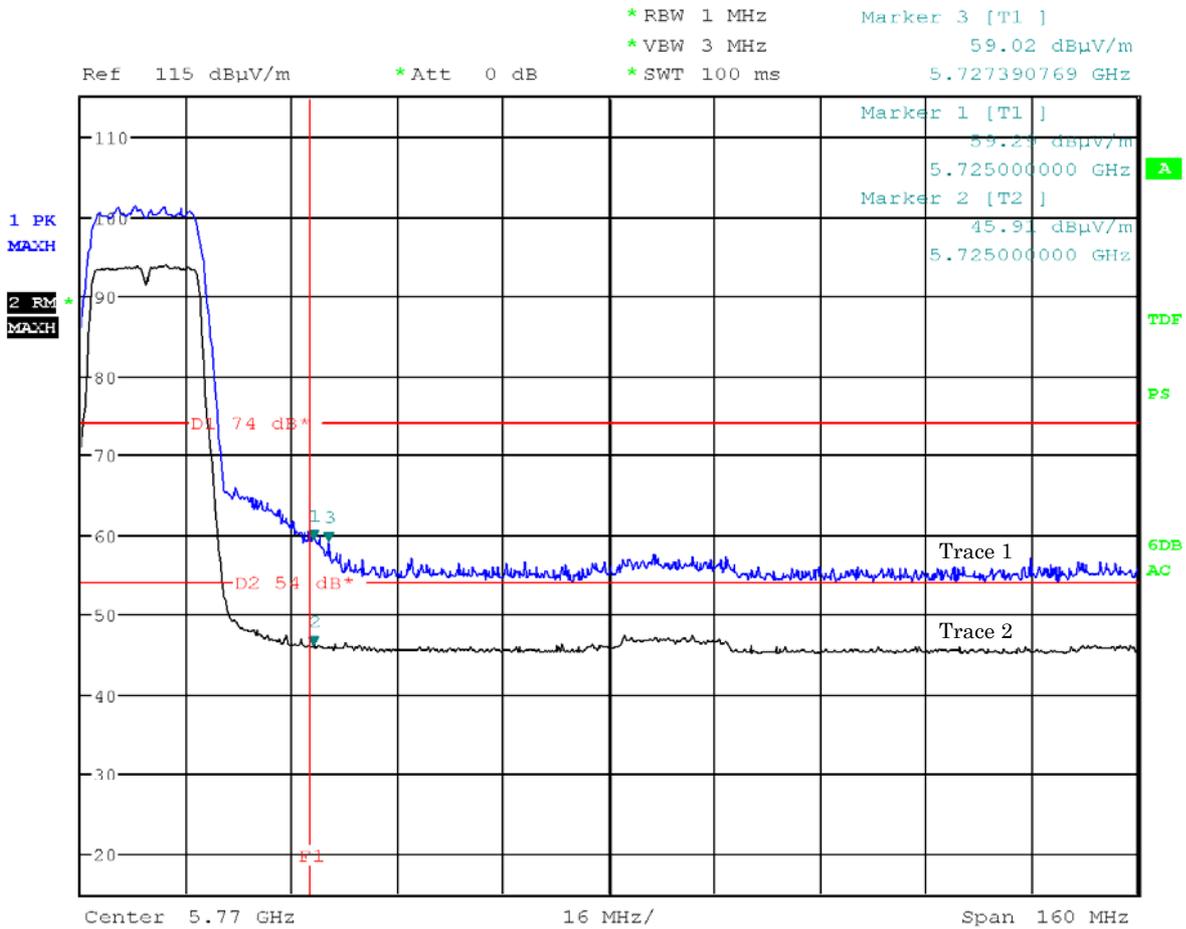

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11a, 140ch: 5700 MHz)


Antenna Polarization : Vertical

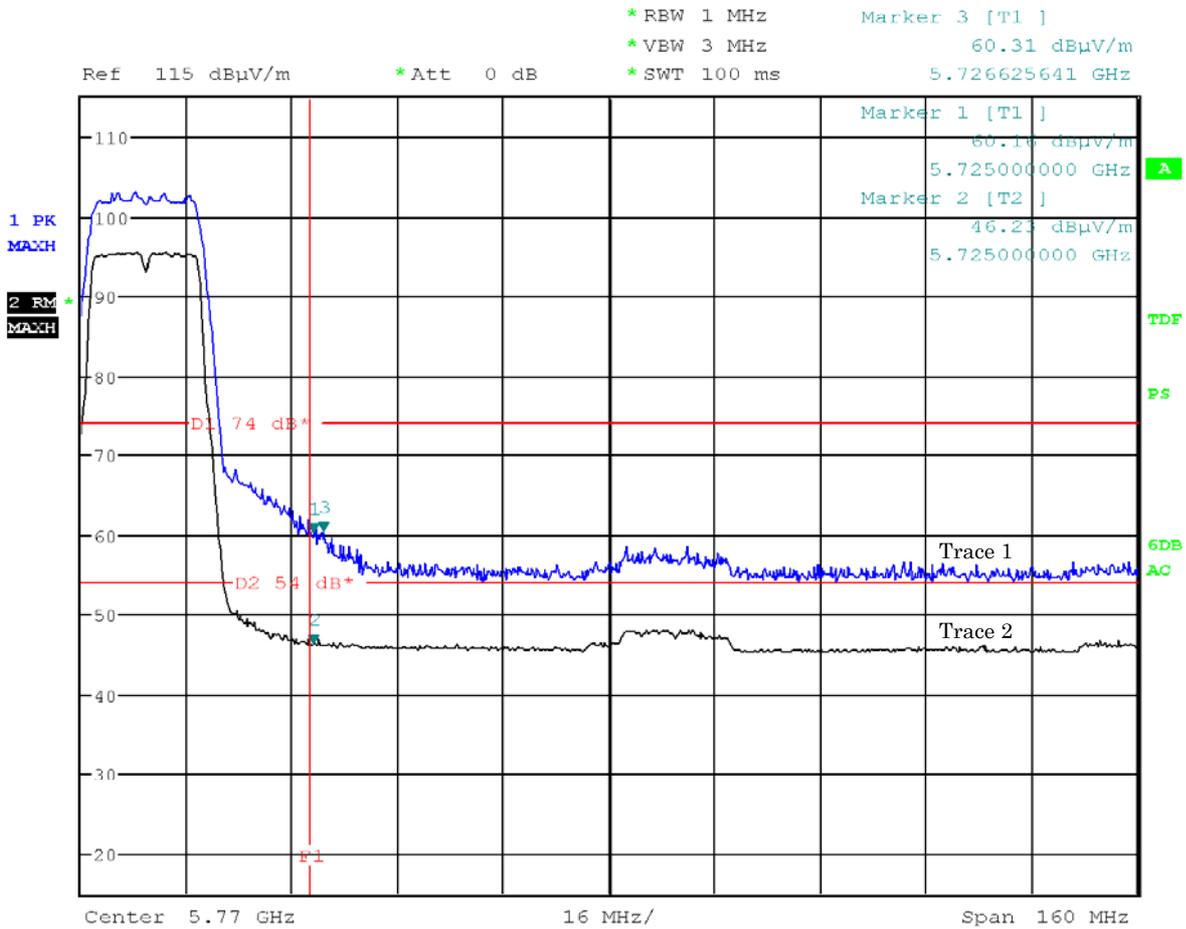

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11 n: 20 MHz, 36ch: 5180 MHz)


Antenna Polarization : Horizontal

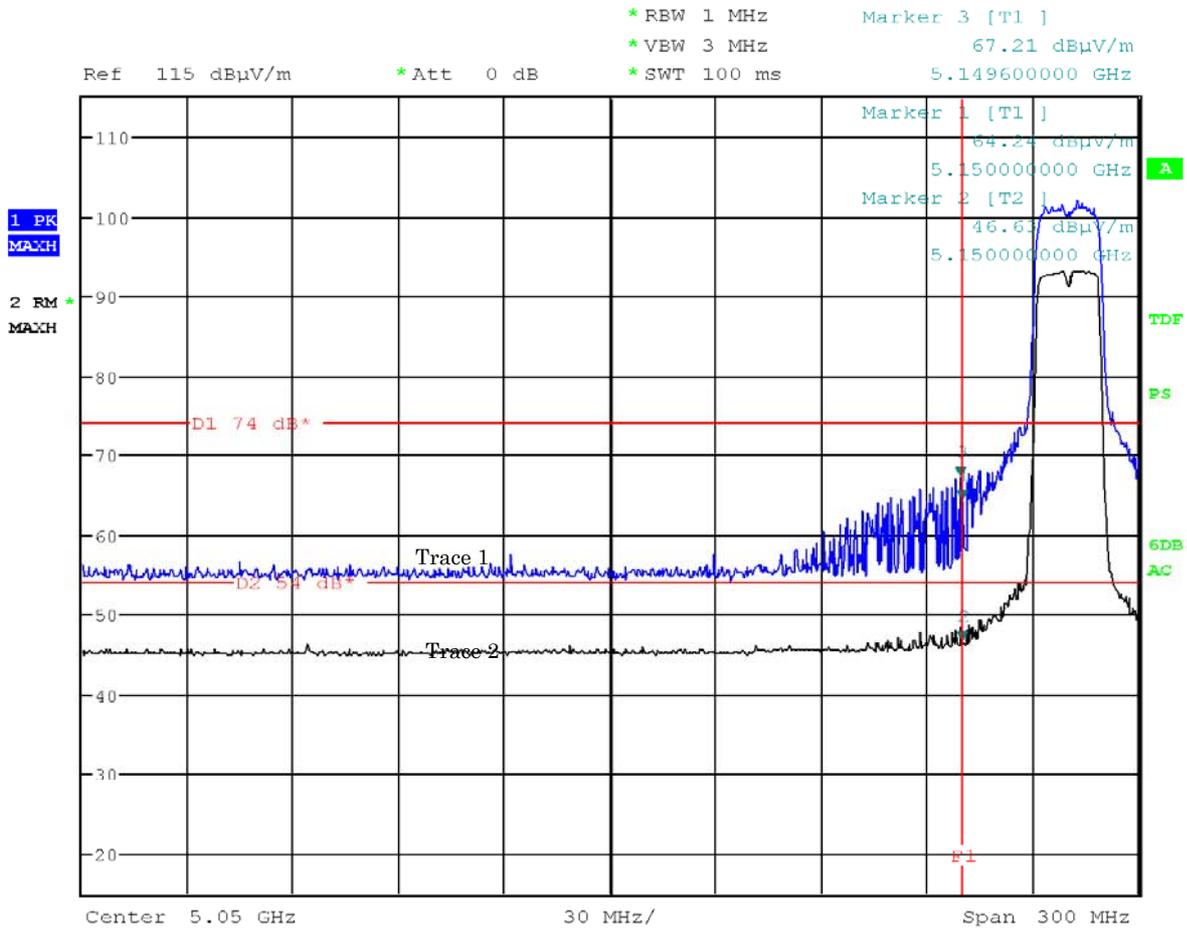

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11 n: 20 MHz, 36ch: 5180 MHz)


Antenna Polarization : Vertical

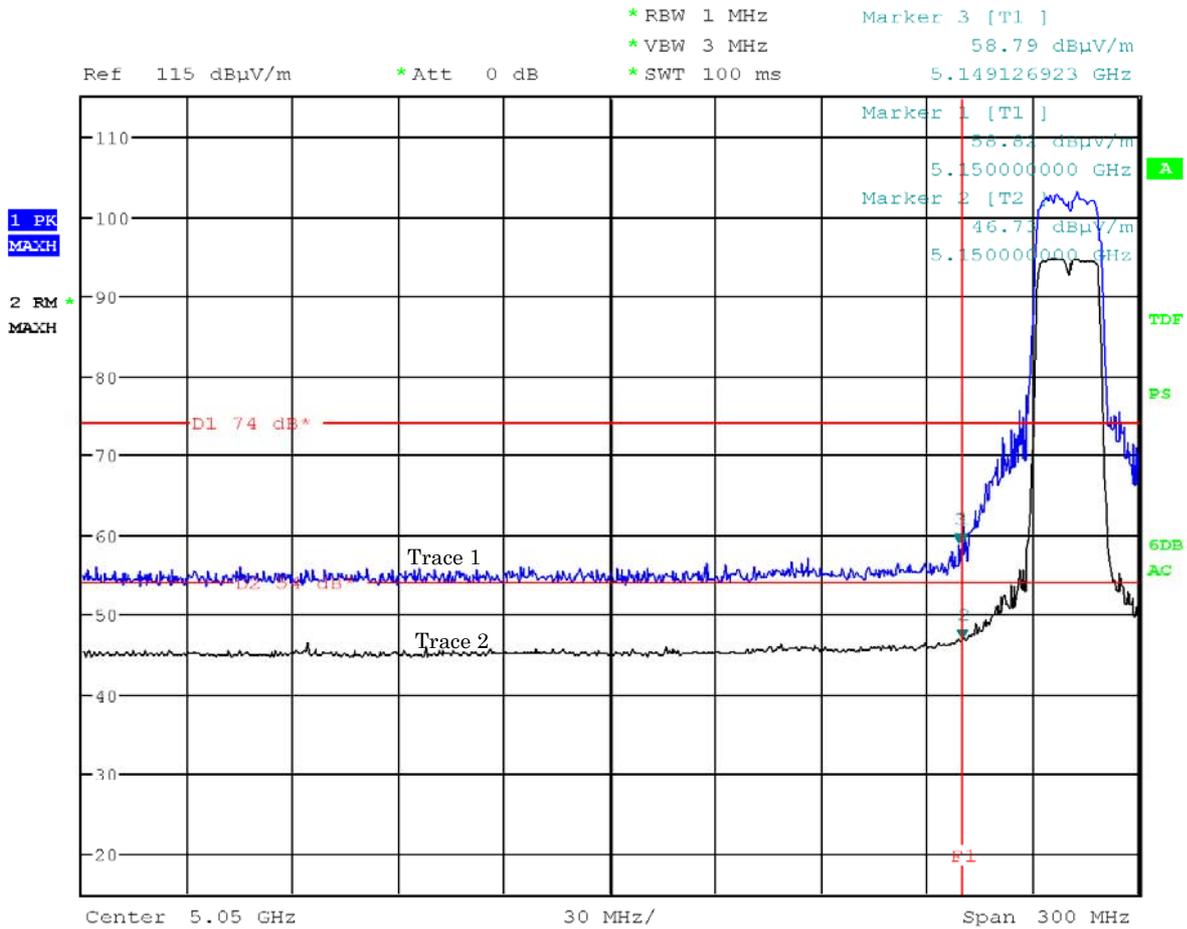

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11 n: 20 MHz, 64ch: 5320 MHz)


Antenna Polarization : Horizontal

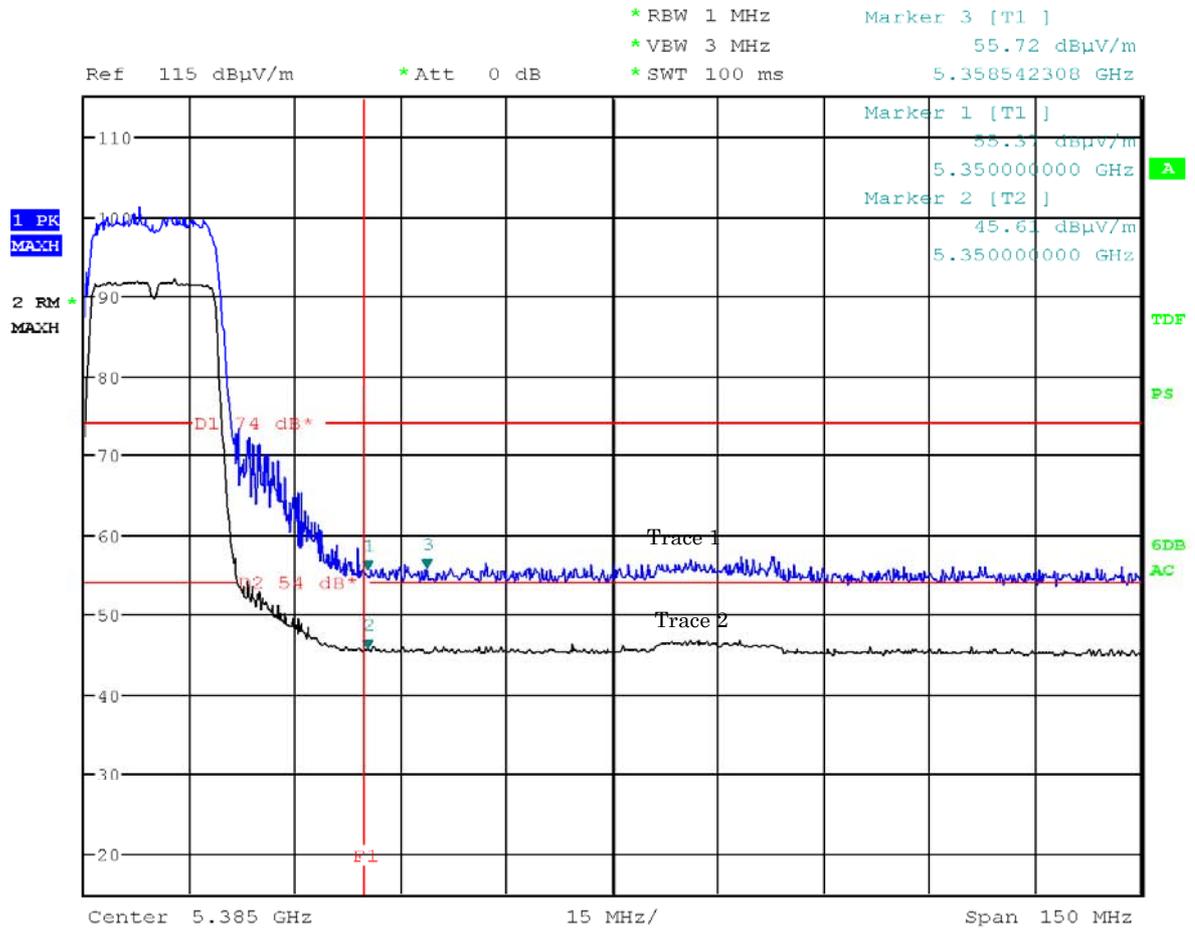

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11 n: 20 MHz, 100ch: 5500 MHz)


Antenna Polarization : Horizontal

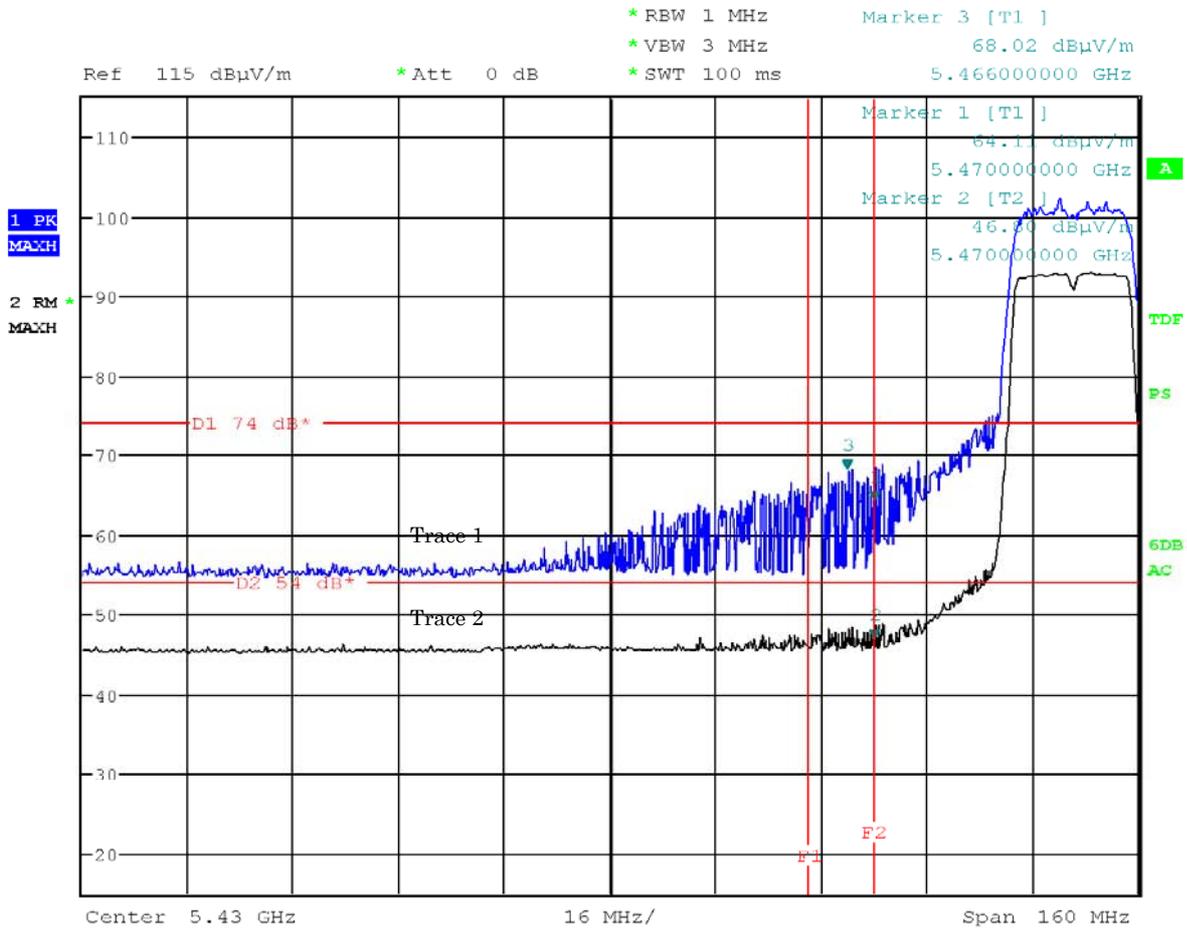

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11 n: 20 MHz, 100ch: 5500 MHz)


Antenna Polarization : Vertical

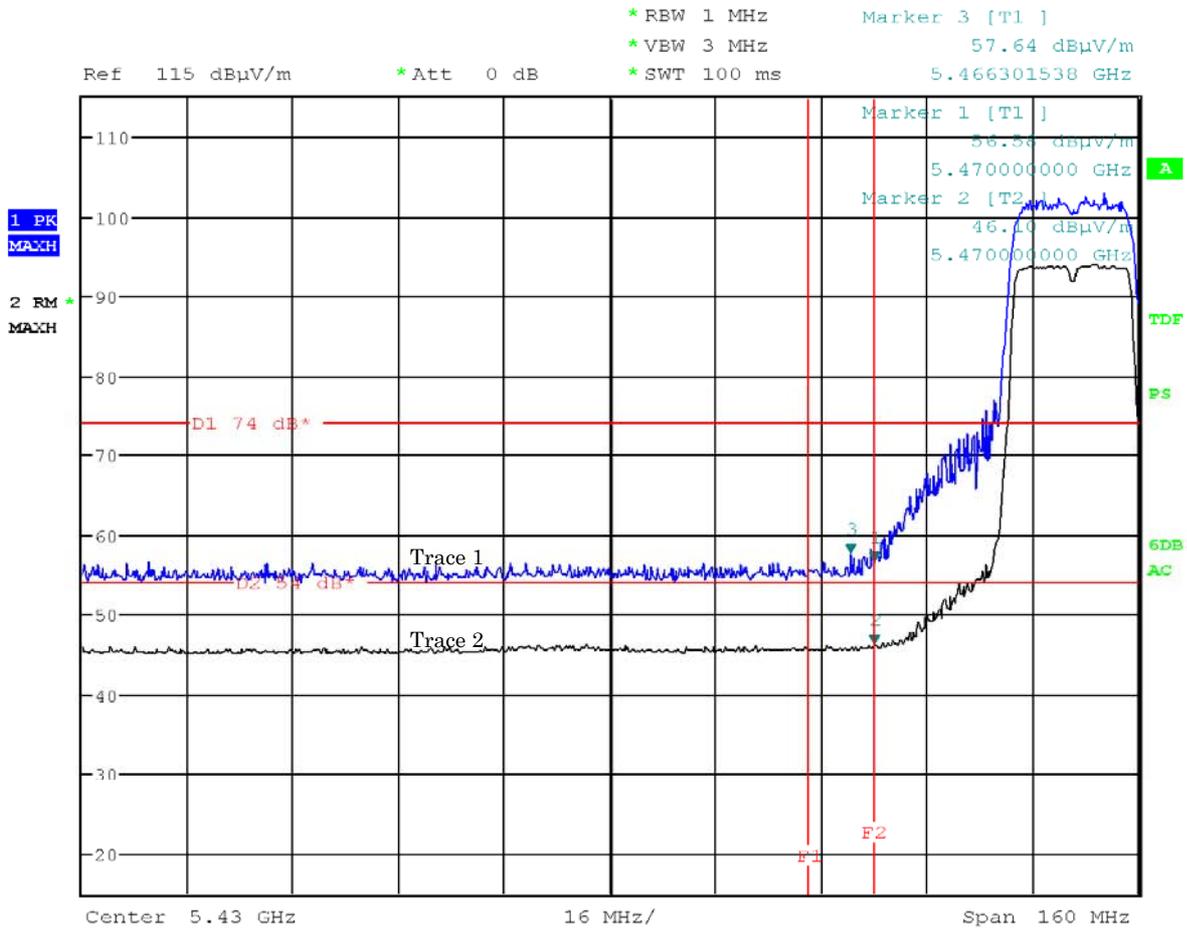

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11 n: 20 MHz, 140ch: 5700 MHz)


Antenna Polarization : Horizontal

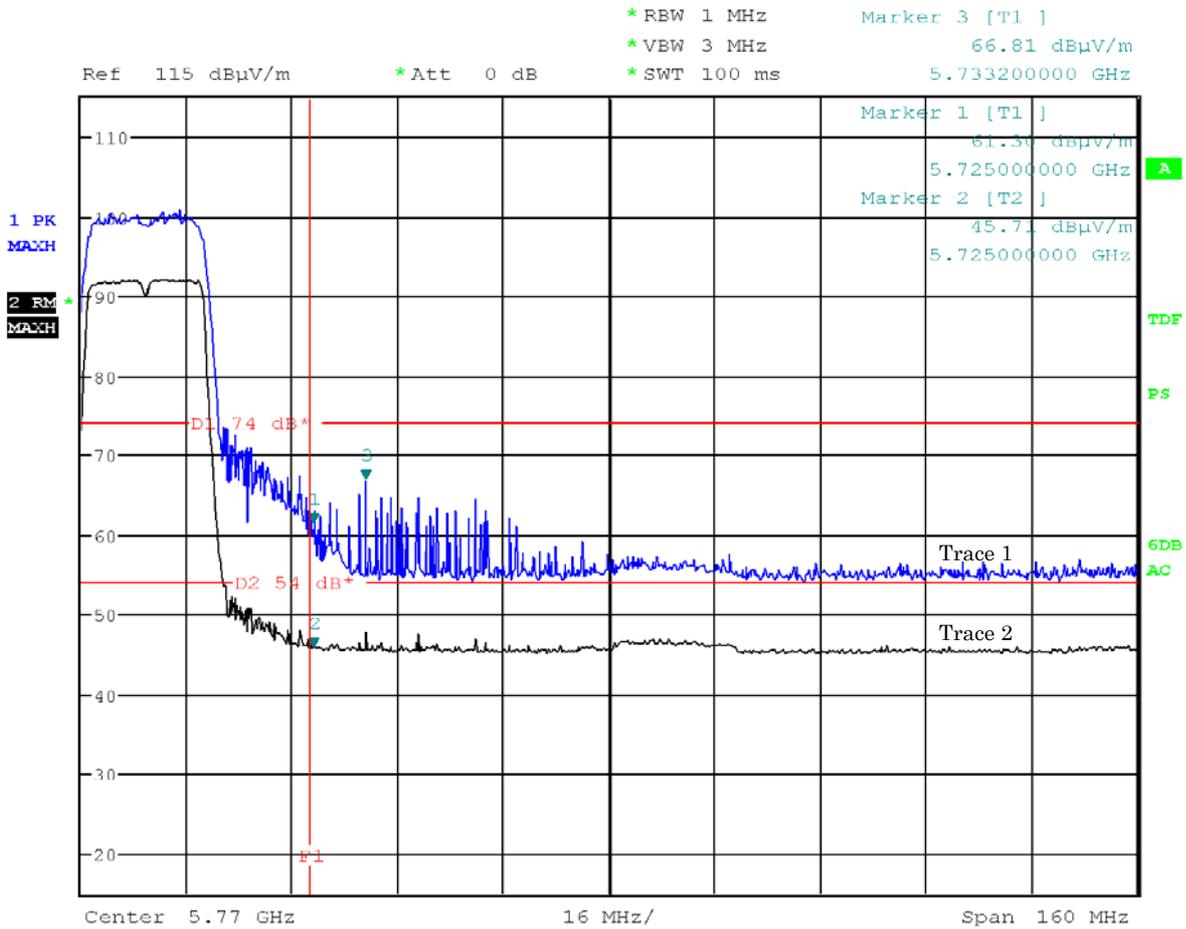

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11 n: 20 MHz, 140ch: 5700 MHz)


Antenna Polarization : Vertical

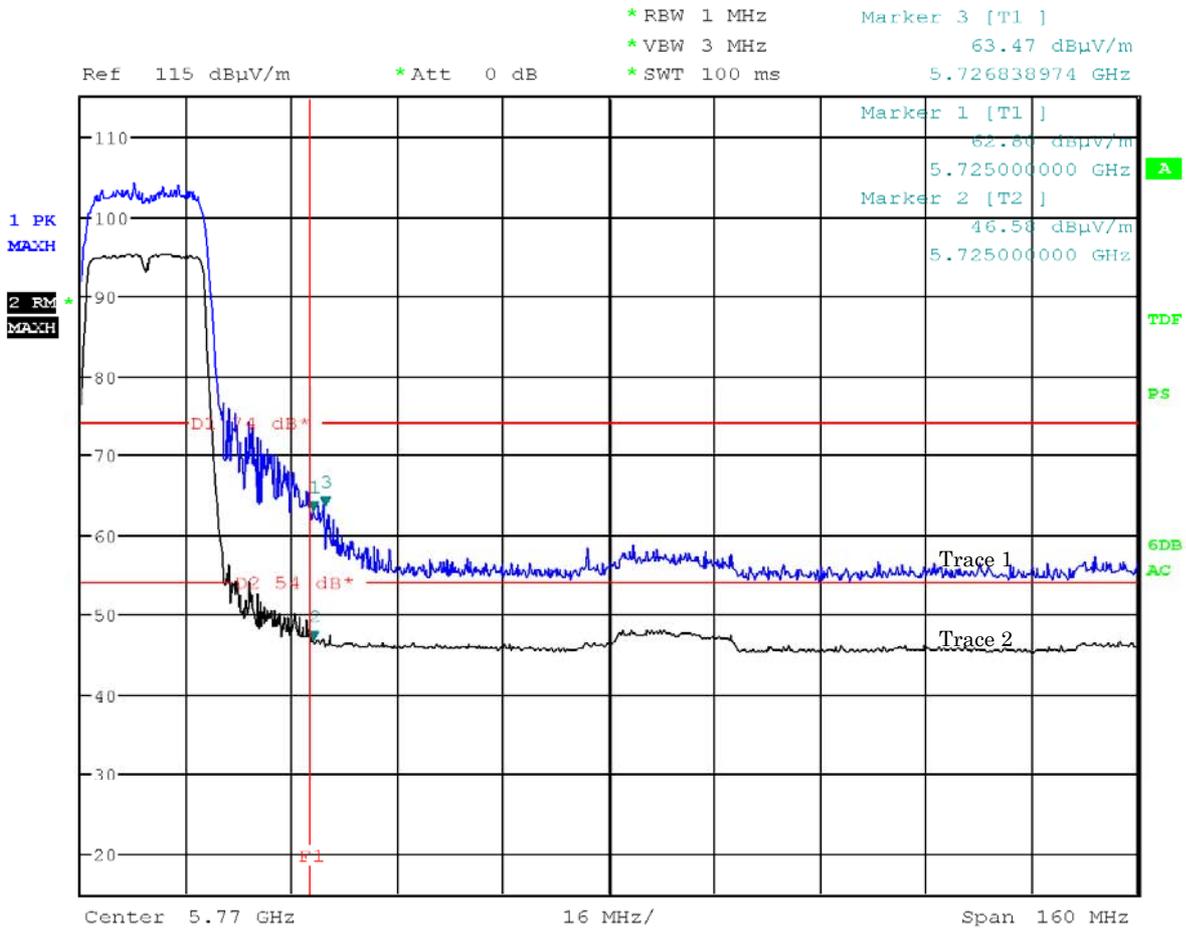

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11n: 40 MHz, 38ch: 5190 MHz)


Antenna Polarization : Vertical

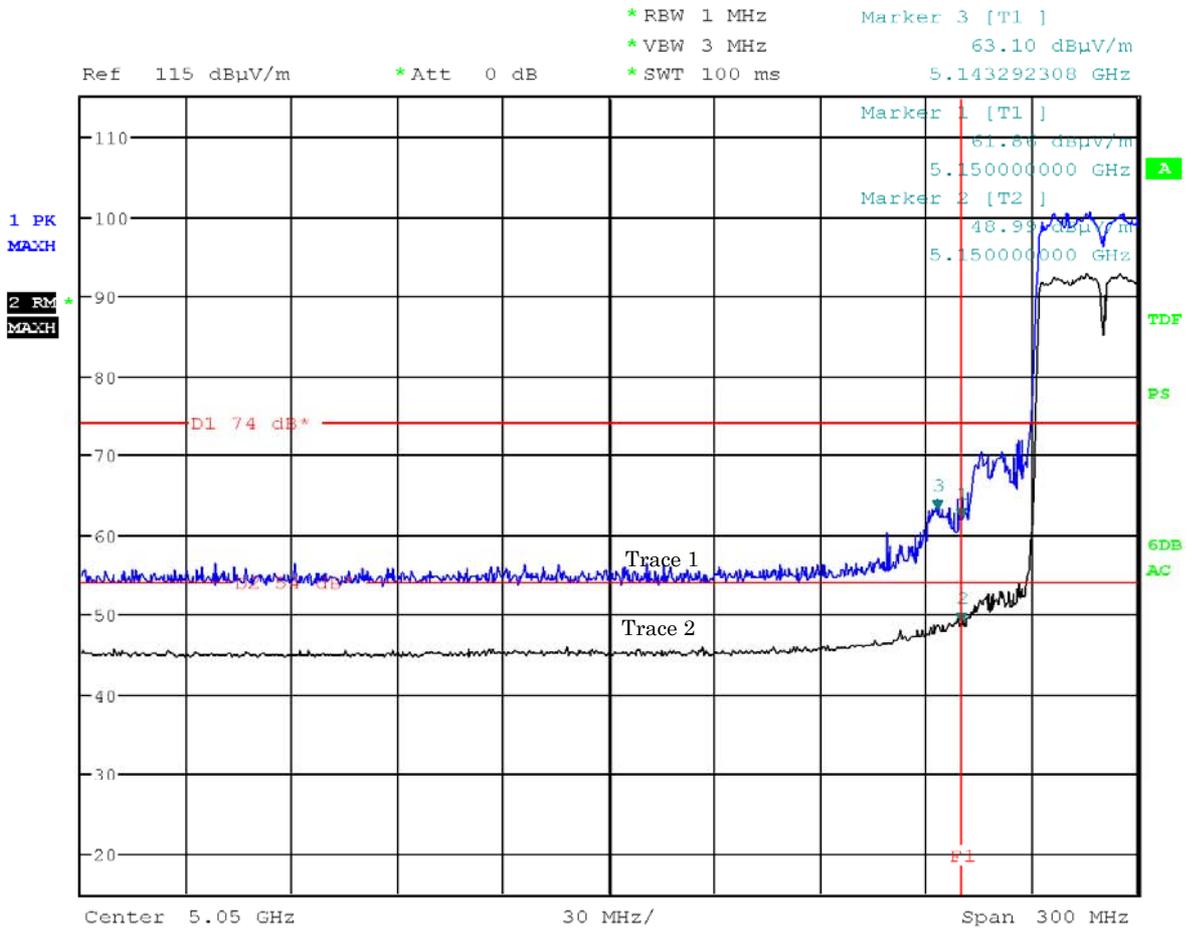

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11n: 40 MHz, 62ch: 5310 MHz)


Antenna Polarization : Horizontal

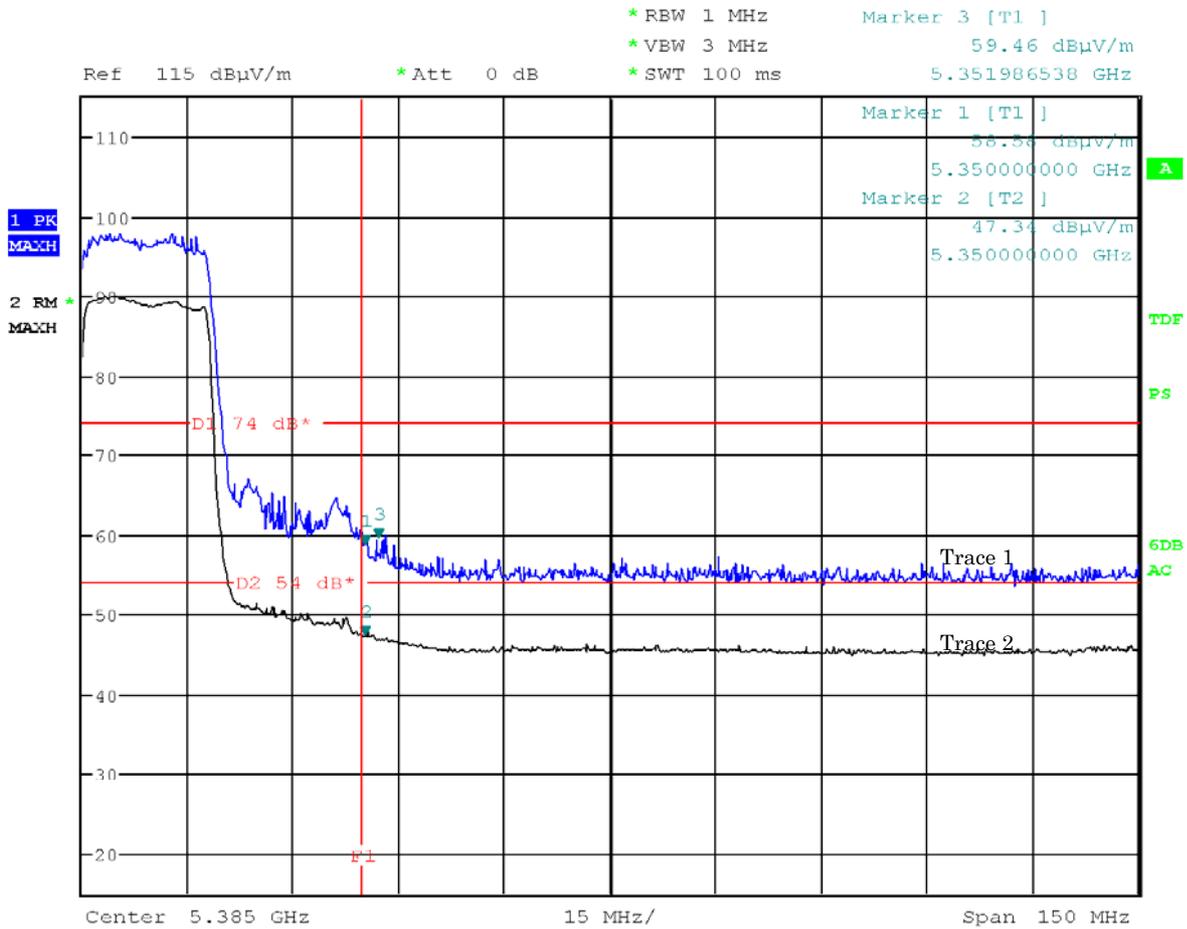

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11n: 40 MHz, 62ch: 5310 MHz)


Antenna Polarization : Vertical

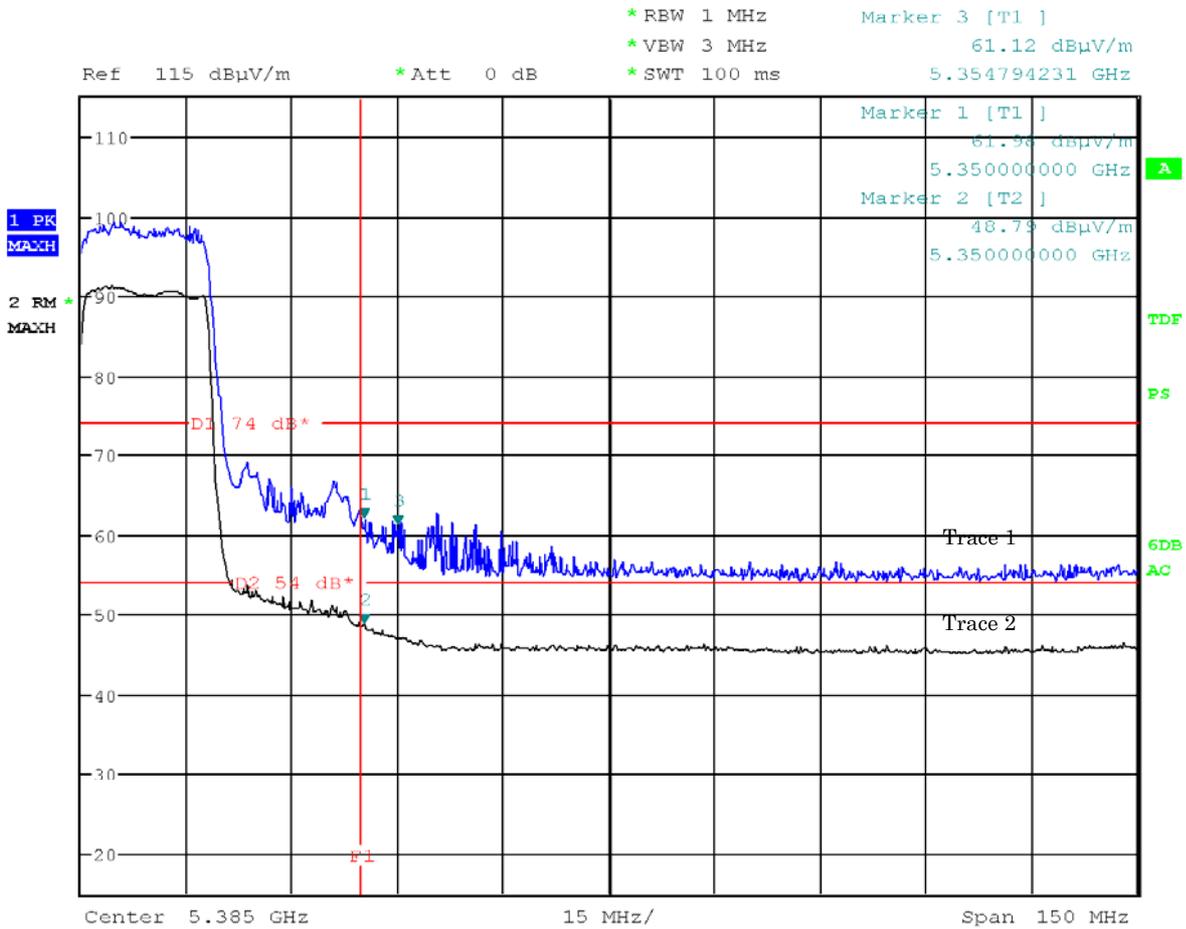

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11n: 40 MHz, 102ch: 5510 MHz)


Antenna Polarization : Horizontal

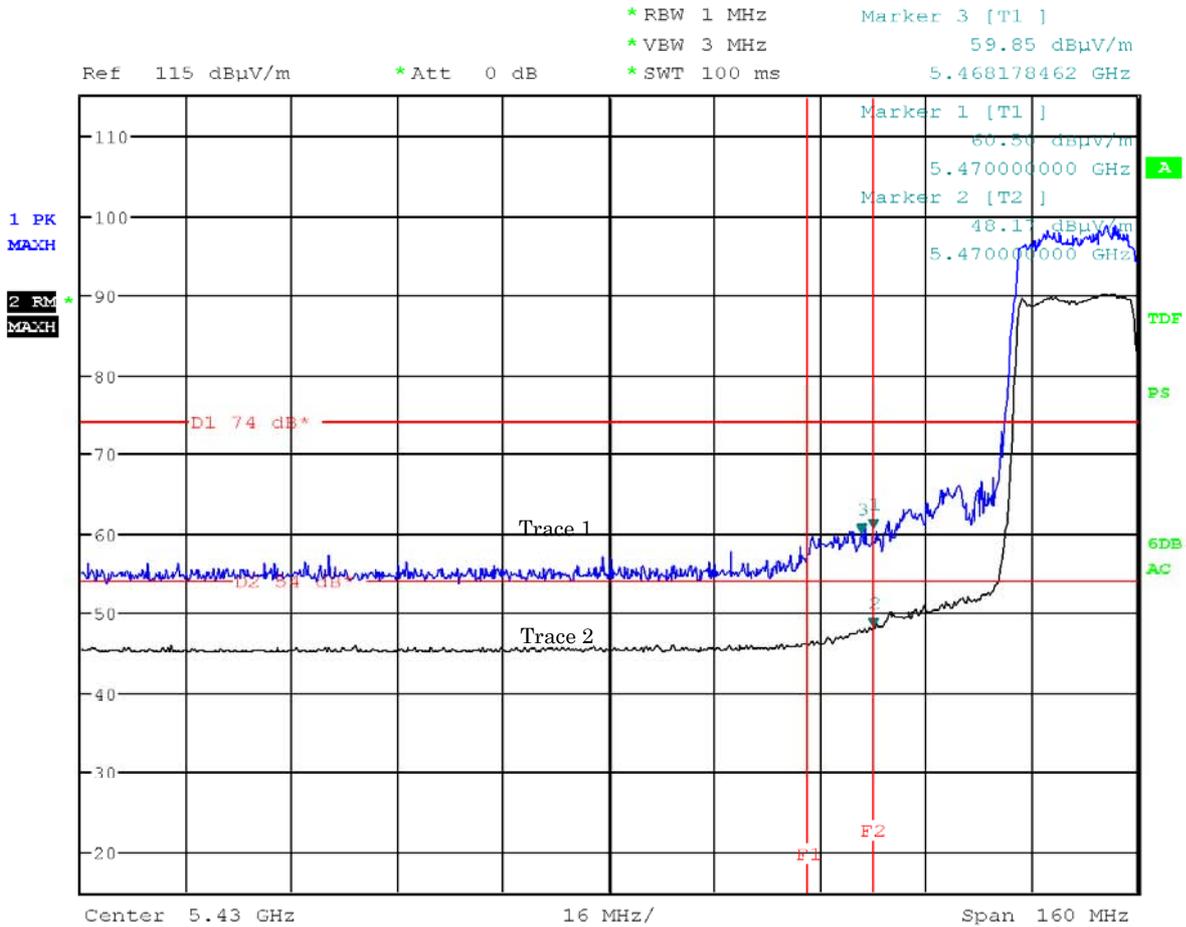

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11n: 40 MHz, 134ch: 5670 MHz)


Antenna Polarization : Horizontal

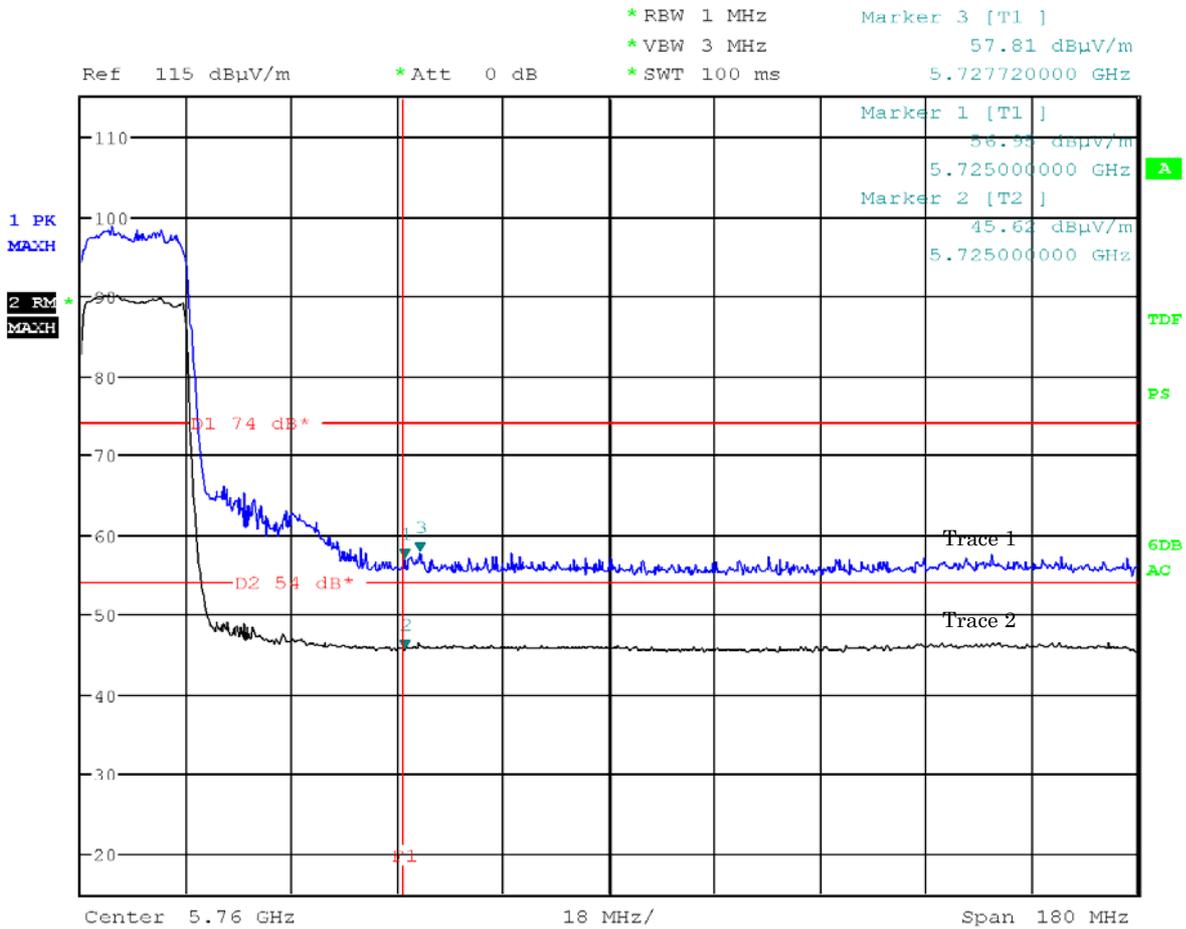

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11n: 40 MHz, 134ch: 5670 MHz)


Antenna Polarization : Vertical

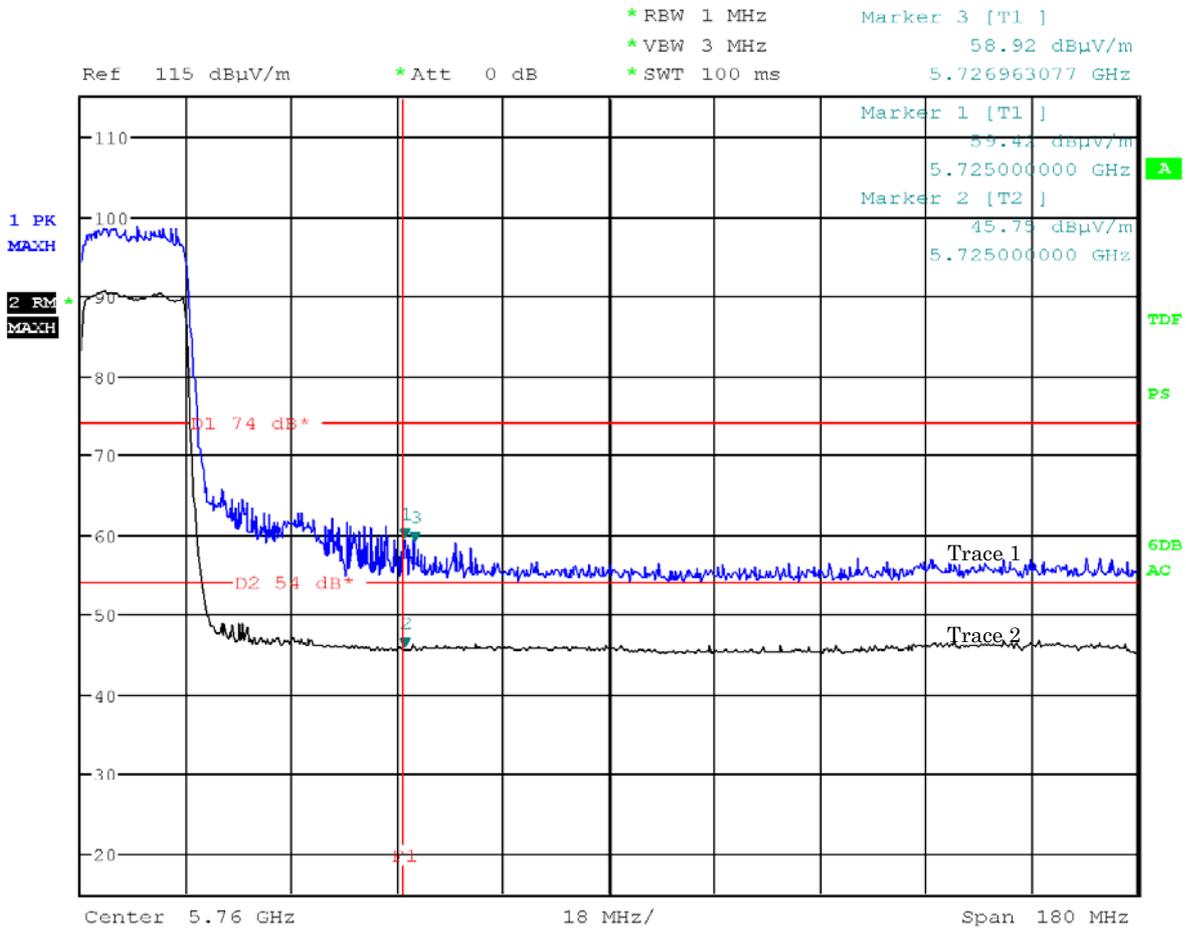

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11ac: 80 MHz, 42ch: 5210 MHz)


Antenna Polarization : Horizontal

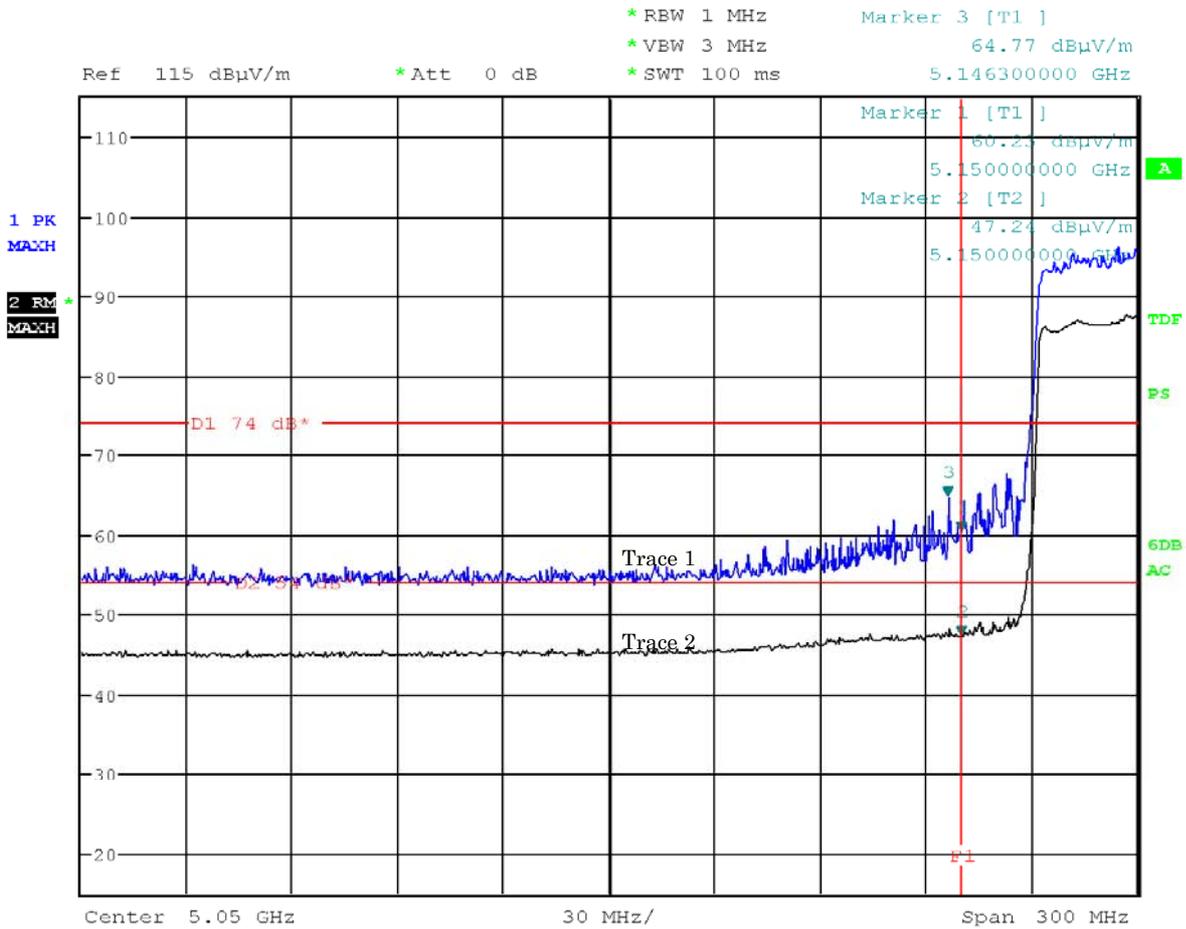

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11ac: 80 MHz, 42ch: 5210 MHz)


Antenna Polarization : Vertical

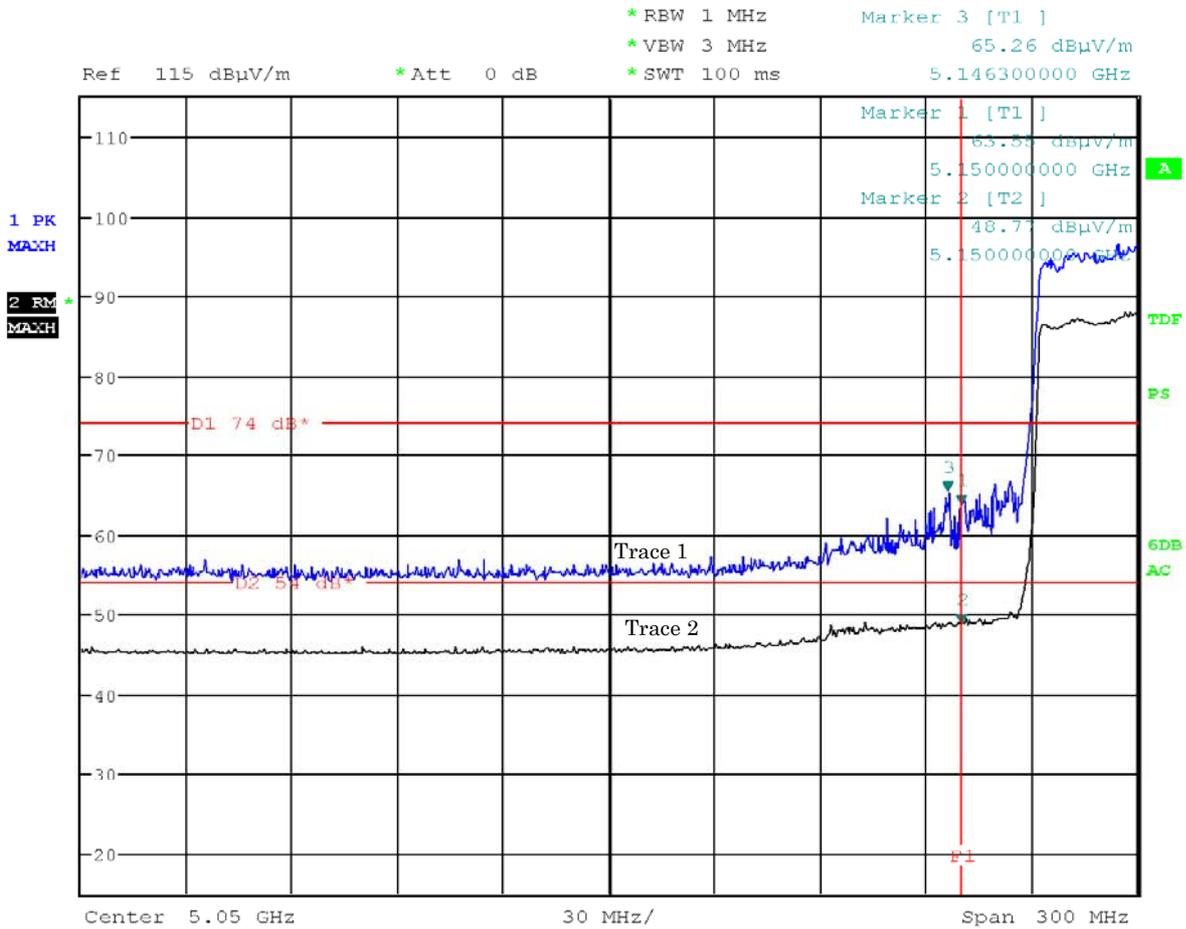

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11ac: 80 MHz, 58ch: 5290 MHz)


Antenna Polarization : Horizontal

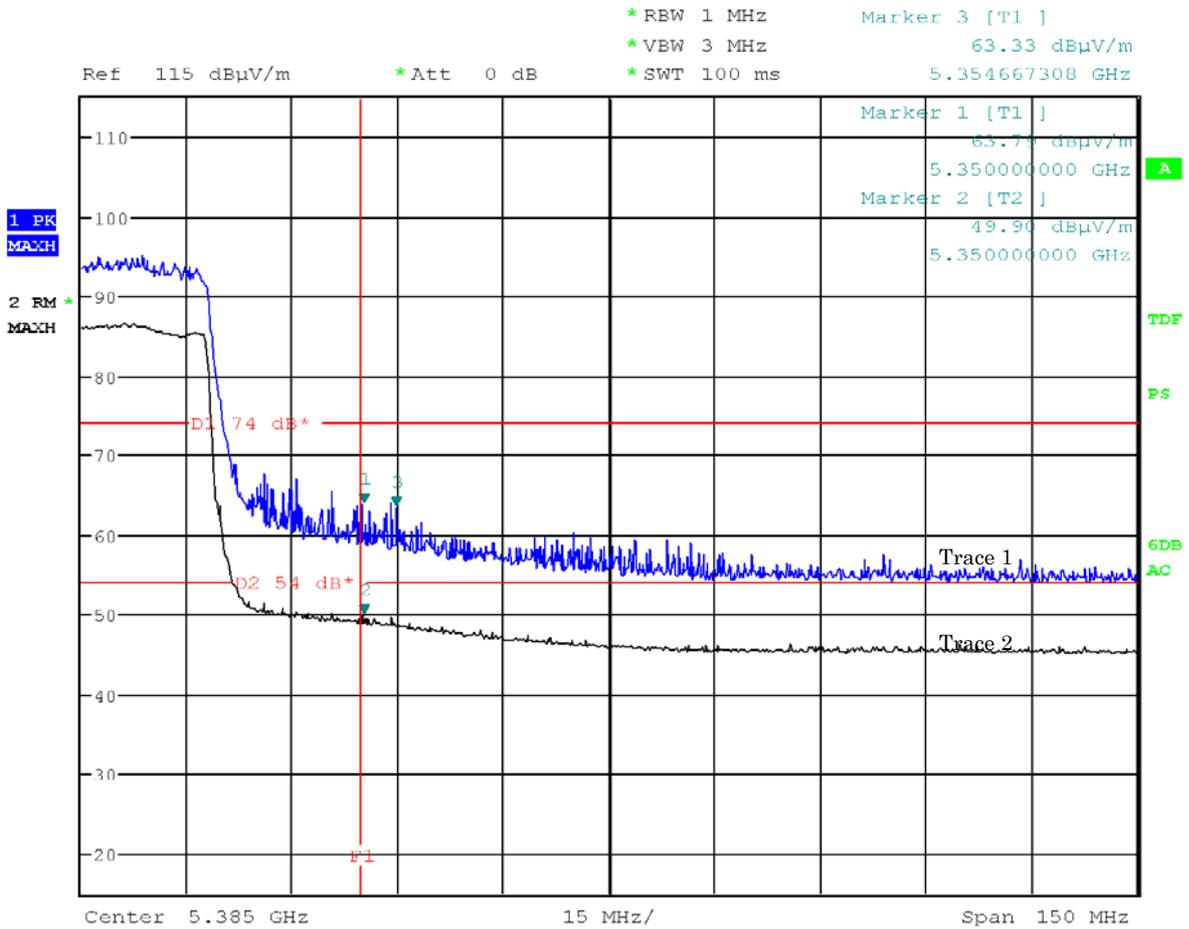

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.


Mode of EUT : TX mode (802.11ac: 80 MHz, 58ch: 5290 MHz)

Antenna Polarization : Vertical

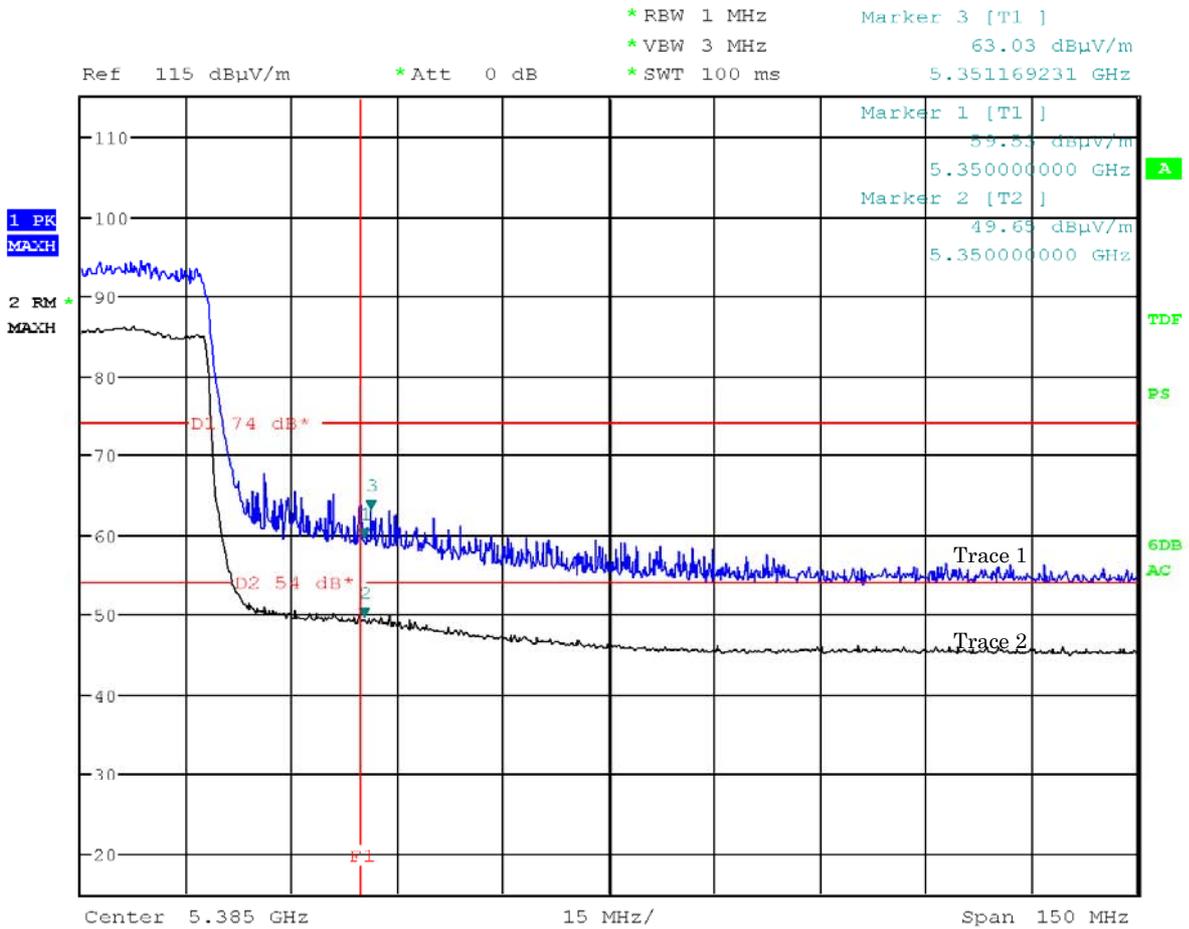

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.


Mode of EUT : TX mode (802.11ac: 80 MHz, 106ch: 5530 MHz)
 Antenna Polarization : Horizontal

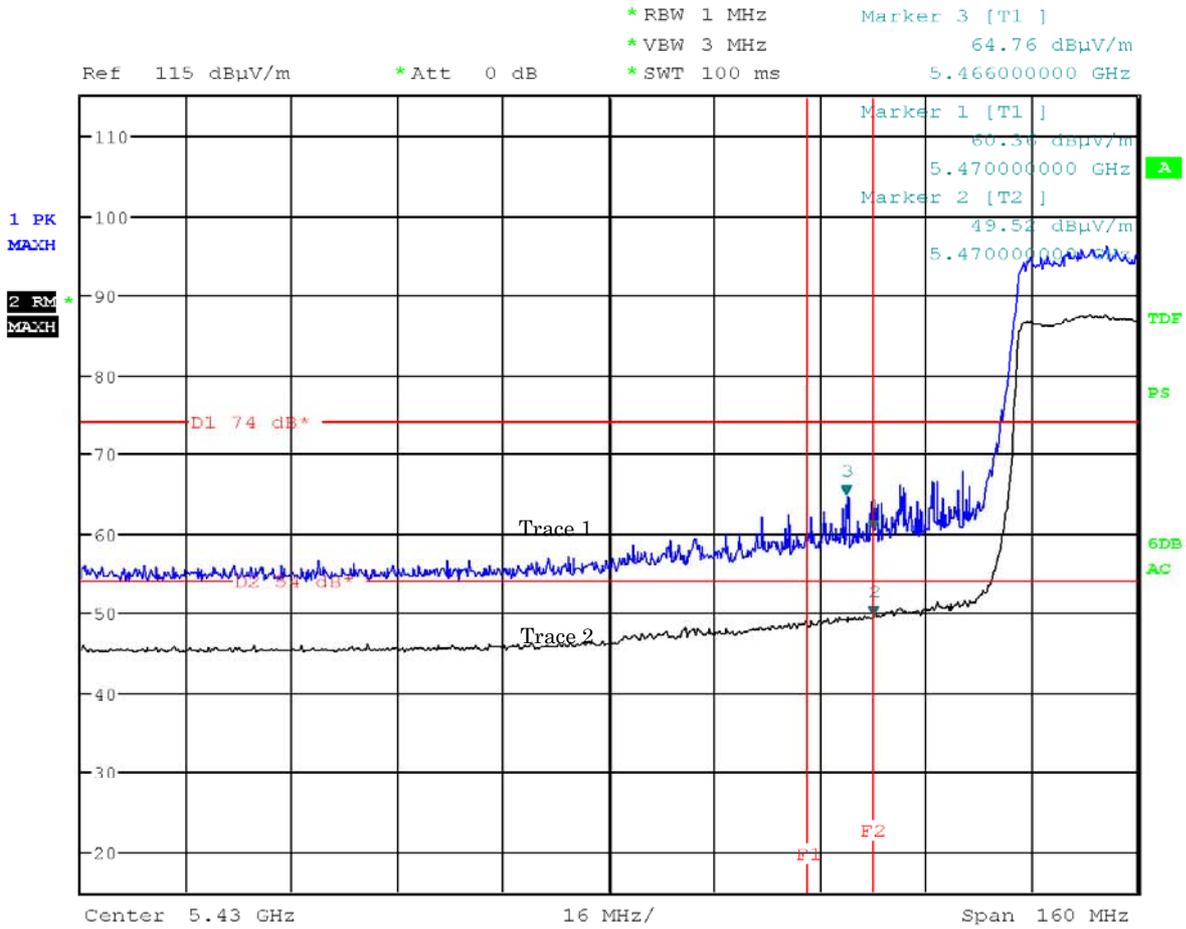

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : TX mode (802.11ac: 80 MHz, 106ch: 5530 MHz)

Antenna Polarization : Vertical

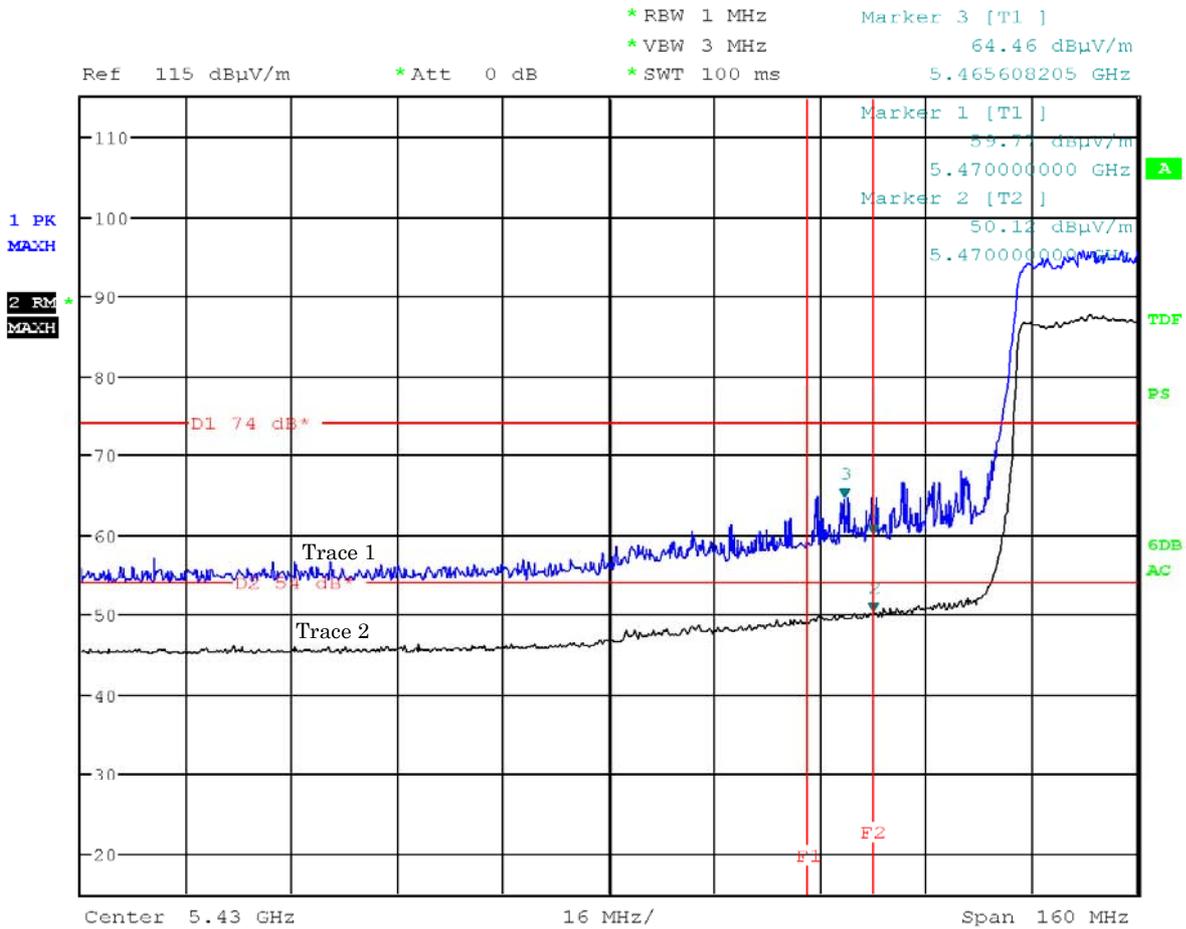

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

7.6.5.2 Unwanted Radiated Emission 9 kHz – 30 MHz

Test Date : May 9, 2013

Temp.:23°C, Humi:42%

Mode of EUT : All mode have been investigated in accordance with clause 6.4 in this report.


Results : No spurious emissions in the range 20dB below the limit.

7.6.5.3 Unwanted Radiated Emission 30 MHz – 1000 MHz

Mode of EUT : All modes have been investigated and the worst case mode for channel (36ch: 5180MHz / IEEE802.11a) has been listed.

Test Date: May 9, 2013
Temp.: 23 °C, Humi: 42 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
<u>36.6</u>	16.2	-27.6	31.9	45.5	40.0	20.5	34.1	+ 5.9	-
46.4	12.6	-27.4	31.0	43.1	40.0	16.2	28.3	+11.7	-
53.4	10.1	-27.3	30.9	41.1	40.0	13.7	23.9	+16.1	-
60.5	8.0	-27.3	39.5	40.2	40.0	20.2	20.9	+19.1	-
220.8	16.9	-25.9	30.3	29.2	46.0	21.3	20.2	+24.7	-
382.2	15.6	-24.9	28.9	< 27.0	46.0	19.6	< 17.7	+26.4	-

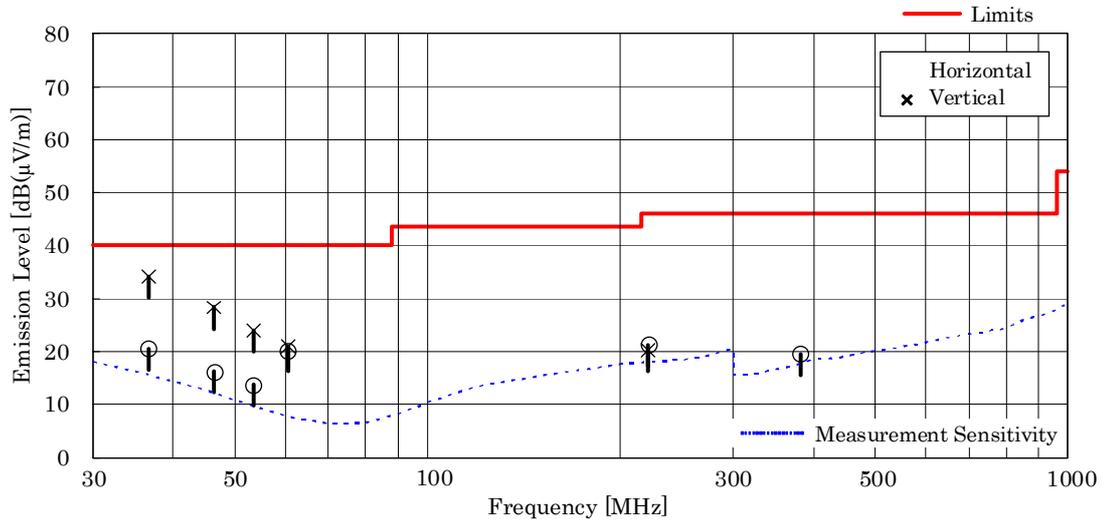

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 36.6 MHz, as the worst point shown on underline:
 Antenna Factor + Cable Loss + Meter Reading = 16.2 + -27.6 + 45.5 = 34.1 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

7.6.5.4 Unwanted Radiated Emission(Above 1 GHz)

7.6.5.4.1 Mode of TX

7.6.5.4.1.1 802.11a Radiated Emission Above 1 GHz data

Mode of EUT : TX mode (802.11a, 5150 - 5250 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 36 Ch												
6906.7	30.0	-20.2	< 40.0	30.0	40.0	< 30.0	74.0	54.0	< 49.8	39.8	+14.2	A/B
10360.0	33.3	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.3	< 37.3	> +16.7	A/B
15540.0	37.1	-26.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.8	< 40.8	> +13.2	A/B
20720.0	40.2	-21.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.5	< 46.5	> + 7.5	A/B
25900.0	40.7	-20.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 58.2	< 48.2	> + 5.8	A/B
31080.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36260.0	43.8	-28.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.2	< 48.2	> + 5.8	A/B
Test condition : Tx 44 Ch												
6959.8	30.0	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.7	< 39.7	> +14.3	A/B
10440.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15660.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
20880.0	40.2	-21.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.6	< 46.6	> + 7.4	A/B
26100.0	40.7	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.8	< 38.8	> +15.2	A/B
31320.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36540.0	44.0	-28.5	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.5	< 48.5	> + 5.5	A/B
Test condition : Tx 48 Ch												
6986.6	29.9	-20.3	< 40.0	30.0	< 40.0	< 30.0	74.0	54.0	< 49.6	39.6	+14.4	A/B
10480.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15720.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
20960.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26200.0	40.6	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.7	< 38.7	> +15.3	A/B
31440.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36680.0	44.0	-28.5	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.5	< 48.5	> + 5.5	A/B

Calculated result at 36540.0 MHz, as the worst point shown on underline:

Antenna Factor = 44.0 dB(1/m)
 Corr. Factor = -28.5 dB
 +) Meter Reading = <33.0 dB(μV)
 Result = <48.5 dB(μV/m)

Minimum Margin: 54.0 - <48.5 = >5.5 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11a, 5250 – 5350 MHz Band)

Test Date: May 10, 2013
 Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
Test condition : Tx 52 Ch												
7013.5	29.9	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.6	< 39.6	> +14.4	A/B
10520.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15780.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
21040.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26300.0	40.6	-29.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.8	< 38.8	> +15.2	A/B
31560.0	43.4	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.5	< 43.5	> +10.5	A/B
36820.0	44.2	-28.4	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.8	< 48.8	> + 5.2	A/B
Test condition : Tx 56 Ch												
7039.9	30.0	-20.2	< 40.0	30.4	< 40.0	< 30.0	74.0	54.0	< 49.8	40.2	+13.8	A/B
10560.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15840.0	37.1	-26.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.6	< 40.6	> +13.4	A/B
21120.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26400.0	40.5	-29.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.7	< 38.7	> +15.3	A/B
31680.0	43.4	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.5	< 43.5	> +10.5	A/B
36960.0	44.0	-28.2	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.8	< 48.8	> + 5.2	A/B
Test condition : Tx 64 Ch												
7093.3	30.0	-20.2	40.0	30.2	< 40.0	< 28.9	74.0	54.0	49.8	40.0	+14.0	A/B
10640.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15960.0	37.1	-26.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.6	< 40.6	> +13.4	A/B
21280.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26600.0	43.2	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.3	< 41.3	> +12.7	A/B
31920.0	43.4	-29.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.6	< 43.6	> +10.4	A/B
37240.0	43.9	-28.0	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.9	< 48.9	> + 5.1	A/B

Calculated result at 37240.0 MHz, as the worst point shown on underline:

Antenna Factor = 43.9 dB(1/m)
 Corr. Factor = -28.0 dB
 +) Meter Reading = <33.0 dB(μV)
 Result = <48.9 dB(μV/m)

Minimum Margin: 54.0 - <48.9 => 5.1 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11a, 5470 – 5725 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 100 Ch												
7333.3	29.9	-19.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B
11000.0	33.4	-25.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.5	< 37.5	> +16.5	A/B
16500.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
22000.0	40.4	-21.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.1	< 47.1	> + 6.9	A/B
27500.0	43.6	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.7	< 41.7	> +12.3	A/B
33000.0	43.7	-29.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.0	< 44.0	> +10.0	A/B
38500.0	43.9	-27.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.3	< 49.3	> + 4.7	A/B
Test condition : Tx 116 Ch												
7439.7	29.9	-19.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.2	< 40.2	> +13.8	A/B
11160.0	33.4	-26.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.3	< 37.3	> +16.7	A/B
16740.0	37.1	-26.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.9	< 40.9	> +13.1	A/B
22320.0	40.4	-21.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.3	< 47.3	> + 6.7	A/B
27900.0	43.6	-30.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	A/B
33480.0	43.6	-29.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.0	< 44.0	> +10.0	A/B
39060.0	44.2	-27.5	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.7	< 49.7	> + 4.3	A/B
Test condition : Tx 140 Ch												
7599.9	29.9	-19.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B
11400.0	33.2	-26.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.0	< 37.0	> +17.0	A/B
17100.0	37.1	-26.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.8	< 40.8	> +13.2	A/B
22800.0	40.3	-21.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.3	< 47.3	> + 6.7	A/B
28500.0	43.4	-30.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.4	< 41.4	> +12.6	A/B
34200.0	43.4	-29.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.1	< 44.1	> + 9.9	A/B
39900.0	44.0	-27.8	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.2	< 49.2	> + 4.8	A/B

Calculated result at 39060.0 MHz, as the worst point shown on underline:

Antenna Factor = 44.2 dB(1/m)
 Corr. Factor = -27.5 dB
 +) Meter Reading = <33.0 dB(μV)
 Result = <49.7 dB(μV/m)

Minimum Margin: 54.0 - <49.7 =>4.3 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

7.6.5.4.1.2 802.11n (20 MHz) Radiated Emission Above 1 GHz data

Mode of EUT : TX mode (802.11n: 20 MHz, 5150 - 5250 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
Test condition : Tx 36 Ch												
6906.7	30.0	-20.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.8	< 39.8	> +14.2	A/B
10360.0	33.3	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.3	< 37.3	> +16.7	A/B
15540.0	37.1	-26.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.8	< 40.8	> +13.2	A/B
20720.0	40.2	-21.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.5	< 46.5	> + 7.5	A/B
25900.0	40.7	-20.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 58.2	< 48.2	> + 5.8	A/B
31080.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36260.0	43.8	-28.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.2	< 48.2	> + 5.8	A/B
Test condition : Tx 44 Ch												
6959.8	30.0	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.7	< 39.7	> +14.3	A/B
10440.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15660.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
20880.0	40.2	-21.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.6	< 46.6	> + 7.4	A/B
26100.0	40.7	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.8	< 38.8	> +15.2	A/B
31320.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36540.0	44.0	-28.5	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.5	< 48.5	> + 5.5	A/B
Test condition : Tx 48 Ch												
6986.6	29.9	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.6	< 39.6	> +14.4	A/B
10480.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15720.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
20960.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26200.0	40.6	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.7	< 38.7	> +15.3	A/B
31440.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36680.0	44.0	-28.5	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.5	< 48.5	> + 5.5	A/B

Calculated result at 36540.0 MHz, as the worst point shown on underline:

Antenna Factor = 44.0 dB(1/m)
 Corr. Factor = -28.5 dB
 +) Meter Reading = <33.0 dB(μV)
 Result = <48.5 dB(μV/m)

Minimum Margin: 54.0 - <48.5 = >5.5 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11n: 20 MHz, 5250 – 5350 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 52 Ch												
7013.5	29.9	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.6	< 39.6	> +14.4	A/B
10520.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15780.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
21040.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26300.0	40.6	-29.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.8	< 38.8	> +15.2	A/B
31560.0	43.4	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.5	< 43.5	> +10.5	A/B
36820.0	44.2	-28.4	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.8	< 48.8	> + 5.2	A/B
Test condition : Tx 56 Ch												
7039.9	30.0	-20.2	< 40.0	30.1	< 40.0	< 30.0	74.0	54.0	< 49.8	39.9	+14.1	A/B
10560.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15840.0	37.1	-26.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.6	< 40.6	> +13.4	A/B
21120.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26400.0	40.5	-29.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.7	< 38.7	> +15.3	A/B
31680.0	43.4	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.5	< 43.5	> +10.5	A/B
36960.0	44.0	-28.2	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.8	< 48.8	> + 5.2	A/B
Test condition : Tx 64 Ch												
7093.3	30.0	-20.2	< 40.0	30.7	< 40.0	< 30.0	74.0	54.0	< 49.8	40.5	+13.5	A/B
10640.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15960.0	37.1	-26.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.6	< 40.6	> +13.4	A/B
21280.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26600.0	43.2	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.3	< 41.3	> +12.7	A/B
31920.0	43.4	-29.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.6	< 43.6	> +10.4	A/B
37240.0	43.9	-28.0	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.9	< 48.9	> + 5.1	A/B

Calculated result at 37240.0 MHz, as the worst point shown on underline:

Antenna Factor = 43.9 dB(1/m)
 Corr. Factor = -28.0 dB
 +) Meter Reading = <33.0 dB(μV)
 Result = <48.9 dB(μV/m)

Minimum Margin: 54.0 - <48.9 = >5.1 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11n: 20 MHz, 5470 – 5725 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 100 Ch												
7333.3	29.9	-19.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B
11000.0	33.4	-25.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.5	< 37.5	> +16.5	A/B
16500.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
22000.0	40.4	-21.3	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.1	< 47.1	> + 6.9	A/B
27500.0	43.6	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.7	< 41.7	> +12.3	A/B
33000.0	43.7	-29.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.0	< 44.0	> +10.0	A/B
38500.0	43.9	-27.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.3	< 49.3	> + 4.7	A/B
Test condition : Tx 116 Ch												
7439.7	29.9	-19.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.2	< 40.2	> +13.8	A/B
11160.0	33.4	-26.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.3	< 37.3	> +16.7	A/B
16740.0	37.1	-26.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.9	< 40.9	> +13.1	A/B
22320.0	40.4	-21.1	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.3	< 47.3	> + 6.7	A/B
27900.0	43.6	-30.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	A/B
33480.0	43.6	-29.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.0	< 44.0	> +10.0	A/B
39060.0	44.2	-27.5	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.7	< 49.7	> + 4.3	A/B
Test condition : Tx 140 Ch												
7599.9	29.9	-19.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B
11400.0	33.2	-26.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.0	< 37.0	> +17.0	A/B
17100.0	37.1	-26.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.8	< 40.8	> +13.2	A/B
22800.0	40.3	-21.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.3	< 47.3	> + 6.7	A/B
28500.0	43.4	-30.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.4	< 41.4	> +12.6	A/B
34200.0	43.4	-29.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.1	< 44.1	> + 9.9	A/B
39900.0	44.0	-27.8	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.2	< 49.2	> + 4.8	A/B

Calculated result at 39060.0 MHz, as the worst point shown on underline:

Antenna Factor	=	44.2 dB(1/m)
Corr. Factor	=	-27.5 dB
+) Meter Reading	=	<33.0 dB(μV)
Result	=	<49.7 dB(μV/m)

Minimum Margin: 54.0 - <49.7 = >4.3 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

7.6.5.4.1.3 802.11n (40 MHz) Radiated Emission Above 1 GHz data

Mode of EUT : TX mode (802.11n: 40 MHz, 5150 - 5250 MHz Band)

Test Date: May 10, 2013
 Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 38 Ch												
6915.3	30.0	-20.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.8	< 39.8	> +14.2	A/B
10380.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15570.0	37.1	-26.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.8	< 40.8	> +13.2	A/B
20760.0	40.2	-21.7	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.5	< 46.5	> + 7.5	A/B
25950.0	40.6	-20.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 58.1	< 48.1	> + 5.9	A/B
31140.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36330.0	43.9	-28.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.3	< 48.3	> + 5.7	A/B
Test condition : Tx 46 Ch												
6973.2	30.0	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.7	< 39.7	> +14.3	A/B
10460.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15690.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
20920.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26150.0	40.6	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.7	< 38.7	> +15.3	A/B
31380.0	43.4	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.5	< 43.5	> +10.5	A/B
36610.0	43.8	-28.5	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.3	< 48.3	> + 5.7	A/B

Calculated result at 36330.0 MHz, as the worst point shown on underline:

Antenna Factor = 43.9 dB(1/m)
 Corr. Factor = -28.6 dB
 +) Meter Reading = <33.0 dB(μV)
 Result = <48.3 dB(μV/m)

Minimum Margin: 54.0 - <48.3 = >5.7 (dB)

NOTES

- Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
- The spectrum was checked from 1 GHz to 40 GHz.
- The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak Detector / AVE : Average Detector
- Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11n: 40 MHz, 5250 – 5350 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 54 Ch												
7026.6	30.0	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.7	< 39.7	> +14.3	A/B
10540.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15810.0	37.1	-26.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.6	< 40.6	> +13.4	A/B
21080.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26350.0	40.5	-29.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.7	< 38.7	> +15.3	A/B
31620.0	43.3	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.4	< 43.4	> +10.6	A/B
36890.0	44.0	-28.3	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.7	< 48.7	> + 5.3	A/B
Test condition : Tx 62 Ch												
7080.3	30.0	-20.2	< 40.0	30.2	< 40.0	30.1	74.0	54.0	< 49.8	40.0	+14.0	A/B
10620.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15930.0	37.1	-26.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.6	< 40.6	> +13.4	A/B
21240.0	40.2	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.7	< 46.7	> + 7.3	A/B
26550.0	43.1	-29.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.3	< 41.3	> +12.7	A/B
31860.0	43.5	-29.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
37170.0	43.9	-28.1	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.8	< 48.8	> + 5.2	A/B

Calculated result at 37170.0 MHz, as the worst point shown on underline:

Antenna Factor	=	43.9 dB(1/m)
Corr. Factor	=	-28.1 dB
+) Meter Reading	=	<33.0 dB(μV)
Result	=	<48.8 dB(μV/m)

Minimum Margin: 54.0 - <48.8 = >5.2 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11n: 40 MHz, 5470 – 5725 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
Test condition : Tx 102 Ch												
7346.6	29.9	-19.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B
11020.0	33.4	-25.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.5	< 37.5	> +16.5	A/B
16530.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
22040.0	40.3	-21.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.1	< 47.1	> + 6.9	A/B
27550.0	43.5	-29.9	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.6	< 41.6	> +12.4	A/B
33060.0	43.7	-29.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.0	< 44.0	> +10.0	A/B
38570.0	44.0	-27.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.4	< 49.4	> + 4.6	A/B
Test condition : Tx 134 Ch												
7559.2	29.9	-19.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B
11340.0	33.3	-26.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.1	< 37.1	> +16.9	A/B
17010.0	37.1	-26.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.9	< 40.9	> +13.1	A/B
22680.0	40.4	-21.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.4	< 47.4	> + 6.6	A/B
28350.0	43.5	-30.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.5	< 41.5	> +12.5	A/B
34020.0	43.5	-29.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.2	< 44.2	> + 9.8	A/B
39690.0	44.4	-27.7	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.7	< 49.7	> + 4.3	A/B

Calculated result at 39690.0 MHz, as the worst point shown on underline:

Antenna Factor	=	44.4 dB(1/m)
Corr. Factor	=	-27.7 dB
+) Meter Reading	=	<33.0 dB(μV)
Result	=	<49.7 dB(μV/m)

Minimum Margin: 54.0 - <49.7 = >4.3 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

7.6.5.4.1.4 802.11ac (80 MHz) Radiated Emission Above 1 GHz data

Mode of EUT : TX mode (802.11ac: 80 MHz, 5150 - 5250 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 42 Ch												
6959.9	30.0	-20.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.7	< 39.7	> +14.3	A/B
10420.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15630.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
20840.0	40.2	-21.6	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.6	< 46.6	> + 7.4	A/B
26050.0	40.6	-20.4	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 58.2	< 48.2	> + 5.8	A/B
31260.0	43.6	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.7	< 43.7	> +10.3	A/B
36470.0	44.0	-28.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.4	< 48.4	> + 5.6	A/B

Calculated result at 36470.0 MHz, as the worst point shown on underline:

Antenna Factor	=	44.0 dB(1/m)
Corr. Factor	=	-28.6 dB
+) Meter Reading	=	<33.0 dB(μV)
Result	=	<48.4 dB(μV/m)

Minimum Margin: 54.0 - <48.4 = >5.6 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11ac: 80 MHz, 5250 – 5350 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
Test condition : Tx 58 Ch												
7053.9	30.0	-20.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.8	< 39.8	> +14.2	A/B
10580.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
15870.0	37.1	-26.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.6	< 40.6	> +13.4	A/B
21160.0	40.1	-21.5	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 56.6	< 46.6	> + 7.4	A/B
26450.0	40.4	-29.8	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 48.6	< 38.6	> +15.4	A/B
31740.0	43.5	-29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 53.6	< 43.6	> +10.4	A/B
37030.0	44.0	-28.2	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 58.8	< 48.8	> + 5.2	A/B

Calculated result at 37030.0 MHz, as the worst point shown on underline:

Antenna Factor	=	44.0 dB(1/m)
Corr. Factor	=	-28.2 dB
+) Meter Reading	=	<33.0 dB(μV)
Result	=	<48.8 dB(μV/m)

Minimum Margin: 54.0 - <48.8 = >5.2 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : TX mode (802.11ac: 80 MHz, 5470 – 5725 MHz Band)

Test Date: May 10, 2013
Temp.: 24 °C, Humi: 40 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
Test condition : Tx 106 Ch												
7373.3	29.9	-19.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B
11060.0	33.4	-26.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 47.4	< 37.4	> +16.6	A/B
16590.0	37.1	-26.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.7	< 40.7	> +13.3	A/B
22120.0	40.4	-21.2	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 57.2	< 47.2	> + 6.8	A/B
27650.0	43.5	-30.0	< 38.0	< 28.0	< 38.0	< 28.0	74.0	54.0	< 51.5	< 41.5	> +12.5	A/B
33180.0	43.7	-29.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 54.0	< 44.0	> +10.0	A/B
38710.0	44.0	-27.6	< 43.0	< 33.0	< 43.0	< 33.0	74.0	54.0	< 59.4	< 49.4	> + 4.6	A/B

Calculated result at 38710.0 MHz, as the worst point shown on underline:
 Antenna Factor = 44.0 dB(1/m)
 Corr. Factor = -27.6 dB
 +) Meter Reading = <33.0 dB(μV)
 Result = <49.4 dB(μV/m)
 Minimum Margin: 54.0 - <49.4 = >4.6 (dB)

NOTES

1. Test Distance : 3 m (1 GHz to 26 GHz) / 1m (26 GHz to 40 GHz)
2. The spectrum was checked from 1 GHz to 40 GHz.
3. The correction factor is shown as follows:
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (18 - 26GHz)
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain - Distance Factor [dB] (over 26GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

7.7 Dynamic Frequency Selection

For the requirements, - Applicable - Tested. - Not tested by applicant request.]
 - Not Applicable

For the limits, - Passed - Failed - Not judged

7.7.1 Test Result and Measurement Uncertainty

7.7.1.1 Channel Moving Time (Limit : < 10 sec.)

802.11n 20 MHz	<u>0.130</u>	sec.	at	5500 MHz
802.11n 40 MHz	<u>0.070</u>	sec.	at	5510 MHz

7.7.1.2 Channel Closing Transmission Time (Limit : < 60 msec.)

802.11n 20 MHz	<u>0.000</u>	msec.	at	5500 MHz
802.11n 40 MHz	<u>0.000</u>	msec.	at	5510 MHz

7.7.1.3 Non-occupancy Period (Limit : ≥ 30 min.)

802.11n 20 MHz	<u>> 30</u>	min.	at	5500 MHz
802.11n 40 MHz	<u>> 30</u>	min.	at	5510 MHz

Uncertainty of Measurement Results +/- 0.6 %

Remarks : The EUT is a client without radar detection therefore applicable requirements are only the above. Test was performed using a radar type 1. The Master device does not have capability of operating at 80MHz Channel BW, therefore tests were performed with the operating mode of 20MHz/40MHz BW. (Refer to the KDB publication 848637.)

7.7.2 Test Site

KITA-KANSAI Testing Center

Test site : SAITO

<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

7.7.3 Test Instruments

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2012/9	1 Year
Vector Signal Generator	MG3710A	Anritsu	B41	2012/9	1 Year
Horn Antenna(*1)	3160-05	EMCO	C-56	2011/6	2 Years
Double-Ridge Guide Horn Antenna(*2)	TR17206	ADVANTEST	C-29	2012/6	1 Year
RF Cable(*1)	SUCOFLEX104	SUHNER	C-67	2013/1	1 Year
RF Cable(*2)	SUCOFLEX102E	SUHNER	C-70	2012/11	1 Year

- (*1) Radar Antenna and the cable
- (*2) Monitor Antenna and the cable

7.7.4 Test Method and Test Setup (Diagrammatic illustration)

The Dynamic Frequency Selection(DFS) measurements were carried out in accordance with FCC Part 15.407(h) and FCC 06-96 Appendix “ COMPLIANCE MEASUREMENT PROCEDURES FOR UNII DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION”.

7.7.4.1 DFS Detection Threshold and DFS Response Requirement

DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1 and 2)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Table 4: DFS Response Requirement Values

Parameter	Value
Non-Occupancy Period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds (See Note 1.)
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. (See Notes 1 and 2.)
U-NII Detection Bandwidth	Minimum 80% of the U-NII 99% transmission power bandwidth. (See Note 3.)
<p>Note 1: The instant that the Channel Move Time and the Channel Closing Transmission Time begins is as follows:</p> <ul style="list-style-type: none"> • For the Short Pulse Radar Test Signals this instant is the end of the Burst. • For the Frequency Hopping radar Test Signal, this instant is the end of the last radar Burst generated. • For the Long Pulse Radar Test Signal this instant is the end of the 12 second period defining the Radar Waveform. <p>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the U-NII Detection Bandwidth detection test, radar type 1 is used and for each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

7.7.4.2 Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. For Short Pulse Radar Type 1, the same waveform is used a minimum of 30 times. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. The aggregate is the average of the percentage of successful detections of Short Pulse Radar Types 1-4.

Long Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Number of Pulses per <i>Burst</i>	Number of <i>Bursts</i>	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50-100	5-20	1000-2000	1-3	8-20	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms. Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the random time interval between the first and second pulses is chosen independently of the random time interval between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.


Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (µsec)	PRI (µsec)	Pulses per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

7.7.4.3 Rader Waveform Calibration

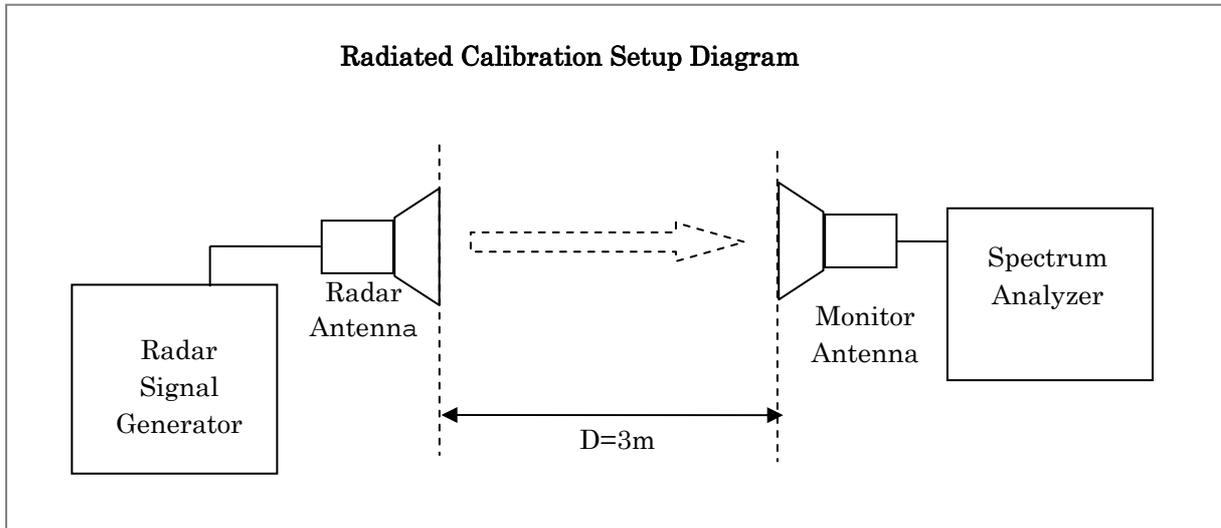

The EUT is the client device without radar detection, then master device is a RDD. Therefore the radar test signal level is set at the Radar Detection Threshold Level of master device.

The Radar Detection Threshold Level is employed $-64\text{dBm} + 1\text{dB} = -63\text{ dBm}$ at the antenna port.


Where the antenna gain of master device is X dBi then the threshold level is corrected as $-63 - X$ dBm (Rated output power and Antenna Gain of the master device is described in EUT Description).

The spectrum analyzer is connected to the monitor antenna via a coaxial cable. The antenna is set vertical polarization for testing. The reference level offset of a spectrum analyzer set to "Monitoring Antenna Gain – Cable loss". The Radar Signal Generator is set to CW output mode and the signal level is adjusted to $-63 - X$ dBm on the spectrum analyze setting as below;

- Frequency: Radar Signal Frequency
- Span: Zero Span(Time Domain)
- RBW/VBW: 3 MHz
- Detection: Peak

The spectrum analyzer plots of the calibrated radar waveform on the Channel frequency is attached in clause 7.7.5.1 in this report.

7.7.4.4 Test Setup and Operation Radiated Method

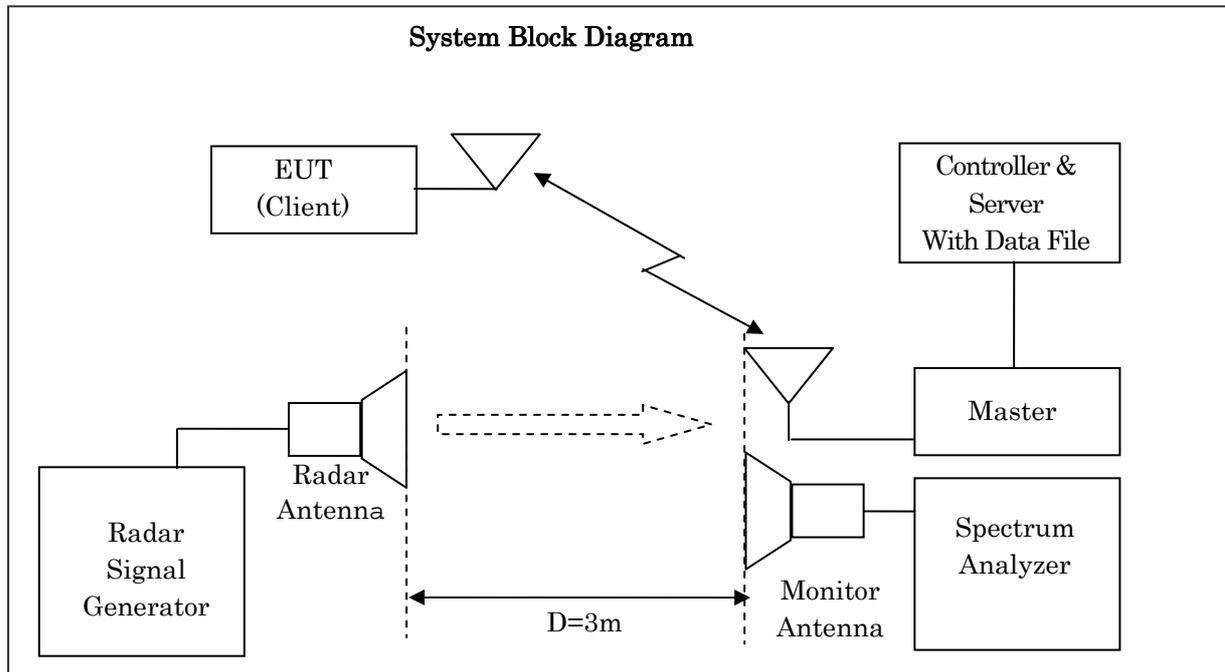

Support Equipment: The following support equipment was used for in this DFS testing

Item	Manufacturer	Model No.	Serial No.	FCC ID
Wireless Access Point	Cisco	AIR-AP1042N-A-K9	FTX1637E2NC	LDK102070
AC Adaptor for AP	Cisco	AA2548L	ALD0516GFDA	N/A
PC(Controller/Server)	HP Compaq	D330 uT	JPA42500TB	DoC

Used Test File and Displayed Traffic Level Adjustment:

The test is performed with the designated MPEG test file that is streamed from the access point to the client in full motion video mode using the media player with the V2.61 Codec package. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.

By control PC, the radio link is established between the master and slave and the test file in saver(PC) is streamed via master(access point) to generate WLAN traffic.

The monitoring antenna is adjusted so that the WLAN traffic level on the spectrum analyzer is lower than the radar detection threshold level.

The spectrum analyzer plots of the slave(EUT) data traffic plot is attached in clause 7.7.5.2 and the nominal noise floor plots is attached in clause 7.7.5.3 in this report.

7.7.4.5 Description of EUT

Item	Specification
Operating Frequency(MHz)	5150 to 5250 / 5250 to 5350 / 5470 to 5725
Operating Mode of EUT	Client(Slave) Device without Radar Detection
FCC ID for Master Device(*1)	LDK102070 (Antenna Gain: 3.0 dBi)
Antenna Type of EUT	Inverted-L Type Antenna
Highest Power Level(EIRP)/ Antenna Gain of EUT	802.11a/n/ac 14.0 dBm Max. 802.11n/ac(40 MHz BW) 14.0 dBm Max. 802.11ac(80 MHz) 14.0 dBm Max. Antenna Gain: 0 dBi
System Architecture	IEEE802.11 a/n/ac, IP based system
TPC Description	N/A(Not Required EIRP below 500 mW)
Data Rate/ Channel Bandwidth	Refer below table.
Power-on Cycle	N/A(No Channel Availability Check Function)

(*1) The rated output power of the master device is greater than 20dBm(EIRP), then the interference threshold level is employed -64 dBm. After correction for procedural adjustments, the radiated threshold level at the master device is $-64 + 1 - 3 \text{ dBi}(\text{Master antenna Gain}) = -66 \text{ dBm}$.

Data Rate/ Channel Bandwidth

IEEE802.11 a			IEEE802.11 n		
Modulation	Data Rate (Mbps)	Channel Bandwidth (MHz)	Modulation	Data Rate(Mbps)	
				Channel Bandwidth(MHz)	
				20	40
BPSK	6	20	BPSK	6.5	13.5
BPSK	9	20	QPSK	13.0	27.0
QPSK	12	20	QPSK	19.5	40.5
QPSK	18	20	16-QAM	26.0	54.0
16-QAM	24	20	16-QAM	39.0	81.0
16-QAM	36	20	64-QAM	52.0	108.0
64-QAM	48	20	64-QAM	58.5	121.5
64-QAM	54	20	64-QAM	65.0	135.0
IEEE802.11 ac					
Modulation	Data Rate(Mbps)				
	Channel Bandwidth(MHz)				
	20	40	80		
BPSK	6.5	13.5	29.3		
QPSK	13.0	27.0	58.5		
QPSK	19.5	40.5	87.8		
16-QAM	26.0	54.0	117.0		
16-QAM	39.0	81.0	175.5		
64-QAM	52.0	108.0	234.0		
64-QAM	58.5	121.5	263.3		
64-QAM	65.0	135.0	292.5		
256-QAM	78.0	162.0	351.0		
256-QAM	N/A	180.0	390.0		

7.7.4.6 Deviation to the procedures and equipment from the standards:



There is no deviation from FCC Rule and FCC 06-96.

7.7.5 Test Data



Test Date : May 9, 2013

Temp.: 25°C, Humi: 25%



7.7.5.1 Radar Waveform Calibration Results (Type 1 Short Pulse)

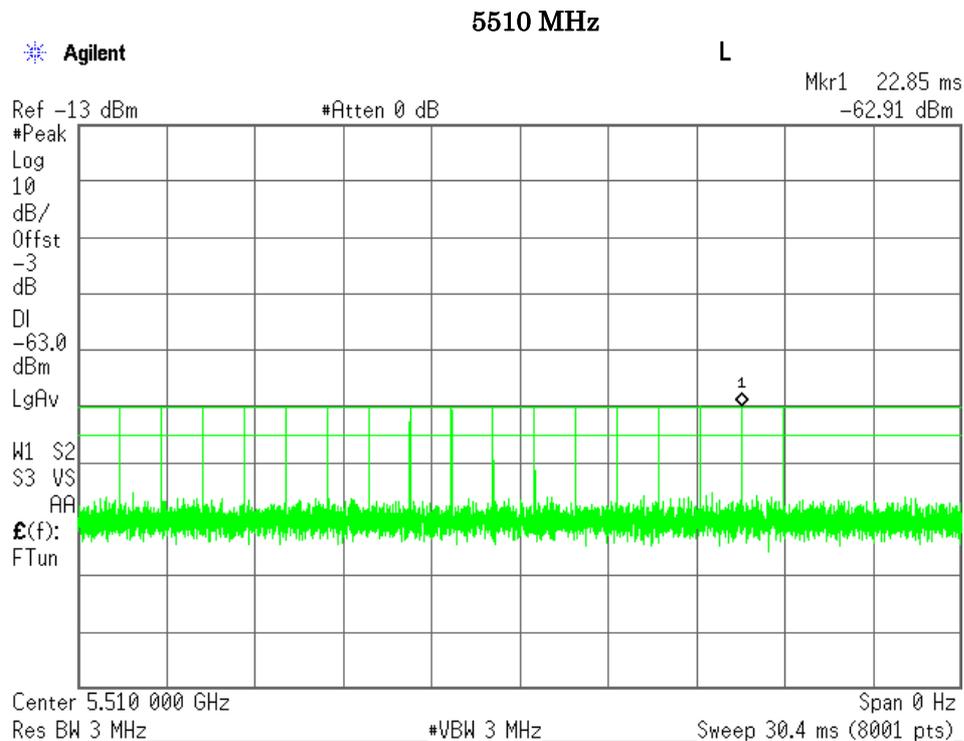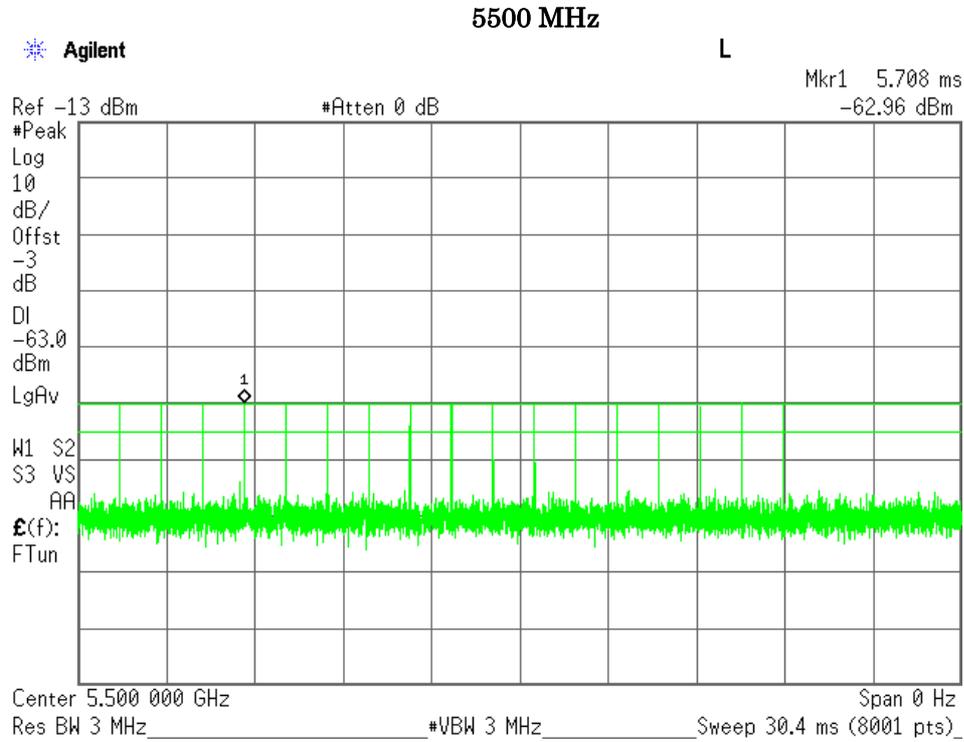

7.7.5.2 EUT (Slave) Traffic Plots

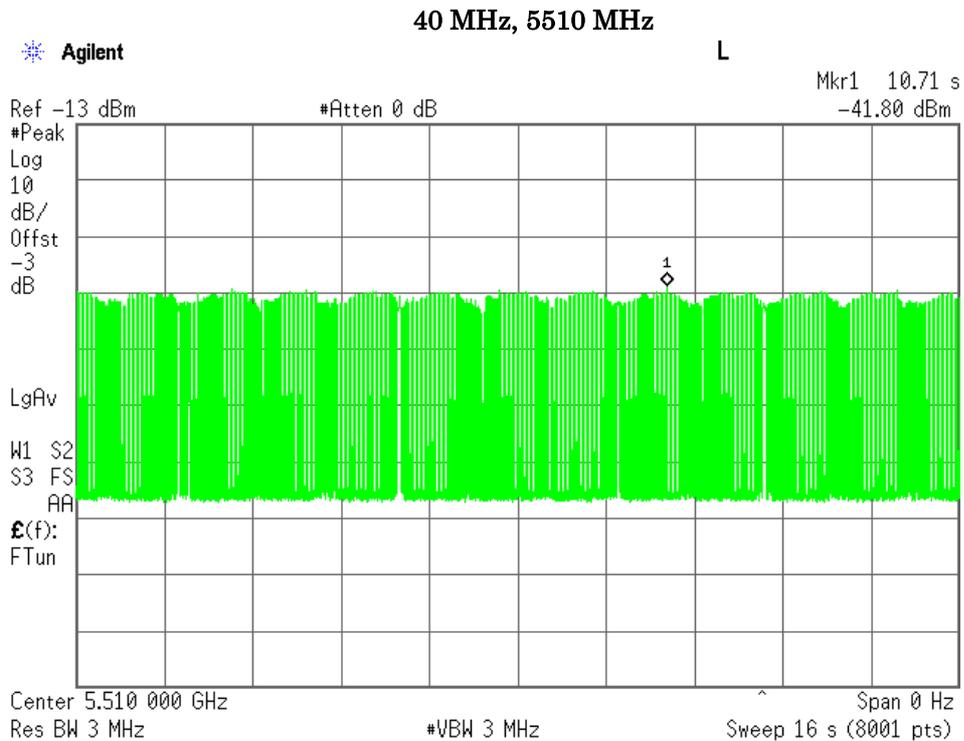
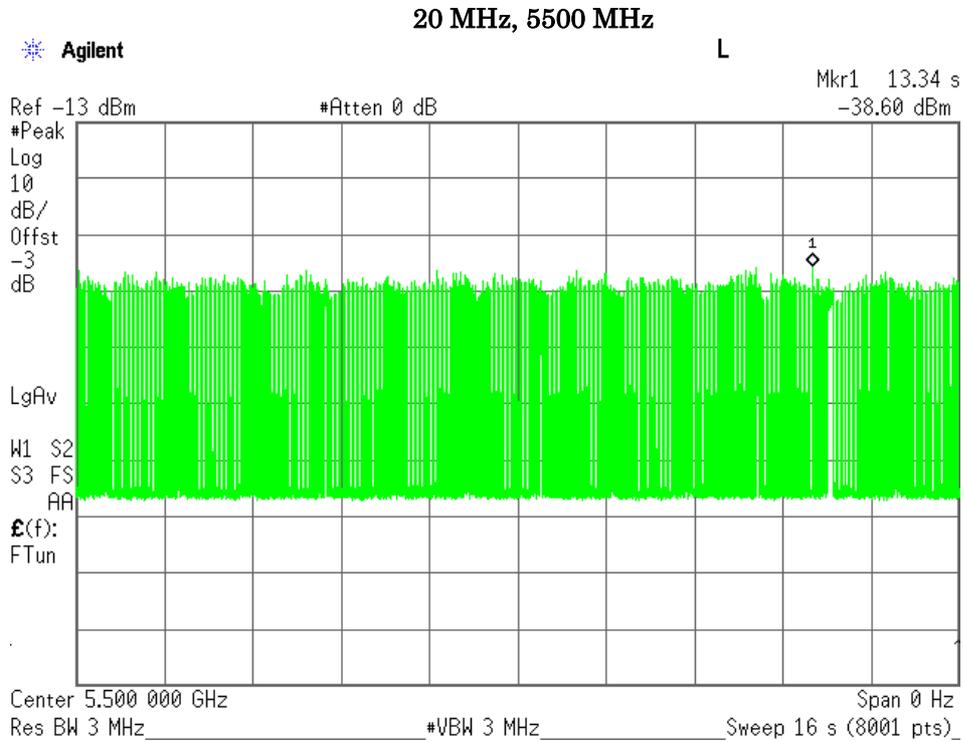


7.7.5.3 No Traffic (Noise Floor) Plots

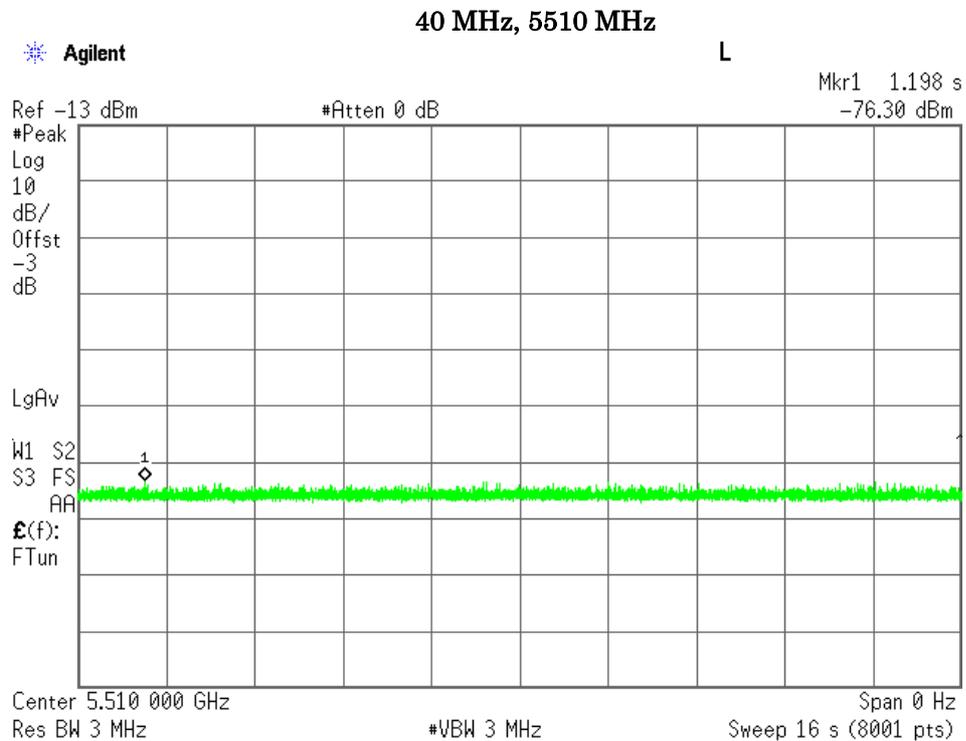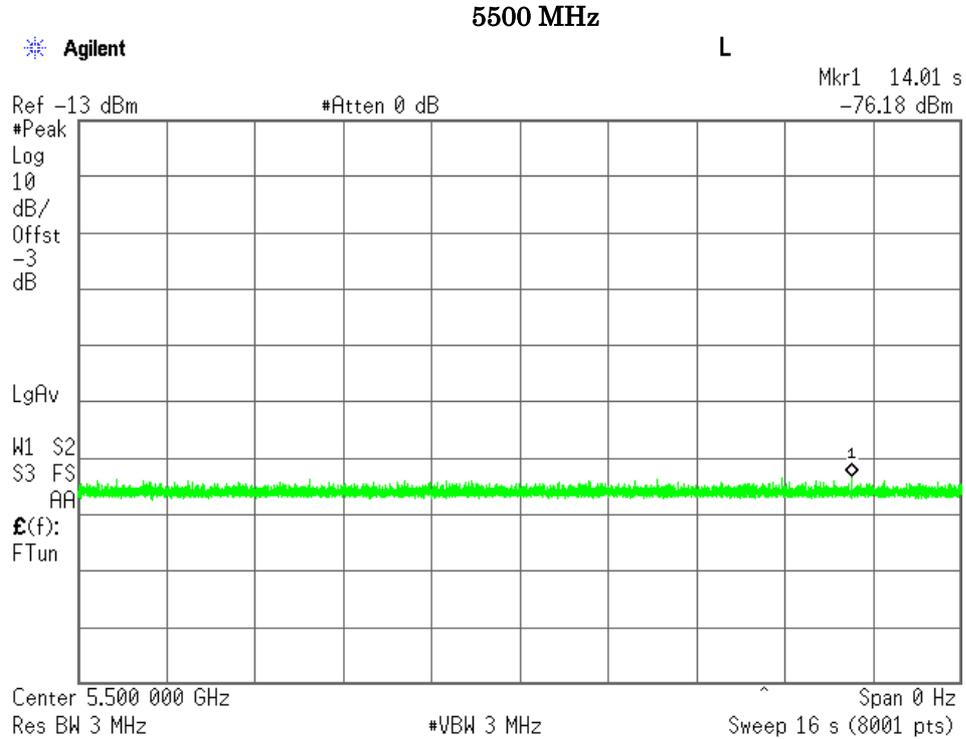

7.7.5.4 Channel Move Time

The channel move time is measured using delta-marker function of the spectrum analyzer. The reference marker is adjusted at the end of radar pulse and the delta marker is adjusted at the end the WLAN transmission. The displayed delta value is the result of move time. It shall be within the 10 seconds. The measurements are carried out 802.11 n CH.100 (5500MHz)/ 20 MHz and CH.102(5510 MHz)/ 40 MHz.

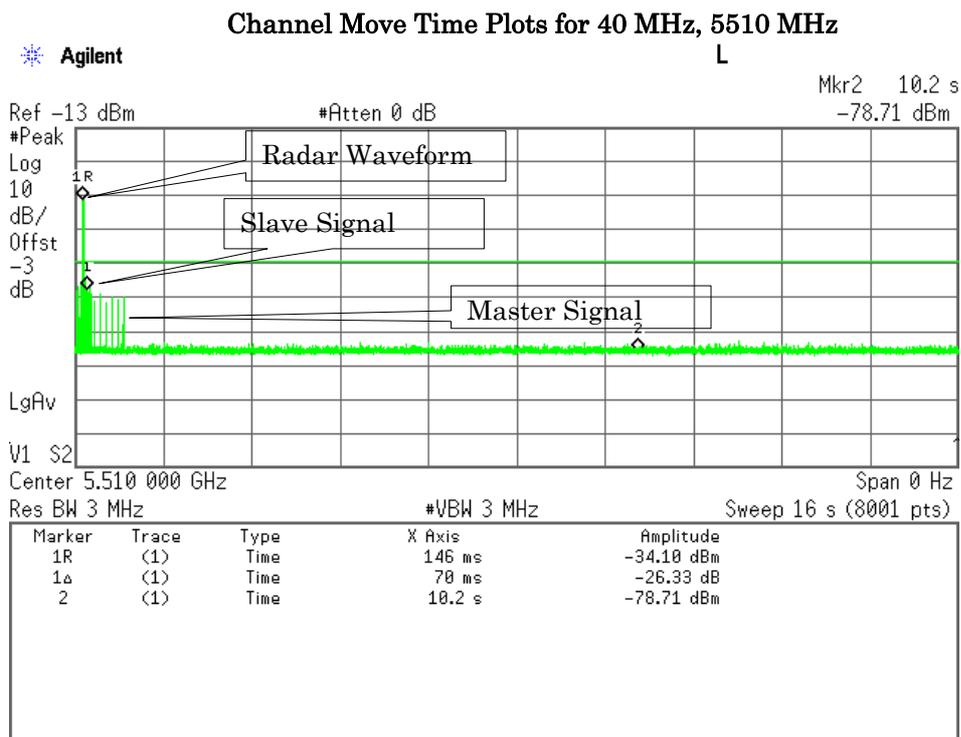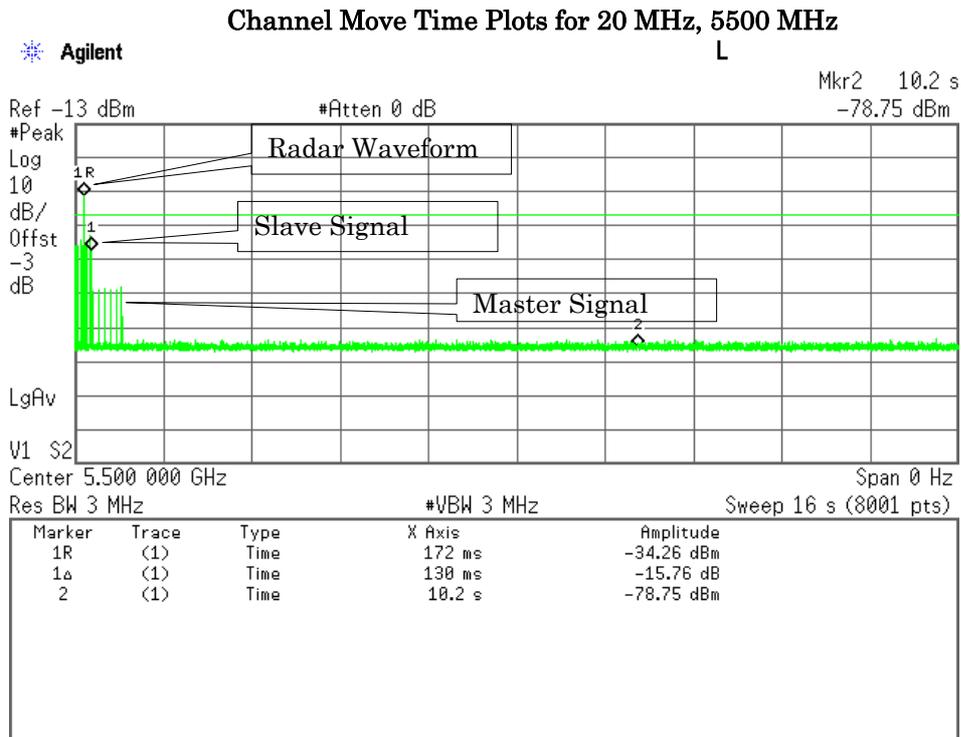

7.7.5.5 Channel Closing Transmission Time

The aggregate channel closing transmission time is calculated as follows;

D is the dwell time per spectrum analyzer sampling bin.

S is the sweep time.

B is the number of spectrum analyzer sampling bin.


N is the number of spectrum analyzer sampling bins showing a UNII transmission(intermittent control signal).

$$\text{Channel Closing Time} = D * N = S / B * N$$


The observation period over which the aggregate transmission time is calculated begins at (the reference marker + 200 msec.) and end on earlier than (the reference marker + 10 sec.).

The measurements are carried out 802.11 n CH.100 (5500MHz)/ 20 MHz and CH.102(5510 MHz)/ 40 MHz.

Channel Closing Transmission Time Plots for 20 MHz, 5500 MHz

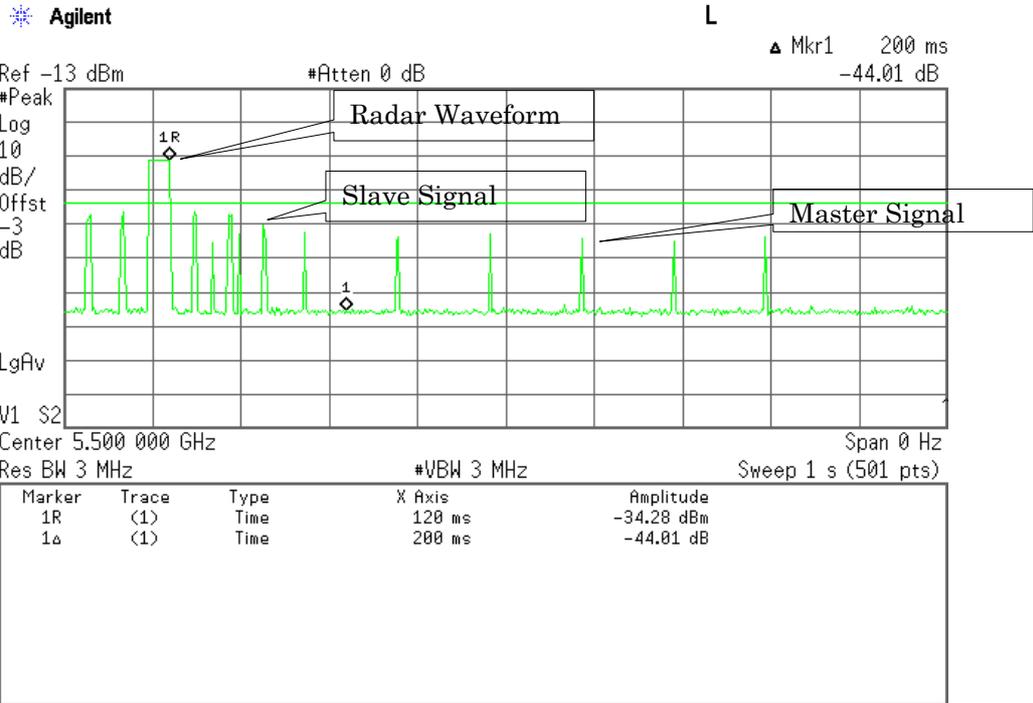

Channel Closing Transmission Time Plots for 40 MHz, 5510 MHz

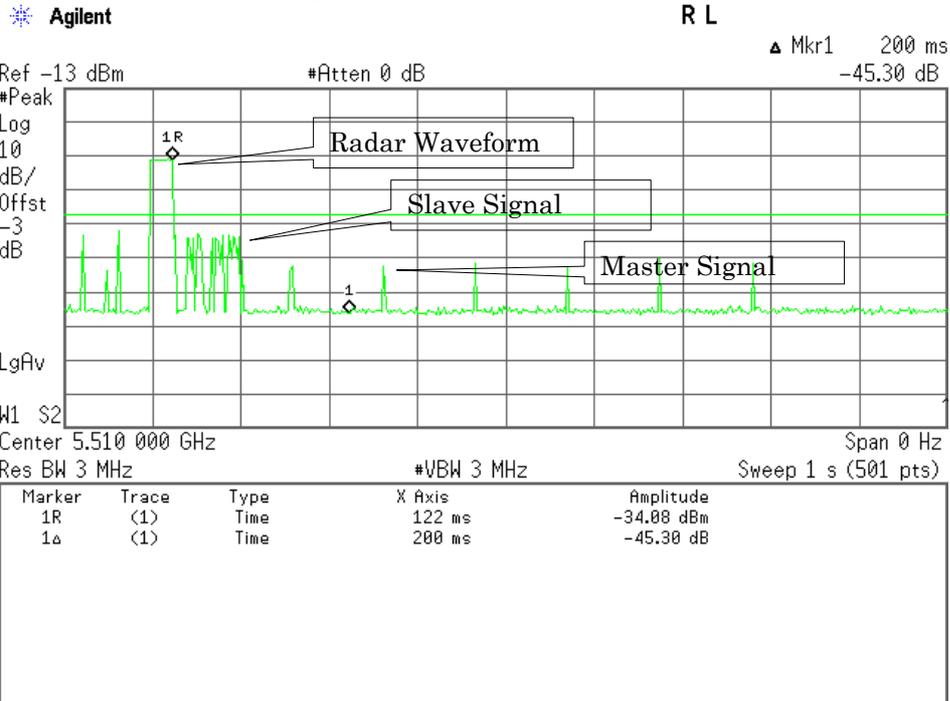


7.7.5.6 Non-Occupancy Period

During the 30 minutes observation time, EUT did not make any transmissions on a channel.

The measurements are carried out 802.11 n CH.100 (5500MHz)/ 20 MHz and CH.102(5510 MHz)/ 40 MHz.

**Non-Occupancy Period Plots for
 20 MHz, 5500 MHz**

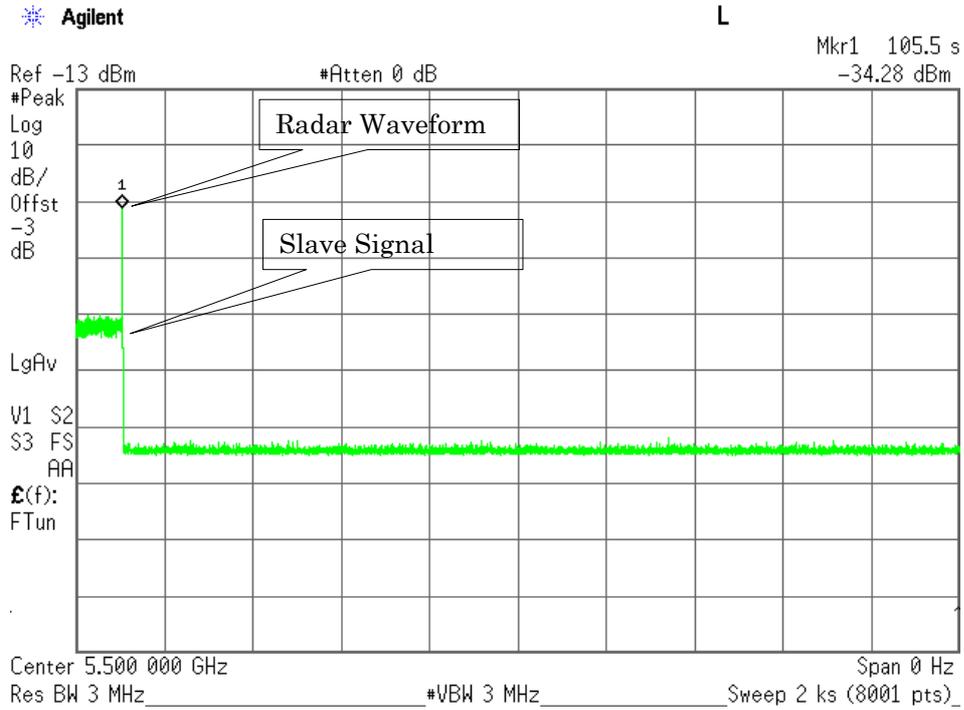

40 MHz, 5510 MHz

