



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the Sharp SHL23 Dual-band CDMA (BC0, BC6) & Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900) & Dual-band UMTS (FDDI, FDDV) & Quad-band LTE (B1, B3, B11, B18) multi mode cellular phone with Bluetooth, WLAN, SRD (NFC,FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00196

Document 75923862 Report 09 Issue 2

November 2013



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Sharp SHL23 Dual-band CDMA (BC0, BC6) & Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900) & Dual-band UMTS (FDDI,
FDDV) & Quad-band LTE (B1, B3, B11, B18) multi mode cellular
phone with Bluetooth, WLAN, SRD (NFC,FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B

Document 75923862 Report 09 Issue 2

November 2013

PREPARED FOR

Sharp Communication Compliance Ltd
Azure House
Bagshot Road
Bracknell
Berkshire
RG12 7QY

PREPARED BY

Natalie Bennett
Senior Administrator, Test Solutions

APPROVED BY

Mark Jenkins
Authorised Signatory

DATED

04 November 2013

This report has been up-issued to Issue 2 to amend the model description.

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

T Guy

Document 75923862 Report 09 Issue 2





Product Service

CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Product Technical Description 6
1.4	Product Information 6
1.5	Test Conditions 6
1.6	Deviations from the Standard 6
1.7	Modification Record 6
2	TEST DETAILS 7
2.1	AC Line Conducted Emissions 8
2.2	Radiated Emissions 11
3	TEST EQUIPMENT USED 15
3.1	Test Equipment Used 16
3.2	Measurement Uncertainty 17
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 18
4.1	Accreditation, Disclaimers and Copyright 19



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp SHL23 Dual-band CDMA (BC0, BC6) & Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900) & Dual-band UMTS (FDDI, FDDV) & Quad-band LTE
(B1, B3, B11, B18) multi mode cellular phone with
Bluetooth, WLAN, SRD (NFC,FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp SHL23 Dual-band CDMA (BC0, BC6) & Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900) & Dual-band UMTS (FDDI, FDDV) & Quad-band LTE (B1, B3, B11, B18) multi mode cellular phone with Bluetooth, WLAN, SRD (NFC,FeliCa) and GPS to the requirements of FCC CFR 47 Part 15B.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	SHL23
Serial Number(s)	IMEI 004401114892850
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 15B (2012)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	9860
Date	25 September 2013
Start of Test	11 October 2013
Finish of Test	12 October 2013
Name of Engineer(s)	T Guy



Product Service

1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15B is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
AC Powered/USB with GPS Rx Operational				
2.1	15.107	AC Line Conducted Emissions	Pass	
2.2	15.109	Radiated Emissions	Pass	



Product Service

1.3 PRODUCT TECHNICAL DESCRIPTION

Please refer to the SHL23 Model Description Form.

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp SHL23 Dual-band CDMA (BC0, BC6) & Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900) & Dual-band UMTS (FDDI, FDDV) & Quad-band LTE (B1, B3, B11, B18) multi mode cellular phone with Bluetooth, WLAN, SRD (NFC,FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp SHL23 Dual-band CDMA (BC0, BC6) & Quad-band GSM
(GSM850/GSM900/DCS1800/PCS1900) & Dual-band UMTS (FDDI, FDDV) & Quad-band LTE
(B1, B3, B11, B18) multi mode cellular phone with
Bluetooth, WLAN, SRD (NFC,FeliCa) and GPS
In accordance with FCC CFR 47 Part 15B



2.1 AC LINE CONDUCTED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.107

2.1.2 Equipment Under Test and Modification State

SHL23 S/N: IMEI 004401114892850 - Modification State 0

2.1.3 Date of Test

12 October 2013

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT is set up on a test table 800mm above a horizontal ground plane. A vertical ground plane is also required and is placed 400mm from the EUT. Where a EUT is floor standing it will be stood on but insulated from the ground plane by up to 12mm.

The EUT is powered through a Line Impedance Stabilisation Network (LISN) which is bonded to the ground plane. The EUT is located so that the distance between the EUT and the LISN is no less than 800mm. Where possible the cable between the mains input of the EUT and the LISN is 1m. Where this is not possible the cable is non-inductively bundled with the bundle not exceeding 400mm in length.

A preliminary profile of the Conducted Emissions is obtained over the frequency range 150kHz to 30MHz. Any points of interest are noted for formal measurements.

During formal measurements, the measuring receiver is tuned to the emission of interest where Quasi – Peak and Average measurements are performed in a 9kHz Video and Resolution Bandwidth.


2.1.6 Environmental Conditions

Ambient Temperature	20.5°C
Relative Humidity	43.0%



2.1.7 Test Results


Live Line

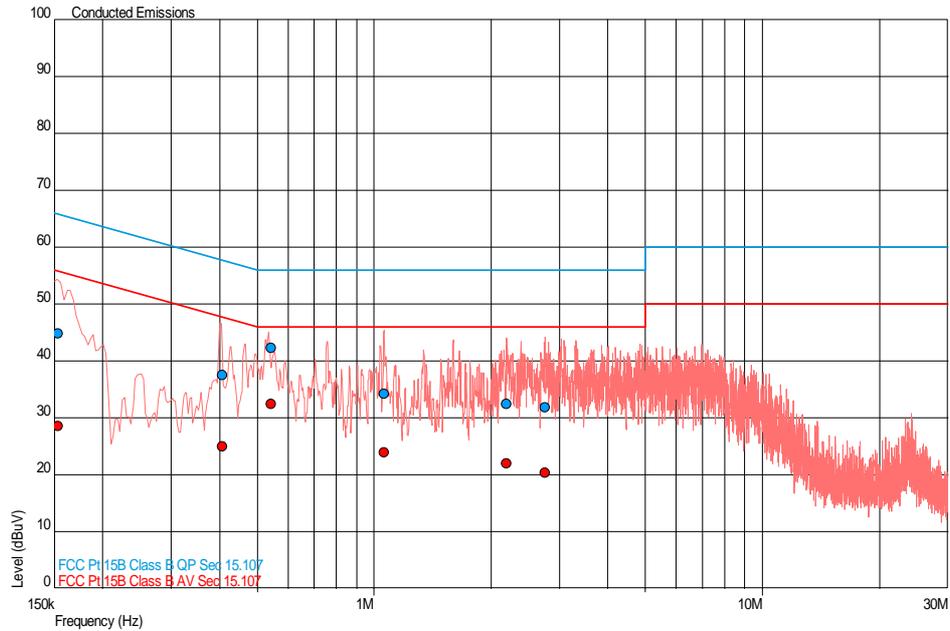

Frequency (MHz)	QP Level (dBµV)	QP Limit (dBµV)	QP Margin (dBµV)	AV Level (dBµV)	AV Limit (dBµV)	AV Margin (dBµV)
0.153	44.9	65.8	-21.0	28.6	55.8	-27.2
0.406	37.5	57.7	-20.2	25.0	47.7	-22.7
0.543	42.3	56.0	-13.7	32.5	46.0	-13.5
1.061	34.3	56.0	-21.7	24.0	46.0	-22.0
2.197	32.4	56.0	-23.6	22.0	46.0	-24.0
2.756	31.9	56.0	-24.1	20.3	46.0	-25.7



Neutral Line

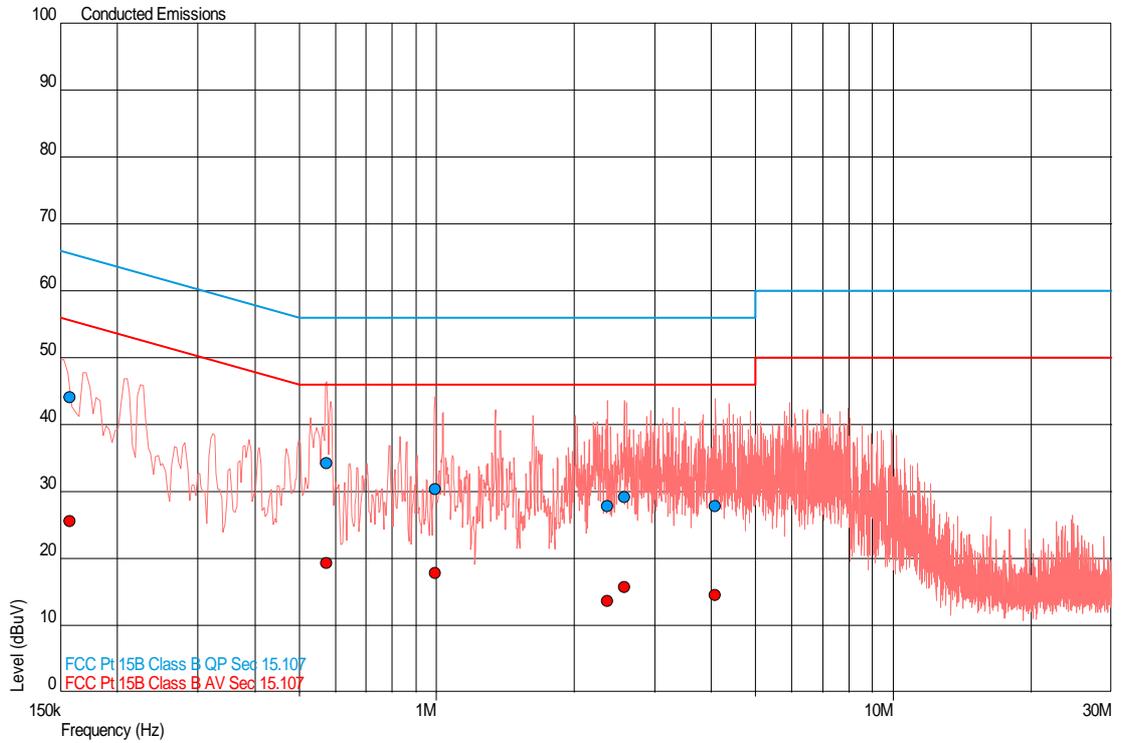

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.158	44.1	65.6	-21.5	25.5	55.6	-30.0
0.574	34.2	56.0	-21.8	19.4	46.0	-26.6
0.993	30.3	56.0	-25.7	17.9	46.0	-28.1
2.369	27.8	56.0	-28.2	13.6	46.0	-32.4
2.574	29.2	56.0	-26.8	15.7	46.0	-30.3
4.075	27.8	56.0	-28.2	14.6	46.0	-31.4



2.2 RADIATED EMISSIONS

2.2.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.109

2.2.2 Equipment Under Test and Modification State

SHL23 S/N: IMEI 004401114892850 - Modification State 0

2.2.3 Date of Test

11 October 2013 & 12 October 2013

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions is obtained up to the 5th harmonic of the EUT's highest internally generated fundamental frequency. For frequencies from 30MHz to 18GHz the EUT is placed on a test table 800mm above the ground plane. For frequencies above 18GHz, the EUT height is increased by 200mm to a height of 1000mm. This is to ensure the beam width of the measuring antenna gives sufficient vertical coverage of the EUT.

During characterisation the turntable azimuth is adjusted from 0 to 360 degrees with the measuring antenna in one polarity. It is then repeated for the other polarity. Any frequencies of interest are noted for formal measuring later. The distance from the measuring antenna to the boundary of the EUT is 3m. Above 18GHz this distance may be reduced to 1m.

During formal measurement the spectrum analyser is tuned to the frequency of the emission. The turntable azimuth is adjusted from 0 to 360 degrees to determine the point at which the maximum emission level occurs. Then the height of the measuring antenna is adjusted from a height of 1m to 4m to determine the height at which the maximum emission level occurs. Once the point of maximum emission has been determined the emission is measured. Emissions in the 30MHz to 1GHz range are measured using a CISPR Quasi – Peak detector function in a 120kHz bandwidth. Emissions in the range 1GHz to 40GHz require Peak and Average measurements. The Peak measurements are made using a peak detector with 1MHz Resolution and Video bandwidths. The average measurements employ a peak detector with a Resolution bandwidth of 1MHz and a Video bandwidth of 10Hz. If measurements are made at a 1m measuring distance, then 10dB is added to the specification limit.


2.2.6 Environmental Conditions

Ambient Temperature	19.2 - 20.3°C
Relative Humidity	32.0 - 43.0%



2.2.7 Test Results


30 MHz to 1 GHz

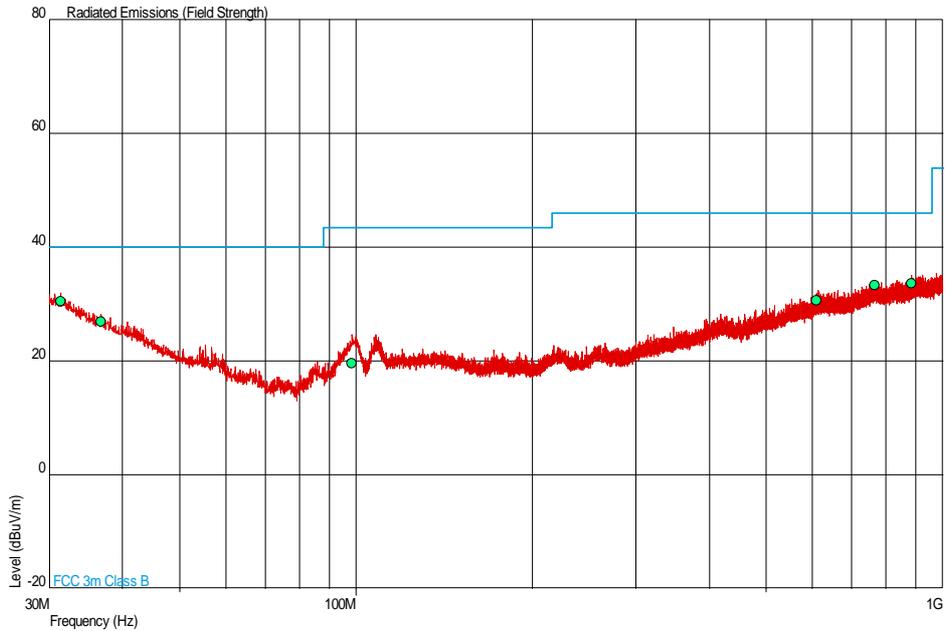

Frequency (MHz)	QP Level (dBµV/m)	QP Level (µV/m)	QP Limit (dBµV/m)	QP Limit (µV/m)	QP Margin (dBµV/m)	QP Margin (µV/m)	Angle (Deg)	Height (m)	Polarity
31.362	30.5	33.5	40.0	100	-9.5	66.5	190	1.00	Vertical
36.798	27.0	22.4	40.0	100	-13.0	77.6	89	3.67	Vertical
98.247	19.7	9.7	43.5	150	-23.8	140.3	13	1.12	Vertical
609.915	30.7	34.3	46.0	200	-15.3	165.7	35	1.29	Vertical
765.768	33.3	46.2	46.0	200	-12.7	153.8	281	1.00	Horizontal
884.204	33.7	48.4	46.0	200	-12.3	151.6	211	1.00	Vertical




1 GHz to 8 GHz

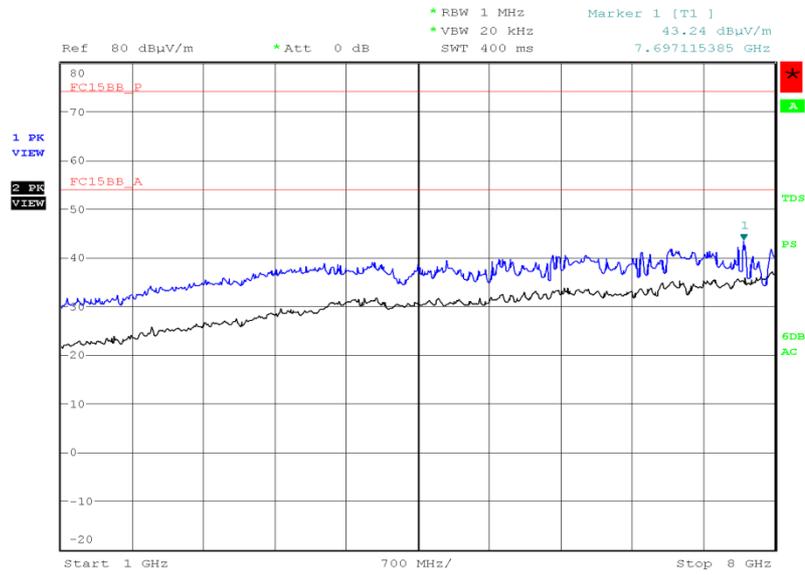

Date: 11.OCT.2013 01:45:45


8 GHz to 18 GHz

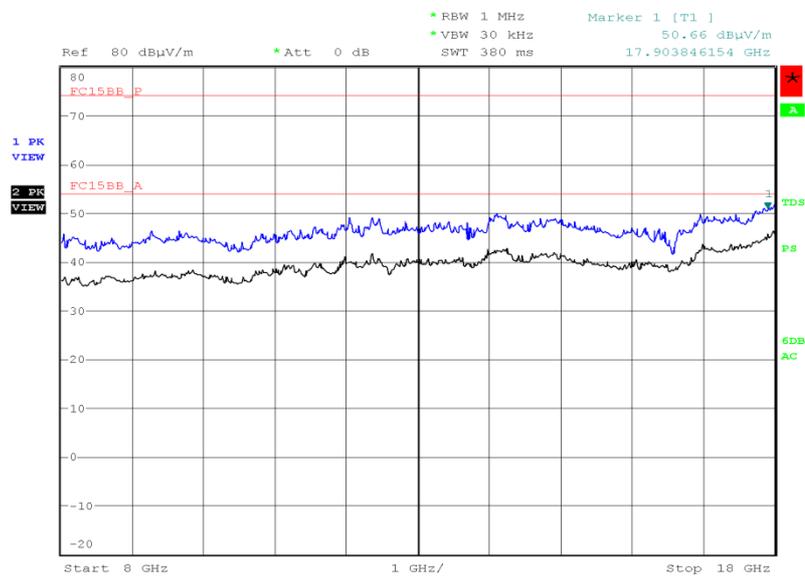

Date: 11.OCT.2013 02:38:44




18 GHz to 25 GHz

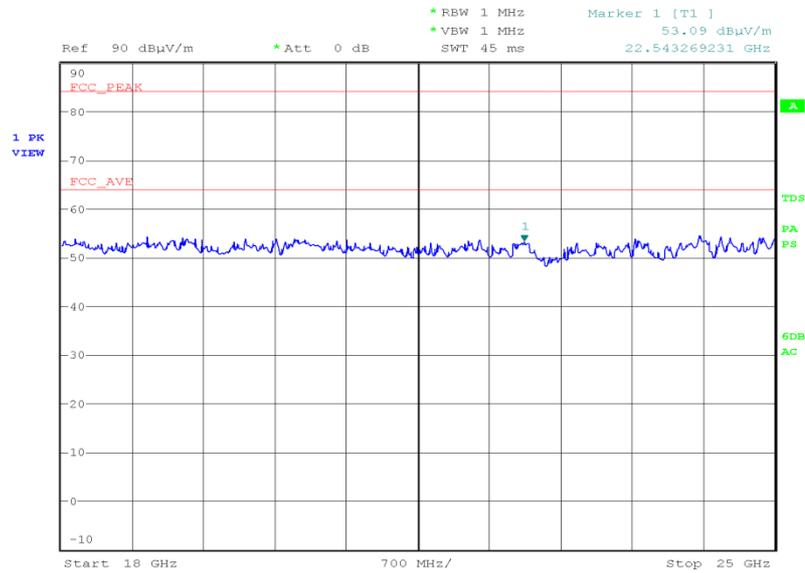

Date: 12.OCT.2013 20:44:35

25 GHz to 29 GHz

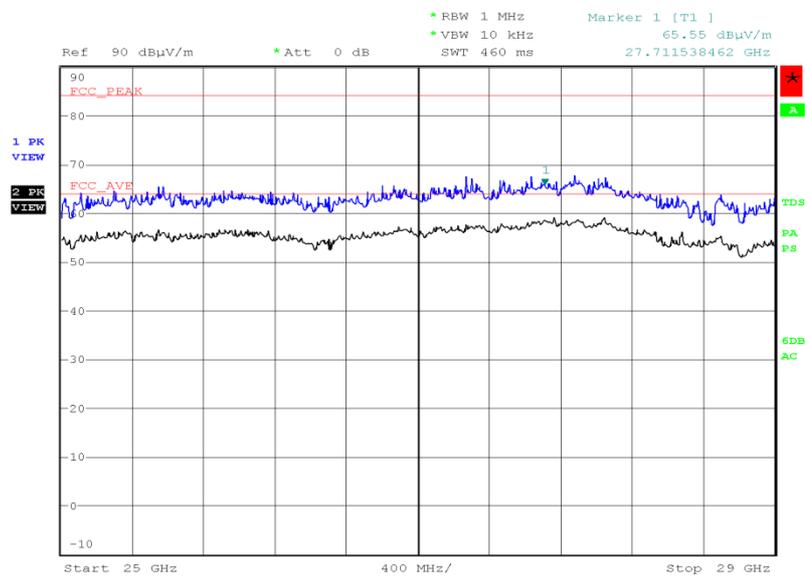

Date: 12.OCT.2013 21:36:11



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 - AC Line Conducted Emissions					
LISN (1 Phase)	Chase	MN 2050	336	12	28-Mar-2014
Transient Limiter	Hewlett Packard	11947A	2377	12	13-Feb-2014
Test Receiver	Rohde & Schwarz	ESIB40	2941	12	23-Oct-2013
Section 2.2 - Radiated Emissions					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	3-Apr-2014
Antenna (Bilog)	Schaffner	CBL6143	287	24	18-Jan-2014
Dual Power Supply Unit	Thurlby	PL320	288	-	TU
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Filter (Hi Pass)	Lorch	9HP7-7000-SR	2833	12	1-Feb-2014
Antenna (Log Periodic)	Schaffner	UPA6108	3108	12	5-Apr-2014
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	12	17-Jul-2014
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	10-Sep-2014
Amplifier (1 - 8GHz)	Phase One	PS06-0060	3175	12	9-Aug-2014
Amplifier (8 - 18GHz)	Phase One	PS06-0061	3176	12	9-Aug-2014
Test Receiver	Rohde & Schwarz	E ESIB40	2941	12	23-Oct-2013
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	12	17-Jul-2014

TU – Traceability Unscheduled



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Radiated Emissions	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB
AC Line Conducted Emissions	± 3.2 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2013 TÜV SÜD Product Service