

## TEST REPORT

**Applicant** : Sharp Corporation, Communication Systems Division  
**Address** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN

**Products** : Cellular Phone  
**Model No.** : 302SH  
**SERIAL NO.** : 004401/11/495697/8  
004401/11/495666/3

**FCC ID** : APYHRO00198

**Test Standard** : CFR 47 FCC Rules and Regulations Part 15

**Test Results** : **Passed**

**Date of Test** : September 30 ~October 8, 2013



A handwritten signature in black ink, appearing to read 'K. Shibata', is written over a horizontal line.

Kousei Shibata  
Manager  
Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

**TABLE OF CONTENTS**

	<b>Page</b>
1 Description of the Equipment Under Test.....	3
2 Summary of Test Results.....	4
3 Test Procedure.....	5
4 Test Location.....	5
5 Recognition of Test Laboratory.....	5
6 Details of the Equipment Under Test.....	6
7 Details of the Test Item.....	9

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT****EUT** : Equipment Under Test**EMC** : Electromagnetic Compatibility**AE** : Associated Equipment**EMI** : Electromagnetic Interference**N/A** : Not Applicable**EMS** : Electromagnetic Susceptibility**N/T** : Not Tested - indicates that the listed condition, standard or equipment is applicable for this report. - indicates that the listed condition, standard or equipment is not applicable for this report.

## 1 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Division  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : 302SH
4. Serial No. : 004401/11/495697/8  
: 004401/11/495666/3
5. Product Type : Pre-production
6. Date of Manufacture : August, 2013
7. Power Rating : 4.0VDC (Lithium-ion Battery 1UAF405884T-B001A 2600mAh)
8. EUT Grounding : None
9. Transmitting Frequency : 2402.0 MHz(00CH) –2480.0MHz(78CH/39CH)
10. Receiving Frequency : 2402.0 MHz(00CH) –2480.0MHz(78CH/39CH)
11. Max. RF Output Power : 2.01dBm(Measure Value)
12. Category : Spread Spectrum Transmitter(FHSS)/DTS
13. EUT Authorization : Certification
14. Received Date of EUT : September 27, 2013

### 15. Channel Plan

The carrier spacing is 1 MHz/2MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Normal Mode:

Transmitting Frequency (in MHz) = 2402.0 + n

Receiving Frequency (in MHz) = 2402.0 + n

where, n : channel number ( $0 \leq n \leq 78$ )

Low Energy Mode:

Transmitting Frequency (in MHz) = 2402.0 + 2\*n

Receiving Frequency (in MHz) = 2402.0 + 2\*n

where, n : channel number ( $0 \leq n \leq 39$ )

## 2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.  
Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- The test result was **passed** for the test requirements of the applied standard.
- The test result was **failed** for the test requirements of the applied standard.
- The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch



Shigeru Osawa  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch

### 3 Test Procedure

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.4-2003

The tests were performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000 and the FCC KDB 558074 D01 DTS Meas Guidance v03r01, released April 9, 2013. The test set-up was made in accordance to the general provisions of ANSI C63.4-2003.

### 4 Test Location

Japan Quality Assurance Organization (JQA)  
KITA-KANSAI Testing Center  
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

### 5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2014)  
VCCI Registration No. : A-0002 (Expiry date : March 30, 2014)  
IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Expiry date : February 22, 2016)

## 6 Details of the Equipment Under Test

### 6.1 Operating Condition

Transmitting/Receiving

Bluetooth 4.0 + EDR + LE

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(78CH/39CH)

Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(78CH/39CH)

The test were carried under 2 mode shown as follows:

1. Standard+EDR
2. Low Energy

Modulation Type

1. DH1/ DH3/ DH5 Packet (Modulation Type : GFSK)
2. 2DH1/ 2DH3/ 2DH5 Packet (Modulation Type : pi/4-DQPSK)
3. 3DH1/ 3DH3/ 3DH5 Packet (Modulation Type : 8DPSK)
4. LE Packet (Modulation Type : GFSK)

Other Clock Frequency

32.768 kHz, 19.2 MHz, 24 MHz, 27 MHz, 27.12 MHz, 48 MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.  
The EUT with temporary antenna port was used in conducted measurement.

## 6.2 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Cellular Phone	Sharp	302SH	004401/11/4 95697/8*1) 004401/11/4 95666/3*2)	APYHRO00198
B	AC Adapter	Sharp	SHCEJ1	--	N/A
C	Headset	Softbank Mobile	ZTCAA1	--	N/A

\*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission

\*2) Used for Antenna Conducted Emission

The auxiliary equipment used for testing :


None

Type of Cable:


No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Power Cord	--	--	NO	NO	1.5
2	Headset Cable	--	--	NO	NO	0.5

**6.3 Test Arrangement (Drawings)**


a) Single Unit



b) AC Adapter used

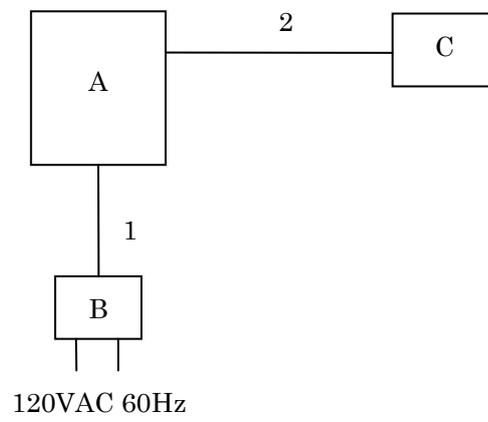

c) Handsfree used

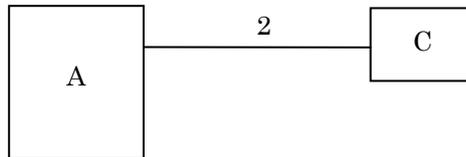

**7 Details of the Test Item****7.1 Channel Separation**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - **Passed**  - **Failed**  - **Not judged**

**7.1.1 Worst Point and Measurement Uncertainty**

Channel Separation is 1.002 MHz  
Channel Separation(Inquiry) is 2.000 MHz

Uncertainty of Measurement Results +/-0.9 %(2σ)

Remarks : \_\_\_\_\_

**7.1.2 Test Site**

KITA-KANSAI Testing Center


Test site : SAITO  - Anechoic chamber (A1)  - Measurement room (M1)  
 - Measurement room (M2)  - Measurement room (M3)  
 - Shielded room (S1)  - Shielded room (S2)  
 - Shielded room (S3)  - Shielded room (S4)

**7.1.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year

**7.1.4 Test Method and Test Setup (Diagrammatic illustration)**

The test system is shown as follows:

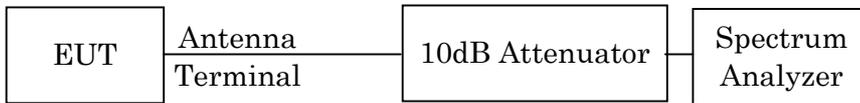

The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	100 kHz
Video Bandwidth	300 kHz
Span	3 MHz / 5 MHz
Sweep Time	AUTO
Trace	Maxhold


**7.1.5 Test Data**

Test Date : October 8, 2013


Temp.:27°C, Humi:54%

Mode of EUT	Channel Separation (MHz)	Limit
Hopping	1.002	Two-thirds of the 20 dB bandwidth of the hopping channel
Inquiry	2.000	

Mode of EUT : Hopping

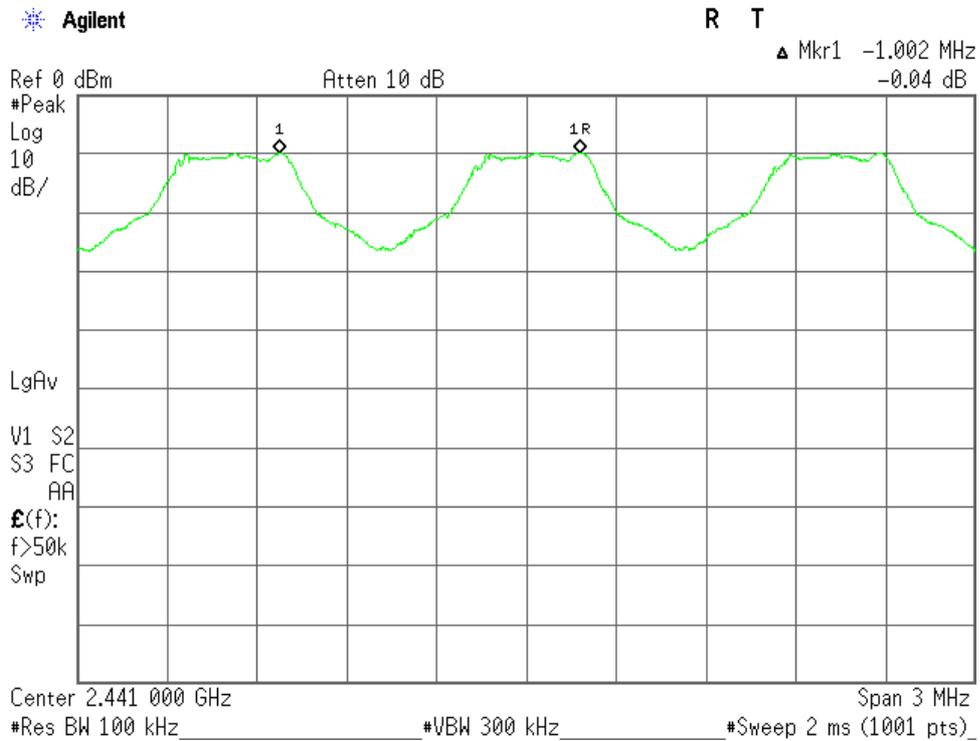

Mode of EUT : Inquiry

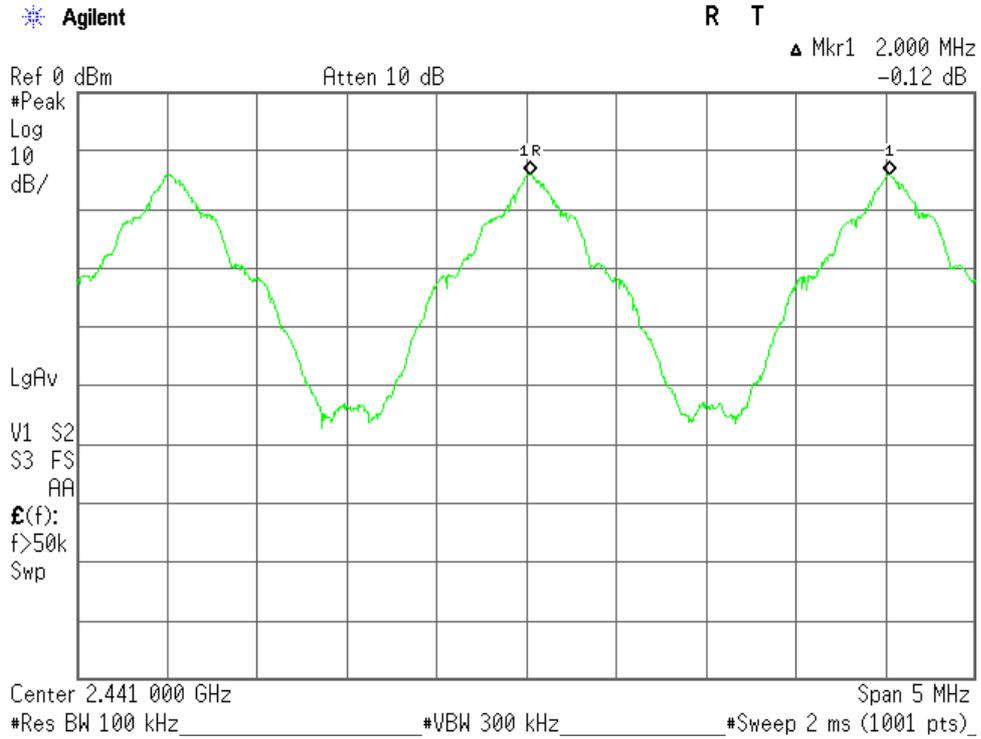

## 7.2 Minimum Hopping Channel

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - Passed  - Failed  - Not judged

### 7.2.1 Worst Point and Measurement Uncertainty

Number of Channel is	<u>79</u>
Number of Channel (Inquiry) is	<u>32</u>
Number of Channel (AFH) is	<u>20</u>

Remarks : \_\_\_\_\_

### 7.2.2 Test Site

KITA-KANSAI Testing Center

Test site : SAITO


<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

**7.2.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year

**7.2.4 Test Method and Test Setup (Diagrammatic illustration)**

The test system is shown as follows:

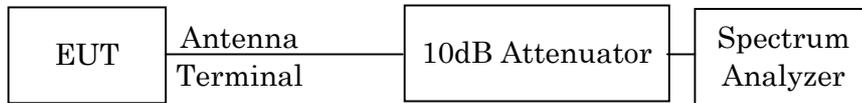

The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	300 kHz
Video Bandwidth	300 kHz
Span	30 MHz
Sweep Time	AUTO
Trace	Maxhold


**7.2.5 Test Data**

Test Date : October 8, 2013


Temp.:27°C, Humi:54%

Mode of EUT	Minimum Hopping Channel	Limit
Hopping	79	15
Inquiry	32	15
AFH(minimum)	20	15


Mode of EUT : Hopping(1/3)

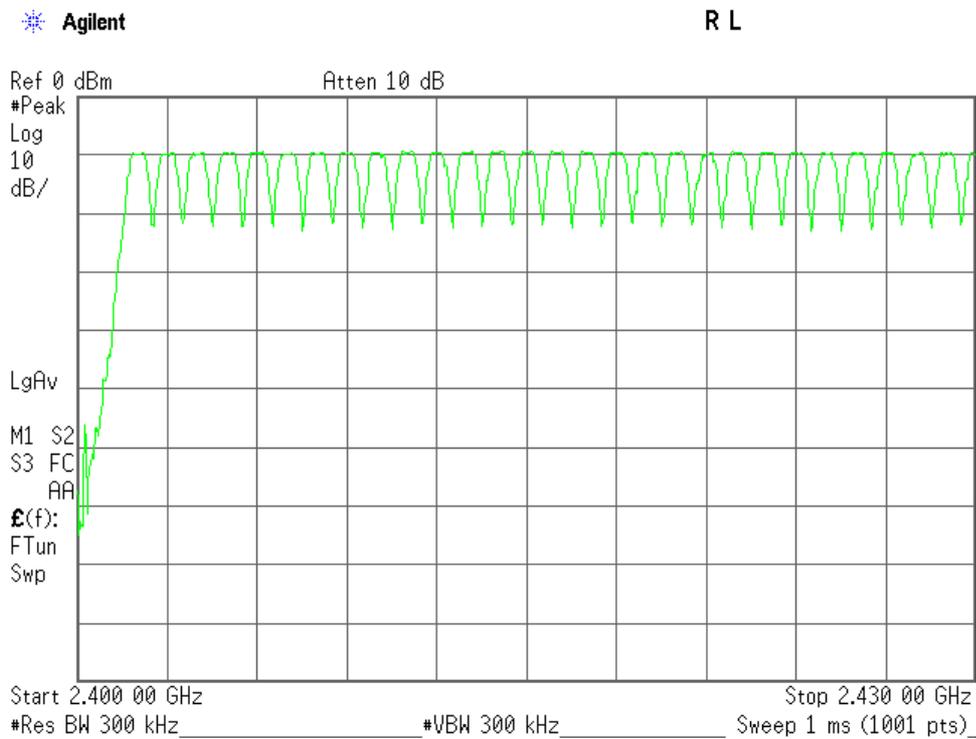


Mode of EUT : Hopping(2/3)

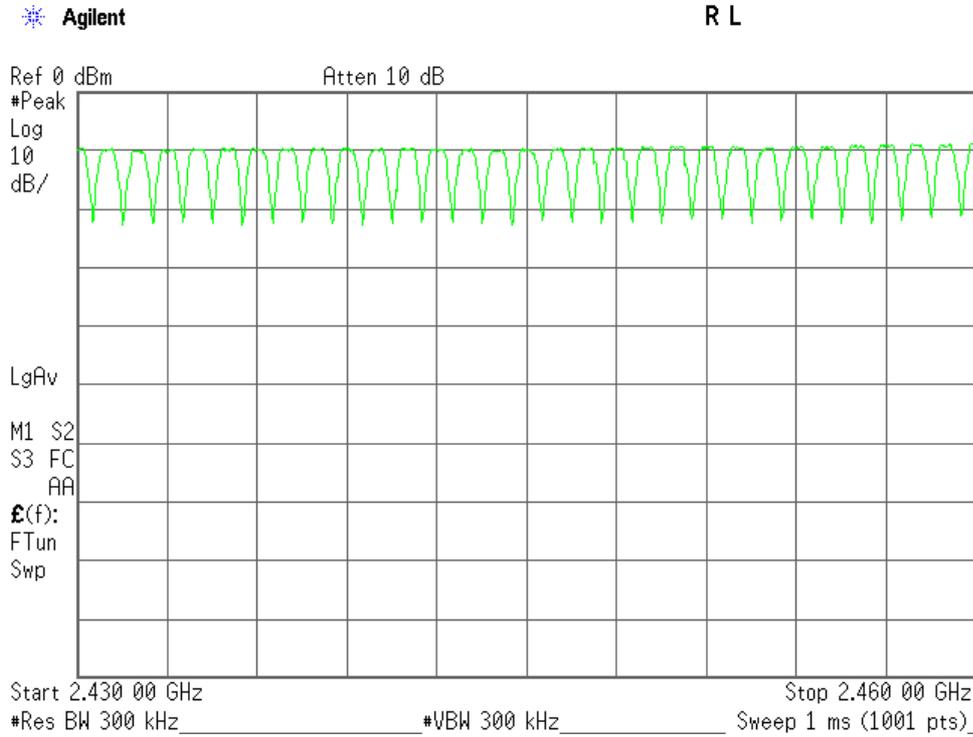


Mode of EUT : Hopping(3/3)

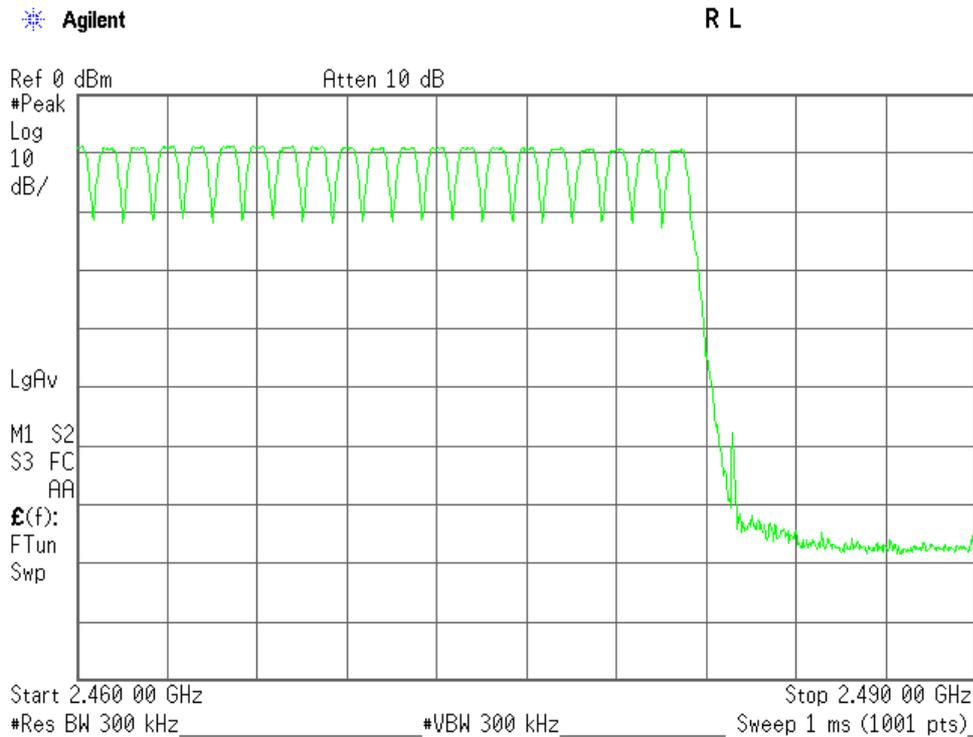


Mode of EUT : Inquiry(1/3)

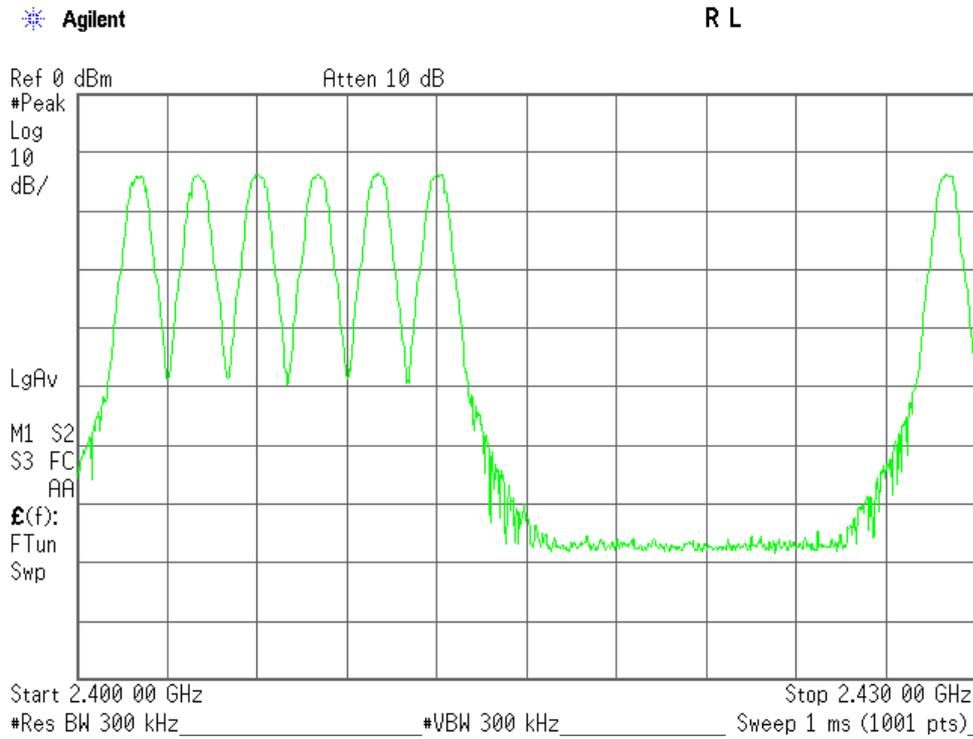


Mode of EUT : Inquiry(2/3)

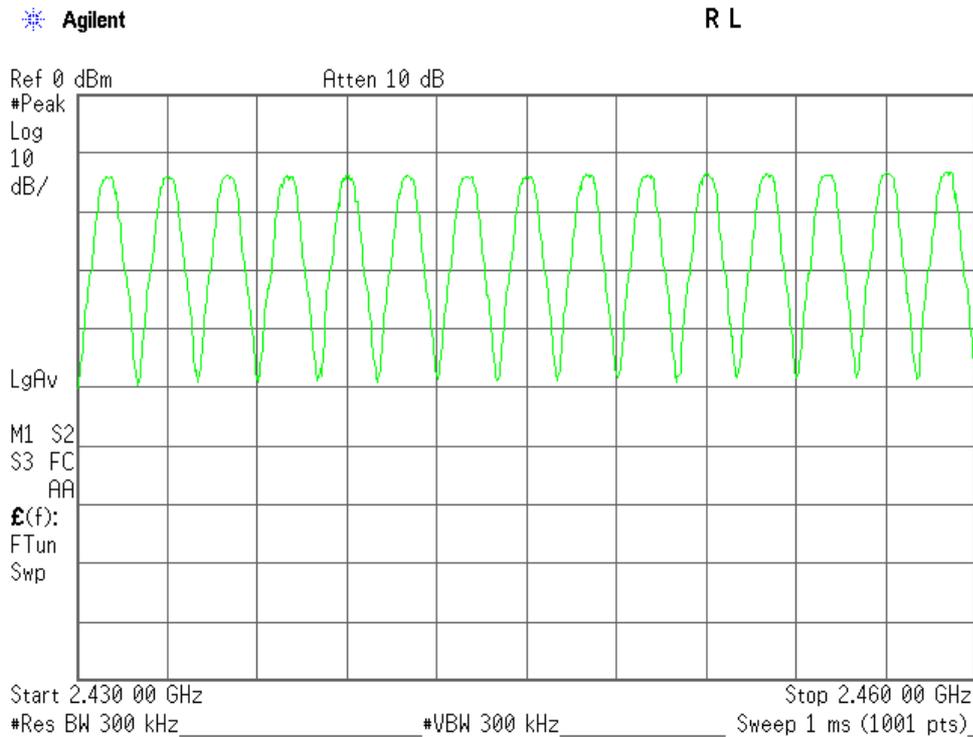


Mode of EUT : Inquiry(3/3)

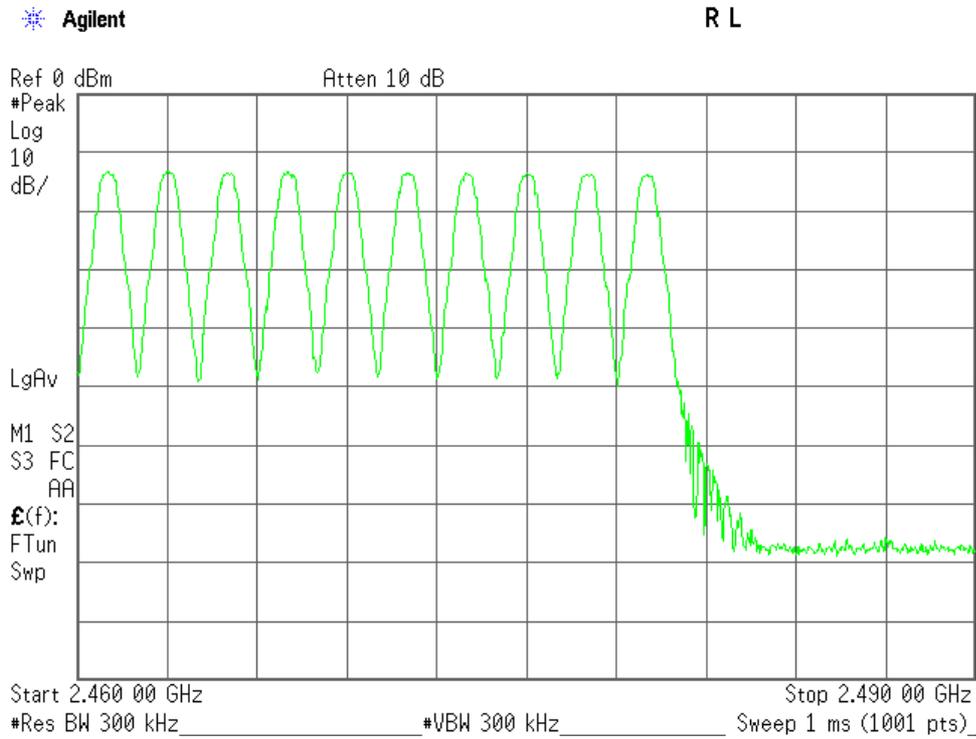


Mode of EUT : AFH(minimum)(1/3)

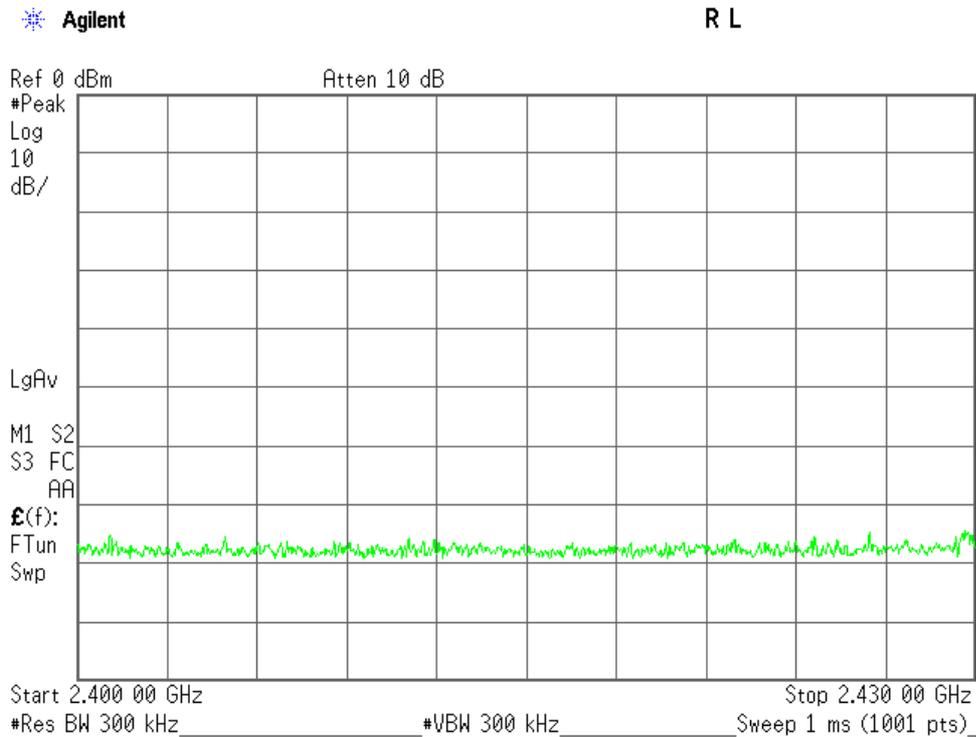

Mode of EUT : AFH(minimum) (2/3)

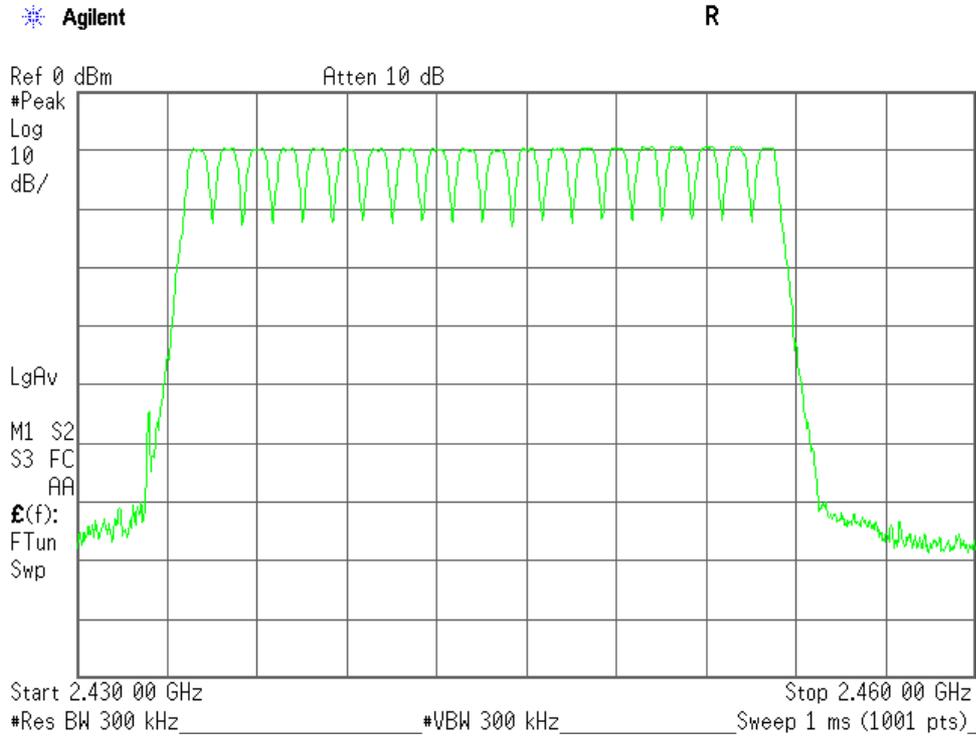

Mode of EUT : AFH(minimum) (3/3)

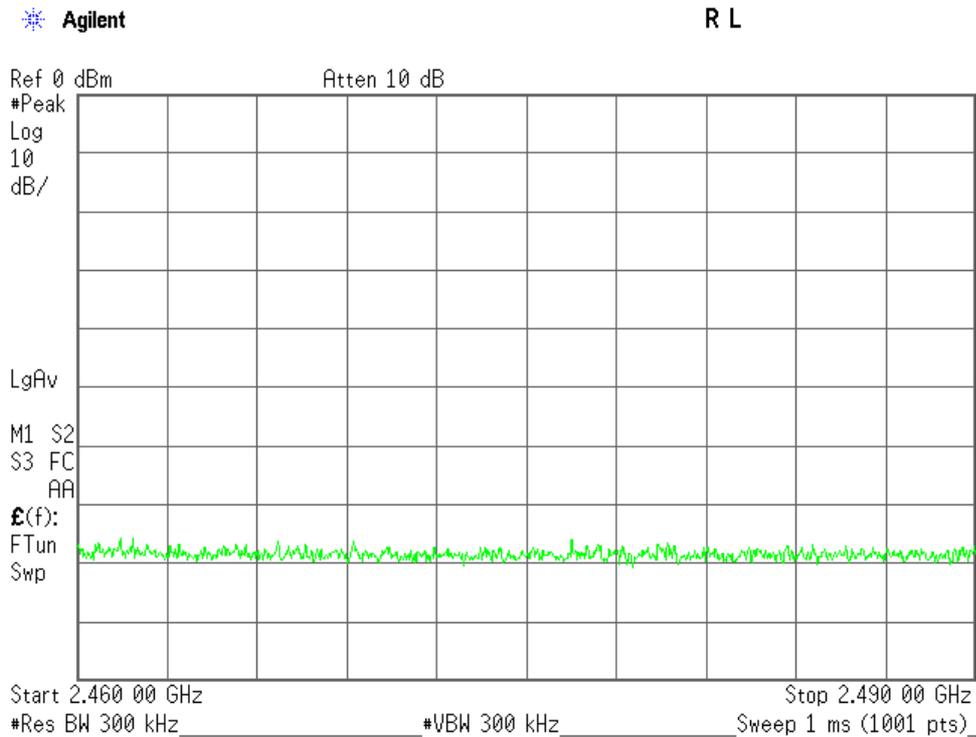

### 7.3 Occupied Bandwidth

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - Passed  - Failed  - Not judged

#### 7.3.1 Worst Point and Measurement Uncertainty

The 99% Bandwidth is	<u>1183.3</u> kHz	at	<u>2441.0</u> MHz
The 20dB Bandwidth is	<u>1260.0</u> kHz	at	<u>2441.0</u> MHz
The 6dB Bandwidth is	<u>719.5</u> kHz	at	<u>2402.0</u> MHz

Uncertainty of Measurement Results +/-0.9 %(2 $\sigma$ )

Remarks : \_\_\_\_\_

#### 7.3.2 Test Site

KITA-KANSAI Testing Center

Test site : SAITO


<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

**7.3.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year

**7.3.4 Test Method and Test Setup (Diagrammatic illustration)**

The test system is shown as follows:

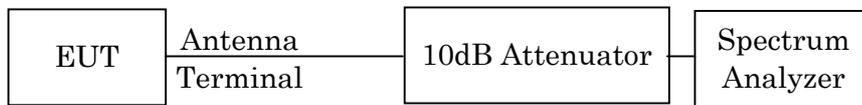

The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	10 kHz
Video Bandwidth	30 kHz
Span	3 MHz
Sweep Time	AUTO
Trace	Maxhold

**7.3.5 Test Data**

Mode of EUT : Standard+EDR

Test Date : October 8, 2013

Temp.:27°C, Humi:54%

The resolution bandwidth was set to about 1% of emission bandwidth, -20dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

1)Packet Setting : DH5(Modulation type : GFSK)

Channel	Frequency (MHz)	99% Bandwidth (kHz)	-20dBc Bandwidth (kHz)	-20dBc Bandwidth Limit
00	2402.0	869.1	882.0	Less than 1.5 times of the channel separation
39	2441.0	873.7	923.9	
78	2480.0	883.8	923.5	


2)Packet Setting : 2DH5(Modulation type : pi/4-DQPSK)

Channel	Frequency (MHz)	99% Bandwidth (kHz)	-20dBc Bandwidth (kHz)	-20dBc Bandwidth Limit
00	2402.0	1172.9	1221.0	Less than 1.5 times of the channel separation
39	2441.0	1168.5	1221.0	
78	2480.0	1169.5	1228.0	


3)Packet Setting : 3 DH5(Modulation type : 8DPSK)


Channel	Frequency (MHz)	99% Bandwidth (kHz)	-20dBc Bandwidth (kHz)	-20dBc Bandwidth Limit
00	2402.0	1176.3	1246.0	Less than 1.5 times of the channel separation
39	2441.0	1183.3	1260.0	
78	2480.0	1181.4	1235.0	

1)Packet Setting : DH5(Modulation type : GFSK)  
Low Channel

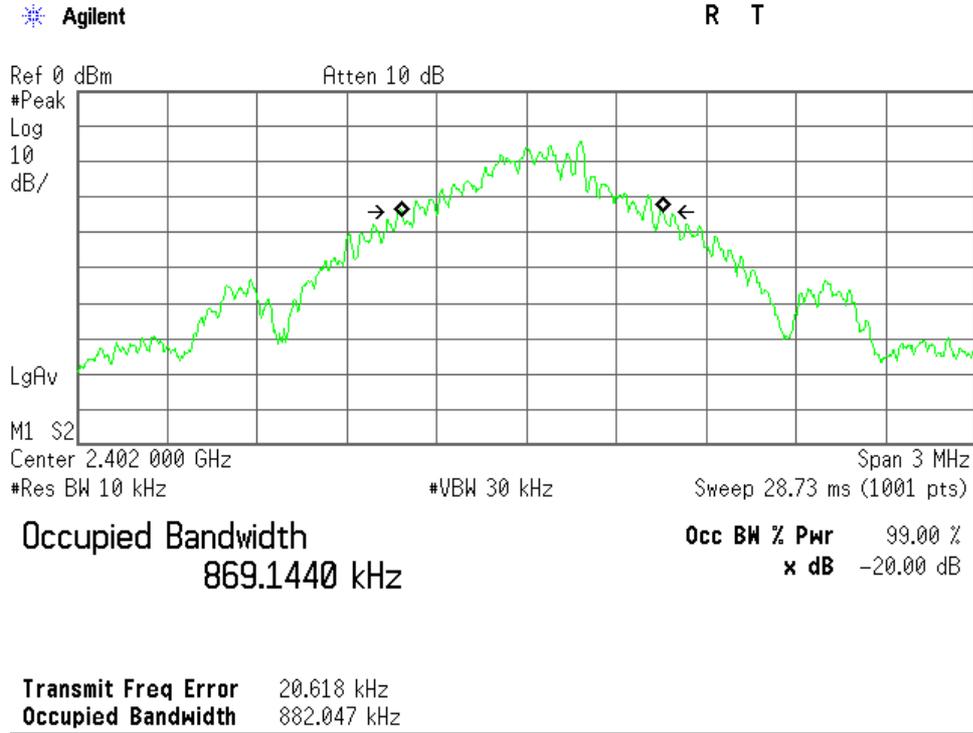


Middle Channel

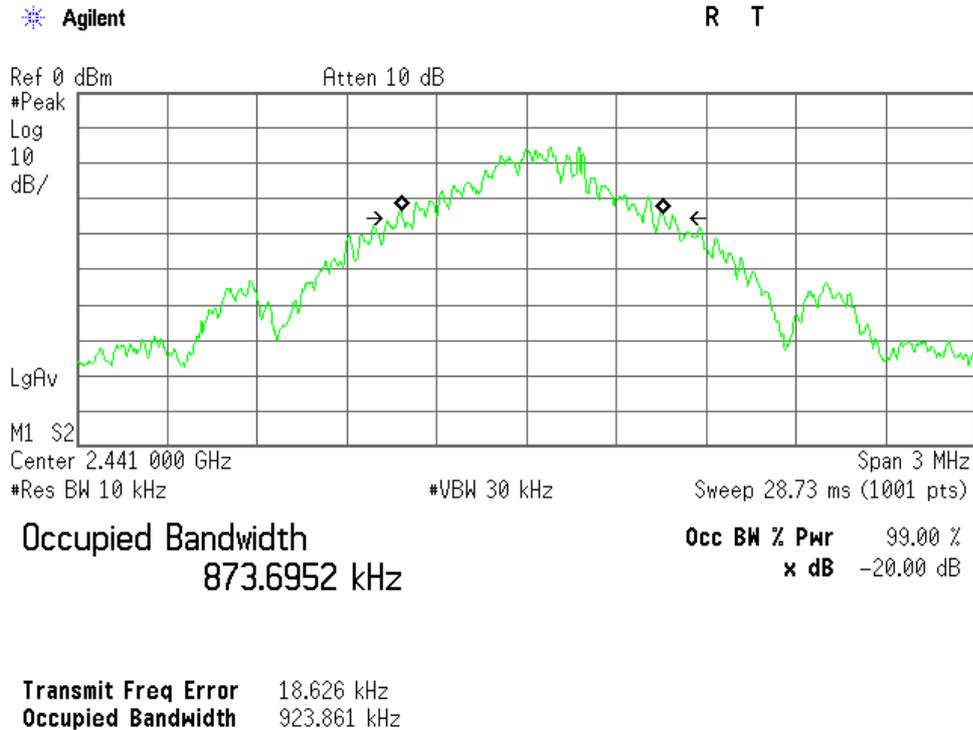


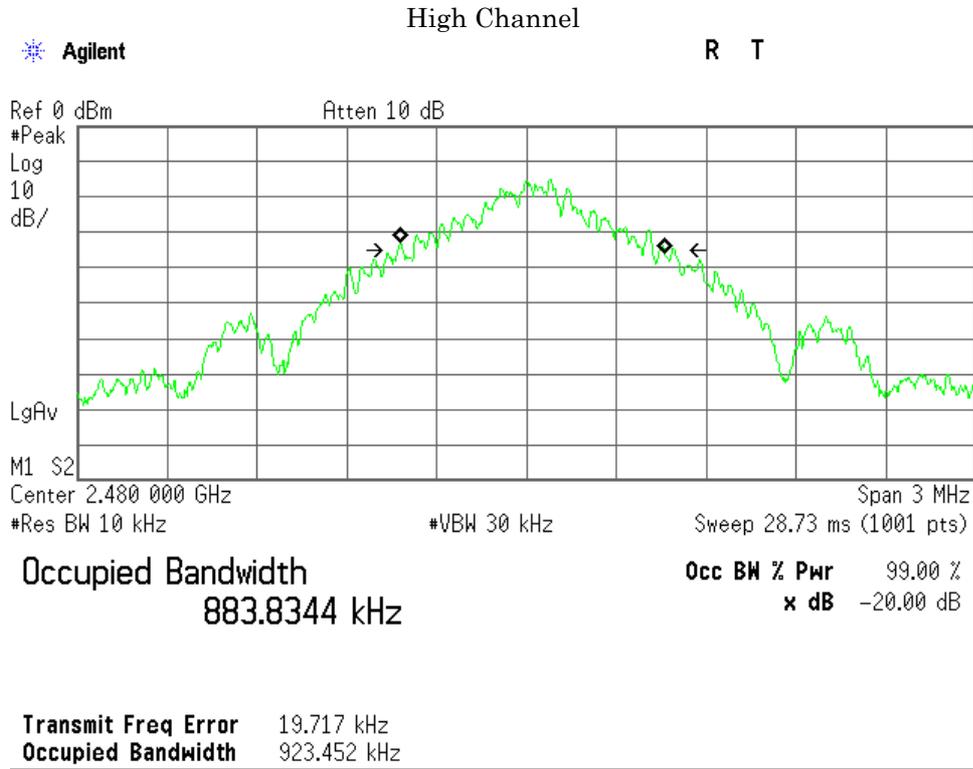


2) Packet Setting : 2DH5 (Modulation type : pi/4-DQPSK)  
Low Channel

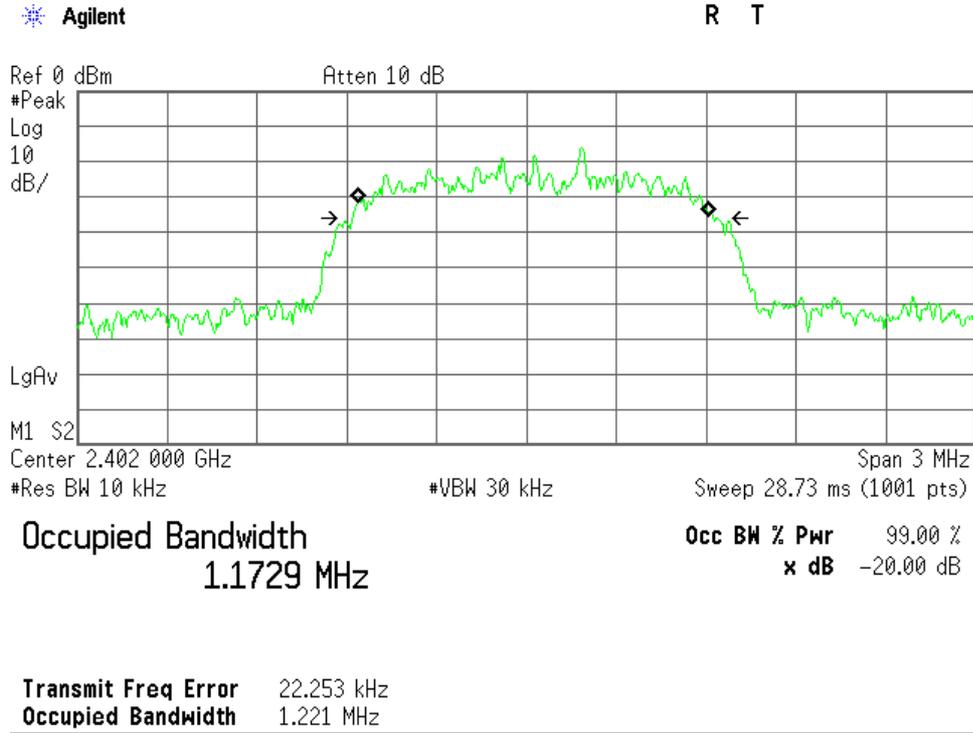


Middle Channel

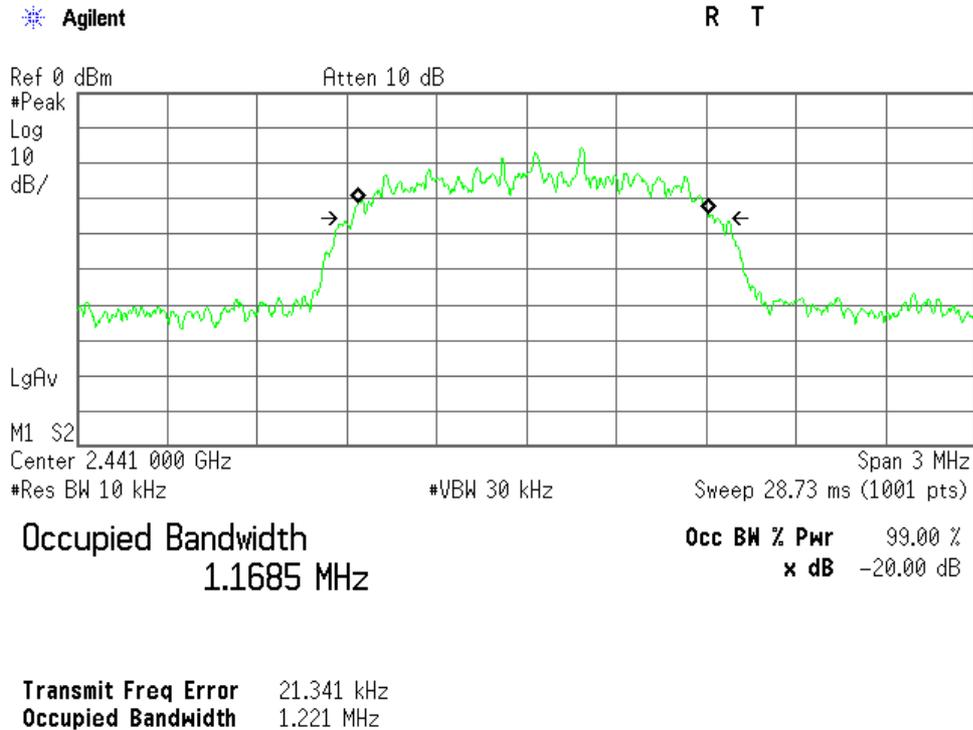


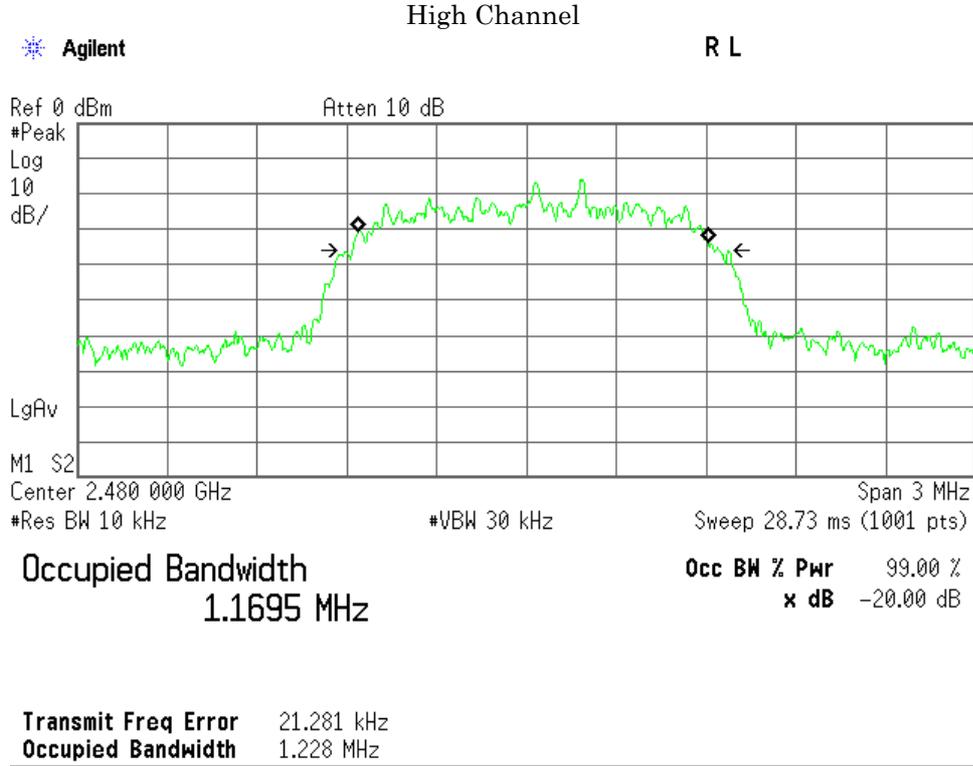


3)Packet Setting : 3 DH5(Modulation type : 8DPSK)  
Low Channel

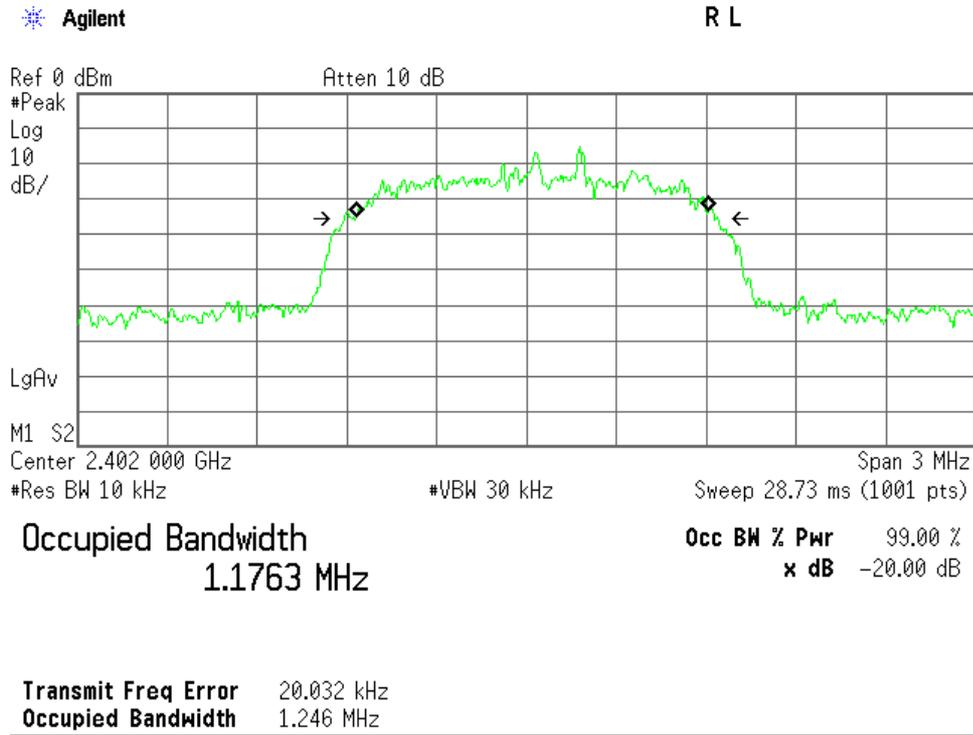

Middle Channel

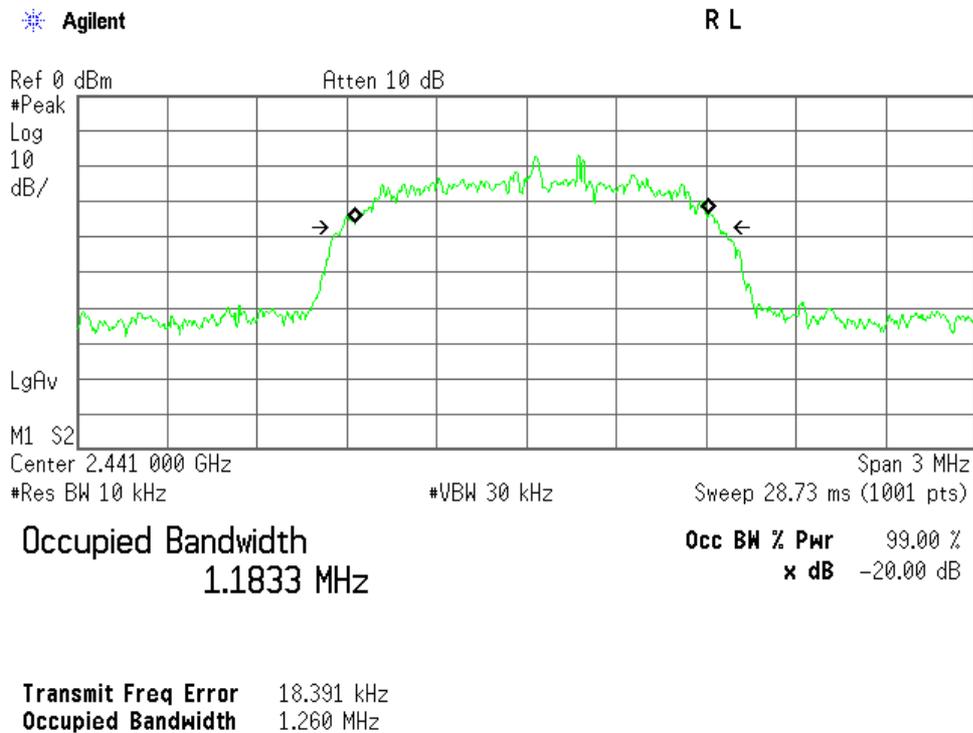

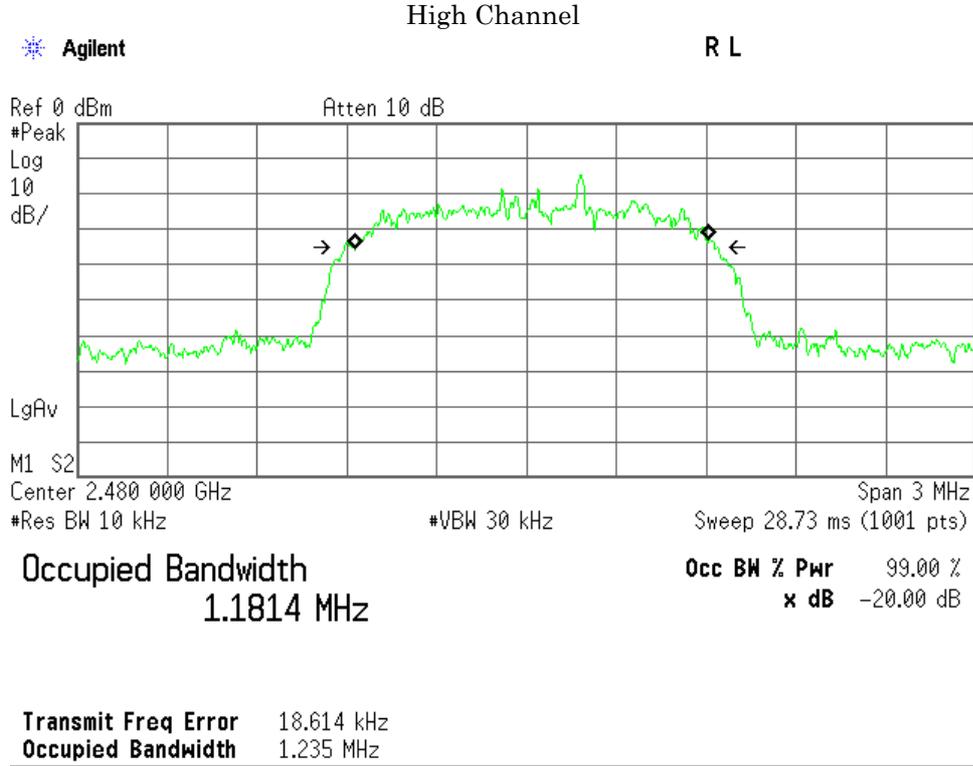

Mode of EUT : Low Energy

Test Date : October 8, 2013

Temp.:27°C, Humi:54%


The resolution bandwidth was set to about 1% of emission bandwidth, -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

1)Packet Setting : LE (Modulation type : GFSK)


Channel	Frequency (MHz)	99% Bandwidth (kHz)	-6dBc Bandwidth (kHz)	-6dBc Bandwidth Limit (kHz)
00	2402.0	1060.5	719.5	> 500
19	2440.0	1061.0	719.1	> 500
39	2480.0	1061.5	719.2	> 500

1)Packet Setting : LE (Modulation type : GFSK)

Low Channel

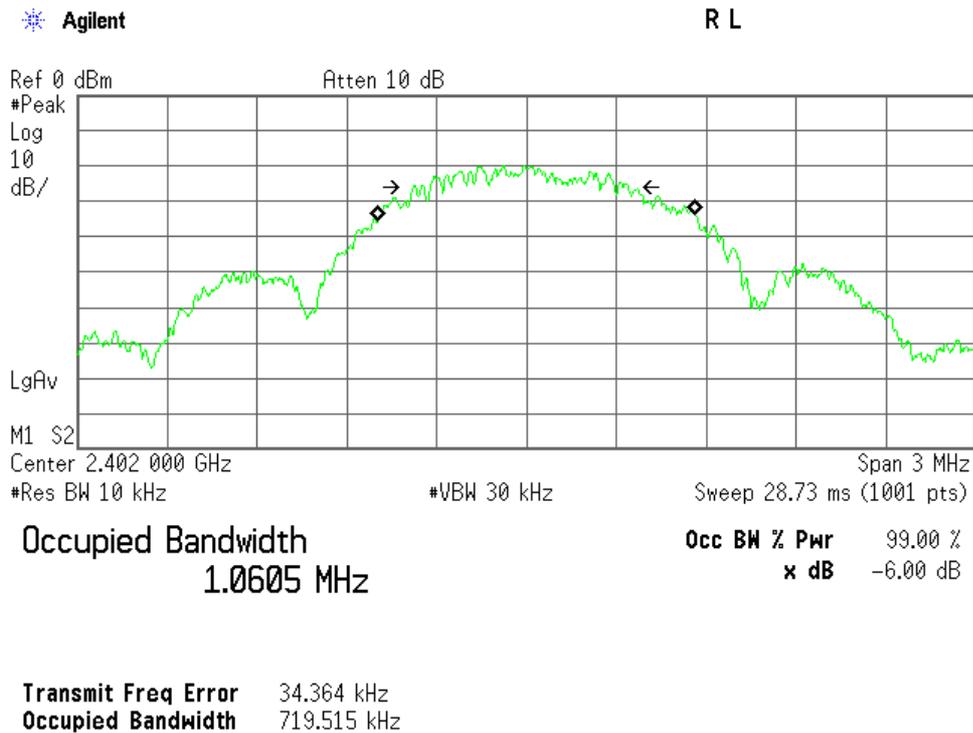


### Middle Channel

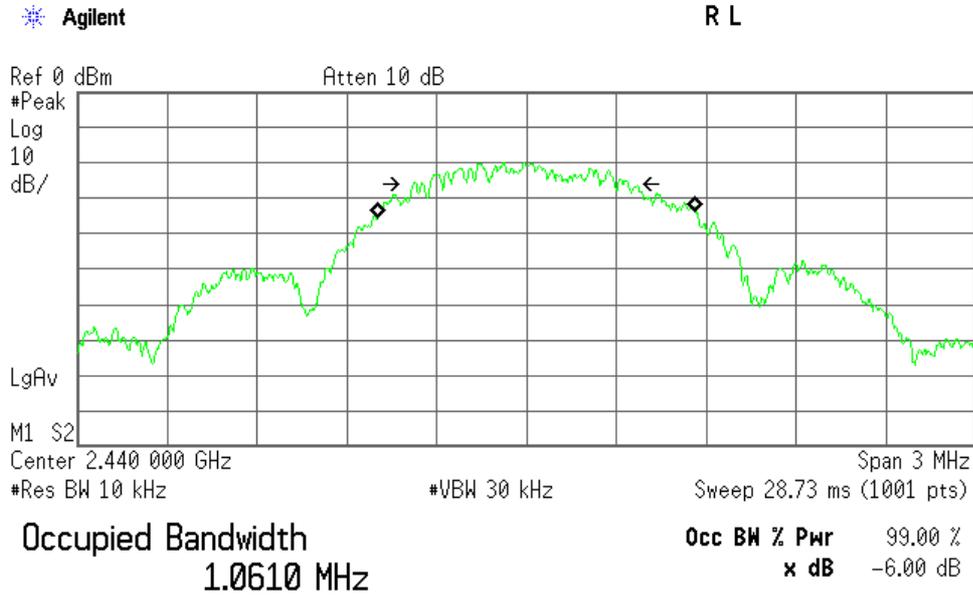

**Transmit Freq Error** 34.689 kHz  
**Occupied Bandwidth** 719.118 kHz

### High Channel

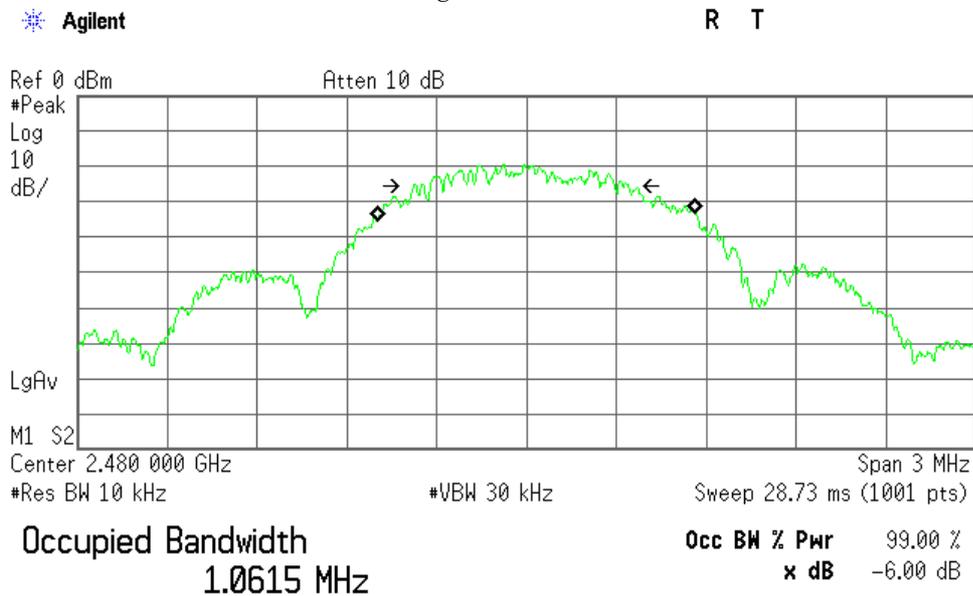

**Transmit Freq Error** 34.065 kHz  
**Occupied Bandwidth** 719.237 kHz

**7.4 Dwell Time**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - **Passed**  - **Failed**  - **Not judged**

**7.4.1 Worst Point and Measurement Uncertainty**

Dwell Time is 307.3 msec  
Dwell Time (Inquiry) is 63.0 msec  
Dwell Time (AFH) is 307.8 msec

Uncertainty of Measurement Results +/-0.6 %(2σ)

Remarks : \_\_\_\_\_

**7.4.2 Test Site**

KITA-KANSAI Testing Center


Test site : SAITO  - Anechoic chamber (A1)  - Measurement room (M1)  
 - Measurement room (M2)  - Measurement room (M3)  
 - Shielded room (S1)  - Shielded room (S2)  
 - Shielded room (S3)  - Shielded room (S4)

**7.4.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year

**7.4.4 Test Method and Test Setup (Diagrammatic illustration)**

The test system is shown as follows:

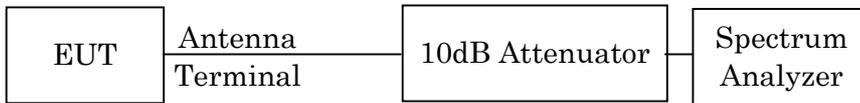

The setting of the spectrum analyzer are shown as follows:

Res. Bandwidth	1 MHz
Video Bandwidth	1 MHz
Span	Zero Span


**7.4.5 Test Data**

Test Date : October 8, 2013

Temp.: 27°C, Humi:54%


Mode of EUT	Dwell Time (msec)	Limit (msec)
DH1	121.9	400
DH3	262.1	400
DH5	307.3	400
Inquiry	63.0	400

DH1(Modulation type : GFSK)

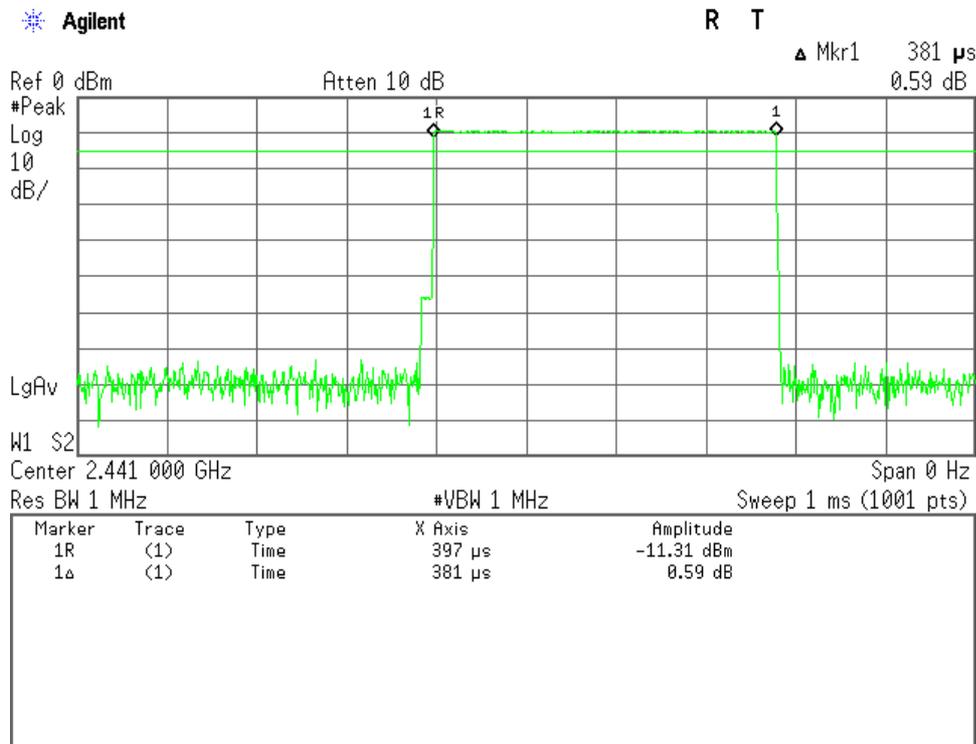


Note : The system makes worst case 1600 hops per second or 1 time slot has a length of 625 μs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 79 channels. So the system has each channel 10.1266 times per second and so for 31.6 seconds the system have 320.0 times of appearance.  
 Each tx-time per appearance is 0.381 ms.  
 Dwell time = 320.0 \* 0.381 = 121.9 ms

DH3(Modulation type : GFSK)

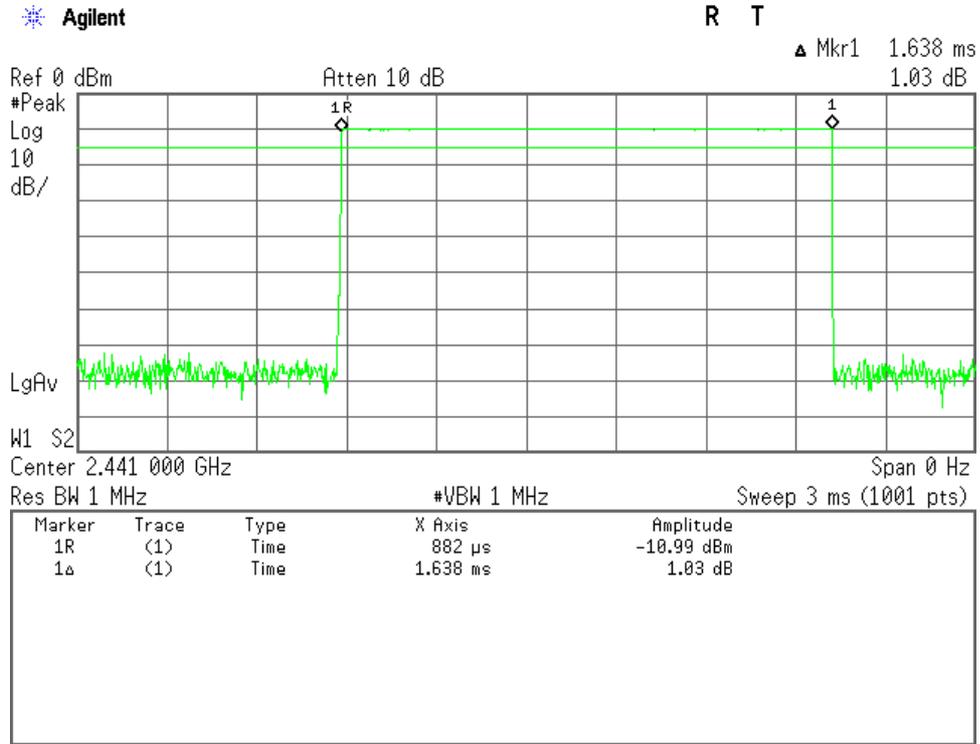


Note : A DH3 Packet need 3 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 400 hops per second with 79 channels. So the system have each channel 5.063 times per second and so for 31.6 seconds the system have 160.0 times of appearance. Each tx-time per appearance is 1.638 ms.  
Dwell time = 160.0 \* 1.638 = 262.1 ms

DH5(Modulation type : GFSK)

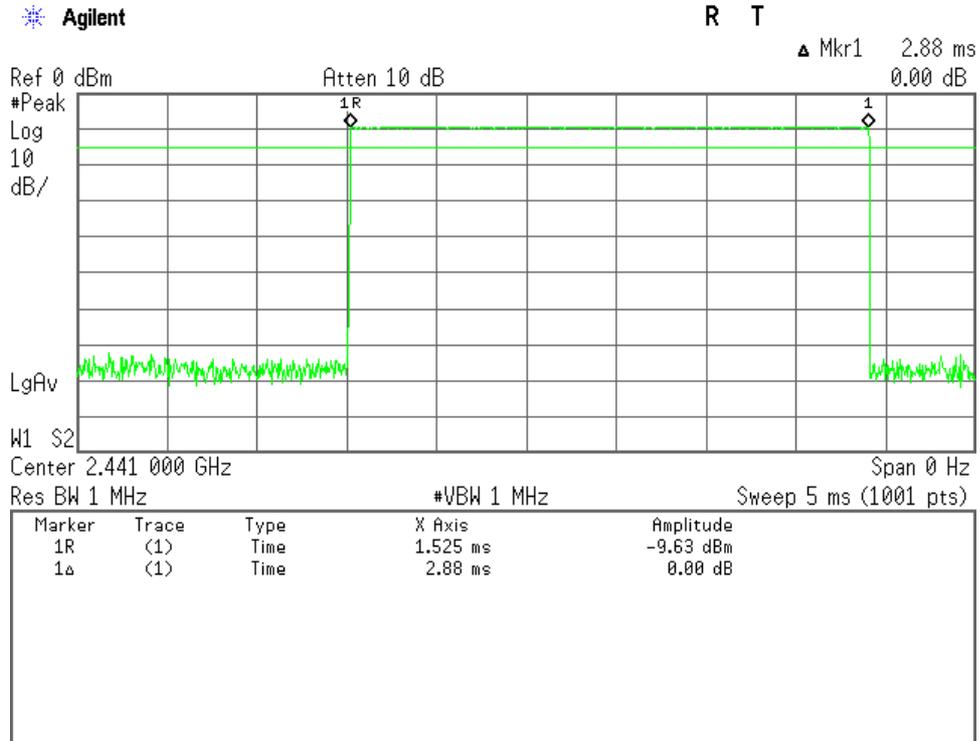

Note : A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 266.667 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.7 times of appearance. Each tx-time per appearance is 2.88 ms.  
Dwell time = 106.7 \* 2.88 = 307.3 ms

Inquiry

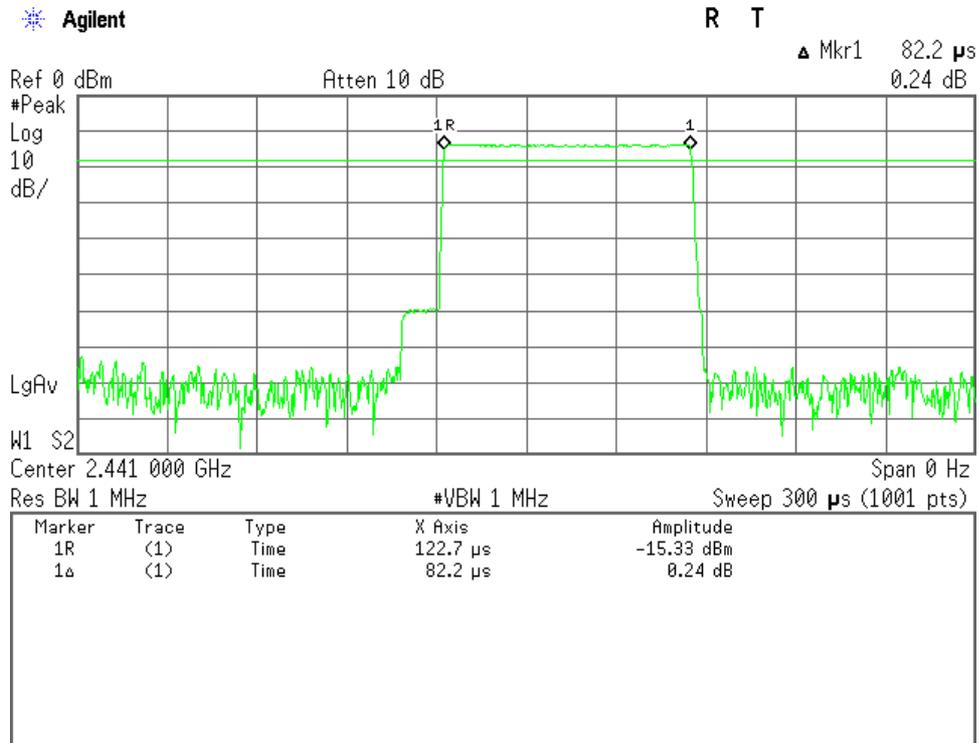

Note : The system have 32 hopping channel in Inquiry mode.

The time period =  $32 * 0.4 = 12.8$  seconds


In maximum case the Bluetooth system have three blocks of 2560 ms in 12.8 s period. One block has 256 burst at each hopping channel.

Each tx-time per appearance is 0.082 ms.

Dwell time =  $0.082 * 256 * 3 = 63.0$  ms

Mode of EUT	Dwell Time (msec)	Limit (msec)
DH1(AFH)	121.9	400
DH3(AFH)	262.1	400
DH5(AFH)	307.8	400

DH1(AFH mode, Modulation type : GFSK)

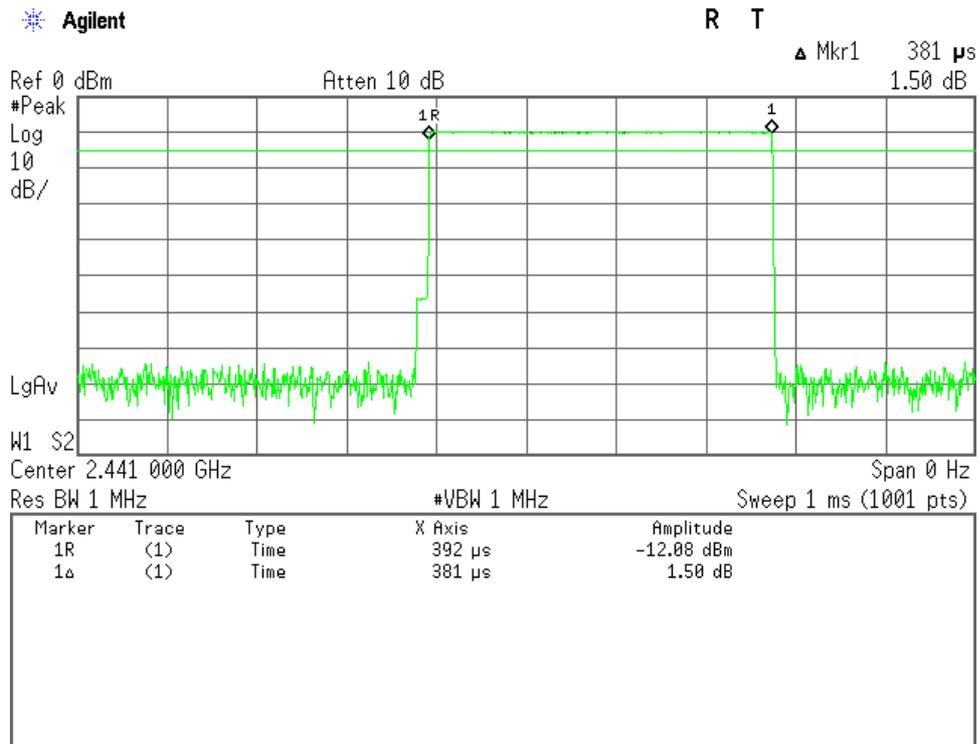


Note : The system makes worst case 1600 hops per second or 1 time slot has a length of 625 μs with 79 channels. A DH1 Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 800 hops per second with 20 channels. So the system has each channel 40 times per second and so for 8 seconds the system have 320.0 times of appearance.

Each tx-time per appearance is 0.381 ms.


Dwell time = 320.0 \* 0.381 = 121.9 ms

DH3(AFH mode, Modulation type : GFSK)

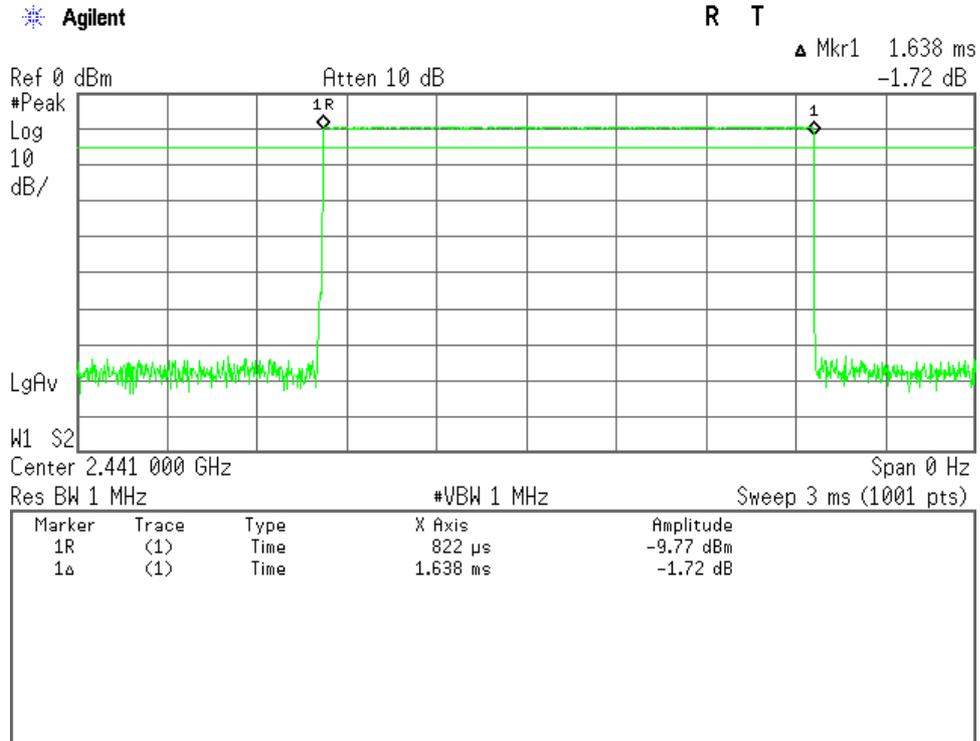

Note : A DH3 Packet need 3 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 400 hops per second with 20 channels. So the system have each channel 20 times per second and so for 8 seconds the system have 160.0 times of appearance. Each tx-time per appearance is 1.638 ms.  
Dwell time = 160.0 \* 1.638 = 262.1 ms

DH5(AFH mode, Modulation type : GFSK)

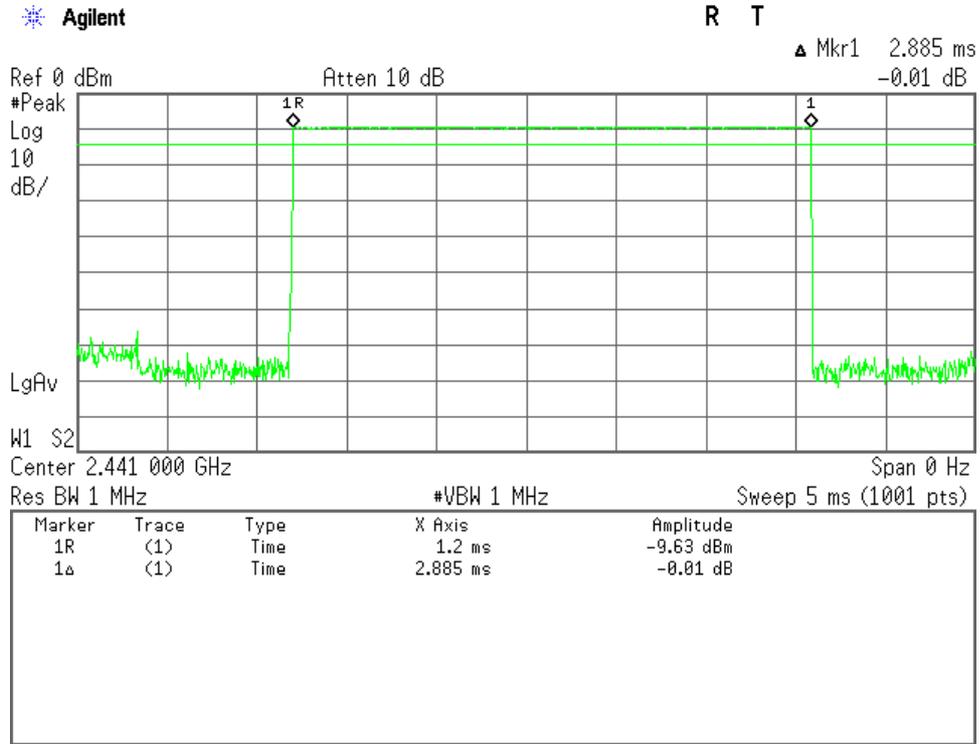

Note : A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 266.667 hops per second with 20 channels. So the system have each channel 13.33335 times per second and so for 8 seconds the system have 106.7 times of appearance. Each tx-time per appearance is 2.885 ms.  
Dwell time = 106.7 \* 2.885 = 307.8 ms

**7.5 Peak Output Power(Conduction)**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - **Passed**  - **Failed**  - **Not judged**

**7.5.1 Worst Point and Measurement Uncertainty**

Peak Output Power is \_\_\_\_\_ 2.01 dBm at \_\_\_\_\_ 2480.0 MHz

Uncertainty of Measurement Results at Amplitude \_\_\_\_\_ +/-0.8 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**7.5.2 Test Site**

KITA-KANSAI Testing Center


Test site : SAITO  - Anechoic chamber (A1)  - Measurement room (M1)  
 - Measurement room (M2)  - Measurement room (M3)  
 - Shielded room (S1)  - Shielded room (S2)  
 - Shielded room (S3)  - Shielded room (S4)

**7.5.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	N1911A	Agilent	B-63	2013/7	1 Year
Power Sensor	N1921A	Agilent	B-64	2013/7	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year

**7.5.4 Test Method and Test Setup (Diagrammatic illustration)**

The Conducted RF Power Output was measured with a power meter, one 10dB attenuator and a short, low loss cable.

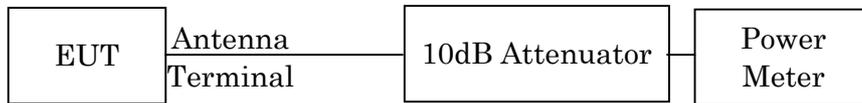

**7.5.5 Test Data**

1)DH5(Modulation type : GFSK)

Test Date: October 8, 2013  
Temp.: 27 °C, Humi: 54 %

CH	Transmitting Frequency	Correction Factor	Meter Reading	Conducted		Limits	Margin
	[MHz]			Peak Output Power	[dBm]		
		[dB]	[dBm]	[dBm]		[dBm]	[dB]
00	2402	10.08	-9.55	0.53	1.13	20.97	+20.44
39	2441	10.09	-9.50	0.59	1.15	20.97	+20.38
78	2480	10.09	-9.28	0.81	1.21	20.97	+20.16

Calculated result at 2480.000 MHz, as the worst point shown on underline:			
Correction Factor	=	10.09 dB	
+ ) Meter Reading	=	-9.28 dBm	
Result	=	0.81 dBm = 1.21 mW	
Minimum Margin: 20.97 - 0.81 = 20.16 (dB)			

NOTES	
1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.	
2. Setting of measuring instrument(s) :	
Detector Function	Video B.W.
Peak	Off

2)2DH5(Modulation type : pi/4-DQPSK)

Test Date: October 8, 2013

Temp.: 27 °C, Humi: 54 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
00	2402	10.08	-8.69	1.39	1.38	20.97	+19.58
39	2441	10.09	-8.67	1.42	1.39	20.97	+19.55
78	2480	10.09	-8.41	1.68	1.47	20.97	+19.29

Calculated result at 2480.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.09 dB
+ ) Meter Reading	=	-8.41 dBm
Result	=	1.68 dBm = 1.47 mW

Minimum Margin: 20.97 - 1.68 = 19.29 (dB)

NOTES

- The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
- Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

3)3DH5(Modulation type : 8DPSK)

Test Date: October 8, 2013

Temp.: 27 °C, Humi: 54 %

CH	Transmitting Frequency		Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
	[MHz]				[dBm]	[mW]		
00	2402		10.08	-8.41	1.67	1.47	20.97	+19.30
39	2441		10.09	-8.37	1.72	1.49	20.97	+19.25
78	2480		10.09	-8.08	2.01	1.59	20.97	+18.96

Calculated result at 2480.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.09 dB
+ ) Meter Reading	=	-8.08 dBm
Result	=	2.01 dBm = 1.59 mW

Minimum Margin: 20.97 - 2.01 = 18.96 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

4)LE(Modulation type : GFSK)

Test Date: October 8, 2013

Temp.: 27 °C, Humi: 54 %

CH	Transmitting Frequency [MHz]	Correction Factor [dB]	Meter Reading [dBm]	Conducted Peak Output Power		Limits [dBm]	Margin [dB]
				[dBm]	[mW]		
00	2402	10.08	-9.58	0.50	1.12	30.00	+29.50
19	2440	10.09	-9.59	0.50	1.12	30.00	+29.50
39	2480	10.09	-9.30	0.79	1.20	30.00	+29.21

Calculated result at 2480.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.09 dB
+ ) <u>Meter Reading</u>	=	<u>-9.30 dBm</u>
Result	=	0.79 dBm = 1.20 mW

Minimum Margin: 30.00 - 0.79 = 29.21 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

**7.6 Peak Power Density(Conduction)**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - **Passed**  - **Failed**  - **Not judged**

**7.6.1 Worst Point and Measurement Uncertainty**

Peak Power Density is  -12.39  dBm at  2480.0  MHz

Uncertainty of Measurement Results at Amplitude  +/-1.2  dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**7.6.2 Test Site**

KITA-KANSAI Testing Center

Test site : SAITO


<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

**7.6.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year

**7.6.4 Test Method and Test Setup (Diagrammatic illustration)**

The test system is shown as follows:

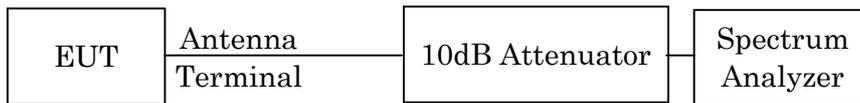

## 7.6.5 Test Data

LE(Modulation type : GFSK)

Test Date: October 8, 2013  
Temp.: 27 °C, Humi: 54 %

CH	Transmitting Frequency		Correction Factor [dB]	BWCF [dB]	Meter Reading [dBm]	Conducted Peak Power Density		Limits [dBm]	Margin [dB]
	[MHz]	[MHz]				[dBm]	[mW]		
00	2402		10.08	-10.00	-12.77	-12.69	0.05	8.00	+20.69
19	2440		10.09	-10.00	-12.77	-12.68	0.05	8.00	+20.68
39	2480		10.09	-10.00	-12.48	-12.39	0.06	8.00	+20.39

Calculated result at 2480.000 MHz, as the worst point shown on underline:



Correction Factor	=	10.09 dB
BWCF	=	-10.00 dB
+ ) Meter Reading	=	-12.48 dBm
Result	=	-12.39 dBm = 0.06 mW

Minimum Margin: 8.00 - -12.39 = 20.39 (dB)

### NOTES

1. The peak power density complied with the limit without BWCF.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. BWCF(bandwidth correction factor) = 10 log (3 kHz/30 kHz) = -10.0 dB
4. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

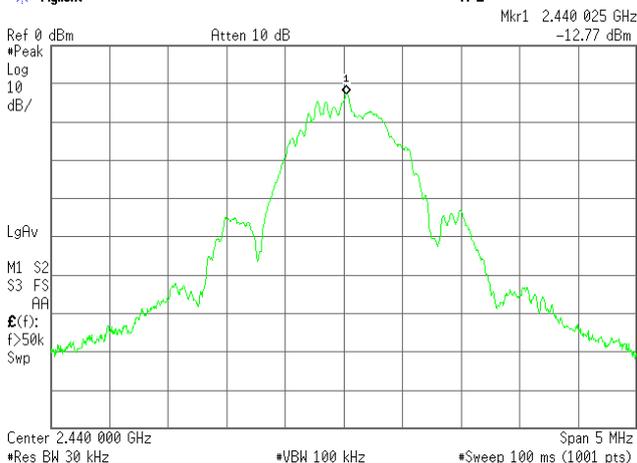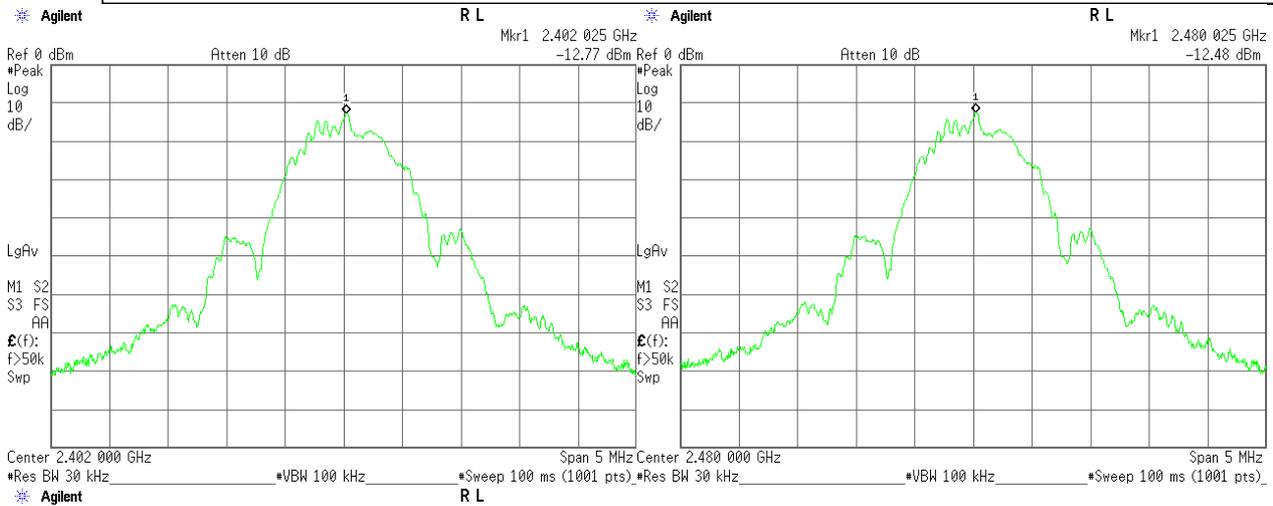

**7.7 Spurious Emissions(Conduction)**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - **Passed**  - **Failed**  - **Not judged**

**7.7.1 Worst Point and Measurement Uncertainty**

Uncertainty of Measurement Results	9 kHz – 1GHz	<u>+/-1.0</u>	dB(2 $\sigma$ )
	1GHz – 18GHz	<u>+/-1.2</u>	dB(2 $\sigma$ )
	18GHz – 40GHz	<u>+/-1.6</u>	dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**7.7.2 Test Site**

KITA-KANSAI Testing Center

Test site : SAITO


<input type="checkbox"/> - Anechoic chamber (A1)	<input type="checkbox"/> - Measurement room (M1)
<input type="checkbox"/> - Measurement room (M2)	<input type="checkbox"/> - Measurement room (M3)
<input type="checkbox"/> - Shielded room (S1)	<input type="checkbox"/> - Shielded room (S2)
<input type="checkbox"/> - Shielded room (S3)	<input checked="" type="checkbox"/> - Shielded room (S4)

**7.7.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Spectrum Analyzer	E4446A	Agilent	A-39	2013/9	1 Year
Attenuator	54A-10	Weinschel	D-28	2013/9	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year

**7.7.4 Test Method and Test Setup (Diagrammatic illustration)**

The test system is shown as follows:

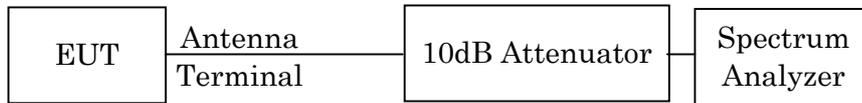

The setting of the spectrum analyzer are shown as follows:

Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold


## 7.7.5 Test Data

Test Date : October 8, 2013




Temp.:27°C, Humi:54%

1) Mode of EUT : Standard+EDR




### Low Channel

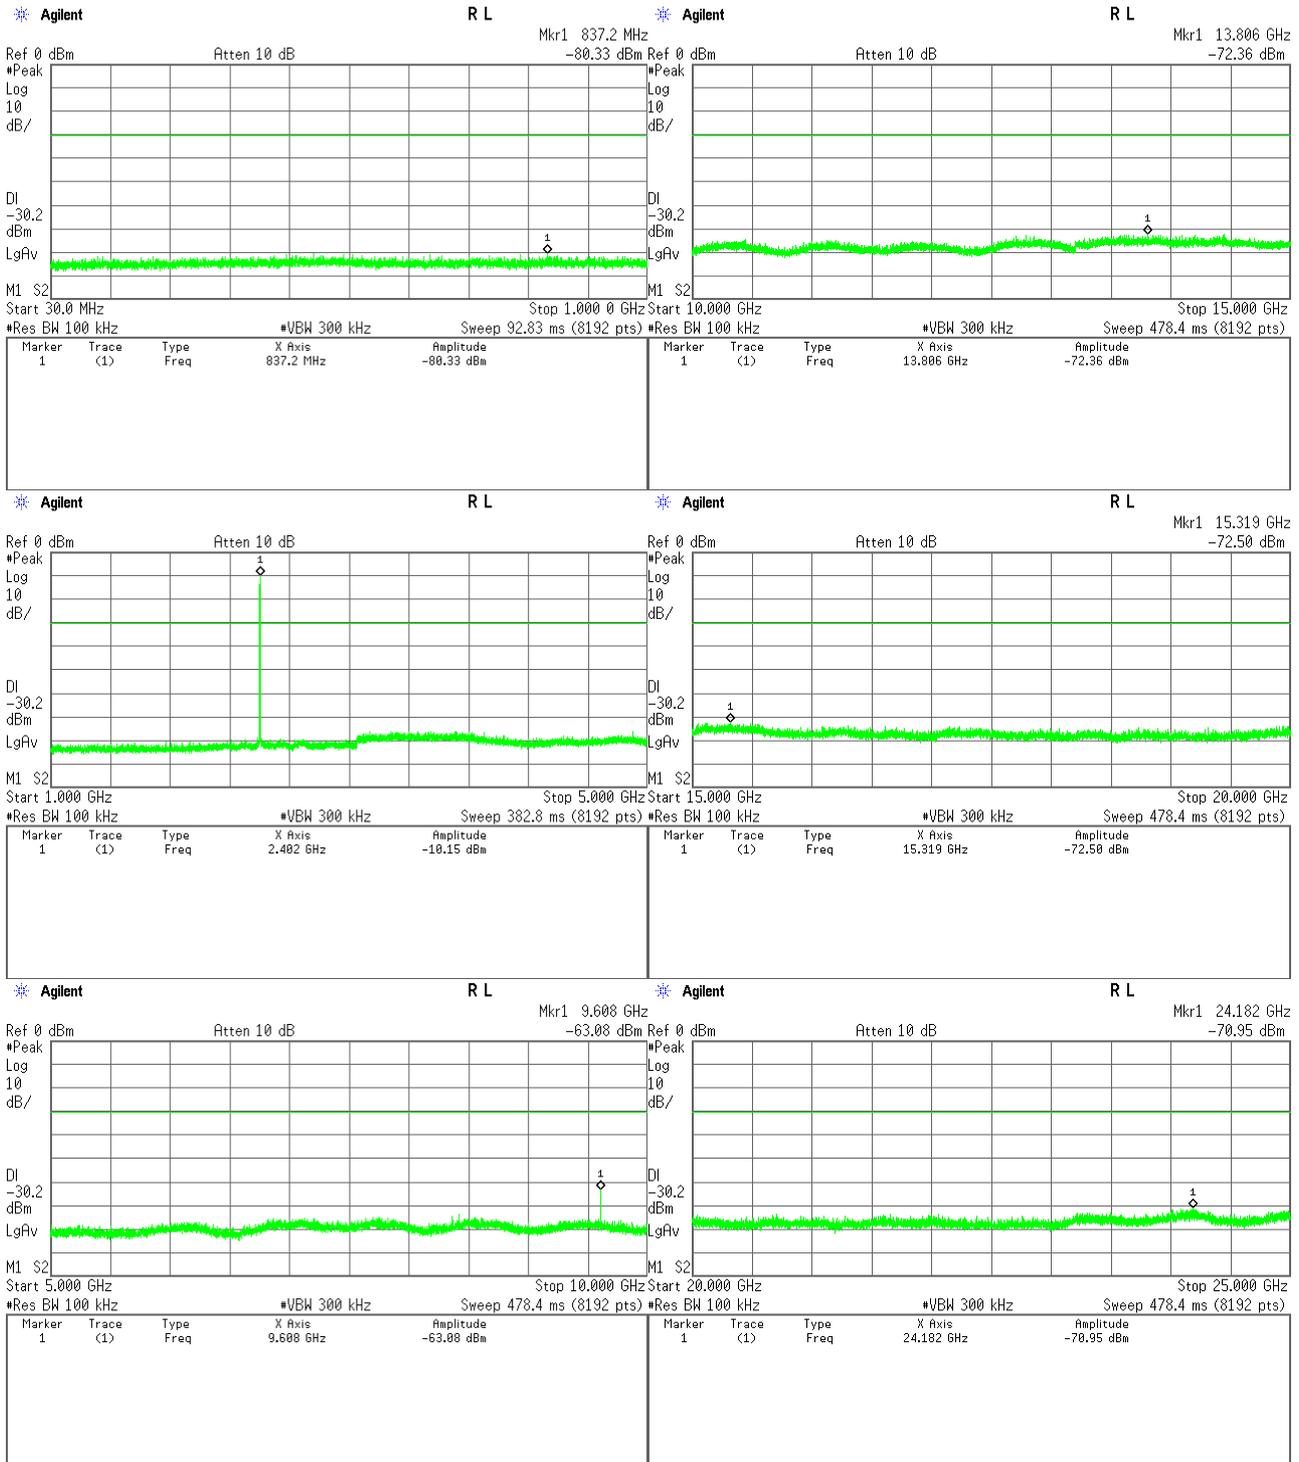

## Middle Channel

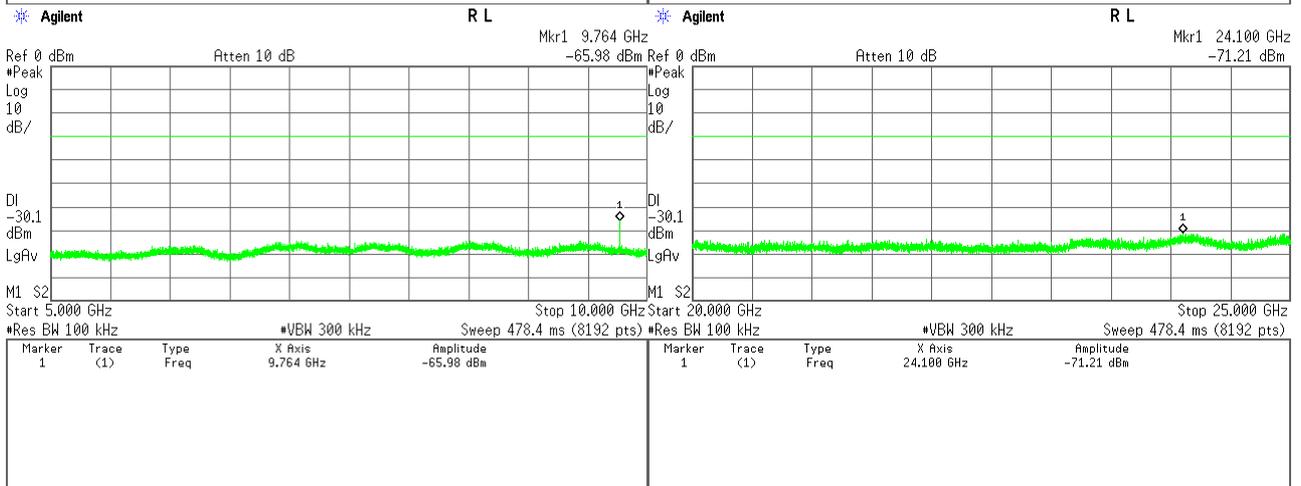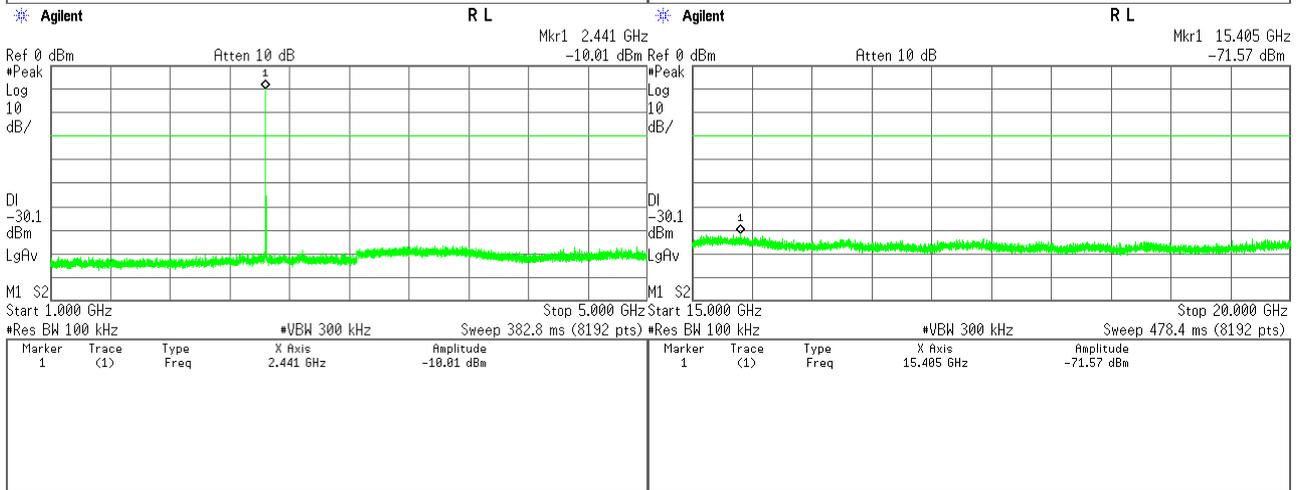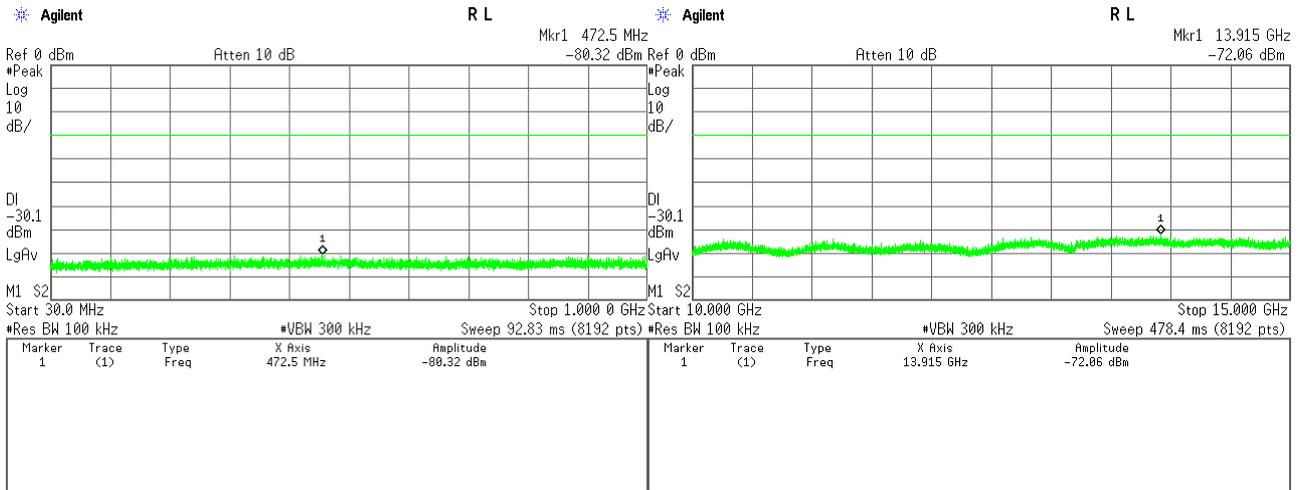


## High Channel

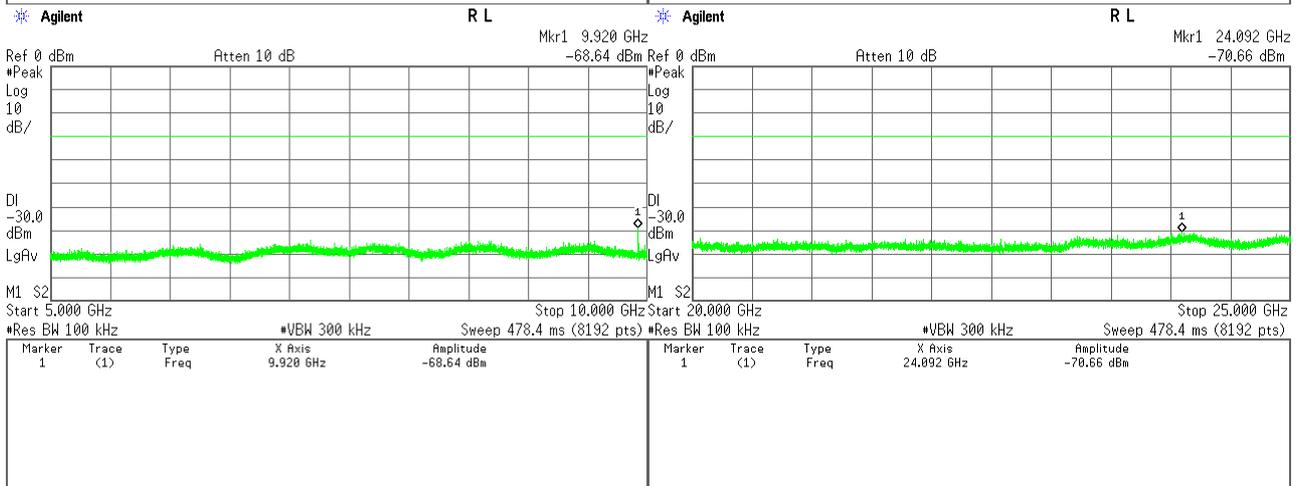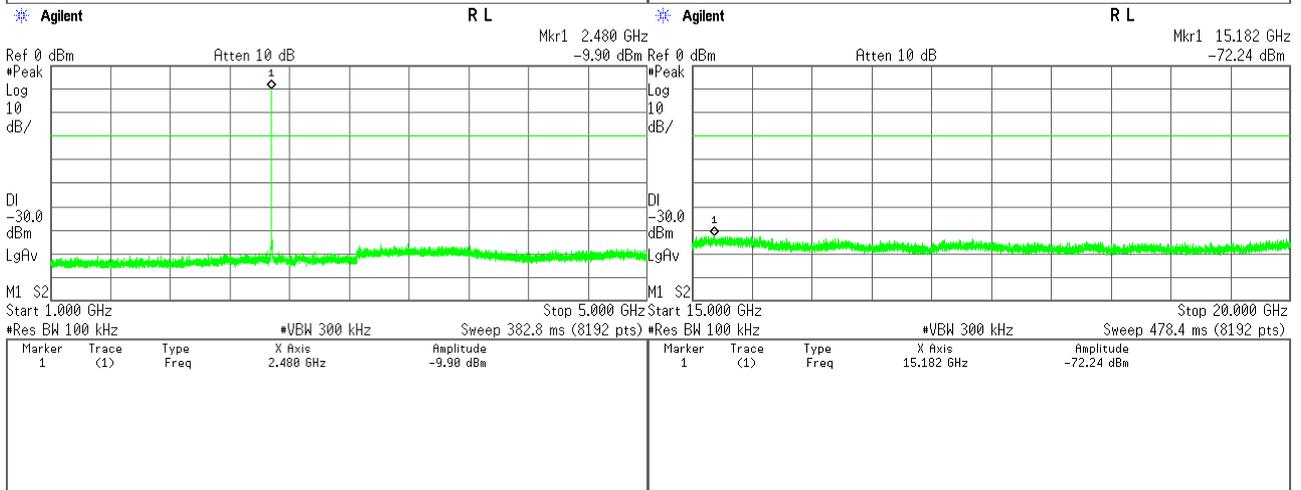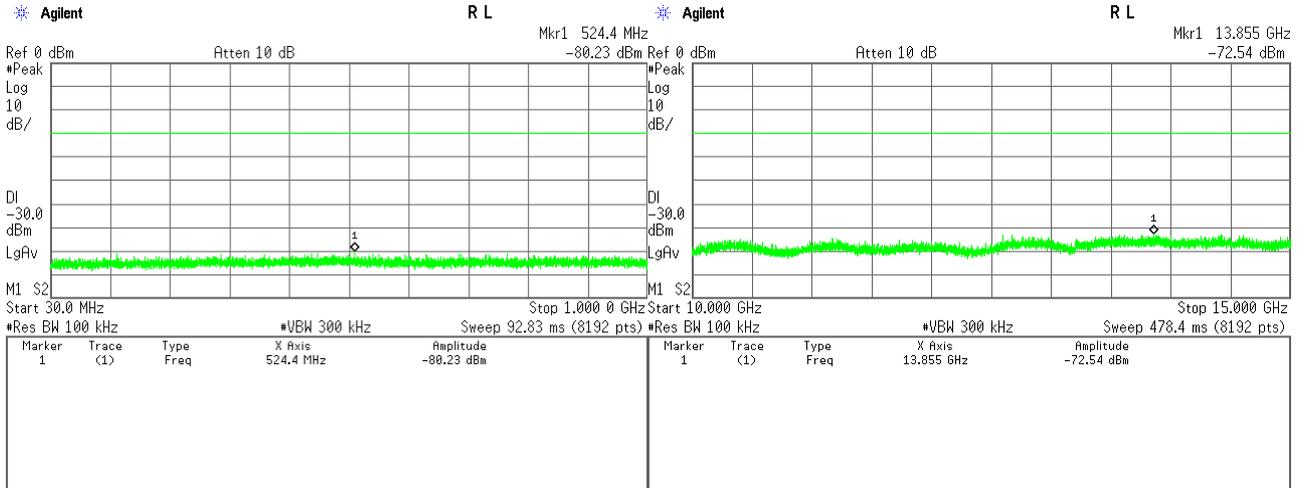


**Band-Edge Emission**


Low Channel(Hopping off), Band-Edge Emission

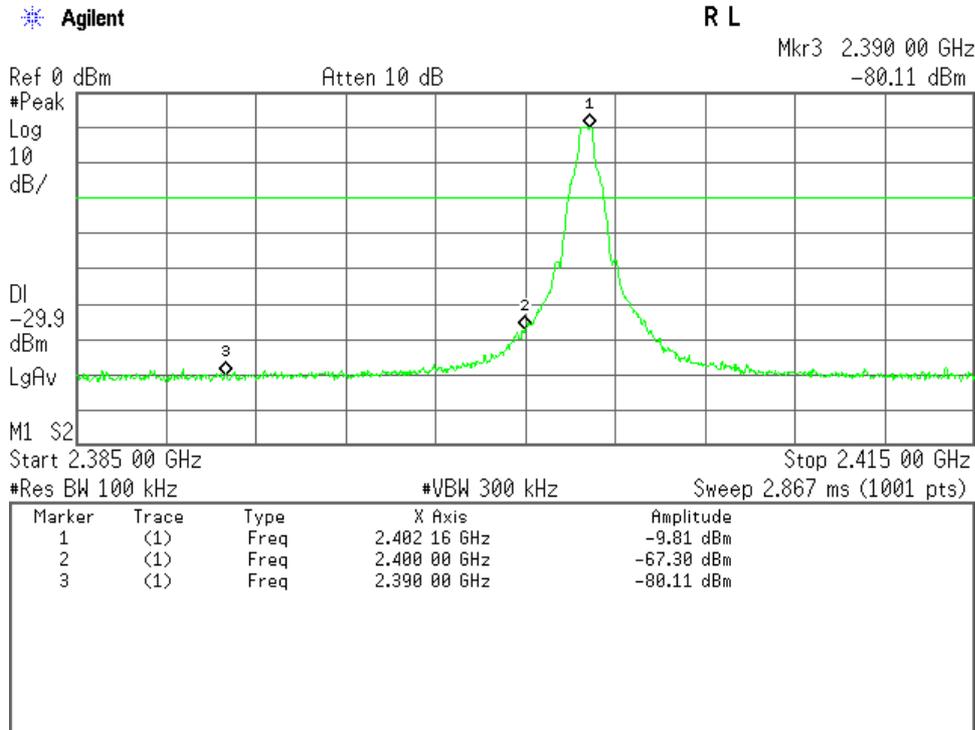


High Channel(Hopping off), Band-Edge Emission

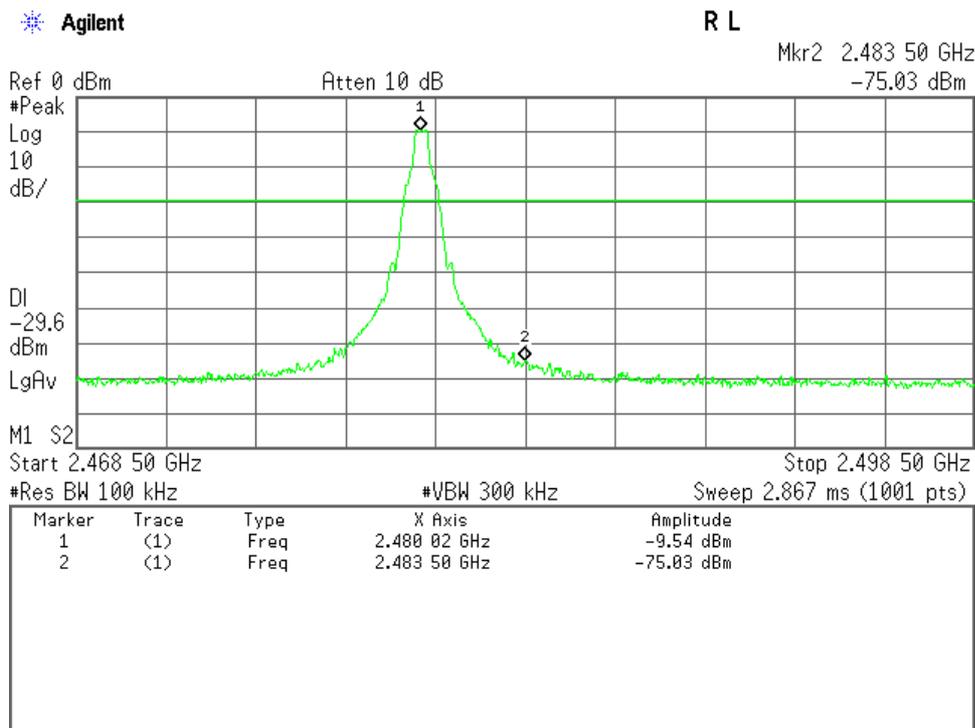

Low Channel(Hopping on), Band-Edge Emission

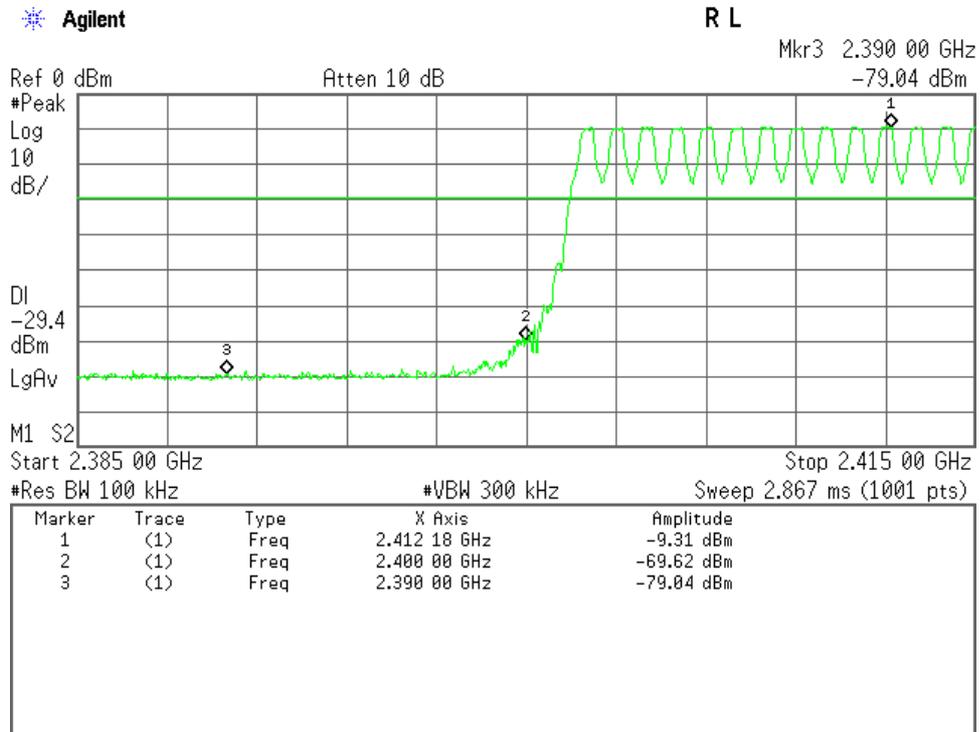


High Channel(Hopping on), Band-Edge Emission



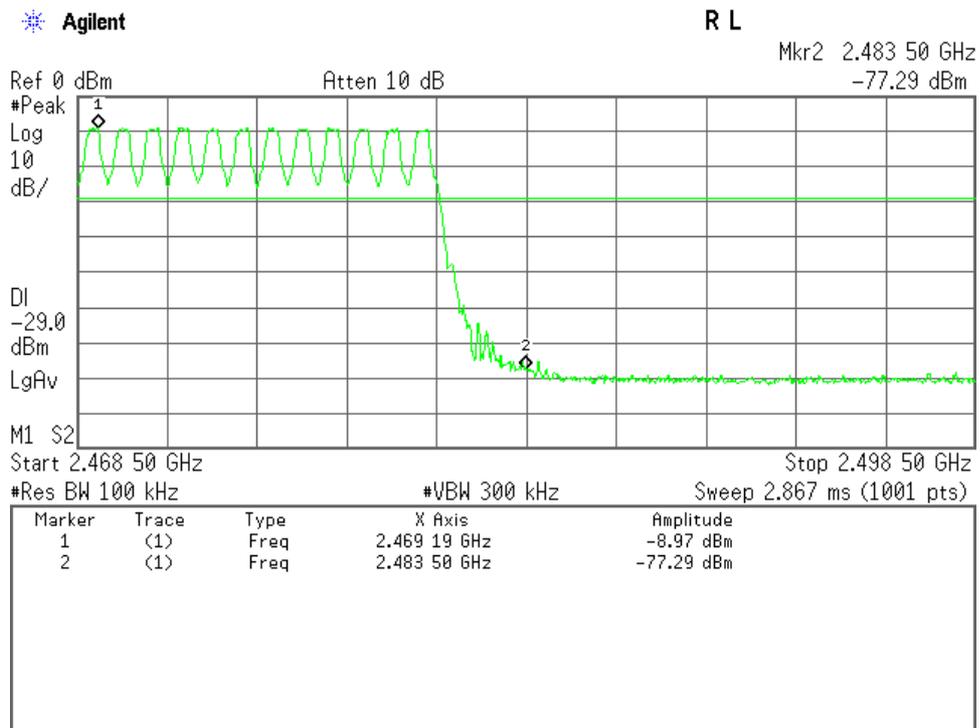


2) Mode of EUT : Low Energy


Low Channel

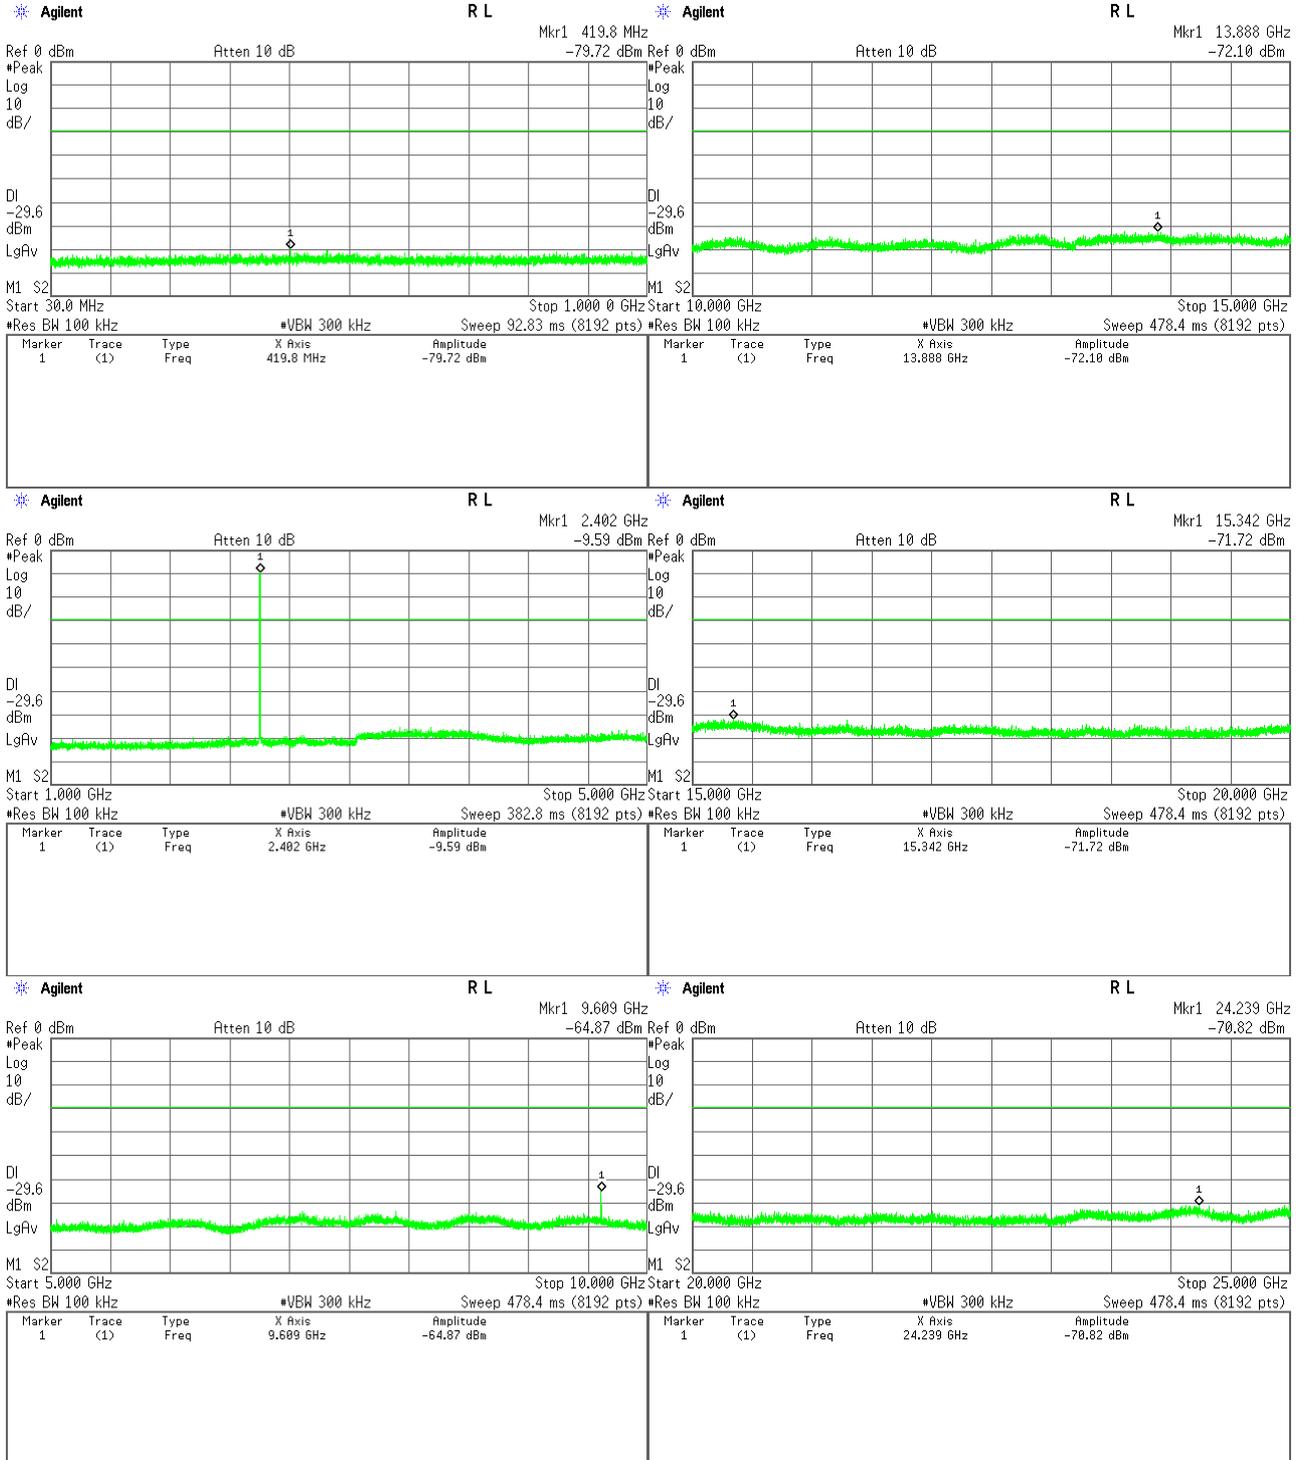

## Middle Channel

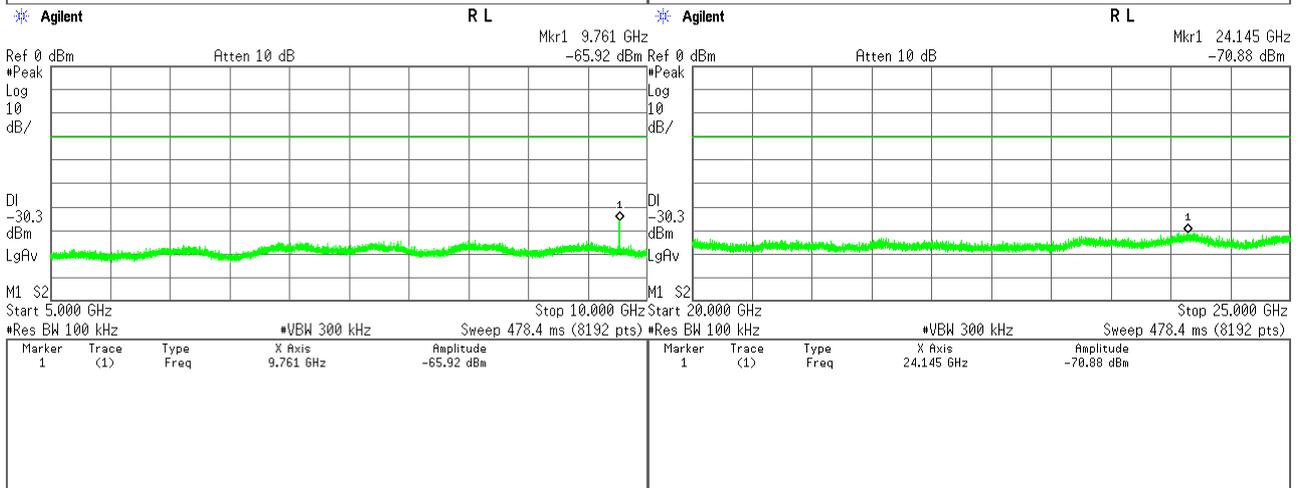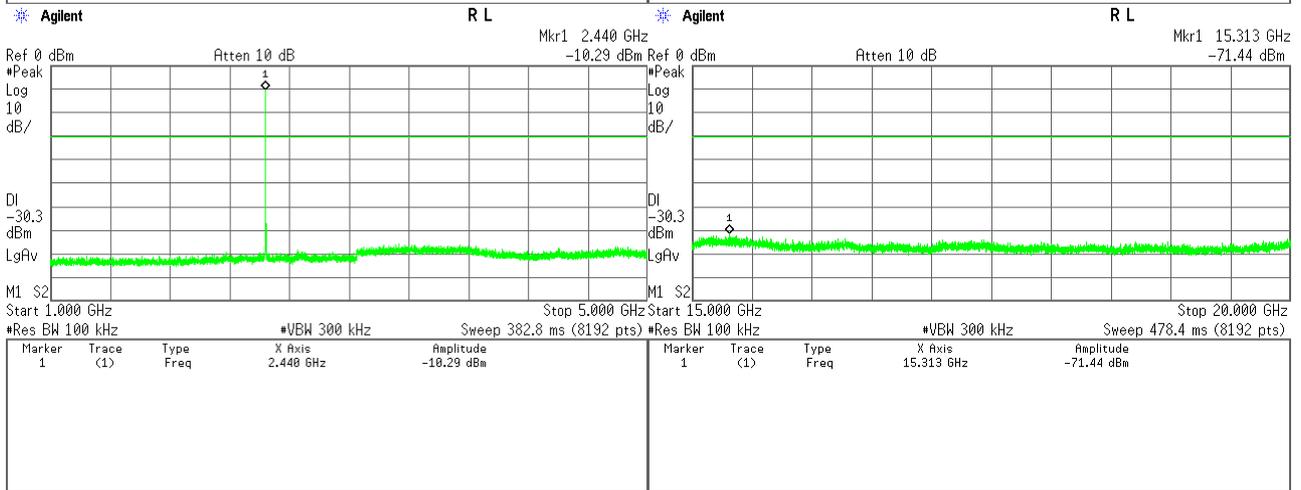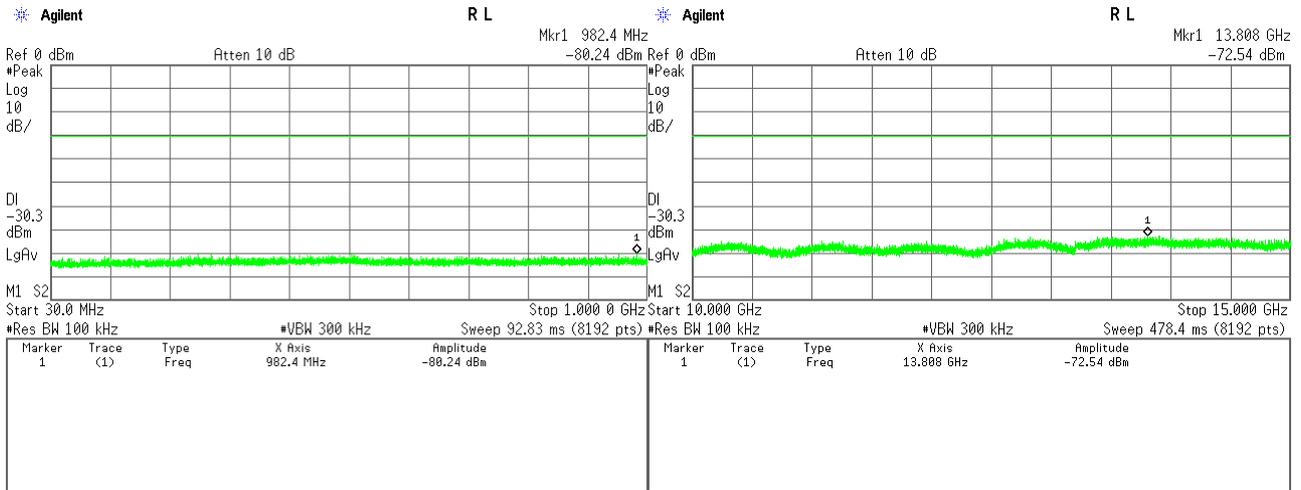


## High Channel

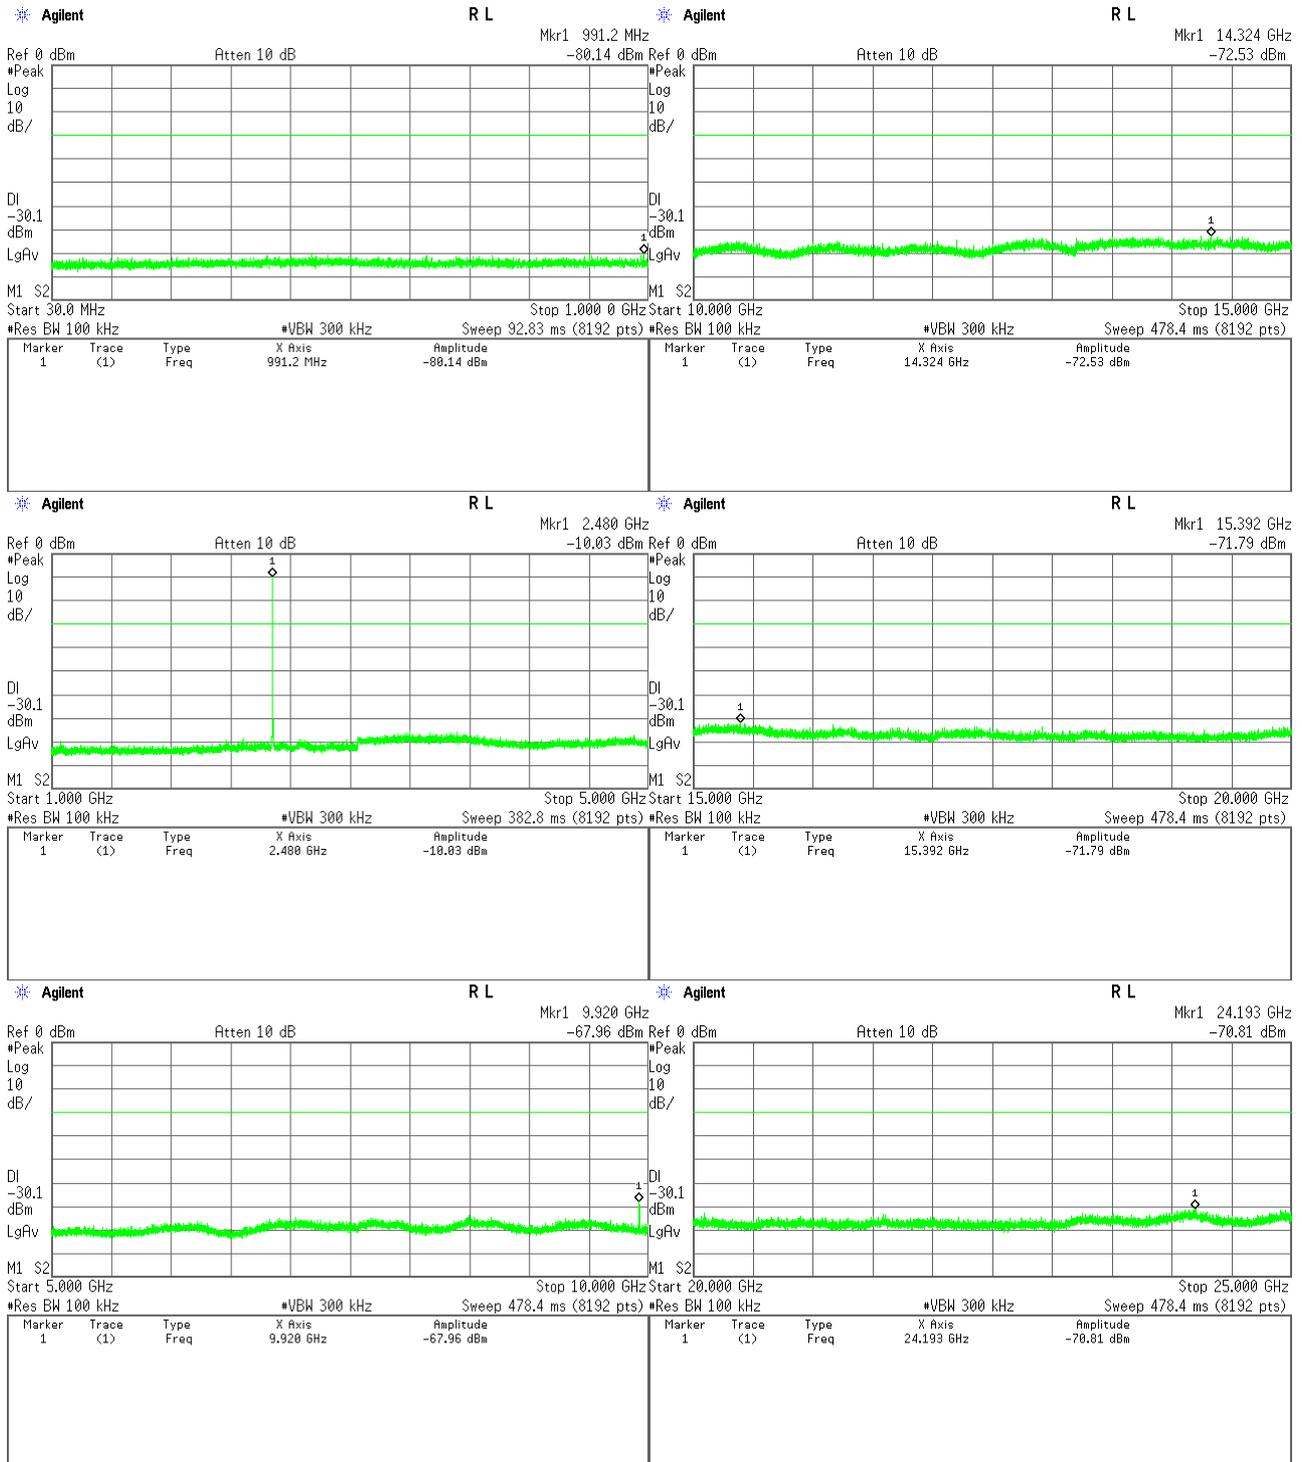


**Band-Edge Emission**

Low Channel, Band-Edge Emission

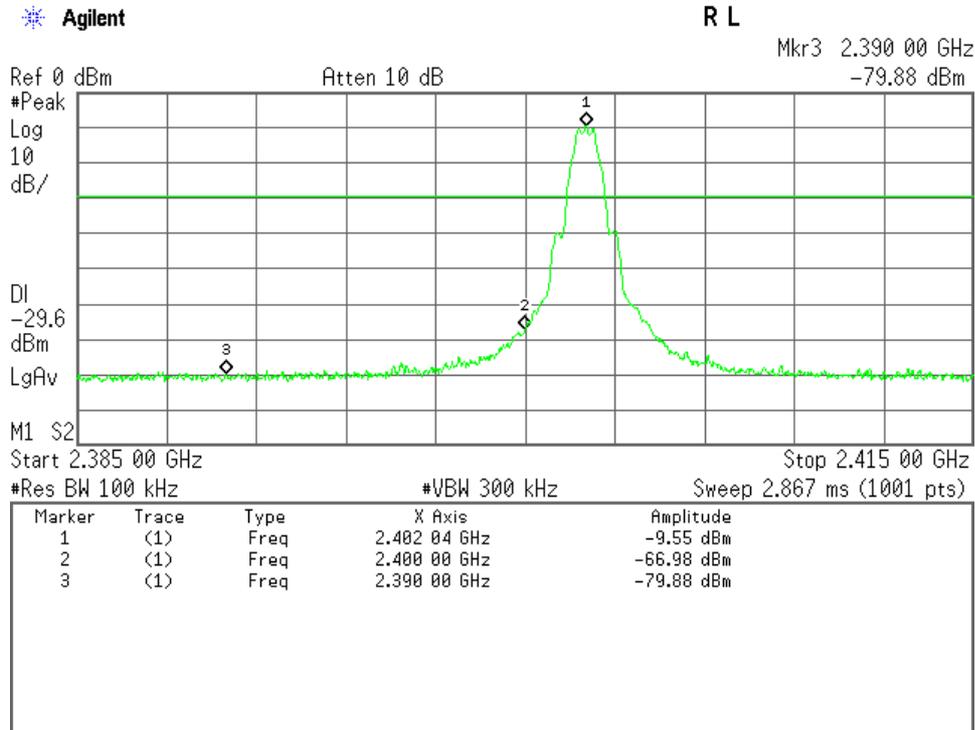

High Channel, Band-Edge Emission

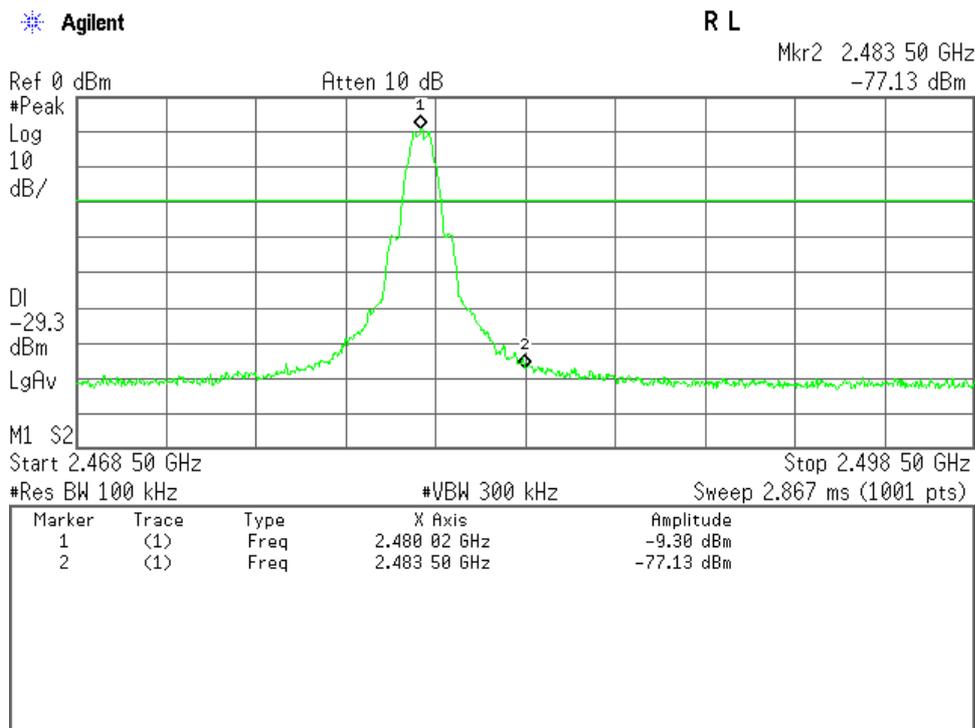

**7.8 AC Powerline Conducted Emission**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - Passed  - Failed  - Not judged

**7.8.1 Worst Point and Measurement Uncertainty**

Min. Limit Margin (Quasi-Peak) 4.0 dB at 1.34 MHz

Uncertainty of Measurement Results +/-2.7 dB(2σ)

Remarks : \_\_\_\_\_

**7.8.2 Test Site**

KITA-KANSAI Testing Center

Test site : SAITO  - Anechoic chamber (A1)  - Measurement room (M1)  
 - Measurement room (M2)  - Measurement room (M3)  
 - Shielded room (S1)  - Shielded room (S2)  
 - Shielded room (S3)  - Shielded room (S4)

**7.8.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2013/4	1 Year
AMN (main)	KNW-407R	Kyoritsu	D-39	2013/9	1 Year
RF Cable	RG223/U	SUHNER	H-7	2012/11	1 Year


**7.8.4 Test Method and Test Setup (Diagrammatic illustration)**

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

– Side View –

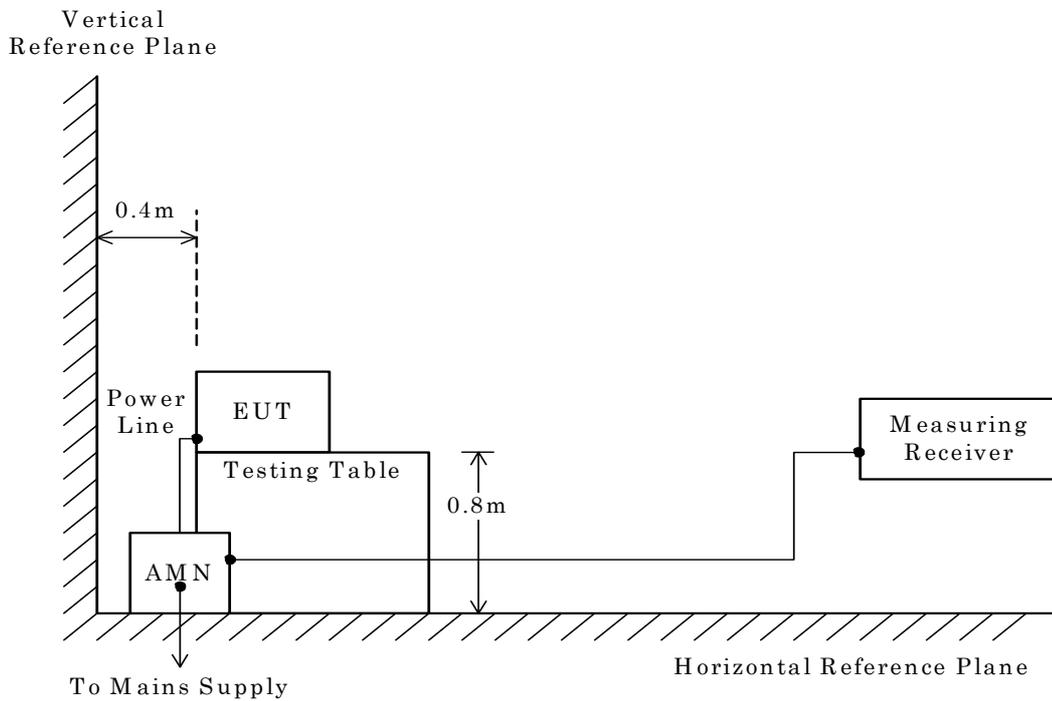

NOTE


AMN : Artificial Mains Network

### 7.8.5 Test Data

Mode of EUT : All modes have been investigated and the worst case mode for channel (39ch: 2441MHz) has been listed.

Test Date: September 30, 2013  
Temp.: 26 °C, Humi.: 50 %

Frequency [MHz]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]	Remarks
		VA QP	VA AVE	VB QP	VB AVE	QP	AVE	QP	AVE		
0.21	10.2	33.4	--	30.3	--	63.2	53.2	43.6	--	+19.6	-
0.30	10.2	35.0	--	30.0	--	60.2	50.2	45.2	--	+15.0	-
0.39	10.2	34.4	--	29.4	--	58.1	48.1	44.6	--	+13.5	-
0.49	10.1	33.5	12.4	29.0	--	56.2	46.2	43.6	22.5	+12.6	-
0.79	10.3	37.7	14.2	30.7	--	56.0	46.0	48.0	24.5	+ 8.0	-
<u>1.34</u>	10.3	38.0	16.3	41.7	21.0	56.0	46.0	52.0	31.3	+ 4.0	-
2.77	10.3	33.8	14.1	20.5	--	56.0	46.0	44.1	24.4	+11.9	-
4.93	10.4	21.4	--	14.5	--	56.0	46.0	31.8	--	+24.2	-
9.83	10.6	16.5	--	< 10.0	--	60.0	50.0	27.1	--	+32.9	-

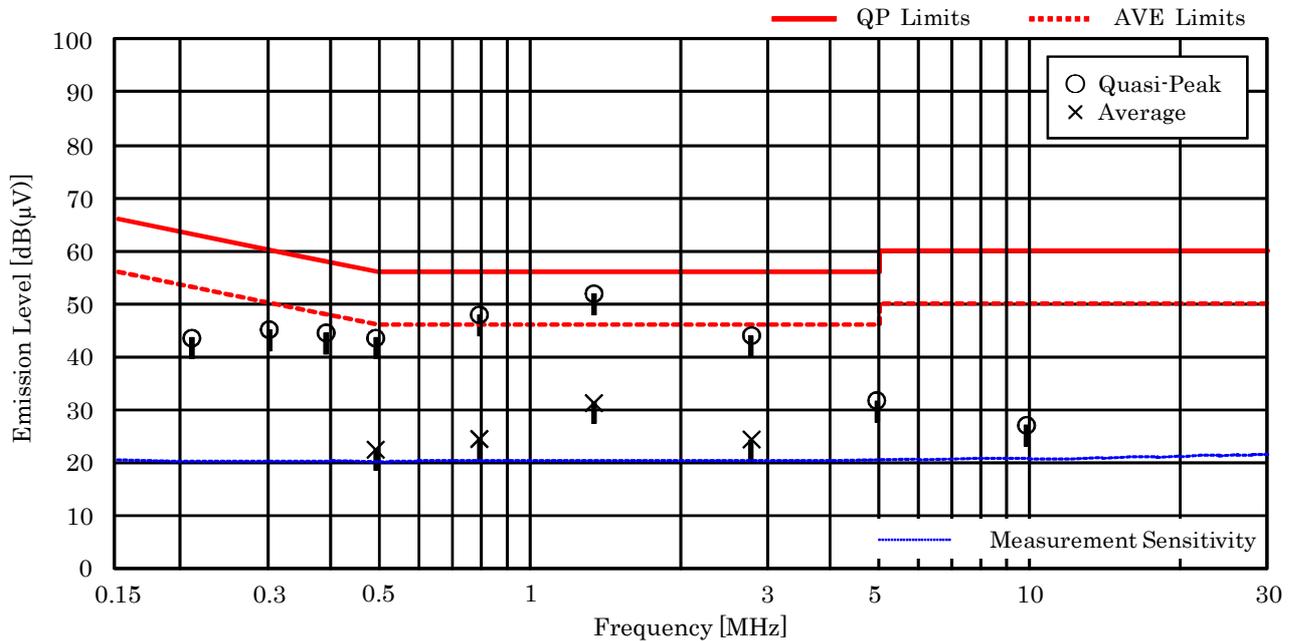

#### NOTES

1. The spectrum was checked from 0.15 MHz to 30 MHz.
2. The correction factor includes the AMN insertion loss and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The symbol of "--" means "not applicable".
6. Calculated result at 1.34 MHz, as the worst point shown on underline:  
 Correction Factor + Meter Reading = 10.3 + 41.7 = 52.0 dB(μV)
7. QP : Quasi-Peak Detector / AVE : Average Detector
8. Test receiver setting(s) : CISPR QP 9 kHz / Average 9 kHz

**7.9 Radiated Emission**

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

**7.9.1 Worst Point and Measurement Uncertainty**

Min. Limit Margin (Average) >5.5 dB at 22320.0 MHz

Uncertainty of Measurement Results	9 kHz – 30 MHz	<u>+/-1.9</u>	dB(2 $\sigma$ )
	30 MHz – 300 MHz	<u>+/-4.3</u>	dB(2 $\sigma$ )
	300 MHz – 1000 MHz	<u>+/-5.4</u>	dB(2 $\sigma$ )
	1 GHz – 6 GHz	<u>+/-4.6</u>	dB(2 $\sigma$ )
	6 GHz – 18 GHz	<u>+/-5.2</u>	dB(2 $\sigma$ )
	18 GHz – 40 GHz	<u>+/-5.4</u>	dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**7.9.2 Test Site**

KITA-KANSAI Testing Center SAITO EMC Branch

- Anechoic chamber A1

- Anechoic chamber A2

**7.9.3 Test Instruments**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Test Receiver	ESU 26	Rohde & Schwarz	A-6	2013/4	1 Year
Loop Antenna	HFH2-Z2	Rohde & Schwarz	C-2	2013/8	1 Year
RF Cable	RG213/U	SUHNER	H-28	2013/8	1 Year
Biconical Antenna	VHA9103/BBA9106	Schwarzbeck	C-30	2013/5	1 Year
Log-periodic Antenna	UHALP9108-A1	Schwarzbeck	C-31	2013/5	1 Year
RF Cable	S 10162 B-11 etc.	SUHNER	H-4	2013/4	1 Year
Site Attenuation	--	----	H-15	2013/2	1 Year
Pre-Amplifier	WJ-6882-824	Watkins Johnson	A-21	2013/2	1 Year
Pre-Amplifier	WJ-6611-513	Watkins Johnson	A-23	2013/2	1 Year
Pre-Amplifier	BZ1840LD1	B&Z	A-29	2013/2	1 Year
Pre-Amplifier	DBL-0618N515	DBS Microwave	A-33	2013/2	1 Year
Horn Antenna	91888-2	EATON	C-41-1	2013/6	1 Year
Horn Antenna	91889-2	EATON	C-41-2	2013/6	1 Year
Horn Antenna	3160-04	EMCO	C-55	2013/7	1 Year
Horn Antenna	3160-05	EMCO	C-56	2013/7	1 Year
Horn Antenna	3160-06	EMCO	C-57	2013/7	1 Year
Horn Antenna	3160-07	EMCO	C-58	2013/7	1 Year
Horn Antenna	3160-08	EMCO	C-59	2013/7	1 Year
Horn Antenna	3160-09	EMCO	C-48	2013/7	1 Year
Attenuator	54A-10	Weinschel	D-29	2013/9	1 Year
Attenuator	2-10	Weinschel	D-79	2012/11	1 Year
Band Rejection Filter	BRM50701	MICRO-TRONICS	D-93	2013/2	1 Year
RF Cable	SUCOFLEX102	SUHNER	C-52	2013/7	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-66	2013/2	1 Year
RF Cable	SUCOFLEX104	SUHNER	C-67	2013/2	1 Year
RF Cable	SUCOFLEX102EA	SUHNER	C-69	2013/2	1 Year
SVSWR	--	----	H-19	2013/2	1 Year
Pre-Amplifier	310N	SONOMA	A-17	2013/4	1 Year

## 7.9.4 Test Method and Test Setup (Diagrammatic illustration)


### 7.9.4.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

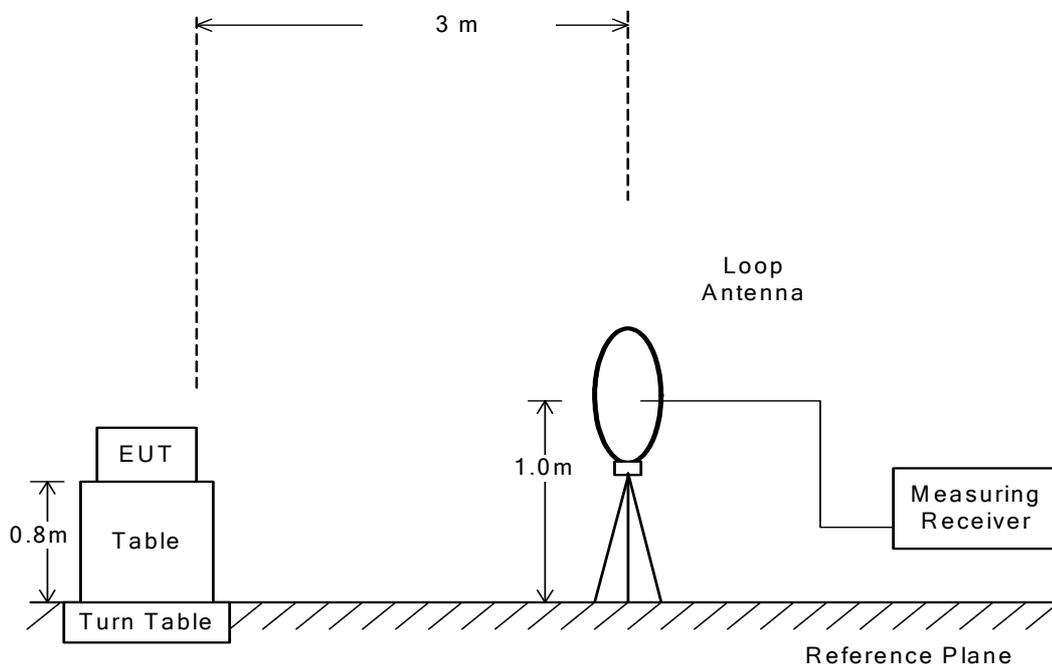


**7.9.4.2 Radiated Emission 30 MHz – 1000 MHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

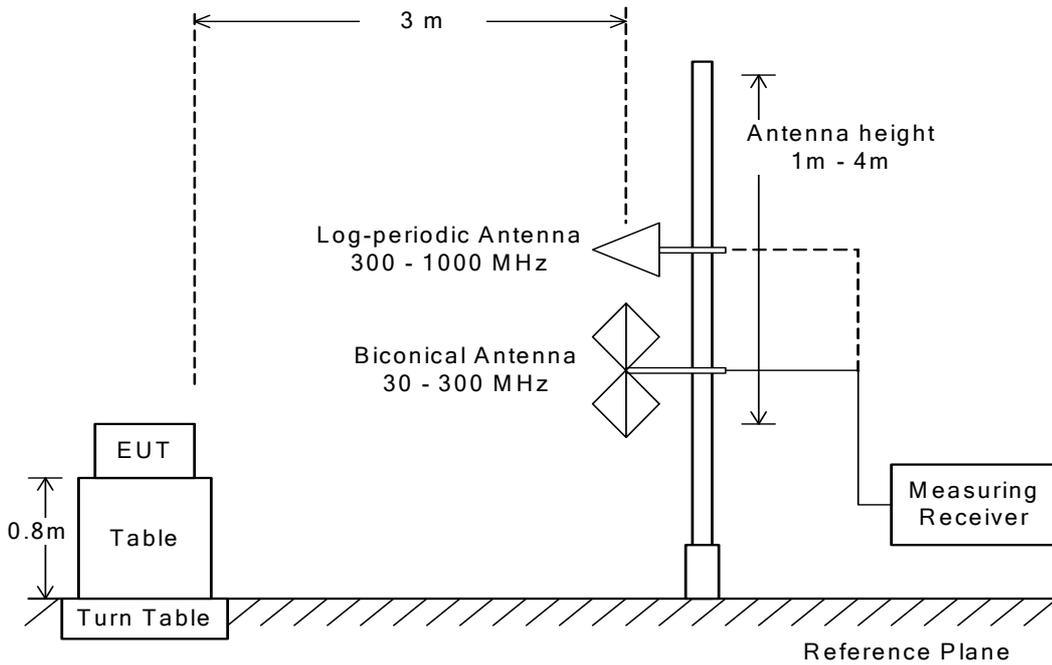


**7.9.4.3 Radiated Emission above 1 GHz**

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

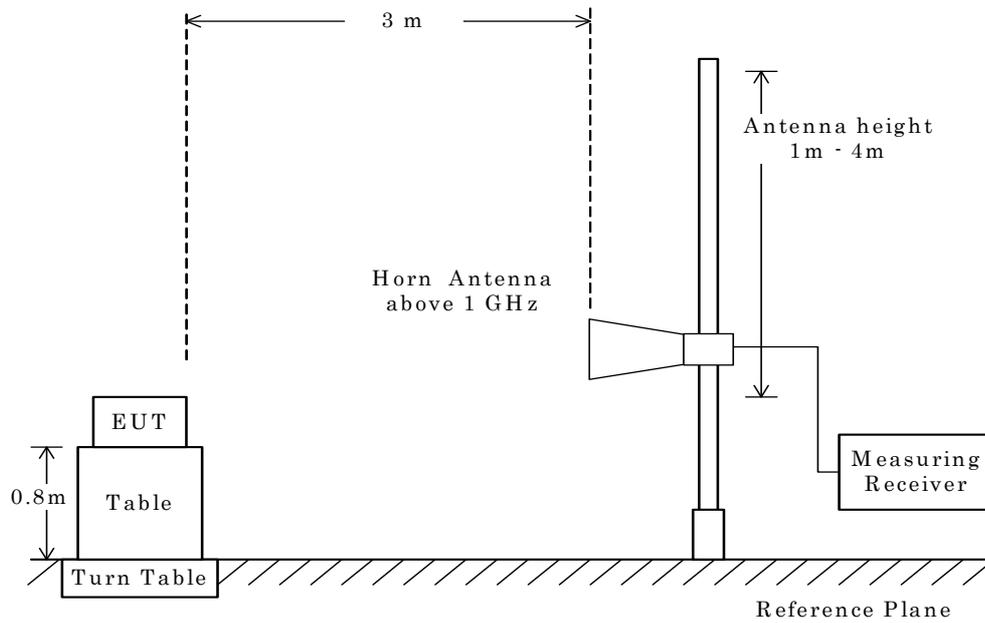

**NOTE**


The antenna height is scanned depending on the EUT's size and mounting height.

**7.9.5 Test Data**

**7.9.5.1 Band-edge Compliance**

Test Date : October 2, 2013  
 Temp.:25°C, Humi:64%


Mode of EUT : Standard/EDR, Hopping off (0ch: 2402 MHz) (worst case)  
 Antenna Polarization : Horizontal

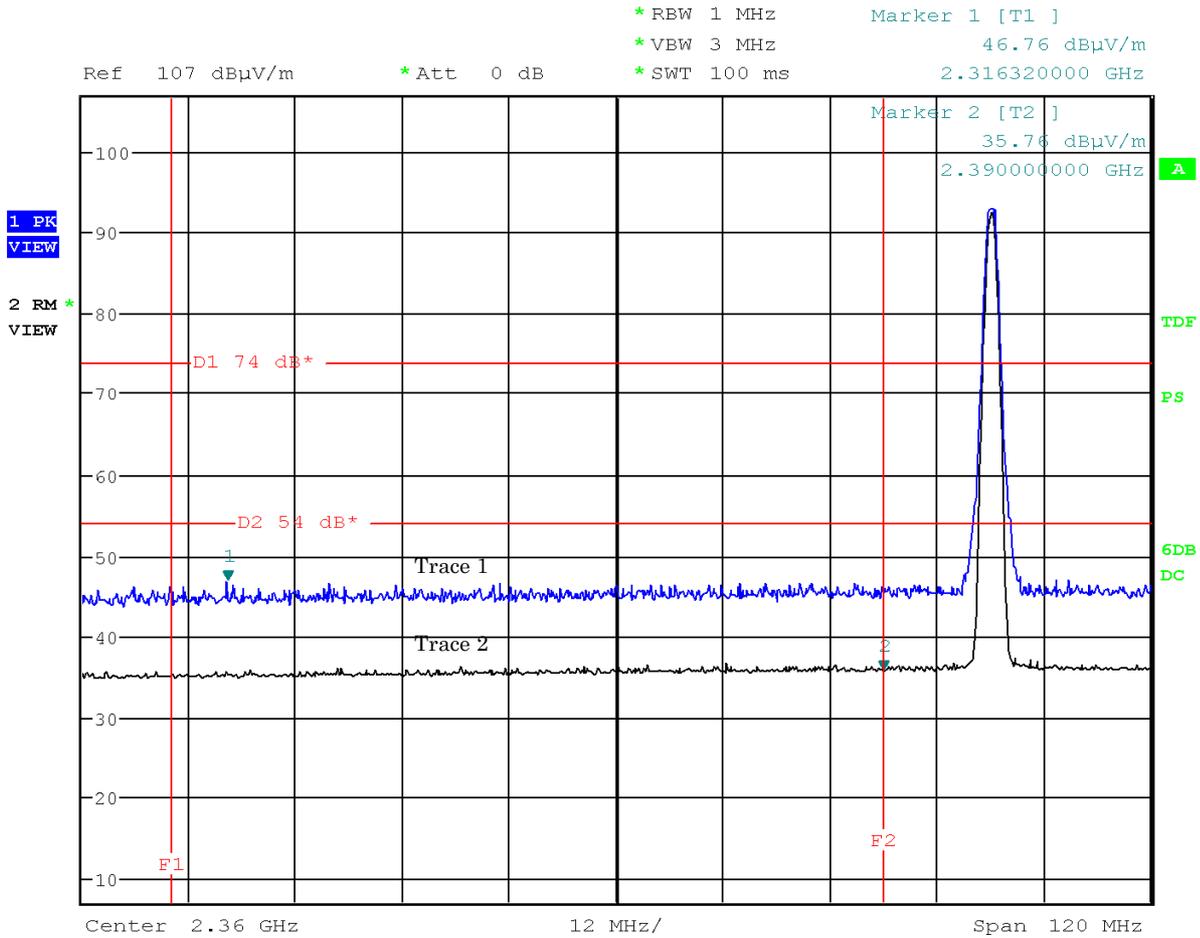

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : Standard/EDR, Hopping off (0ch: 2402 MHz) (worst case)


Antenna Polarization : Vertical

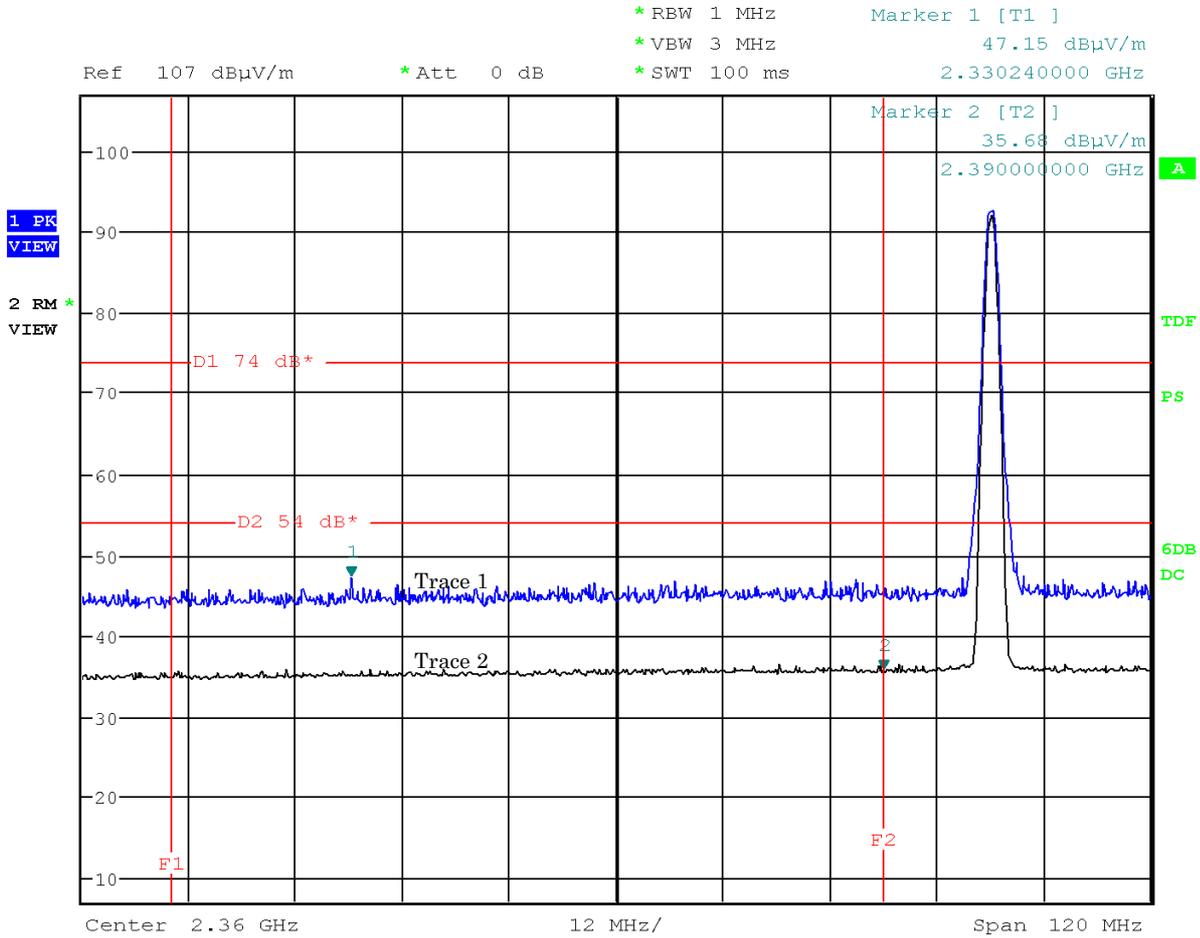

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : Standard/EDR, Hopping off (78ch: 2480 MHz) (worst case)


Antenna Polarization : Horizontal

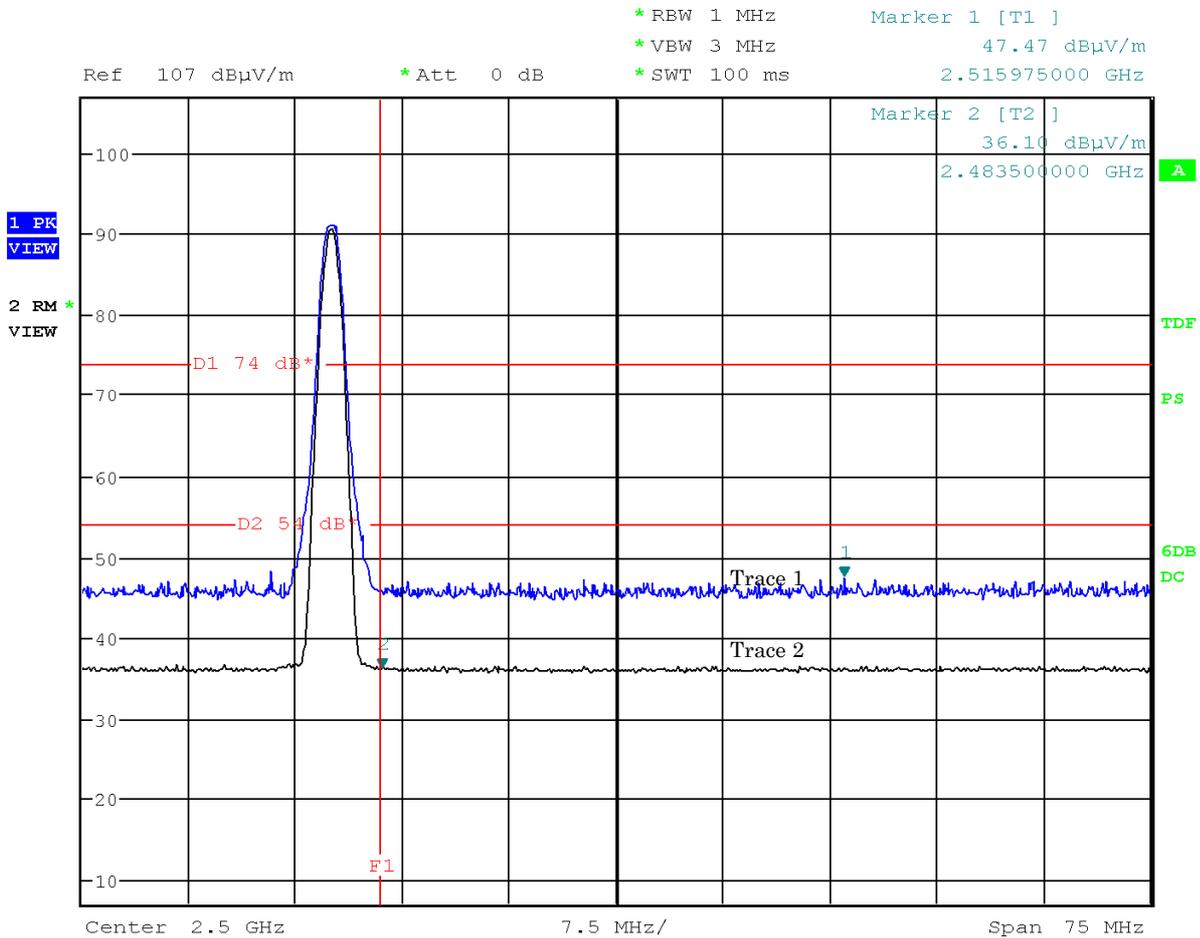

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : Standard/EDR, Hopping off (78ch: 2480 MHz) (worst case)


Antenna Polarization : Vertical

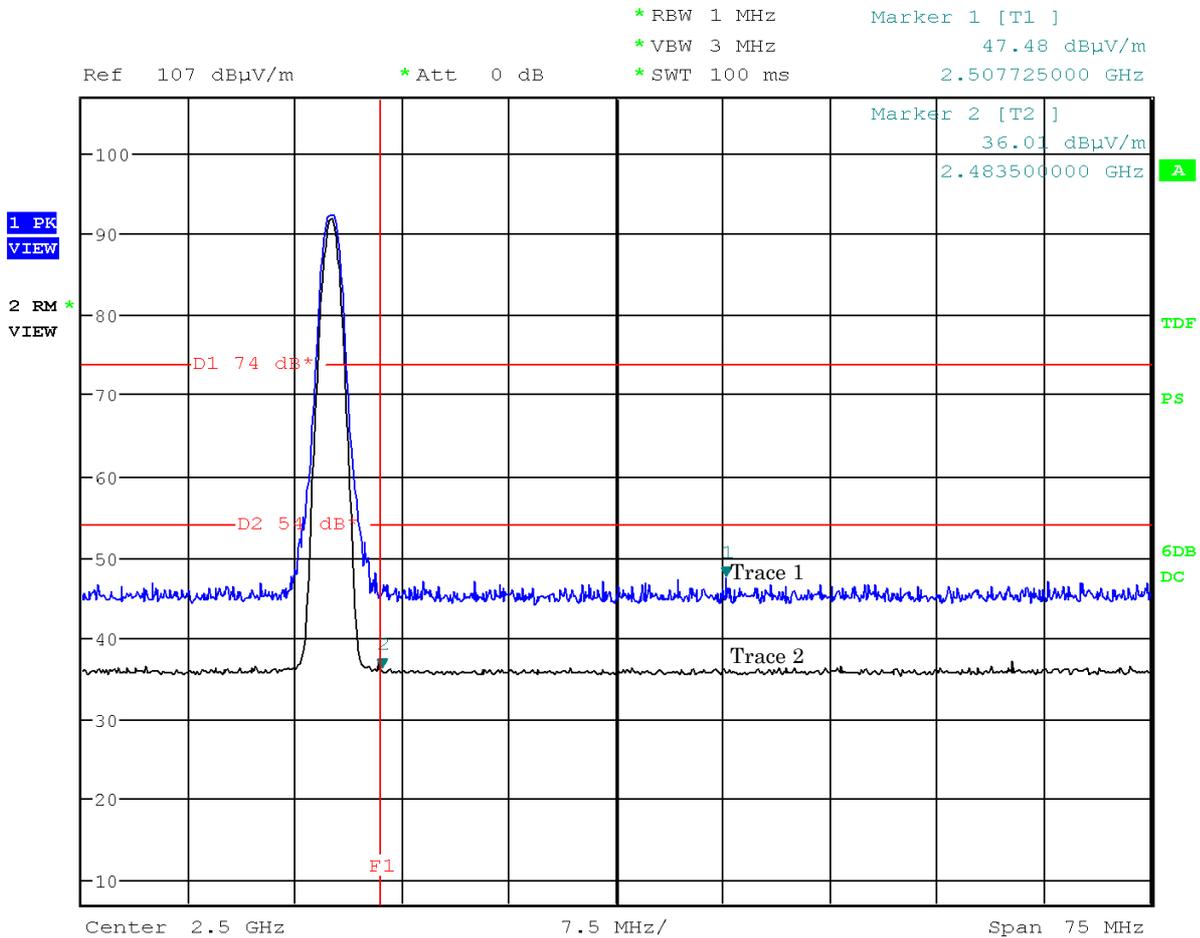

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : Low Energy, Hopping off (Och: 2402 MHz) (worst case)


Antenna Polarization : Horizontal

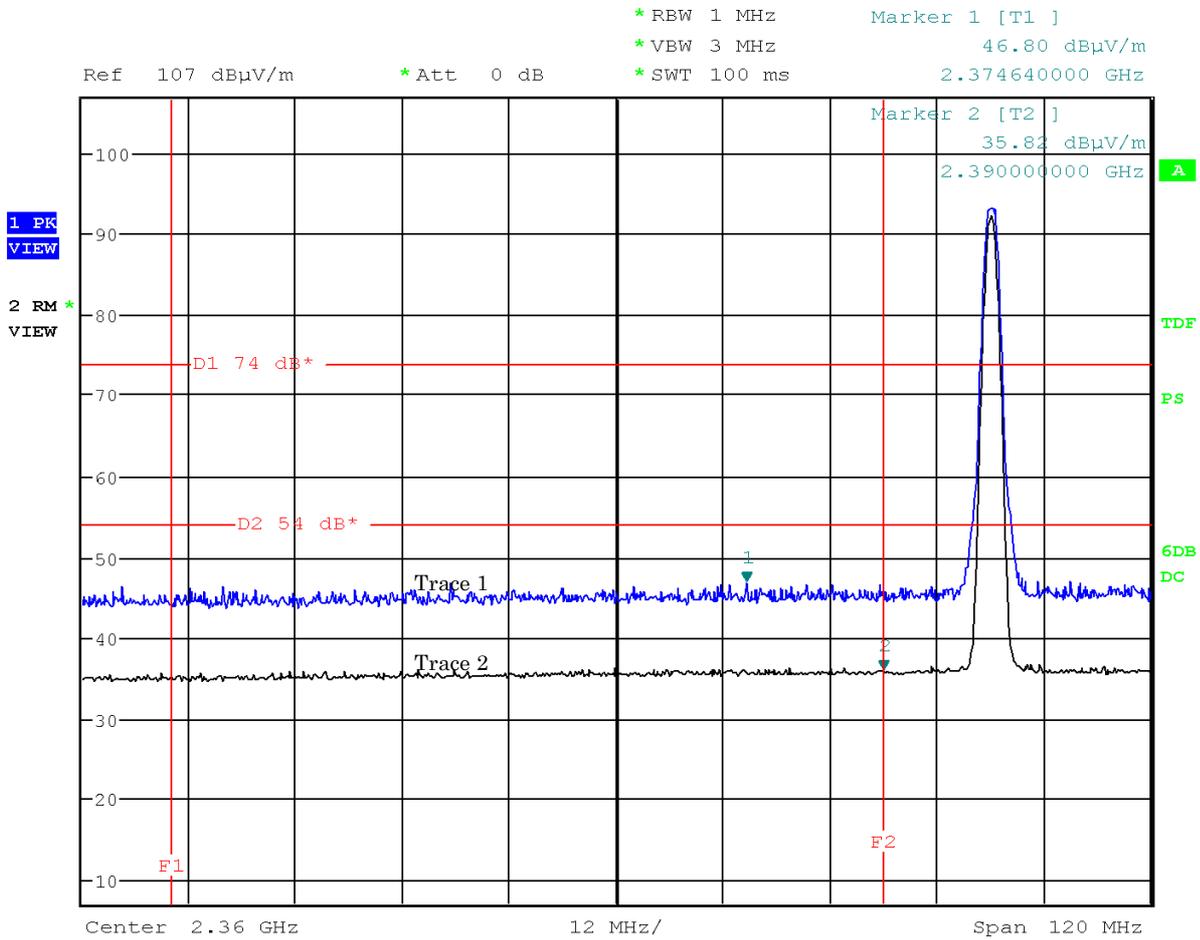

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : Low Energy, Hopping off (0ch: 2402 MHz) (worst case)


Antenna Polarization : Vertical

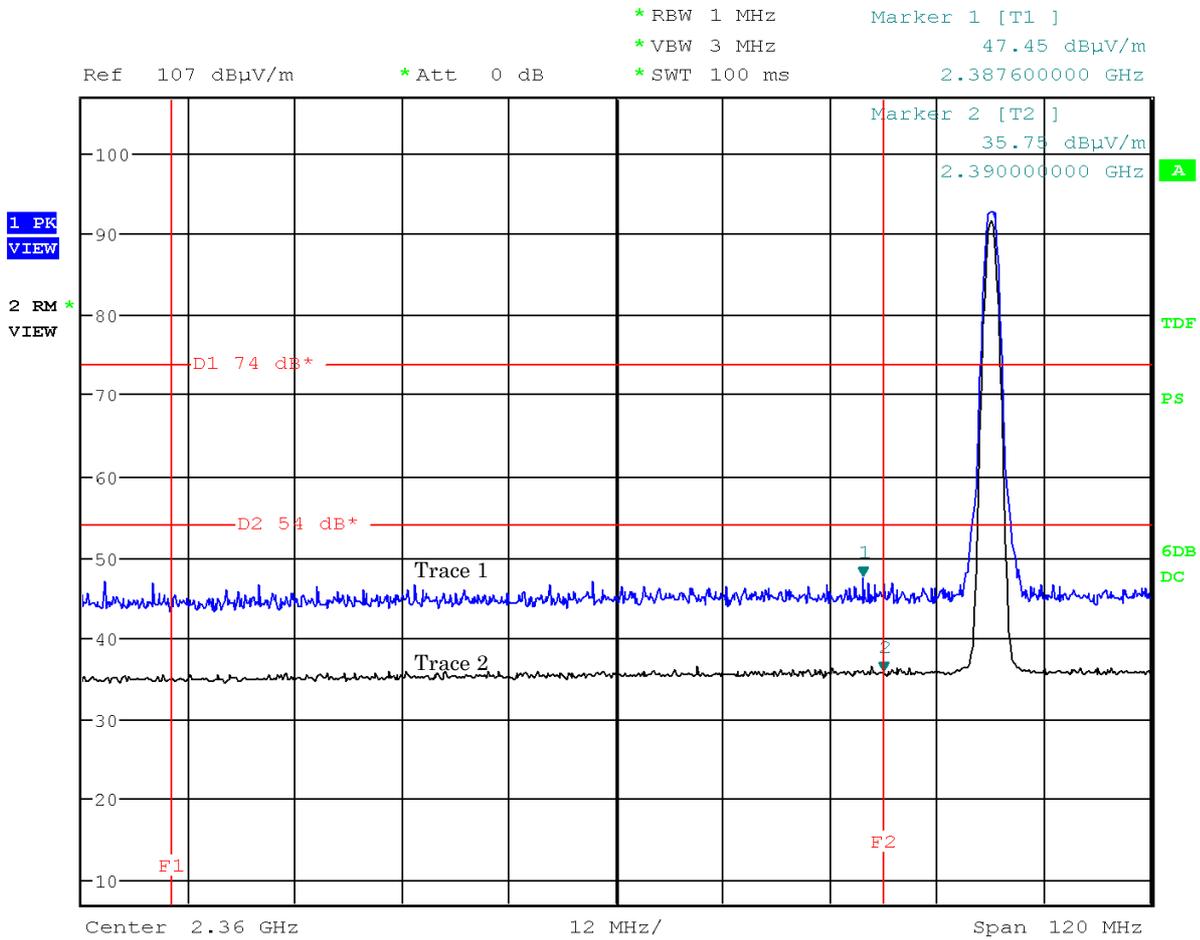

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : Low Energy, Hopping off (78ch: 2480 MHz) (worst case)


Antenna Polarization : Horizontal

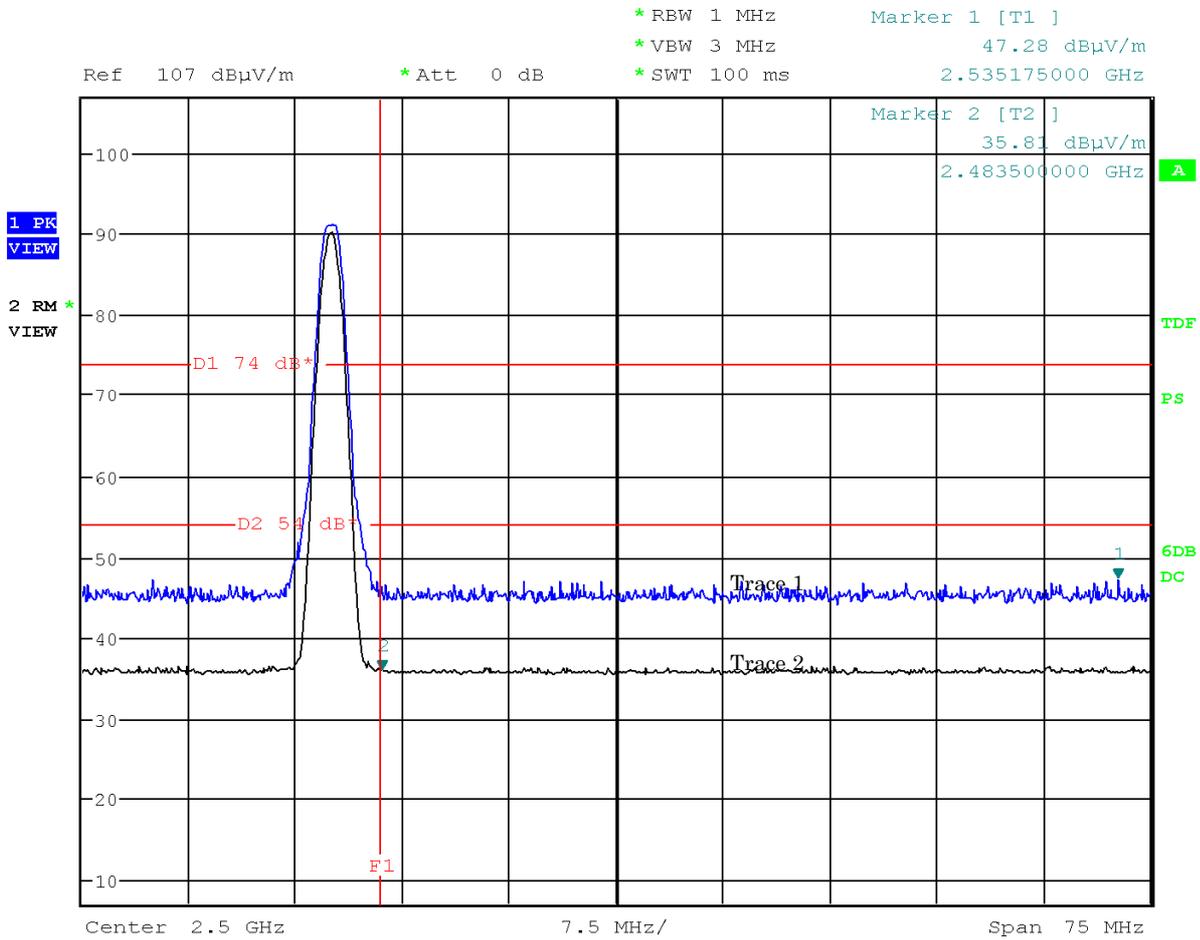

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

Mode of EUT : Low Energy, Hopping off (78ch: 2480 MHz) (worst case)

Antenna Polarization : Vertical

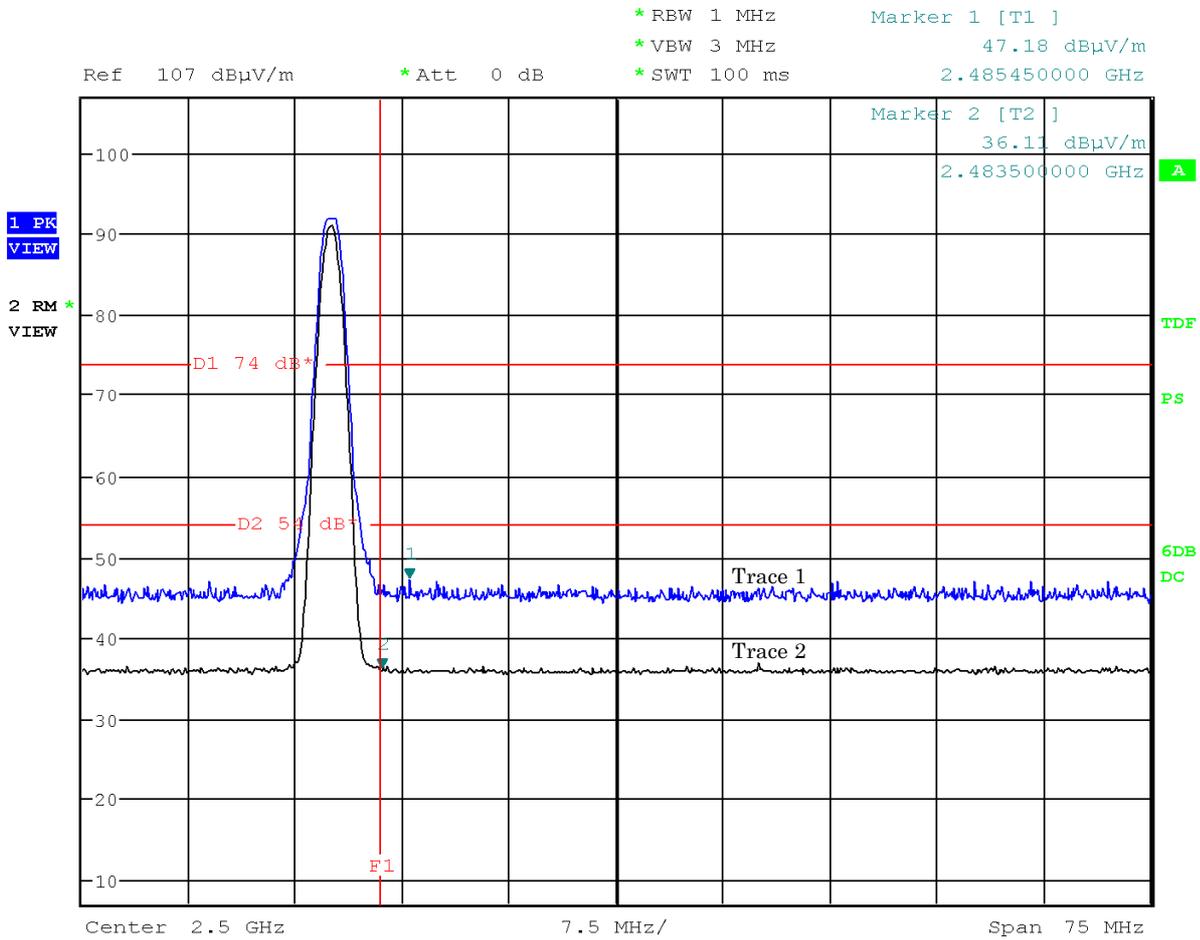

Note: The trace 1 is Peak detection. The trace 2 is RMS detection.

**7.9.5.2 Other Spurious Emission (9kHz – 30MHz)**

Test Date : September 30, 2013

Temp.:26°C, Humi:49%

Mode of EUT : All modes have been investigated and the worst case mode has been listed.

Results : No spurious emissions in the range 20dB below the limit.


**7.9.5.3 Other Spurious Emission (30MHz – 1000MHz)**

Mode of EUT : All modes have been investigated and the worst case mode has been listed.

Test Date: September 30, 2013

Temp: 26 °C, Humi: 49 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Cable Loss [dB]	Meter Readings [dB(μV)]		Limits [dB(μV/m)]	Results [dB(μV/m)]		Margin [dB]	Remarks
			Hori.	Vert.		Hori.	Vert.		
<u>33.0</u>	17.6	-27.6	< 25.0	26.3	40.0	< 15.0	16.3	+23.7	-
44.4	13.3	-27.5	< 25.0	29.8	40.0	< 10.8	15.6	+24.4	-
79.3	6.5	-27.0	29.7	35.6	40.0	9.2	15.1	+24.9	-
126.4	13.5	-26.6	27.7	< 25.0	43.5	14.6	< 11.9	+28.9	-

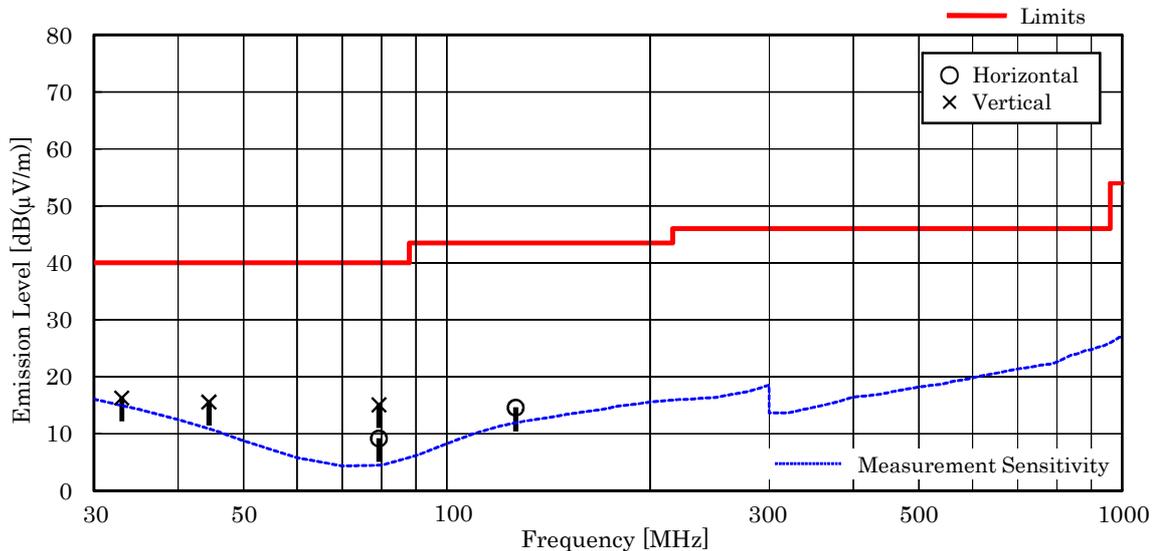

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of “<” means “or less”.
4. The symbol of “>” means “more than”.
5. Calculated result at 33.0 MHz, as the worst point shown on underline:  
 Antenna Factor + Cable Loss + Meter Reading = 17.6 + -27.6 + 26.3 = 16.3 dB(μV/m)
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

### 7.9.5.4 Other Spurious Emission (Above 1000MHz)

Mode of EUT : Standard/EDR (worst case)

Test Date: October 7, 2013  
 Temp.: 25 °C, Humi: 70 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
<b>Test condition : Tx Low Ch</b>												
4804.0	27.2	-21.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12010.0	33.7	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19216.0	40.5	-23.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.5	< 47.5	> + 6.5	A/B
<b>Test condition : TX Middle Ch</b>												
4882.0	27.2	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7323.0	30.0	-19.6	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12205.0	33.5	-26.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.6	< 36.6	> +17.4	A/B
19528.0	40.4	-22.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.5	< 47.5	> + 6.5	A/B
<b>Test condition : TX High Ch</b>												
4960.0	27.2	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.9	< 35.9	> +18.1	A/B
7440.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12400.0	33.6	-26.7	< 40.0	< 30.0	40.0	< 30.0	74.0	54.0	< 46.9	< 36.9	> +17.1	A/B
19840.0	40.4	-22.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.5	< 47.5	> + 6.5	A/B
22320.0	40.6	-22.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.5	< 48.5	> + 5.5	A/B

Calculated result at 22320.0 MHz, as the worst point shown on underline:

Antenna Factor	=	40.6 dB(1/m)
Corr. Factor	=	-22.1 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<48.5 dB(μV/m)

Minimum Margin: 54.0 - <48.5 = >5.5 (dB)

#### NOTES

- Test Distance : 3 m
- The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
- The correction factor is shown as follows:  
 Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)  
 Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)  
 Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- PK : Peak Detector / AVE : Average Detector
- Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : Standard/EDR (worst case)

Test Date: October 7, 2013

Temp.: 25 °C, Humi: 70 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
<b>Test condition : RX Middle Ch</b>												
2441.0	21.6	-21.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 39.8	< 29.8	> +24.2	A/B
4882.0	27.2	-21.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.7	< 35.7	> +18.3	A/B
7323.0	30.0	-19.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.1	< 40.1	> +13.9	A/B

Calculated result at 7323.0 MHz, as the worst point shown on underline:

Antenna Factor	=	30.0 dB(1/m)
Corr. Factor	=	-19.9 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<40.1 dB(μV/m)

Minimum Margin: 54.0 - <40.1 =>13.9 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 7.5 GHz .
3. The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : Low Energy

Test Date: October 7, 2013

Temp.: 25 °C, Humi: 70 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE	PK	AVE	PK	AVE		
<b>Test condition : Tx Low Ch</b>												
4804.0	27.2	-21.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.1	< 36.1	> +17.9	A/B
12010.0	33.7	-27.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.5	< 36.5	> +17.5	A/B
19216.0	40.5	-23.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.5	< 47.5	> + 6.5	A/B
<b>Test condition : TX Middle Ch</b>												
4880.0	27.2	-21.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.0	< 36.0	> +18.0	A/B
7320.0	30.0	-19.7	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.3	< 40.3	> +13.7	A/B
12200.0	33.5	-26.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 46.6	< 36.6	> +17.4	A/B
19520.0	40.5	-22.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.6	< 47.6	> + 6.4	A/B
<b>Test condition : TX High Ch</b>												
4960.0	27.2	-21.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.9	< 35.9	> +18.1	A/B
7440.0	29.9	-19.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.4	< 40.4	> +13.6	A/B
12400.0	33.6	-26.7	< 40.0	< 30.0	40.0	< 30.0	74.0	54.0	< 46.9	< 36.9	> +17.1	A/B
19840.0	40.4	-22.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 57.5	< 47.5	> + 6.5	A/B
22320.0	40.6	-22.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 58.5	< 48.5	> + 5.5	A/B

Calculated result at 22320.0 MHz, as the worst point shown on underline:

Antenna Factor	=	40.6 dB(1/m)
Corr. Factor	=	-22.1 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<48.5 dB(μV/m)

Minimum Margin: 54.0 - <48.5 = >5.5 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:
  - Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
  - Corr. Factor [dB] = Cable Loss + 10dB Pad Att. - Pre-Amp. Gain [dB] (7.6 - 18.0GHz)
  - Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB] (over 18 GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO

Mode of EUT : Low Energy

Test Date: October 7, 2013

Temp.: 25 °C, Humi: 70 %

Frequency [MHz]	Antenna Factor [dB(1/m)]	Corr. Factor [dB]	Meter Readings [dB(μV)]				Limits [dB(μV/m)]		Results [dB(μV/m)]		Margin [dB]	Remarks
			Horizontal		Vertical		PK	AVE	PK	AVE		
			PK	AVE	PK	AVE						
<b>Test condition : RX Middle Ch</b>												
2440.0	21.6	-21.8	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 39.8	< 29.8	> +24.2	A/B
4880.0	27.2	-21.5	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.7	< 35.7	> +18.3	A/B
7320.0	30.0	-20.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.0	< 40.0	> +14.0	A/B

Calculated result at 7320.0 MHz, as the worst point shown on underline:

Antenna Factor	=	30.0 dB(1/m)
Corr. Factor	=	-20.0 dB
+ ) Meter Reading	=	<30.0 dB(μV)
Result	=	<40.0 dB(μV/m)

Minimum Margin: 54.0 - <40.0 =>14.0 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 7.5 GHz .
3. The correction factor is shown as follows:  
Corr. Factor [dB] = Cable Loss + 20dB Pad Att. - Pre-Amp. Gain [dB] (1.0 - 7.6GHz)
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak Detector / AVE : Average Detector
7. Setting of measuring instrument(s) :

	Detector Function	Resolution B.W.	Video B.W.	Sweep Time
A	Peak	1 MHz	3 MHz	AUTO
B	RMS	1 MHz	3 MHz	AUTO