



Product Service

---

**Choose certainty.  
Add value.**

## Report On

FCC Testing of the Sharp SHL24 Dual-band CDMA (800MHz\_BC0, 1900MHz\_BC6), Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-band mode cellular phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS enabled  
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00201

Document 75924750 Report 16 Issue 1

February 2014



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

FCC Testing of the  
Sharp SHL24 Dual-band CDMA (800MHz\_BC0, 1900MHz\_BC6),  
Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-  
band mode cellular phone with Bluetooth, WLAN, SRD(NFC,FeliCa)  
and GPS enabled  
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24

Document 75924750 Report 16 Issue 1

February 2014

**PREPARED FOR**

Sharp Communication Compliance Ltd  
Azure House  
Bagshot Road  
Bracknell  
Berkshire  
RG12 7QY

**PREPARED BY**

**Natalie Bennett**  
Senior Administrator, Technical Solutions

**APPROVED BY**

**Simon Bennett**  
Authorised Signatory

**DATED**

03 February 2014

**ENGINEERING STATEMENT**

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

M Russell

Document 75924750 Report 16 Issue 1

T Guy



J Tuckwell



## CONTENTS

Section	Page No
<b>1</b>	<b>REPORT SUMMARY ..... 3</b>
1.1	Introduction ..... 4
1.2	Brief Summary of Results ..... 5
1.3	Product Technical Description ..... 6
1.4	Product Information ..... 6
1.5	Test Conditions ..... 6
1.6	Deviations from the Standard ..... 6
1.7	Modification Record ..... 6
<b>2</b>	<b>TEST DETAILS ..... 7</b>
2.1	Frequency Stability ..... 8
2.2	Spurious Emissions at Band Edge ..... 10
2.3	Effective Isotropic Radiated Power ..... 13
2.4	Maximum Peak Output Power - Conducted ..... 17
2.5	Modulation Characteristics ..... 19
2.6	Emission Limitations for Broadband PCS Equipment ..... 22
2.7	Conducted Spurious Emissions ..... 32
2.8	Occupied Bandwidth ..... 38
<b>3</b>	<b>TEST EQUIPMENT USED ..... 42</b>
3.1	Test Equipment Used ..... 43
3.2	Measurement Uncertainty ..... 45
<b>4</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT ..... 46</b>
4.1	Accreditation, Disclaimers and Copyright ..... 47



Product Service

## SECTION 1

### REPORT SUMMARY

FCC Testing of the  
Sharp SHL24 Dual-band CDMA (800MHz\_BC0, 1900MHz\_BC6), Quad-band GSM  
(GSM850/GSM900/DCS1800/PCS1900), Dual-band mode cellular phone with Bluetooth,  
WLAN, SRD(NFC,FeliCa) and GPS enabled  
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24



Product Service

## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Sharp SHL24 Dual-band CDMA (800MHz\_BC0, 1900MHz\_BC6), Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-band mode cellular phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS enabled to the requirements of FCC CFR 47 Part 2 and FCC CFR 47 Part 24.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Model Number(s)	SHL24
Serial Number(s)	IMEI 004401115003671 IMEI 004401115003689
Number of Samples Tested	2
Test Specification/Issue/Date	FCC CFR 47 Part 2 (2012) FCC CFR 47 Part 24 (2013)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	9952
Date	25 November 2013
Start of Test	3 January 2014
Finish of Test	17 January 2014
Name of Engineer(s)	M Russell T Guy J Tuckwell
Related Document(s)	ANSI C63.4: 2003



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24 is shown below.

Section	Spec Clause		Test Description	Result	Comments/Base Standard
	Pt 2	Pt 24			
PCS 1900					
2.1	2.1055	24.135(a) and 24.235	Frequency Stability	Pass	
2.2	2.1051	24.229	Spurious Emissions at Band Edge	Pass	
2.3	-	24.232(c)	Effective Isotropic Radiated Power	Pass	
2.4	2.1046	24.232	Maximum Peak Output Power - Conducted	Pass	
2.5	2.1047(d)	-	Modulation Characteristics	-	Customer Declaration
2.6	2.1051	24.238	Emission Limitations for Broadband PCS Equipment	Pass	
2.7	2.1051	24.238(a)	Conducted Spurious Emissions	Pass	
2.8	2.1049(h)	24.238(b)	Occupied Bandwidth	Pass	



Product Service

### **1.3 PRODUCT TECHNICAL DESCRIPTION**

Please refer to the SHL24 Model Description Form.

### **1.4 PRODUCT INFORMATION**

#### **1.4.1 Technical Description**

The Equipment Under Test (EUT) was a Sharp SHL24 Dual-band CDMA (800MHz\_BC0, 1900MHz\_BC6), Quad-band GSM (GSM850/GSM900/DCS1800/PCS1900), Dual-band mode cellular phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS enabled. A full technical description can be found in the manufacturer's documentation.

### **1.5 TEST CONDITIONS**

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply for lab tests and a fully charged integral battery for radiated tests.

FCC Measurement Facility Registration Number  
90987 Octagon House, Fareham Test Laboratory

### **1.6 DEVIATIONS FROM THE STANDARD**

No deviations from the applicable test standard were made during testing.

### **1.7 MODIFICATION RECORD**

Modification 0 - No modifications were made to the test sample during testing.



Product Service

## **SECTION 2**

### **TEST DETAILS**

FCC Testing of the  
Sharp SHL24 Dual-band CDMA (800MHz\_BC0, 1900MHz\_BC6), Quad-band GSM  
(GSM850/GSM900/DCS1800/PCS1900), Dual-band mode cellular phone with Bluetooth,  
WLAN, SRD(NFC,FeliCa) and GPS enabled  
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24



Product Service

## **2.1 FREQUENCY STABILITY**

### **2.1.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1055  
FCC CFR 47 Part 24, Clause 24.135(a) and 24.235

### **2.1.2 Equipment Under Test and Modification State**

SHL24 S/N: IMEI 004401115003671 - Modification State 0

### **2.1.3 Date of Test**

9 January 2014

### **2.1.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.1.5 Test Procedure**

The EUT was set to transmit on maximum power. An CMW 500 was used to measure the frequency error. The temperature was adjusted between -30°C and +50°C in 10° steps as per 2.1055.

### **2.1.6 Environmental Conditions**

Ambient Temperature	20.3°C
Relative Humidity	30.6%



### 2.1.7 Test Results

4.0 V DC Supply

Under Temperature Variations

1880.0 MHz

Temperature Interval (°C)	Mode	Deviation (ppm)
-30	GMSK	-0.051
-20	GMSK	-0.046
-10	GMSK	-0.041
0	GMSK	-0.043
+10	GMSK	-0.043
+20	GMSK	-0.021
+30	GMSK	-0.034
+40	GMSK	-0.026
+50	GMSK	-0.046

Limit Clause

The frequency stability of the transmitter shall be maintained within  $\pm 0.0001\%$  ( $\pm 1$  ppm).

Under Voltage Variations

1880.0 MHz

DC Voltage (V)	Mode	Deviation (ppm)
4.0	GMSK	-0.021
3.7	GMSK	-0.021
4.0	GMSK	-0.021

Limit Clause

The frequency stability of the transmitter shall be maintained within  $\pm 0.0001\%$  ( $\pm 1$  ppm).  
Test was performed on channel 661 to 1880 MHz.



Product Service

## 2.2 SPURIOUS EMISSIONS AT BAND EDGE

### 2.2.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 24, Clause 24.229

### 2.2.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003671 - Modification State 0

### 2.2.3 Date of Test

7 January 2014

### 2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.2.5 Test Procedure

In accordance with 24.238, any emissions outside of the block edges shall be attenuated by at least  $43 + 10 \log (P)$ . The measurements are shown to  $\pm 1$  MHz from the block edges. The plots shown under the Spurious Emissions sections covers the required range of 9 kHz to 20 GHz.

The reference power and path losses of all channels used for testing in each frequency block were measured. Having entered the reference level offset, a limit line was displayed, showing the  $-13 \text{ dBm} (43 + 10 \log (P))$ , limit.

### 2.2.6 Environmental Conditions

Ambient Temperature	25.2°C
Relative Humidity	34.4%




Product Service

**2.2.7 Test Results**

4.0 V DC Supply

Frequency Block (MHz)	Mode	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A :(1850.0 – 1865.0)	GMSK	Channel : 512 Frequency : 1850.2 MHz	N/A
B :(1895.0 – 1910.0)	GMSK	N/A	Channel : 810 Frequency : 1909.8 MHz


Frequency Block A

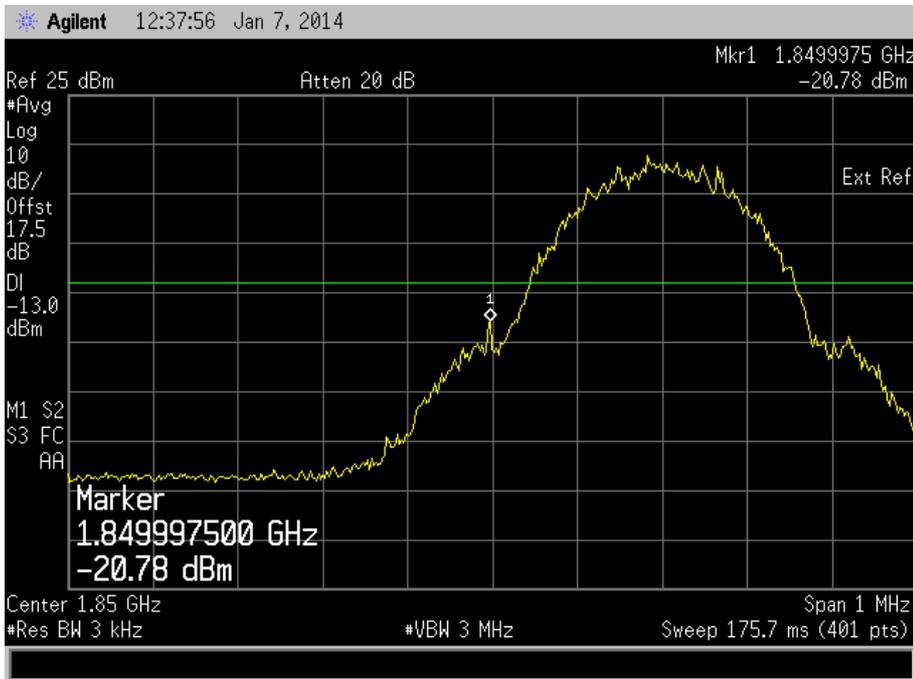



Product Service

Frequency Block B

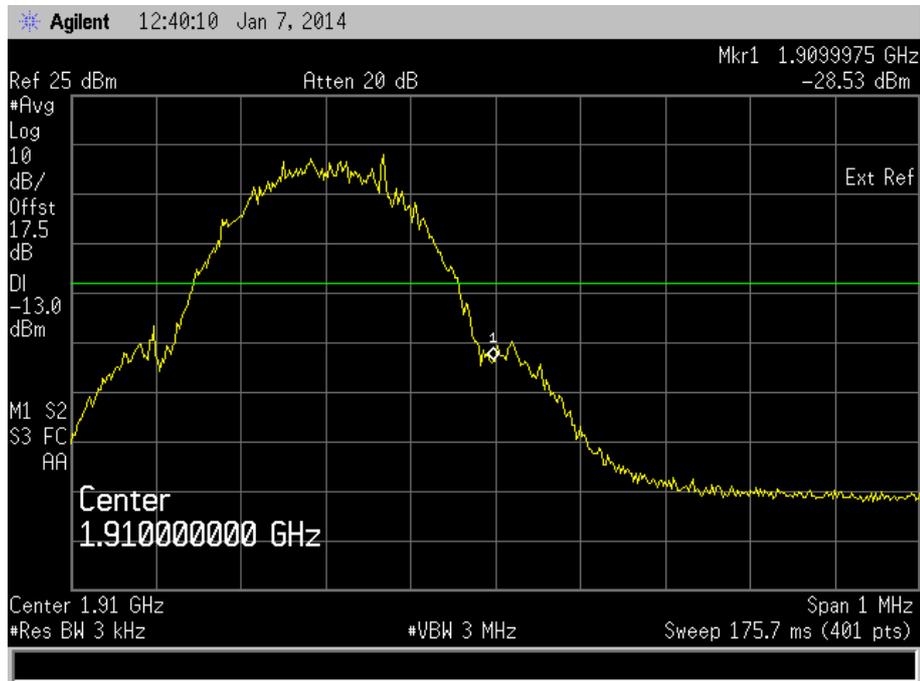

Limit Clause

-13 dBm at block edge.



Product Service

## **2.3 EFFECTIVE ISOTROPIC RADIATED POWER**

### **2.3.1 Specification Reference**

FCC CFR 47 Part 24, Clause 24.232(c)

### **2.3.2 Equipment Under Test and Modification State**

SHL24 S/N: IMEI 004401115003689 - Modification State 0

### **2.3.3 Date of Test**

3 January 2014 & 4 January 2014

### **2.3.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.3.5 Test Procedure**

Measurements of the fundamental from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The fundamental frequency was maximised by adjusting the antenna height, antenna polarisation and turntable azimuth. A peak detector was used with the trace set to max hold. The maximum result was recorded.

The EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result (EIRP) was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

### **2.3.6 Environmental Conditions**


Ambient Temperature	21.8 - 23.0°C
Relative Humidity	31.0 - 37.0%



**2.3.7 Test Results**

1850.2 MHz

Result (dBm)	Result (W)
29.15	0.46463

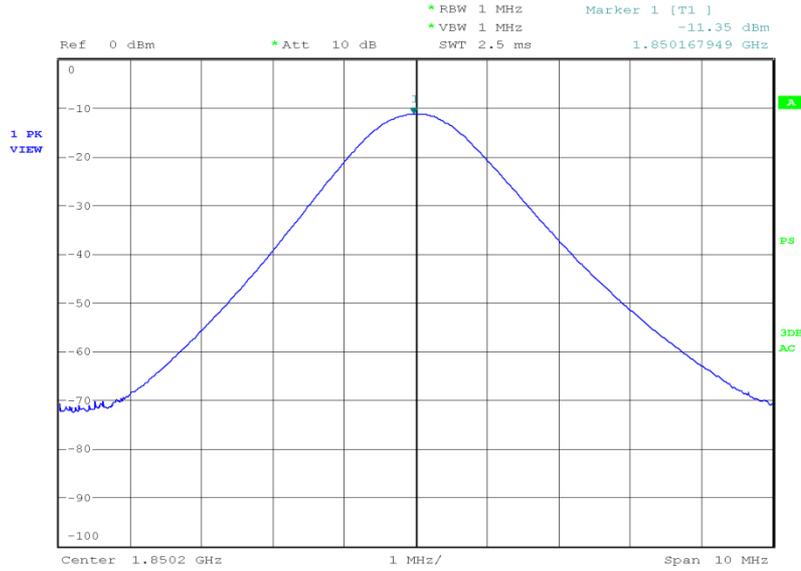


Date: 3.JAN.2014 04:40:35



1880.0 MHz

Result (dBm)	Result (W)
29.48	0.46953

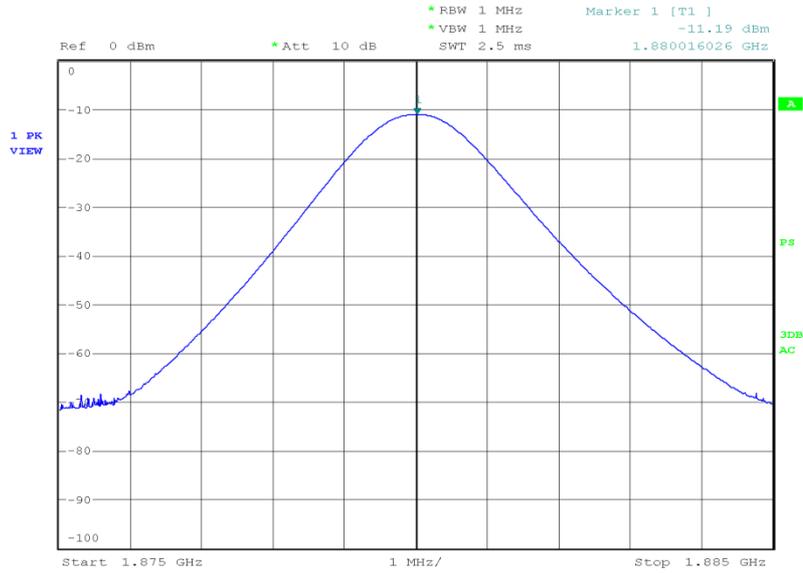


Date: 3.JAN.2014 04:35:16



Product Service

1909.8 MHz

Result (dBm)	Result (W)
28.46	0.45423

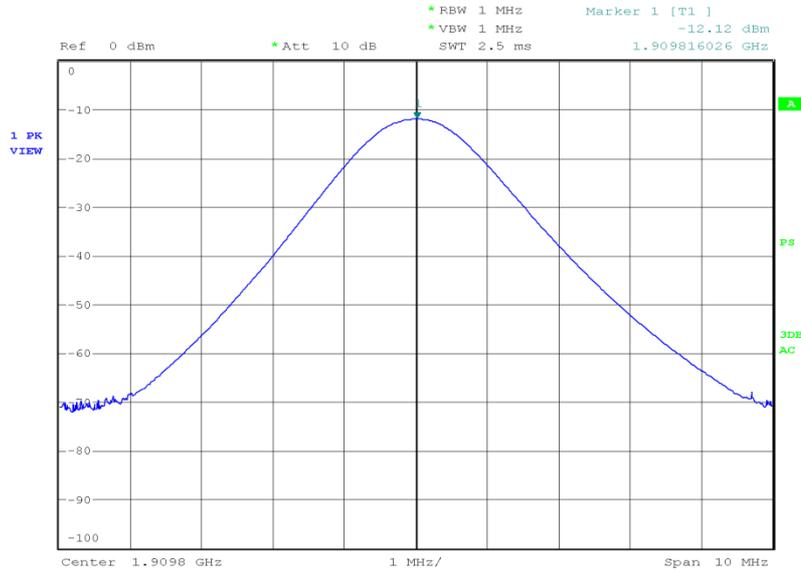

Date: 3.JAN.2014 04:45:59

Limit Clause

Limit	2 W / 33 dBm
-------	--------------



Product Service

## **2.4 MAXIMUM PEAK OUTPUT POWER - CONDUCTED**

### **2.4.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1046  
FCC CFR 47 Part 24, Clause 24.232

### **2.4.2 Equipment Under Test and Modification State**

SHL24 S/N: IMEI 004401115003671 - Modification State 0

### **2.4.3 Date of Test**

3 January 2014

### **2.4.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.4.5 Test Procedure**

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals.

The EUT was tested with GMSK modulation.

The spectrum analyser RBW and VBW were set to 1 MHz and the path loss measured and entered as a reference offset level.

### **2.4.6 Environmental Conditions**

Ambient Temperature	24.0°C
Relative Humidity	36.9%



Product Service

**2.4.7 Test Results**

4.0 V DC Supply

1850.2 MHz

Mode	Result (dBm)	Result (W)
GMSK	29.22	0.836

1880.0 MHz

Mode	Result (dBm)	Result (W)
GMSK	29.08	0.809

1909.8 MHz

Mode	Result (dBm)	Result (W)
GMSK	28.86	0.769

Limit Clause

Limit	2 W / 33 dBm
-------	--------------



## 2.5 MODULATION CHARACTERISTICS

### 2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1047(d)

### 2.5.2 Equipment Under Test

SHL24

### 2.5.3 Test Results

#### Customer Description

#### Description Of Modulation Technique

The modulation scheme used in GSM is called Gaussian Minimum Shift Keying (GMSK). GMSK facilitates the use of narrow bandwidth and allows for both coherent and non coherent detection capabilities. It is a scheme in which the transitions from One to Zero or Zero to One do not occur quickly, but over a period of time. If pulses are transmitted quickly harmonics are transmitted. The power spectrum for a square wave is rich in harmonics, and the power within the side lobes is wasted, and can be a cause of potential interference.

A method to reduce the harmonics is to round off the edges of the pulses thus lowering the spectral components of the signal. In GSM this is done by using a Gaussian pre-filter which typically has a bandwidth of 81.25kHz. The output from the Gaussian filter then phase modulates the carrier. As there are no dramatic phase transitions of the carrier this gives a constant envelope and low spectral component output from the transmitter.

The spectral efficiency is calculated by

bit rate / Channel bandwidth = 270.83333 kbit/s / 200 kHz = 1.354 bit/s/Hz.

The bandwidth product BT = Bandwidth x bit duration = 81.25 kHz x 3.6923 micros = 0.3


#### **GMSK OVERVIEW**

The modulation scheme used for the EUT is GMSK.

A brief overview of how GMSK works is shown below.

#### **GMSK (Gaussian Minimum Shift Keying)**

The fundamental principle behind GMSK is Phase shift keying. This splits a data stream into a series of 2-digit phase shifts, using the following phase shifts to represent data pairs.

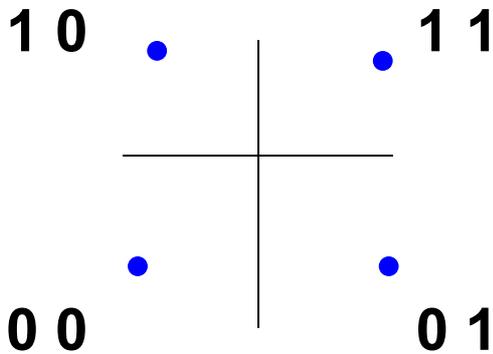

Therefore for the BIT sequence 0 0 1 1 1 0 0 1 The corresponding phase shift will be used

BIT SEQUENCE	0 0	1 1	1 0	0 1
PHASE	225°	45°	135°	315°

This is called QPSK (Quadratic Phase Shift Keying)

**However**

There is a problem with QPSK: transition from e.g. 00 to 11 gives phase shift of 180° ( $\pi$  radians). This has the effect of inverting the carrier waveform and this can lead to detection errors at the receiver.

Solution: restrict phase changes to  $\pm 90^\circ$

1. Split bitstream into 2 streams e.g.

	0 0		1 1		0 1		1 0	
I Stream	0		1		0		1	
Q stream		0		1		1		0

2. Modulate each stream with PSK (1 = 90° or  $\pi/2$ , 0 = -90° or  $-\pi/2$  phase shift)


I Stream	0		1		0		1	
	$-\pi/2$		$-\pi/2$		$-\pi/2$		$\pi/2$	
Q stream		0		1		1		0
		$-\pi/2$		$\pi/2$		$\pi/2$		$-\pi/2$



3. Combine (add) the two PSK signals:


Combined Phase	$-\pi/2$	$-\pi$	$-\pi/2$	0	$-\pi/2$	0	$\pi/2$	0
----------------	----------	--------	----------	---	----------	---	---------	---

Result: offset - QPSK, phase change is restricted to  $\pm \pi/2$  radians:

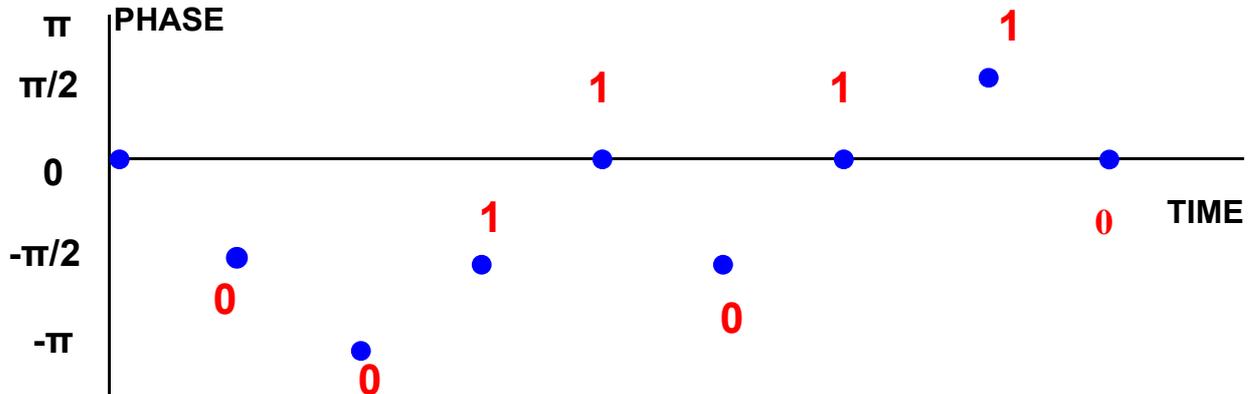

It would be preferable to have "gradual" changes in phase between each pair of bits (Continuous-phase modulation). Replacing each "rectangular" shaped pulse (for 1 or 0) with a sinusoidal pulse can do this:

Result: Minimum Shift Keying (MSK):

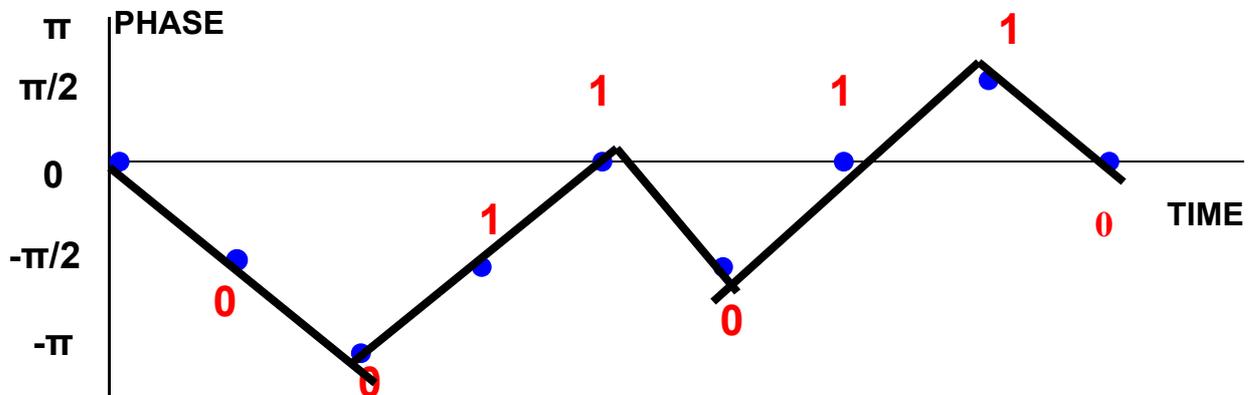

**Gaussian Minimum Shift Keying**

MSK has high sidebands relative to the main lobes in the frequency domain - this can lead to interference with adjacent signals.

If the rectangular pulses corresponding to the bitstream are filtered using a Gaussian-shaped impulse response filter, we get Gaussian MSK (GMSK) - this has low sidelobes compared to MSK.

**Limit Clause**

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.



## 2.6 EMISSION LIMITATIONS FOR BROADBAND PCS EQUIPMENT

### 2.6.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 24, Clause 24.238

### 2.6.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003689 - Modification State 0

### 2.6.3 Date of Test

3 January 2014 & 4 January 2014

### 2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.6.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions was obtained up to the 10th harmonic by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The EUT was set to transmit on full power with GMSK modulation. The EUT was tested on bottom, middle and top channels at maximum power.

For any emissions found the EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result was determined by a calculation using the signal generator level, antenna gain and cable loss. The measurements were performed at a 3m distance unless otherwise stated.

### 2.6.6 Environmental Conditions


Ambient Temperature	21.8 - 23.0°C
Relative Humidity	31.0 - 37.0%



### 2.6.7 Test Results


1850.2 MHz

30 MHz to 1 GHz

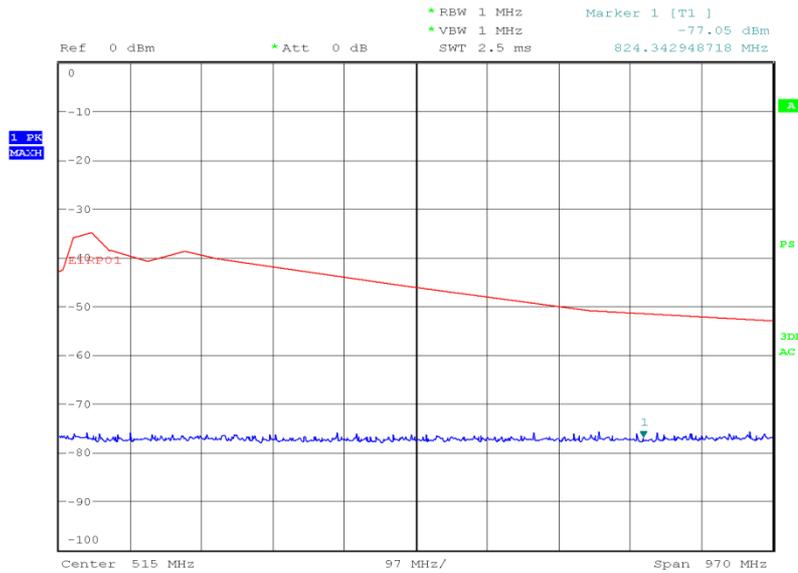

Date: 3.JAN.2014 03:18:36


1 GHz to 3 GHz

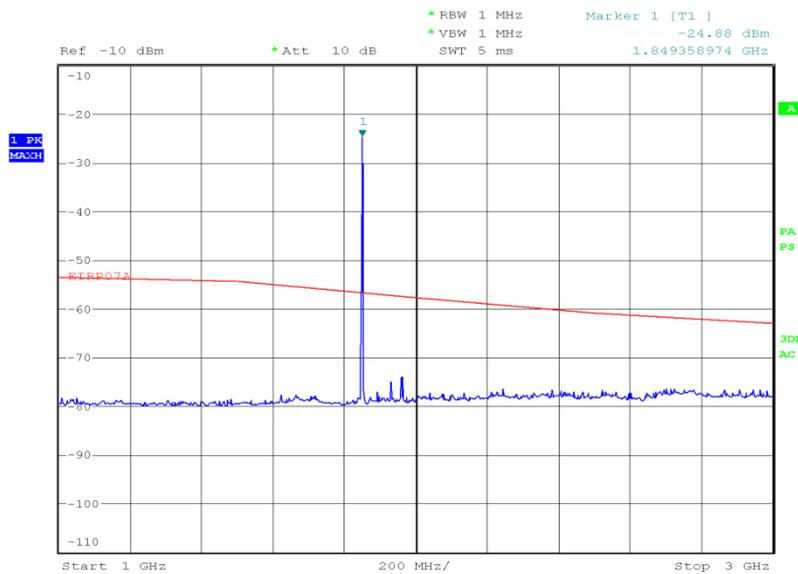

Date: 4.JAN.2014 00:49:07




3 GHz to 8 GHz

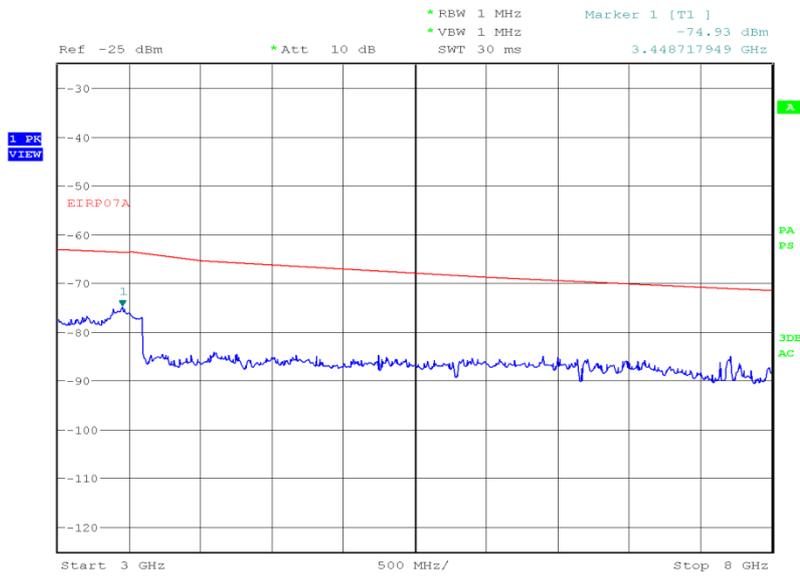

Date: 4.JAN.2014 00:25:18


8 GHz to 18 GHz

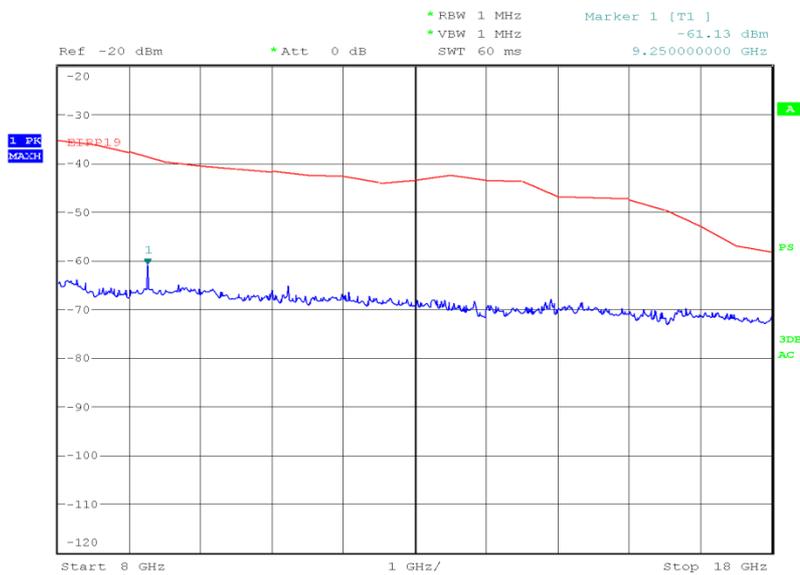

Date: 4.JAN.2014 01:19:21



18 GHz to 20 GHz

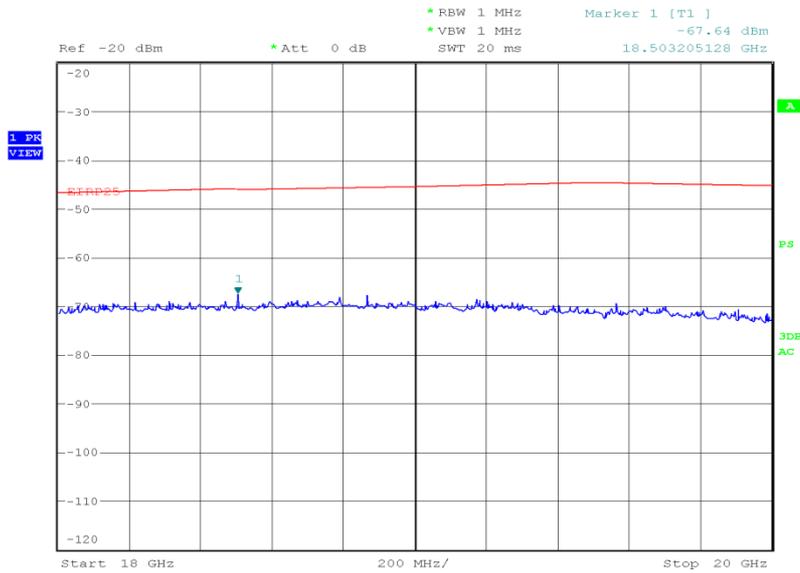


Date: 4.JAN.2014 03:19:21



Product Service


1880.0 MHz

30 MHz to 1 GHz

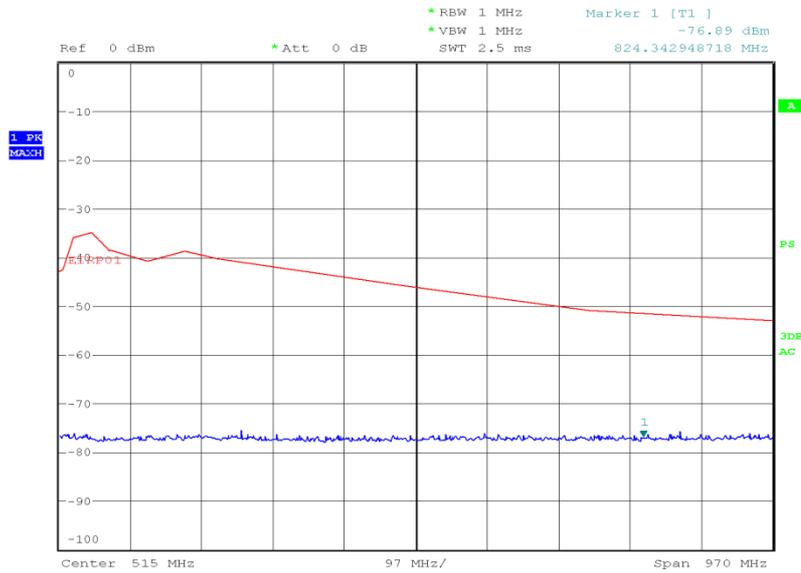

Date: 3.JAN.2014 03:15:44


1 GHz to 3 GHz

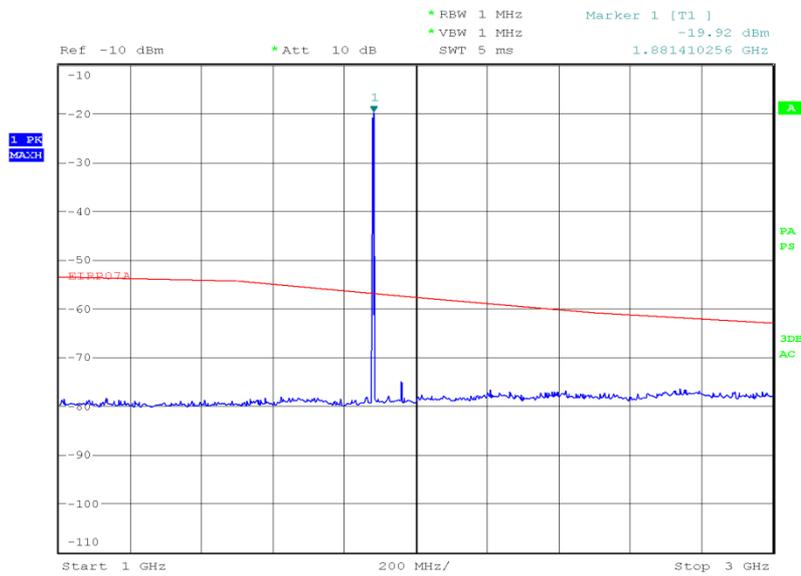

Date: 4.JAN.2014 00:44:44




3 GHz to 8 GHz

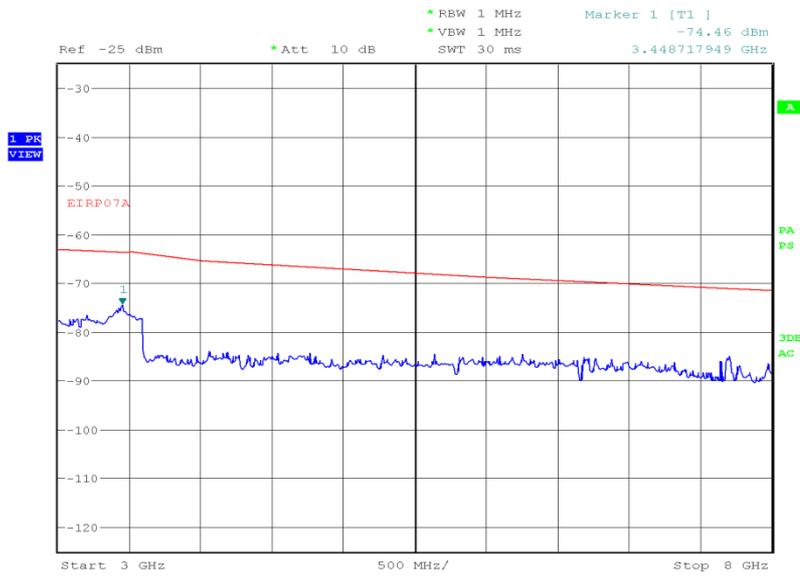

Date: 4.JAN.2014 00:29:53


8 GHz to 18 GHz

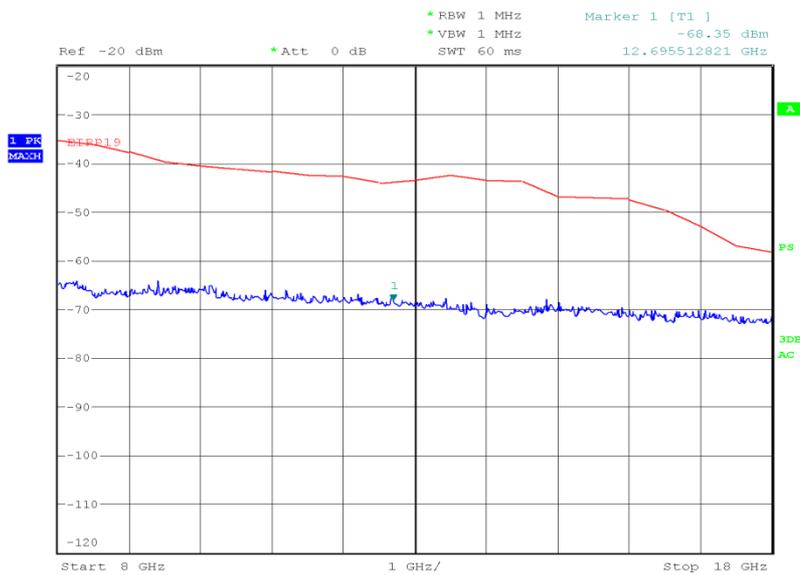

Date: 4.JAN.2014 01:14:26



18 GHz to 20 GHz

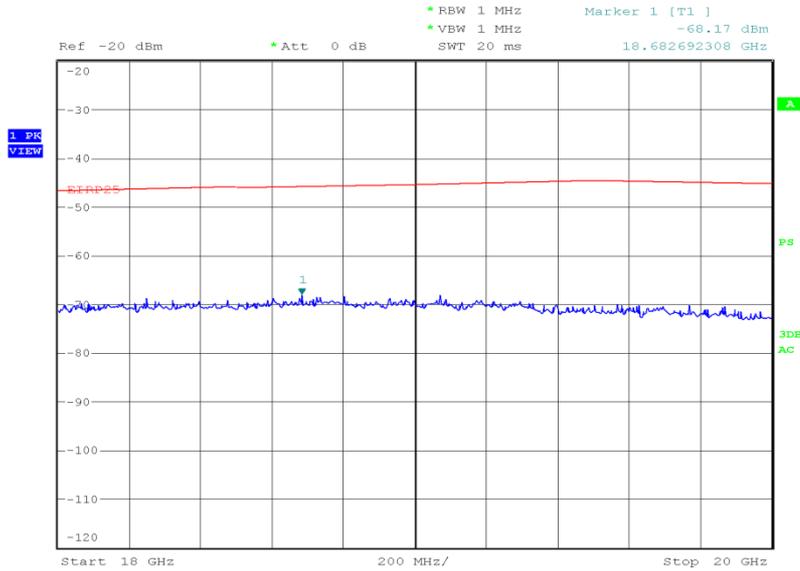


Date: 4.JAN.2014 03:07:19




1909.8 MHz

30 MHz to 1 GHz

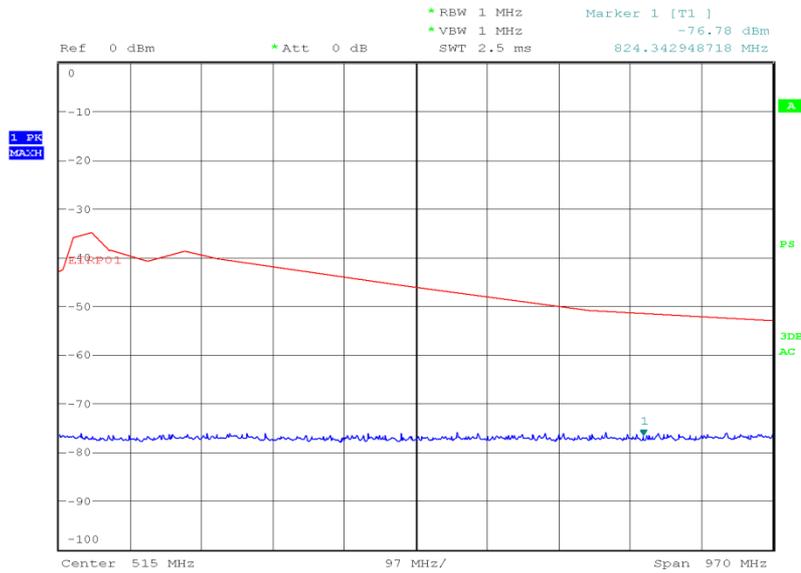

Date: 3.JAN.2014 03:22:47


1 GHz to 3 GHz

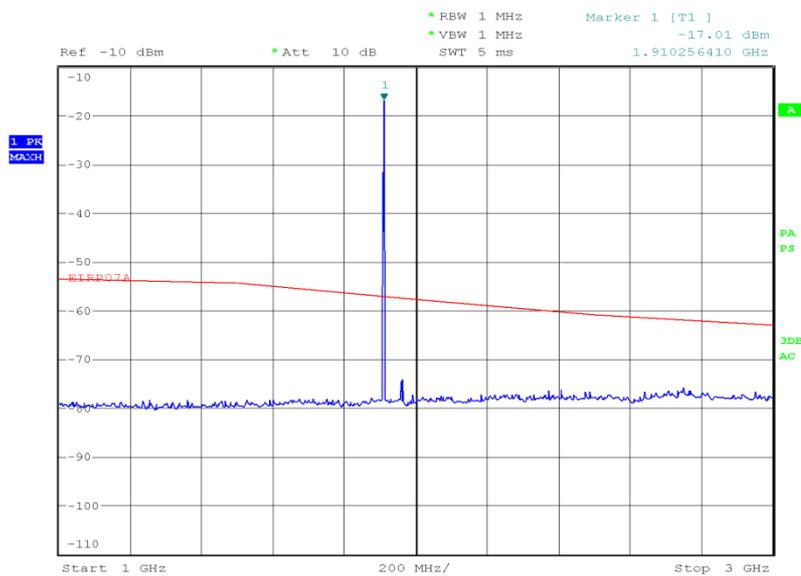

Date: 4.JAN.2014 00:53:27




3 GHz to 8 GHz

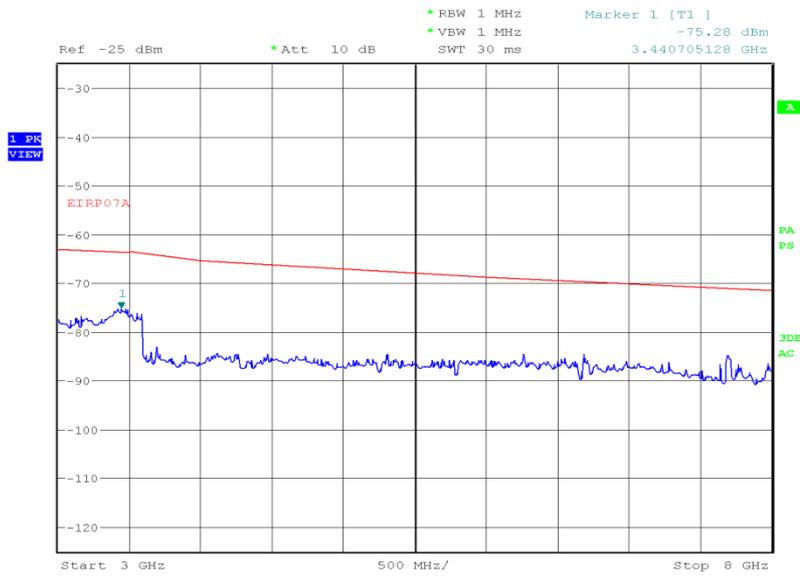

Date: 4.JAN.2014 00:33:32


8 GHz to 18 GHz

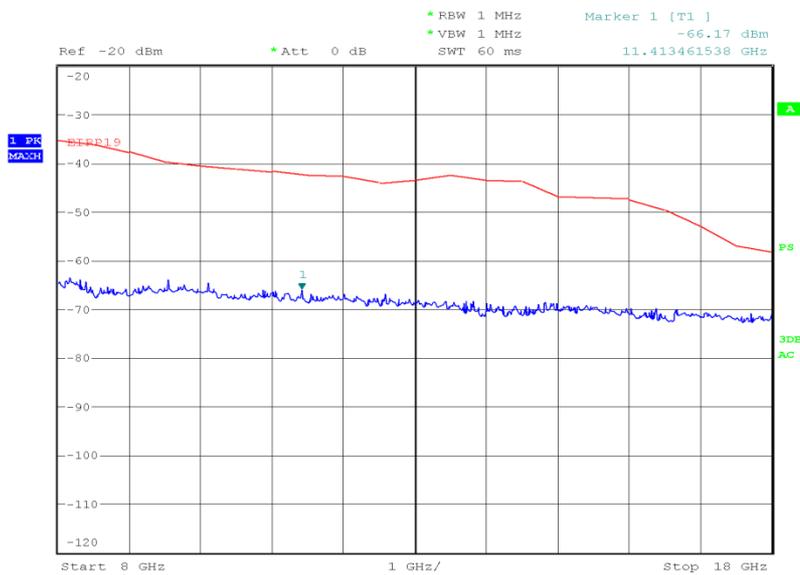

Date: 4.JAN.2014 01:30:27



18 GHz to 20 GHz

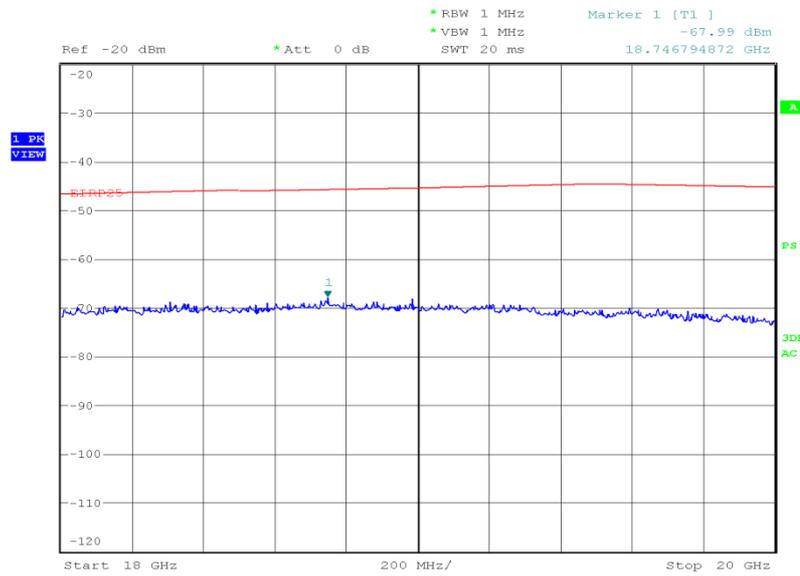

Date: 4.JAN.2014 03:23:21

Limit Clause

43+10log(P) or -13 dBm



Product Service

## 2.7 CONDUCTED SPURIOUS EMISSIONS

### 2.7.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051  
FCC CFR 47 Part 24, Clause 24.238(a)

### 2.7.2 Equipment Under Test and Modification State

SHL24 S/N: IMEI 004401115003671 - Modification State 0

### 2.7.3 Date of Test

17 January 2014

### 2.7.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.7.5 Test Procedure

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9 kHz to 20 GHz. The EUT was set to transmit on full power with GMSK modulation. The EUT was tested on Bottom, Middle and Top channels for maximum power. The resolution and video bandwidths were set to 1 MHz and 3 MHz thus meeting the requirements of Part 24.238(a). The spectrum analyser detector was set to max hold.

From 9 kHz to 4 GHz, an attenuator was used. For measuring the range 4 GHz to 20 GHz an attenuator and high pass filter were used. This was to reduce saturation effects in the spectrum analyser.

The maximum path loss across the measurement bands were used as reference level offsets to ensure worst case.

### 2.7.6 Environmental Conditions

Ambient Temperature	25.3°C
Relative Humidity	36.2%




Product Service

### 2.7.7 Test Results

4.0 V DC Supply

1850.2 MHz


9kHz to 4 GHz

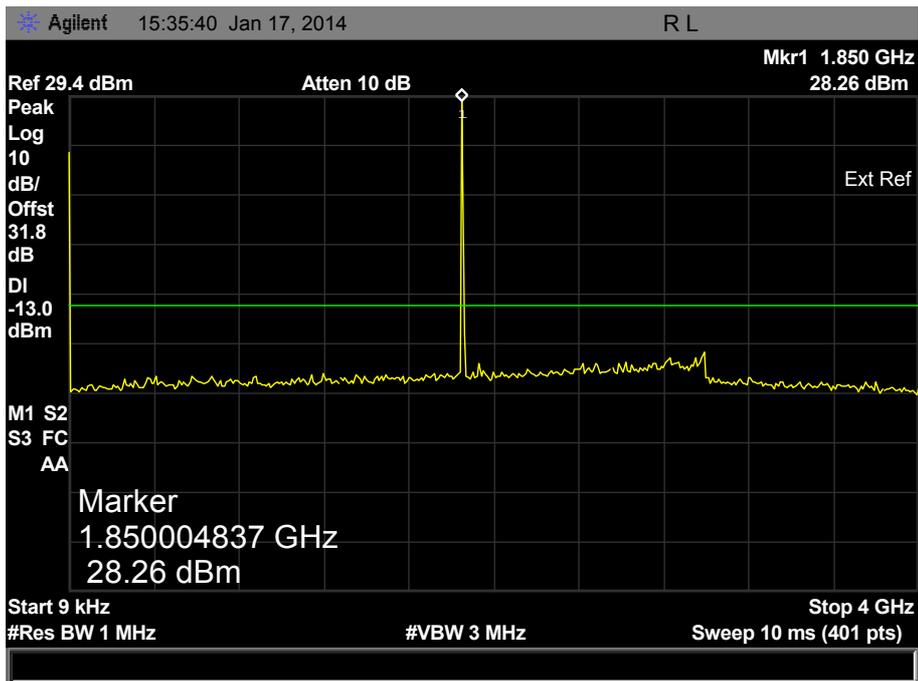




Product Service

4 GHz to 12 GHz

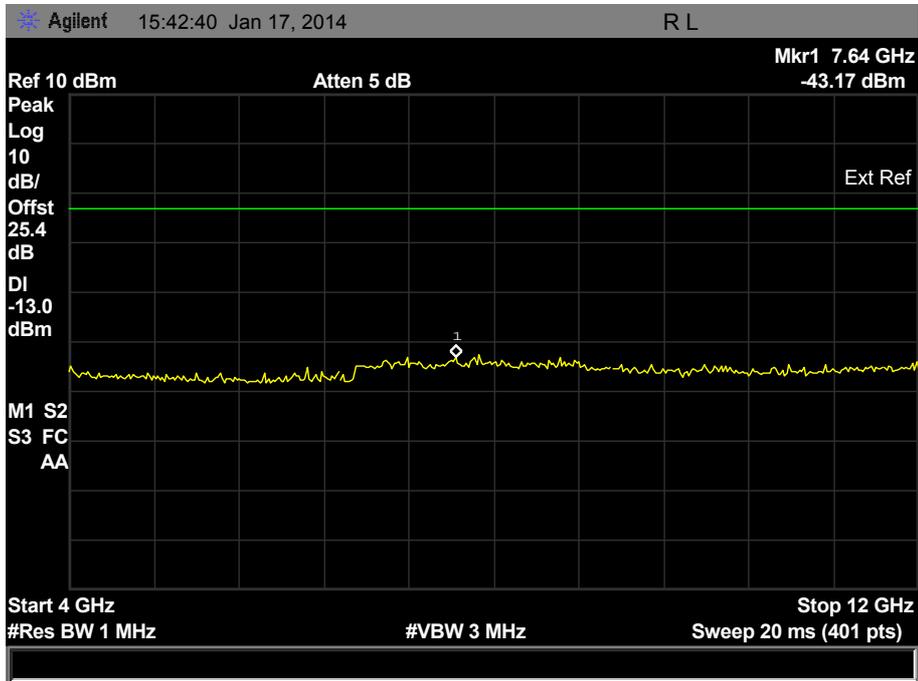

12 GHz to 20 GHz

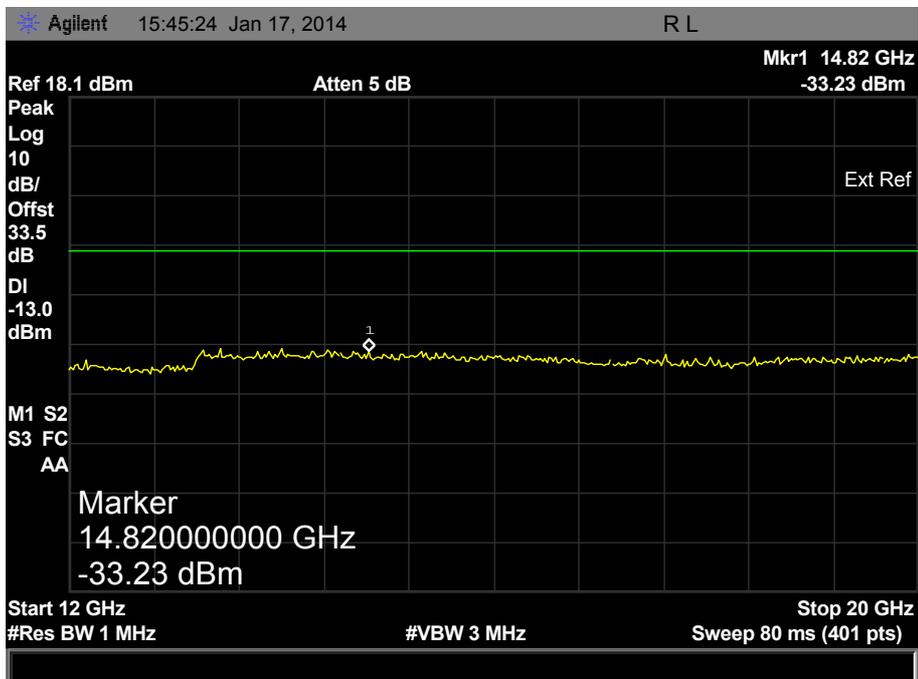





Product Service

1880.0 MHz

9kHz to 4 GHz

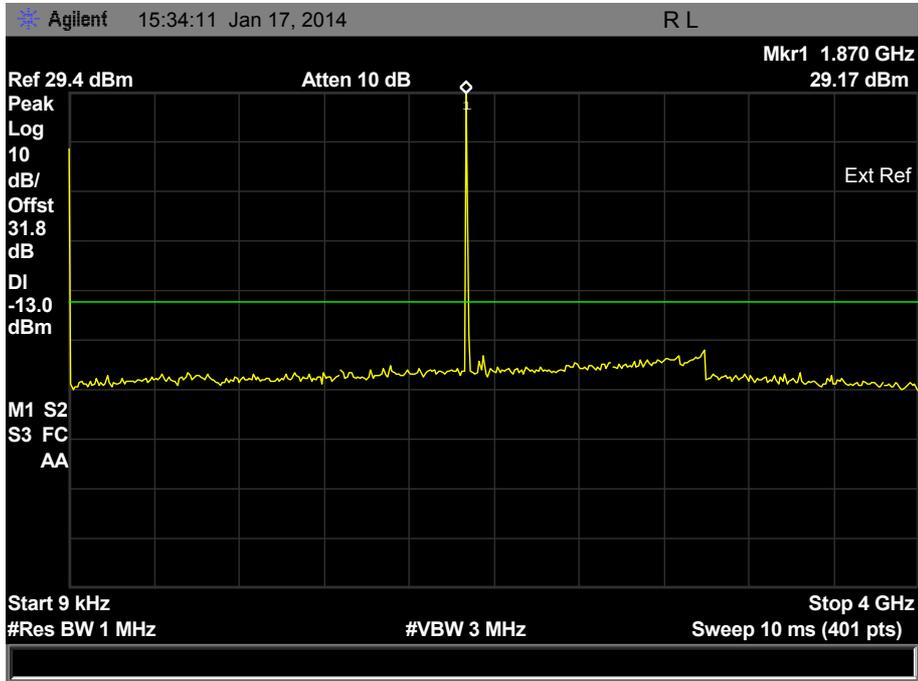


4 GHz to 12 GHz

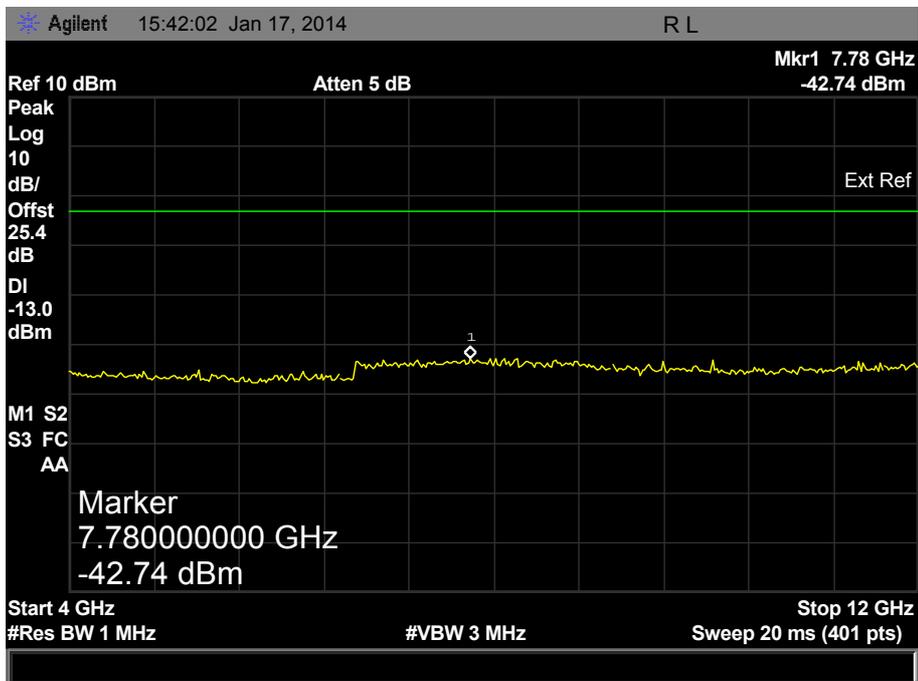




Product Service

12 GHz to 20 GHz

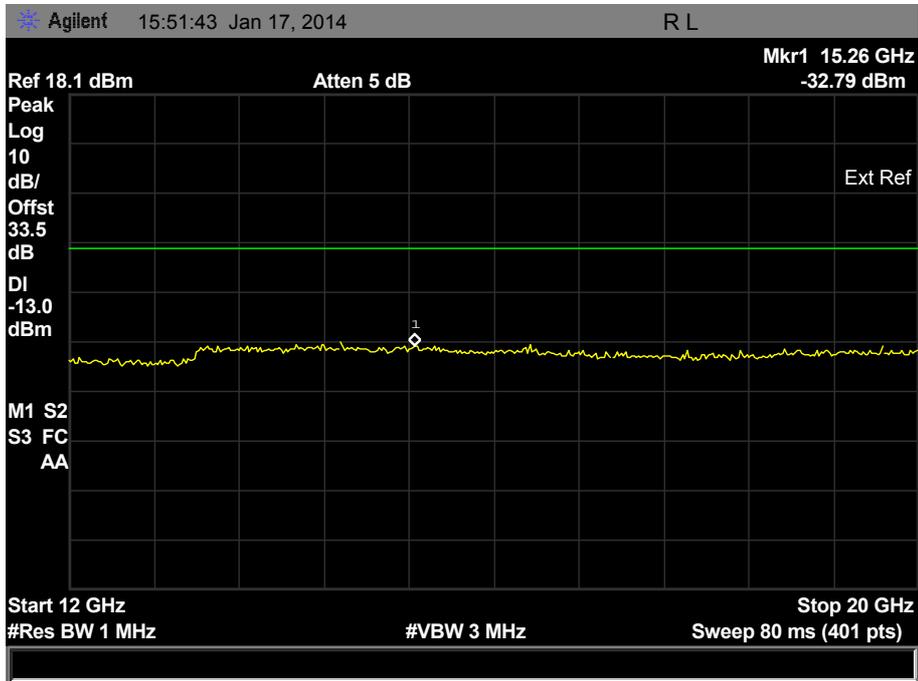

1909.8 MHz


9kHz to 4 GHz

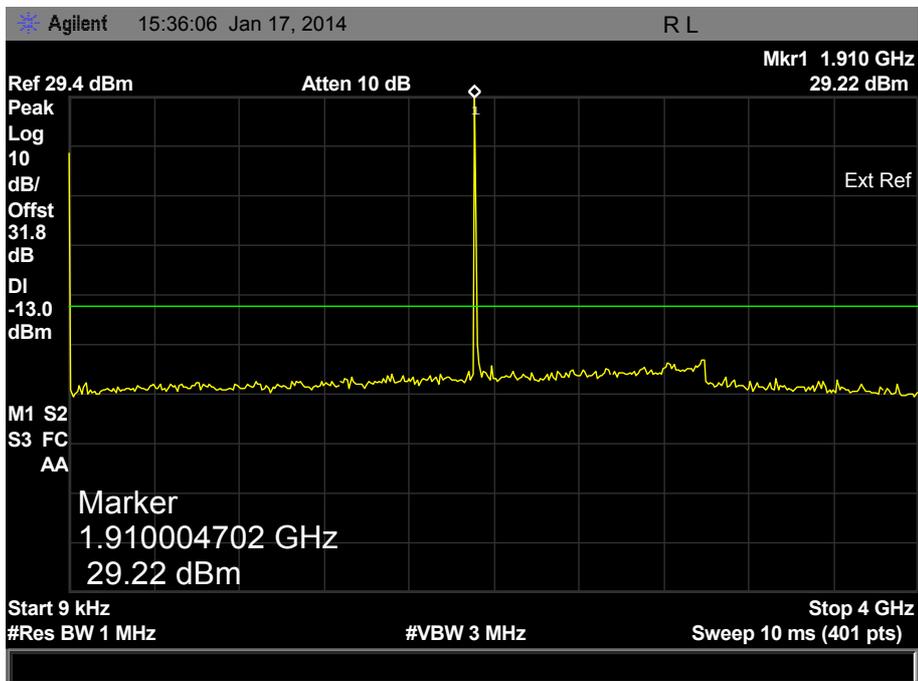




Product Service

4 GHz to 12 GHz

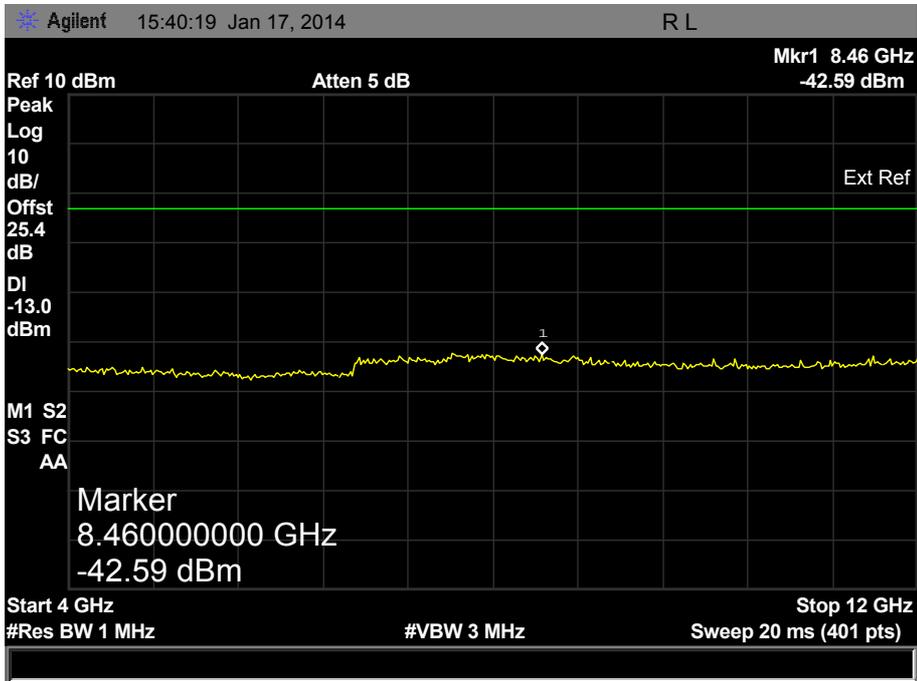

12 GHz to 20 GHz

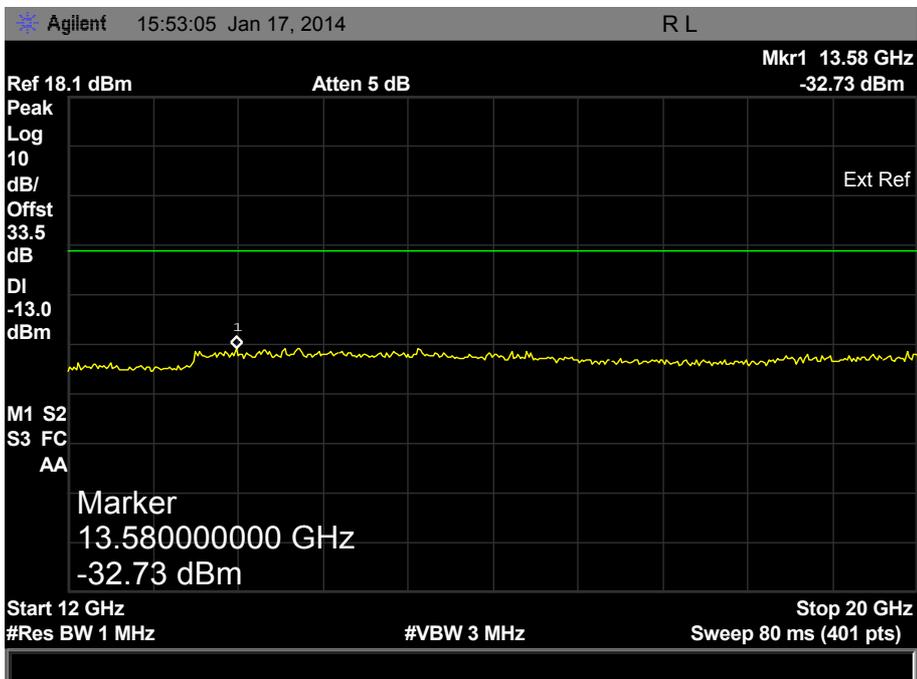

Limit Clause

43+10log(P) or -13 dBm



Product Service

## **2.8 OCCUPIED BANDWIDTH**

### **2.8.1 Specification Reference**

FCC CFR 47 Part 2, Clause 2.1049(h)  
FCC CFR 47 Part 24, Clause 24.238(b)

### **2.8.2 Equipment Under Test and Modification State**

SHL24 S/N: IMEI 004401115003671 - Modification State 0

### **2.8.3 Date of Test**

7 January 2014

### **2.8.4 Test Equipment Used**

The major items of test equipment used for the above tests are identified in Section 3.1.

### **2.8.5 Test Procedure**

The EUT was transmitting at maximum power, with GMSK modulation. Using a resolution bandwidth of 10 kHz and a video bandwidth of 30 kHz, the -26 dBc points were established and the emission bandwidth determined.

The plot of the following pages shows the resultant display from the Spectrum Analyser.

### **2.8.6 Environmental Conditions**

Ambient Temperature	25.2°C
Relative Humidity	34.4%




Product Service

**2.8.7 Test Results**

4.0 V DC Supply

1850.2 MHz

Mode	Occupied Bandwidth (kHz)
GMSK	248.01

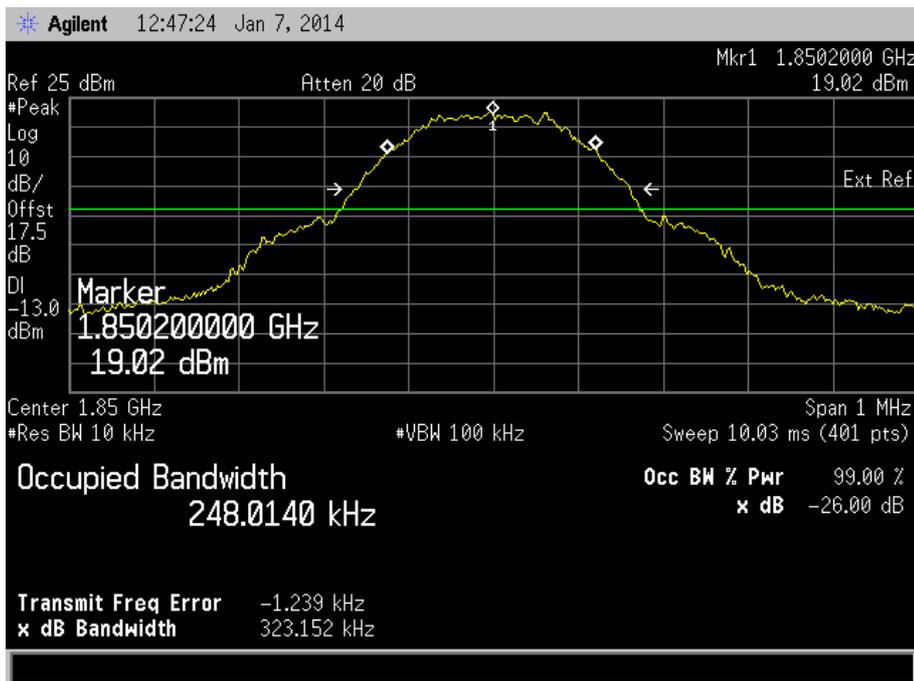




Product Service

1880.0 MHz

Mode	Occupied Bandwidth (kHz)
GMSK	249.37

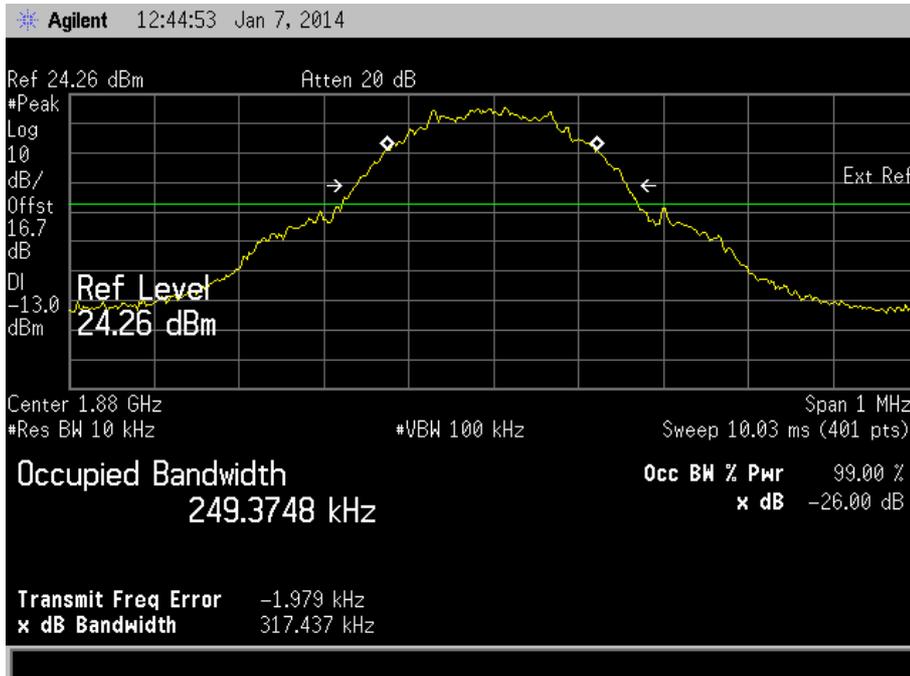




Product Service

1909.8 MHz

Mode	Occupied Bandwidth (kHz)
GMSK	243.06

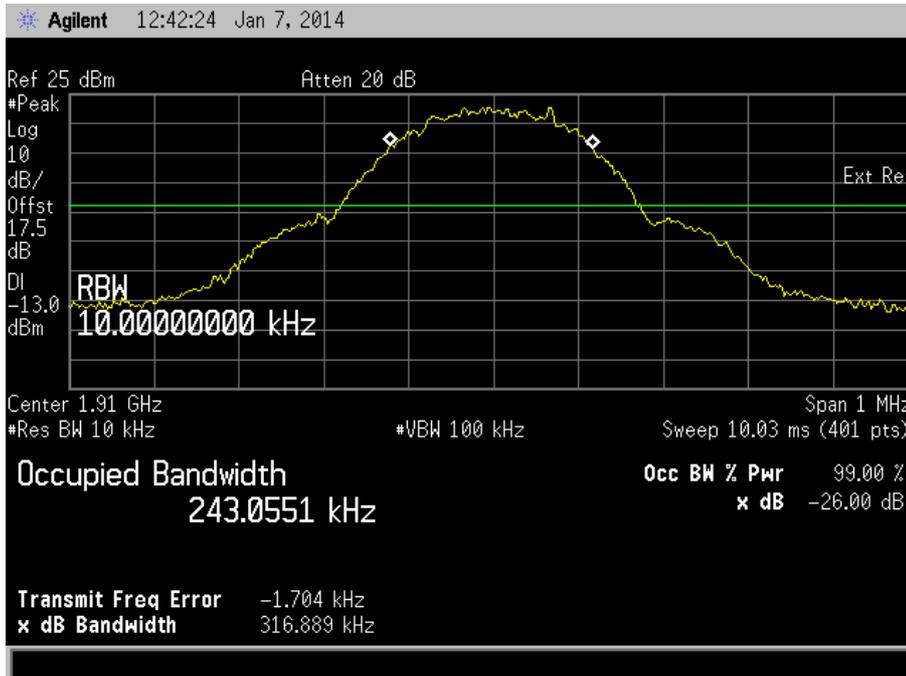

Limit Clause

The occupied bandwidth, that is the frequency bandwidth such that, below is lower and above is upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.1 - Frequency Stability</b>					
Climatic Chamber	Votsch	VT4002	161	-	O/P Mon
Multimeter	White Gold	WG022	190	12	28-Oct-2014
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Temperature Chamber	Montford	2F3	467	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Attenuator (10dB)	Weinschel	47-10-34	481	12	27-Mar-2014
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	24-Jan-2014
Digital Temperature Indicator	Fluke	51	2267	12	11-Sep-2014
Multimeter	Iso-tech	IDM101	2424	12	12-Sep-2014
Attenuator (30dB, 25W)	Weinschel	46-30-34	2776	12	6-Feb-2014
Thermocouple Thermometer	Fluke	51	3174	12	3-Dec-2014
Signal Analyser	Rohde & Schwarz	FSQ 26	3545	12	4-Jul-2014
DC - 8 GHz Attenuator	Lucas Weinschel	24-30-33	3963	12	27-Jun-2014
1 Metre SMA Cable	Rhophase	3PS-1801A-1000-3PS	4099	12	5-Nov-2014
1 Metre N Type Cable	Rhophase	NPS-1601A-1000-NPS	4102	12	11-Jun-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	12	17-Jul-2014
<b>Section 2.2 - Spurious Emissions at Band Edge</b>					
Multimeter	White Gold	WG022	190	12	28-Oct-2014
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	24-Jan-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
DC - 12.4 GHz 10 dB Attenuator	Suhner	6810.17.A	3965	12	17-Oct-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	12	17-Jul-2014
<b>Section 2.3 - Effective Isotropic Radiated Power</b>					
Antenna (Double Ridge Guide)	EMCO	3115	34	12	8-Nov-2014
Radio Communications Test Set	Rohde & Schwarz	CMU 200	3035	12	25-Oct-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Oct-2014
P-Series Power Meter	Agilent Technologies	N1911A	3980	12	18-Sep-2014
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3982	12	18-Sep-2014
<b>Section 2.4 - Maximum Peak Output Power - Conducted</b>					
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Communications Tester	Rohde & Schwarz	CMU 200	442	12	8-Nov-2014
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Multimeter	Iso-tech	IDM101	2419	12	9-Oct-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	13-Sep-2014
LISN, 5µH +10µF	ACME LISN Foundry	Def Stan 59-41/411	3905	12	21-Jun-2014
P-Series Power Meter	Agilent Technologies	N1911A	3981	12	18-Sep-2014
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3983	12	18-Sep-2014
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	18-Sep-2014



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
<b>Section 2.6 - Emission Limitations for Broadband PCS Equipment</b>					
Antenna (Double Ridge Guide)	EMCO	3115	34	12	8-Nov-2014
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	3-Apr-2014
Antenna (Bilog)	Schaffner	CBL6143	287	24	18-Jan-2014
Dual Power Supply Unit	Thurlby	PL320	288	-	TU
Antenna (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	7-Nov-2014
Pre-Amplifier	Phase One	PS04-0086	1533	12	19-Dec-2014
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Filter (Hi Pass)	Lorch	9HP7-7000-SR	2833	12	1-Feb-2014
Radio Communications Test Set	Rohde & Schwarz	CMU 200	3035	12	25-Oct-2014
Signal Generator (10MHz to 40GHz)	Rohde & Schwarz	SMR40	3171	12	10-Sep-2014
Amplifier (8 - 18GHz)	Phase One	PS06-0061	3176	12	9-Aug-2014
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Oct-2014
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	1-Feb-2014
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
<b>Section 2.7 - Conducted Spurious Emissions</b>					
Multimeter	White Gold	WG022	190	12	28-Oct-2014
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Attenuator (10dB)	Weinschel	47-10-34	481	12	27-Mar-2014
Spectrum Analyser	Agilent Technologies	E4407B	1154	12	13-Aug-2014
Hygrometer	Rotronic	I-1000	3220	12	16-Jul-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	13-Sep-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	18-Sep-2014
<b>Section 2.8- Occupied Bandwidth</b>					
Multimeter	White Gold	WG022	190	12	28-Oct-2014
RF Coupler	TUV SUD Product Service	RFC1	414	-	TU
Power Supply Unit	Hewlett Packard	6253A	441	-	O/P Mon
Attenuator (10dB, 10W)	Texscan	HFP-50N	468	12	27-Jun-2014
Spectrum Analyser	Agilent Technologies	E4407B	1154	12	13-Aug-2014
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	24-Jan-2014
Hygrometer	Rotronic	I-1000	3220	12	16-Jul-2014
Power Divider	Weinschel	1506A	3345	12	23-May-2014
DC - 12.4 GHz 10 dB Attenuator	Suhner	6810.17.A	3965	12	17-Oct-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4143	12	22-Jul-2014
Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	4144	12	17-Jul-2014

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



Product Service

### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Modulation Characteristics	-
Maximum Peak Output Power - Conducted	$\pm 0.70$ dB
Emission Limitations for Broadband PCS Equipment	$\pm 3.08$ dB
Conducted Spurious Emissions	$\pm 3.454$ dB
Spurious Emissions at Band Edge	$\pm 2.20$ dB
Occupied Bandwidth	$\pm 10.14$ kHz
Effective Isotropic Radiated Power	$\pm 3.08$ dB
Frequency Stability	$\pm 99.54$ Hz



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2014 TÜV SÜD Product Service