

## TEST REPORT

**Applicant** : Sharp Corporation, Communication Systems Division  
**Address** : 2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN

**Products** : Cellular Phone  
**Model No.** : SH-02F  
**Serial No.** : 004401114985308

**FCC ID** : APYHRO00202

**Test Standard** : CFR 47 FCC Rules and Regulations Part 15

**Test Results** : **Passed**

**Date of Test** : November 21 ~ December 2, 2013



Kousei Shibata

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- 
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan and National Institute of Information and Communications Technology (NICT) of Japan.
  - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
  - The test results presented in this report relate only to the offered test sample.
  - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
  - This test report shall not be reproduced except in full without the written approval of JQA.
  - VLAC does not approve, certify or warrant the product by this test report.

**TABLE OF CONTENTS**

|  | <b>Page</b> |
|--|-------------|
| 1 Description of the Equipment Under Test..... | 3           |
| 2 Summary of Test Results.....                 | 4           |
| 3 Test Procedure.....                          | 5           |
| 4 Test Location.....                           | 5           |
| 5 Recognition of Test Laboratory.....          | 5           |
| 6 Details of the Equipment Under Test.....     | 6           |
| 7 Details of the Test Item.....                | 7           |

**DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT****EUT** : Equipment Under Test**AE** : Associated Equipment**N/A** : Not Applicable**N/T** : Not Tested**EMC** : Electromagnetic Compatibility**EMI** : Electromagnetic Interference**EMS** : Electromagnetic Susceptibility - indicates that the listed condition, standard or equipment is applicable for this report. - indicates that the listed condition, standard or equipment is not applicable for this report.

**1 Description of the Equipment Under Test**

1. Manufacturer : Sharp Corporation, Communication Systems Division  
2-13-1, Iida Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, JAPAN
2. Products : Cellular Phone
3. Model No. : SH-02F
4. Serial No. : 004401114985308
5. Product Type : Pre-production
6. Date of Manufacture : November, 2013
7. Power Rating : 4.0VDC(Lithium-ion Battery UBATIA234AFN1 2120mAh)
8. EUT Grounding : None
9. Transmitting Frequency : 13.560 MHz
10. Receiving Frequency : 13.560 MHz
11. EUT Authorization : Certification
12. Received Date of EUT : November 19, 2013

## 2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15  
Subpart C – Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.  
Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- The test result was **passed** for the test requirements of the applied standard.
- The test result was **failed** for the test requirements of the applied standard.
- The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch



Shigeru Osawa  
Deputy Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch

### 3 Test Procedure

Test Requirements : §15.225, §15.207 and §15.209

Test Procedure : ANSI C63.4–2003

### 4 Test Location

Japan Quality Assurance Organization (JQA)

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan

SAITO EMC Branch

7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

### 5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2014)

VCCI Registration No. : A-0002 (Expiry date : March 30, 2014)

IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 20, 2014)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Expiry date : February 22, 2016)

## 6 Details of the Equipment Under Test

### 6.1 Operating Condition

The test were carried under 3 mode shown as follows:

1. Felica (Modulation Type : ASK)
2. ISO/IEC14443 Type A (Modulation Type : ASK)
3. ISO/IEC14443 Type B (Modulation Type : ASK)

The Radiated Emission test were carried under 1 test configurations shown in clause 6.3.

In all tests, the fully charged battery is used for the EUT.

Detailed Transmitter portion:

Transmitter frequency : 13.560 MHz

Detailed Receiver portion:

Receiver frequency : 13.560 MHz

Other Clock Frequency

32.768 kHz, 19.2 MHz, 27 MHz, 27.12 MHz, 37.4 MHz

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

### 6.2 Test Configuration

The equipment under test (EUT) consists of :

|   | Item           | Manufacturer | Model No. | Serial No.          | FCC ID      |
|---|----------------|--------------|-----------|---------------------|-------------|
| A | Cellular Phone | Sharp        | SH-02F    | 004401114<br>985308 | APYHRO00202 |


The auxiliary equipment used for testing :

None

Type of Cable:

None

### 6.3 Test Arrangement (Drawings)



**7 Details of the Test Item**

**7.0 Summary of the Test Results**

| Test Item                       | FCC Specification          | Reference of the Test Report | Results    | Remarks |
|---------------------------------|----------------------------|------------------------------|------------|---------|
| AC Powerline Conducted Emission | Section 15.207             | Section 7.1                  | N/A<br>*1) | -       |
| Radiated Emission               | Section 15.225(a)(b)(c)(d) | Section 7.2                  | Passed     | -       |
| Occupied Bandwidth              | Section 15.215(c)          | Section 7.3                  | Passed     | -       |
| Band-Edge Emission              | Section 15.225(d)          | Section 7.4                  | Passed     | -       |
| Frequency Stability             | Section 15.225(e)          | Section 7.5                  | Passed     | -       |

Note: 1) See Section 7.1.

**7.1 AC Powerline Conducted Emission**

The requirements are  - Applicable [ - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

Remarks : When the cellular phone is connected to the AC Charger or Stereo Handsfree, the RF(13.56MHz) communicating function is not available.

## 7.2 Radiated Emission

### 7.2.1.1 Radiated Emission (§15.225(a)(b)(c))

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

### 7.2.1.2 Worst Point and Measurement Uncertainty

Min. Limit Margin (Quasi-Peak) 54.2 dB at 13.567 MHz

Uncertainty of Measurement Results 9 kHz – 30 MHz +/-1.7 dB(2 $\sigma$ )

Remarks : The Radited Emission at 30m of 13.567 MHz is -3.7 dB(uV/m).

### 7.2.2.1 Radiated Emission (§15.225(d))

The requirements are  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

- Passed  - Failed  - Not judged

### 7.2.2.2 Worst Point and Measurement Uncertainty

Min. Limit Margin (Quasi-Peak) 6.4 dB at 122.0 MHz

Uncertainty of Measurement Results  
9 kHz – 30 MHz +/-1.7 dB(2 $\sigma$ )  
30 MHz – 300 MHz +/-4.3 dB(2 $\sigma$ )  
300 MHz – 1000 MHz +/-4.5 dB(2 $\sigma$ )  
above 1 GHz \_\_\_\_\_ dB(2 $\sigma$ )

Remarks : When the cellular phone is connected to the AC Charger or Stereo Handsfree, the RF(13.56MHz) communicating function is not available.

**7.2.3 Test Site**

KITA-KANSAI Testing Center SAITO EMC Branch

 - Anechoic chamber A1 - Anechoic chamber A2**7.2.4 Test Instruments**

| Type                 | Model             | Manufacturer    | ID No. | Last Cal. | Interval |
|----------------------|-------------------|-----------------|--------|-----------|----------|
| Test Receiver        | ESU26             | Rohde & Schwarz | A-6    | 2013/5    | 1 Year   |
| Loop Antenna         | HFH2-Z2           | Rohde & Schwarz | C-2    | 2013/8    | 1 Year   |
| RF Cable             | RG213/U           | SUHNER          | H-28   | 2013/8    | 1 Year   |
| Biconical Antenna    | VHA9103/BBA9106   | Schwarzbeck     | C-30   | 2013/5    | 1 Year   |
| Log-periodic Antenna | UHALP9108-A1      | Schwarzbeck     | C-31   | 2013/5    | 1 Year   |
| RF Cable             | S 10162 B-11 etc. | SUHNER          | H-4    | 2013/4    | 1 Year   |
| Site Attenuation     | --                | ----            | H-15   | 2013/2    | 1 Year   |
| Pre-Amplifier        | 310N              | SONOMA          | A-17   | 2013/4    | 1 Year   |

## 7.2.5 Test Method and Test Setup (Diagrammatic illustration)


### 7.2.5.1 Radiated Emission 9 kHz – 30 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

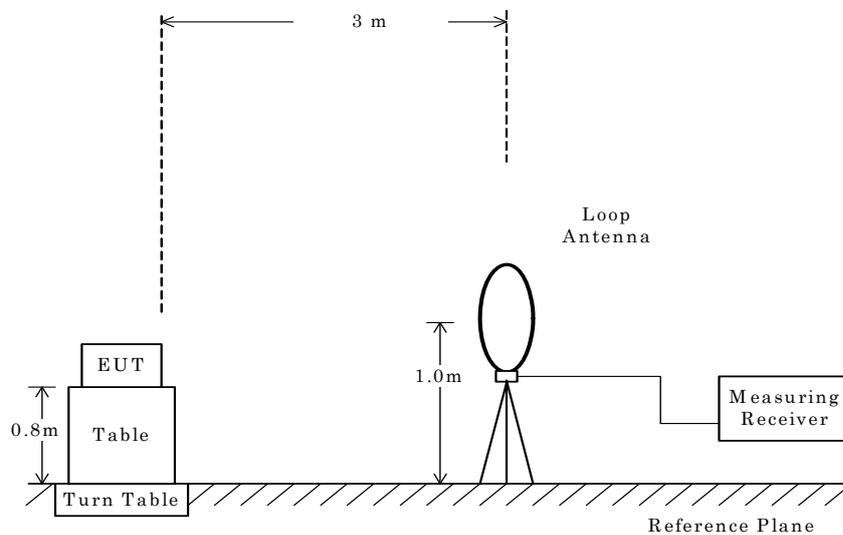


### 7.2.5.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration(in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

– Side View –

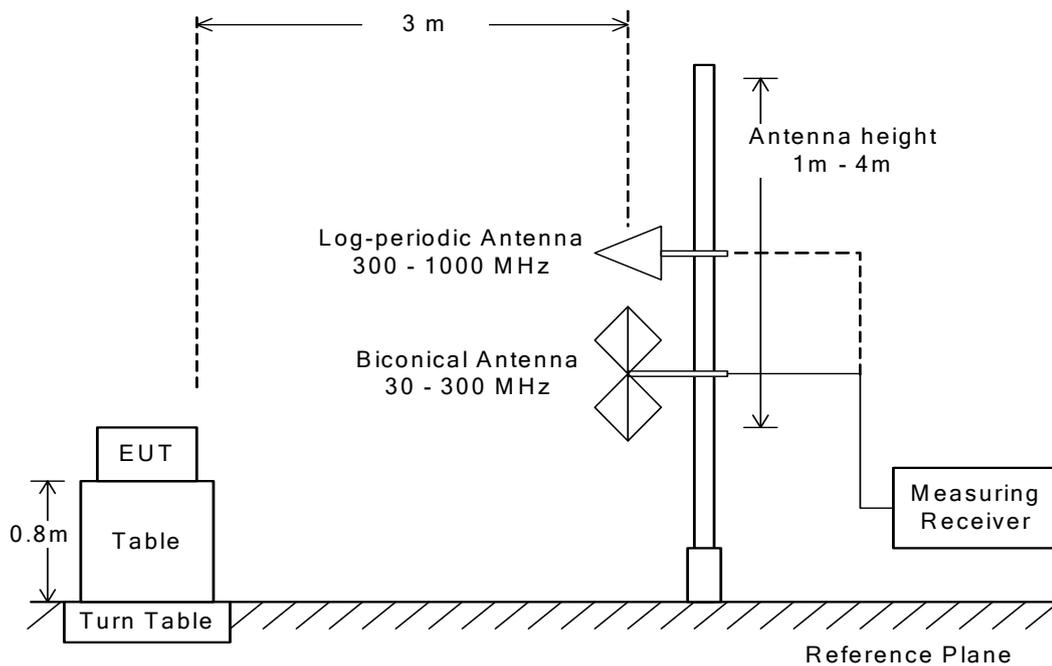

## 7.2.6 Test Data

### 7.2.6.1 Radiated Emission (§15.225(a)(b)(c) & §15.209(a))

Test Mode : Felica

| Test condition : Transmitting(Felica) |                                   |                                      |                      |                              |                                       |                | Test Date: November 26, 2013<br>Temp.: 21 °C, Humi: 32 % |  |
|---------------------------------------|-----------------------------------|--------------------------------------|----------------------|------------------------------|---------------------------------------|----------------|--|--|
| Frequency<br>[MHz]                    | Correction<br>Factor<br>[dB(1/m)] | Meter Readings<br>at 3 m<br>[dB(μV)] | Limits<br>[dB(μV/m)] | Specified<br>Distance<br>[m] | Extrapolated<br>Results<br>[dB(μV/m)] | Margin<br>[dB] | Remarks  |  |
| 13.410                                | 19.9                              | < 10.0                               | 40.5                 | 30.0                         | < -10.1                               | > +50.6        | -  |  |
| 13.553                                | 20.0                              | 15.9                                 | 50.5                 | 30.0                         | - 4.1                                 | +54.6          | -  |  |
| 13.560                                | 20.0                              | 30.0                                 | 84.0                 | 30.0                         | 10.0                                  | +74.0          | -  |  |
| 13.567                                | 20.0                              | 16.3                                 | 50.5                 | 30.0                         | - 3.7                                 | +54.2          | -  |  |
| 13.710                                | 20.0                              | < 10.0                               | 40.5                 | 30.0                         | < -10.0                               | > +50.5        | -  |  |
| 27.120                                | 22.2                              | < 10.0                               | 29.5                 | 30.0                         | < - 7.8                               | > +37.3        | -  |  |

#### NOTES

- Test Distance : 3 m
- The correction factor includes the antenna factor and the cable loss.
- The symbol of "<" means "or less".
- The symbol of ">" means "more than".
- The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.  
The above Meter Reading was maximum emission level.
- Calculation:  
For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).

Fundamental : Correction Factor + Meter Reading = 20.0 + 30.0 = 50.0 dB(μV/m)  
 Result at 30 m = -40 + 50.0 = 10.0 dB(μV/m) (Conversion Factor : 40dB/decade)  
 Limits for 13.553-13.567MHz(§15.225(a)) = 20log10(15848) = 84.0 dBμV/m  
 Limits for 13.410-13.553,13.567-13.710MHz(§15.225(b)) = 20log10(334) = 50.5 dBμV/m  
 Limits for 13.110-13.410,13.710-14.010MHz (§15.225(c)) = 20log10(106) = 40.5 dBμV/m  
 Harmonics : Correction Factor + Meter Reading = 22.2 + <10.0 = <32.2 dB(μV/m)  
 Result at 30 m = -40 + <32.2 = <-7.8 dB(μV/m) (Conversion Factor : 40dB/decade)  
 Limits for Harmonics(§15.209(a)) = 20log10(30) = 29.5 dBμV/m

#### 7. Test receiver setting(s) :

Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)  
 Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

Test Mode : ISO/IEC14443 Type A

Test Date: November 26, 2013

Temp.: 21 °C, Humi: 32 %

Test condition : Transmitting(Type A)

| Frequency<br>[MHz] | Correction<br>Factor<br>[dB(1/m)] | Meter Readings<br>at 3 m<br>[dB(μV)] | Limits<br>[dB(μV/m)] | Specified<br>Distance<br>[m] | Extrapolated<br>Results<br>[dB(μV/m)] | Margin<br>[dB] | Remarks |
|--------------------|-----------------------------------|--------------------------------------|----------------------|------------------------------|---------------------------------------|----------------|---------|
| 13.410             | 19.9                              | < 10.0                               | 40.5                 | 30.0                         | < -10.1                               | > +50.6        | -       |
| 13.553             | 20.0                              | 15.7                                 | 50.5                 | 30.0                         | - 4.3                                 | +54.8          | -       |
| 13.560             | 20.0                              | 29.9                                 | 84.0                 | 30.0                         | 9.9                                   | +74.1          | -       |
| 13.567             | 20.0                              | 16.2                                 | 50.5                 | 30.0                         | - 3.8                                 | +54.3          | -       |
| 13.710             | 20.0                              | < 10.0                               | 40.5                 | 30.0                         | < -10.0                               | > +50.5        | -       |
| 27.120             | 22.2                              | < 10.0                               | 29.5                 | 30.0                         | < - 7.8                               | > +37.3        | -       |

NOTES

1. Test Distance : 3 m
2. The correction factor includes the antenna factor and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.  
The above Meter Reading was maximum emission level.
6. Calculation:  
For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).  
  
Fundamental : Correction Factor + Meter Reading = 20.0 + 29.9 = 49.9 dB(μV/m)  
Result at 30 m = -40 + 49.9 = 9.9 dB(μV/m) (Conversion Factor : 40dB/decade)  
Limits for 13.553-13.567MHz(§15.225(a)) = 20log10(15848) = 84.0 dBμV/m  
Limits for 13.410-13.553,13.567-13.710MHz(§15.225(b)) = 20log10(334) = 50.5 dBμV/m  
Limits for 13.110-13.410,13.710-14.010MHz ( §15.225(c)) = 20log10(106) = 40.5 dBμV/m  
Harmonics : Correction Factor + Meter Reading = 22.2 + <10.0 = <32.2 dB(μV/m)  
Result at 30 m = -40 + <32.2 = <-7.8 dB(μV/m) (Conversion Factor : 40dB/decade)  
Limits for Harmonics(§15.209(a)) = 20log10(30) = 29.5 dBμV/m
7. Test receiver setting(s) :  
Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)  
Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

Test Mode : ISO/IEC14443 Type B

Test Date: November 26, 2013

Temp.: 21 °C, Humi: 32 %

Test condition : Transmitting(Type B)

| Frequency<br>[MHz] | Correction<br>Factor<br>[dB(1/m)] | Meter Readings<br>at 3 m<br>[dB(μV)] | Limits<br>[dB(μV/m)] | Specified<br>Distance<br>[m] | Extrapolated<br>Results<br>[dB(μV/m)] | Margin<br>[dB] | Remarks |
|--------------------|-----------------------------------|--------------------------------------|----------------------|------------------------------|---------------------------------------|----------------|---------|
| 13.410             | 19.9                              | < 10.0                               | 40.5                 | 30.0                         | < -10.1                               | > +50.6        | -       |
| 13.553             | 20.0                              | 15.9                                 | 50.5                 | 30.0                         | - 4.1                                 | +54.6          | -       |
| 13.560             | 20.0                              | 30.1                                 | 84.0                 | 30.0                         | 10.1                                  | +73.9          | -       |
| 13.567             | 20.0                              | 16.3                                 | 50.5                 | 30.0                         | - 3.7                                 | +54.2          | -       |
| 13.710             | 20.0                              | < 10.0                               | 40.5                 | 30.0                         | < -10.0                               | > +50.5        | -       |
| 27.120             | 22.2                              | < 10.0                               | 29.5                 | 30.0                         | < - 7.8                               | > +37.3        | -       |

NOTES

1. Test Distance : 3 m
2. The correction factor includes the antenna factor and the cable loss.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. The testing loop antenna was rotated at the vertical and horizontal axis to maximize received emissions.  
The above Meter Reading was maximum emission level.
6. Calculation:  
For fundamental, the measured field strength was extrapolated to distance 30m, using the formula that field strength using the formula that field strength aries as the inverse distance square(40 dB per decade of distance).  
  
Fundamental : Correction Factor + Meter Reading = 20.0 + 30.1 = 50.1 dB(μV/m)  
Result at 30 m = -40 + 50.1 = 10.1 dB(μV/m) (Conversion Factor : 40dB/decade)  
Limits for 13.553-13.567MHz(§15.225(a)) = 20log10(15848) = 84.0 dBμV/m  
Limits for 13.410-13.553,13.567-13.710MHz(§15.225(b)) = 20log10(334) = 50.5 dBμV/m  
Limits for 13.110-13.410,13.710-14.010MHz ( §15.225(c)) = 20log10(106) = 40.5 dBμV/m  
Harmonics : Correction Factor + Meter Reading = 22.2 + <10.0 = <32.2 dB(μV/m)  
Result at 30 m = -40 + <32.2 = <-7.8 dB(μV/m) (Conversion Factor : 40dB/decade)  
Limits for Harmonics(§15.209(a)) = 20log10(30) = 29.5 dBμV/m
7. Test receiver setting(s) :  
Quasi-Peak Detector IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)  
Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)

**7.2.6.2 Radiated Emission (§15.209(a))(9kHz – 30MHz)**


Test Mode: All mode

Test Date: November 26, 2013

Temp.: 21 °C, Humi: 32 %

Test condition : Transmitting

| Frequency<br>[MHz] | Correction<br>Factor<br>[dB(1/m)] | Meter Readings<br>at 3 m<br>[dB(μV)] | Limits<br>[dB(μV/m)] | Specified<br>Distance<br>[m] | Extrapolated<br>Results<br>[dB(μV/m)] | Margin<br>[dB] | Remarks |
|--------------------|-----------------------------------|--------------------------------------|----------------------|------------------------------|---------------------------------------|----------------|---------|
| 0.009              | 29.7                              | < 15.0                               | 48.5                 | 300.0                        | < -35.3                               | > +83.8        | -       |
| 0.01               | 29.0                              | < 15.0                               | 47.6                 | 300.0                        | < -36.0                               | > +83.6        | -       |
| 0.05               | 21.3                              | < 15.0                               | 33.6                 | 300.0                        | < -43.7                               | > +77.3        | -       |
| 0.10               | 20.4                              | < 15.0                               | 27.6                 | 300.0                        | < -44.6                               | > +72.2        | -       |
| 0.50               | 20.0                              | < 10.0                               | 33.6                 | 30.0                         | < -10.0                               | > +43.6        | -       |
| 1.00               | 19.9                              | < 10.0                               | 27.6                 | 30.0                         | < -10.1                               | > +37.7        | -       |
| 5.00               | 19.8                              | < 10.0                               | 29.5                 | 30.0                         | < -10.2                               | > +39.7        | -       |
| 10.00              | 19.7                              | < 10.0                               | 29.5                 | 30.0                         | < -10.3                               | > +39.8        | -       |
| 20.00              | 21.0                              | < 10.0                               | 29.5                 | 30.0                         | < - 9.0                               | > +38.5        | -       |
| 30.00              | 22.5                              | < 10.0                               | 29.5                 | 30.0                         | < - 7.5                               | > +37.0        | -       |

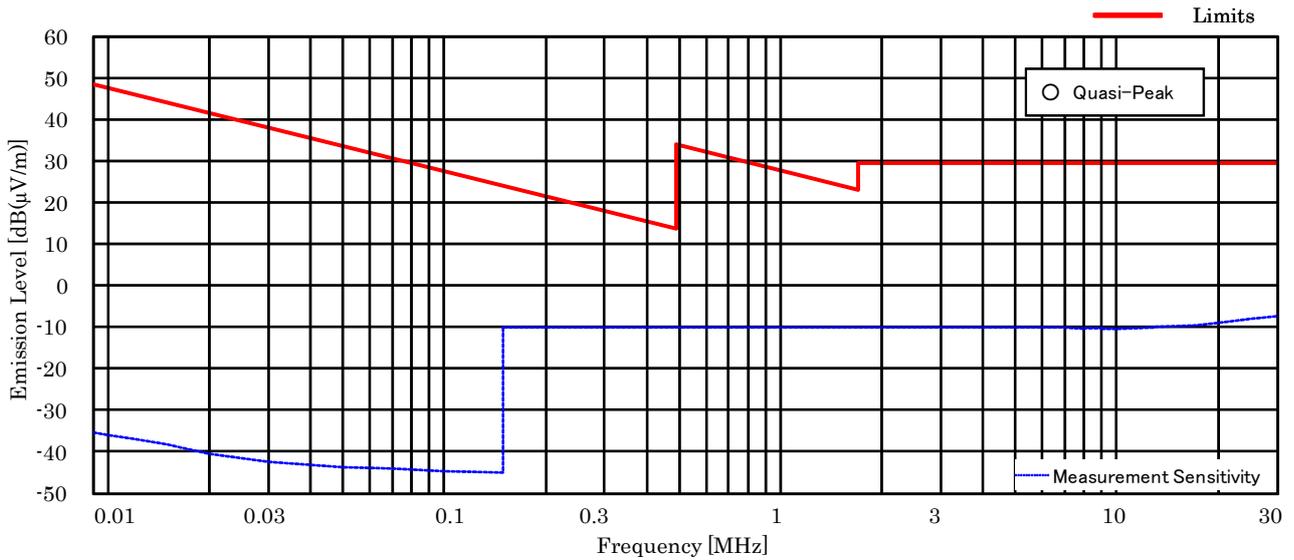

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 9 kHz to 30 MHz.
3. The correction factor includes the antenna factor and the cable loss.
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. Calculated result at 30.00 MHz, as the worst point shown on underline:  
 Correction Factor + Meter Reading = 22.5 + <10.0 = <32.5 dB(μV/m)  
 Result at 30 m = -40.0 + <32.5 = <-7.5 dB(μV/m) (Conversion Factor : 40dB/decade)
7. Test receiver setting(s) :  
 Quasi-Peak Detector, IF Bandwidth: 9kHz or 200Hz(Except for 9 kHz -90 kHz, 110 kHz -490 kHz)  
 Average Detector, IF Bandwidth: 9kHz or 200Hz(9 kHz -90 kHz, 110 kHz -490 kHz)


### 7.2.6.3 Radiated Emission (§15.209(a))( 30MHz – 1000MHz)

Test Mode : All mode

Test Date: November 27, 2013

Temp.: 21 °C, Humi: 36 %

| Frequency<br>[MHz] | Antenna<br>Factor<br>[dB(1/m)] | Cable<br>Loss<br>[dB] | Meter Readings<br>[dB(μV)] |       | Limits<br>[dB(μV/m)] | Results<br>[dB(μV/m)] |       | Margin<br>[dB] | Remarks |
|--------------------|--------------------------------|-----------------------|----------------------------|-------|----------------------|-----------------------|-------|----------------|---------|
|                    |                                |                       | Hori.                      | Vert. |                      | Hori.                 | Vert. |                |         |
| 40.7               | 14.7                           | -27.5                 | 31.9                       | 36.6  | 40.0                 | 19.1                  | 23.8  | +16.2          | -       |
| 67.8               | 6.9                            | -27.2                 | 38.9                       | 42.1  | 40.0                 | 18.6                  | 21.8  | +18.2          | -       |
| 94.9               | 9.1                            | -26.9                 | 42.3                       | 45.0  | 43.5                 | 24.5                  | 27.2  | +16.3          | -       |
| 108.5              | 11.5                           | -26.7                 | 36.3                       | 37.3  | 43.5                 | 21.1                  | 22.1  | +21.4          | -       |
| 122.0              | 13.1                           | -26.6                 | 50.3                       | 50.6  | 43.5                 | 36.8                  | 37.1  | + 6.4          | -       |
| 149.2              | 14.7                           | -26.4                 | 35.5                       | 34.4  | 43.5                 | 23.8                  | 22.7  | +19.7          | -       |

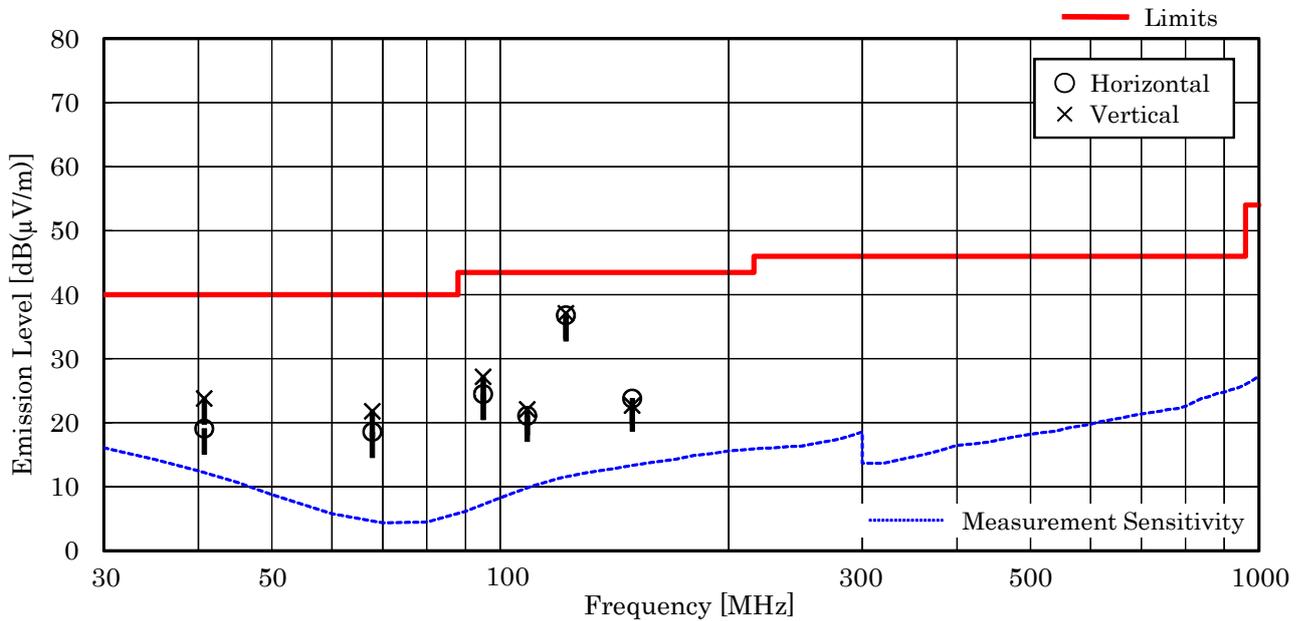

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 30 MHz to 1000 MHz.
3. The symbol of "<" means "or less".
4. The symbol of ">" means "more than".
5. Calculated result at 122.0 MHz, as the worst point shown on underline:  
 $\text{Antenna Factor} + \text{Cable Loss} + \text{Meter Reading} = 13.1 + -26.6 + 50.6 = 37.1 \text{ dB}(\mu\text{V}/\text{m})$
6. Test receiver setting(s) : CISPR QP 120 kHz (QP : Quasi-Peak)

**7.3 Occupied Bandwidth**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - Passed  - Failed  - Not judged

**7.3.1 Worst Point and Measurement Uncertainty**

Uncertainty of Measurement Results +/-0.9 % (2σ)

Remarks : \_\_\_\_\_

**7.3.2 Test Site**

KITA-KANSAI Testing Center


Test site : SAITO  - Anechoic chamber (A1)  - Measurement room (M1)  
 - Measurement room (M2)  - Measurement room (M3)  
 - Shielded room (S1)  - Shielded room (S2)  
 - Shielded room (S3)  - Shielded room (S4)

**7.3.3 Test Instruments**

| Type              | Model   | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|---------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A  | Agilent      | A-39   | 2013/9    | 1 Year   |
| Loop Antenna      | LU-100A | TEXIO        | C-33   | N/A       | N/A      |

### 7.3.4 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:

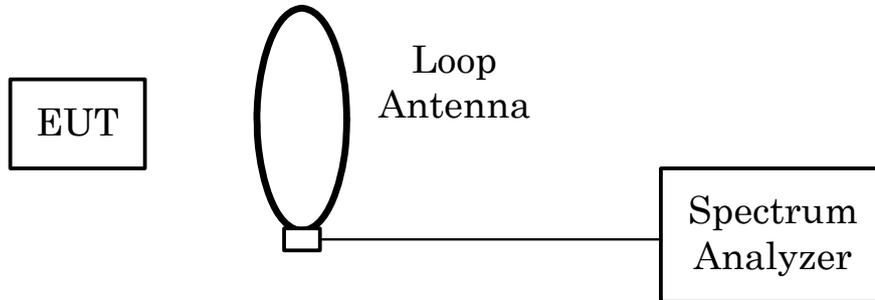

The setting of the spectrum analyzer are shown as follows:


|                 |         |
|-----------------|---------|
| Res. Bandwidth  | 1 kHz   |
| Video Bandwidth | 3 kHz   |
| Span            | 30 kHz  |
| Sweep Time      | AUTO    |
| Trace           | Maxhold |

### 7.3.5 Test Data


Test Date : November 21, 2013

Temp.:21°C, Humi:30%

Test Mode : Felica

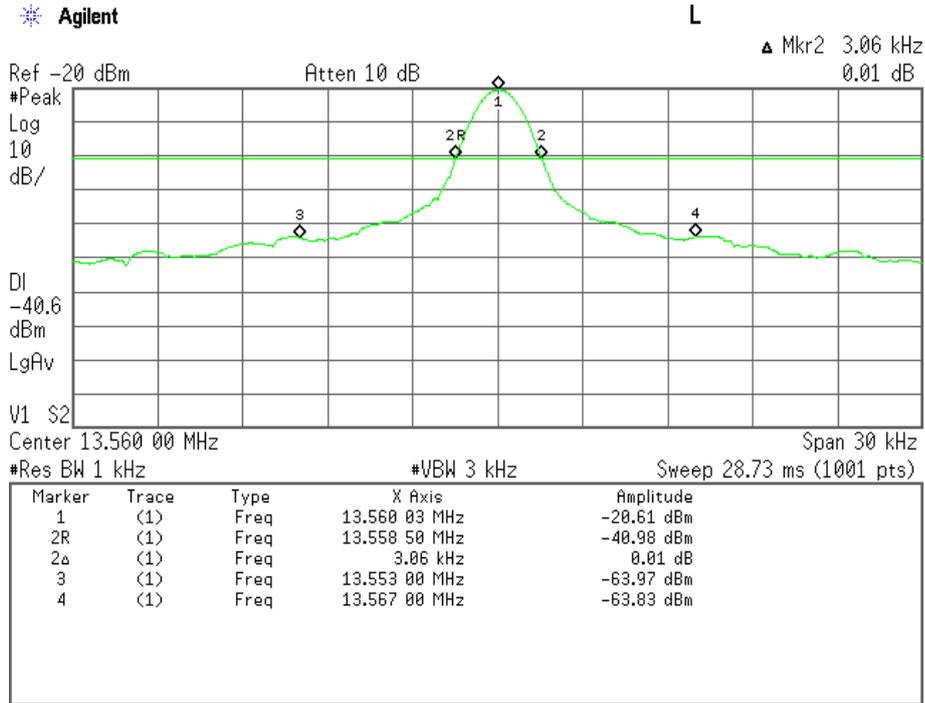


Test Mode : ISO/IEC14443 Type A

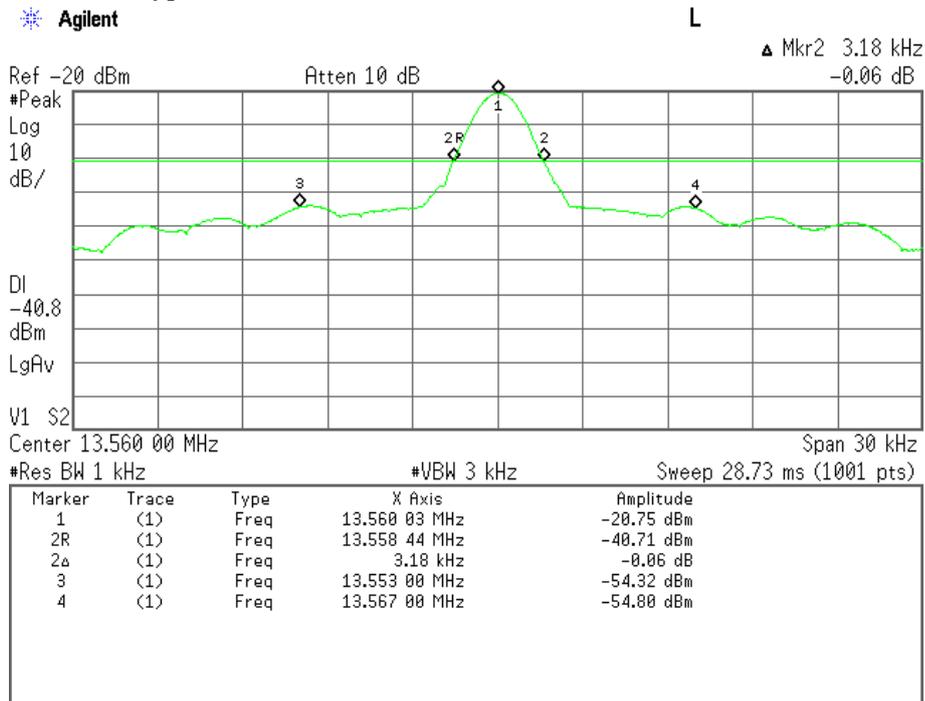

Test Mode : ISO/IEC14443 Type B

Agilent

L

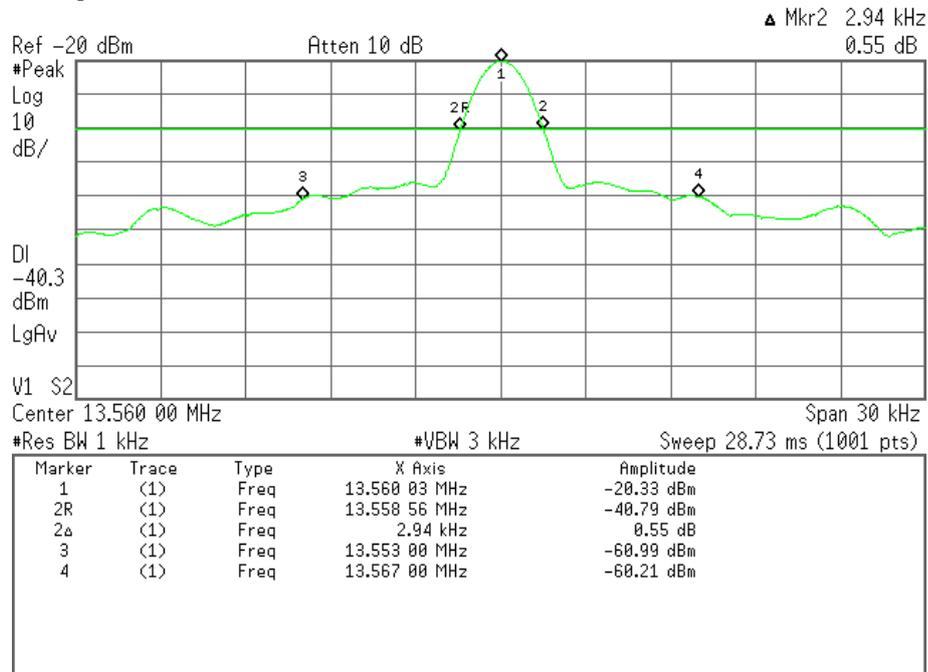

**7.4 Band-Edge Emission**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - Passed  - Failed  - Not judged

**7.4.1 Worst Point and Measurement Uncertainty**

Uncertainty of Measurement Results +/-1.0 dB(2 $\sigma$ )

Remarks : \_\_\_\_\_

**7.4.2 Test Site**

KITA-KANSAI Testing Center

Test site : SAITO


|  |  |
|--|--|
| <input type="checkbox"/> - Anechoic chamber (A1) | <input type="checkbox"/> - Measurement room (M1)         |
| <input type="checkbox"/> - Measurement room (M2) | <input type="checkbox"/> - Measurement room (M3)         |
| <input type="checkbox"/> - Shielded room (S1)    | <input type="checkbox"/> - Shielded room (S2)            |
| <input type="checkbox"/> - Shielded room (S3)    | <input checked="" type="checkbox"/> - Shielded room (S4) |

**7.4.3 Test Instruments**

| Type              | Model   | Manufacturer | ID No. | Last Cal. | Interval |
|-------------------|---------|--------------|--------|-----------|----------|
| Spectrum Analyzer | E4446A  | Agilent      | A-39   | 2013/9    | 1 Year   |
| Loop Antenna      | LU-100A | TEXIO        | C-33   | N/A       | N/A      |

**7.4.4 Test Method and Test Setup (Diagrammatic illustration)**

The test system is shown as follows:

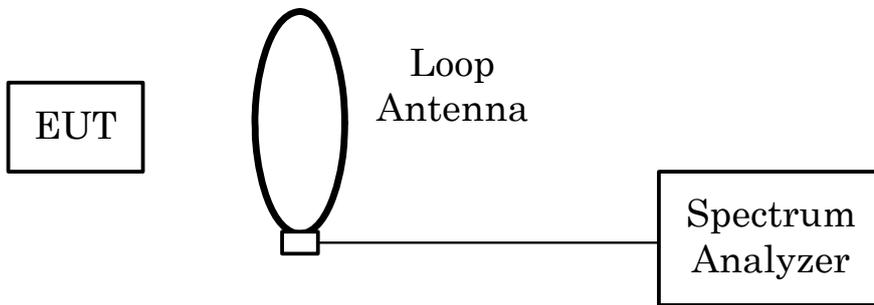

The setting of the spectrum analyzer are shown as follows:



|                     |                         |
|---------------------|-------------------------|
| TX Frequency        | 13.560 MHz              |
| Band-Edge Frequency | 13.110 MHz / 14.010 MHz |
| Res. Bandwidth      | 10 kHz                  |
| Video Bandwidth     | 10 kHz                  |
| Span                | 1 MHz                   |
| Sweep Time          | AUTO                    |
| Trace               | Maxhold                 |

### 7.4.5 Test Data



Test Date : November 21, 2013

Temp.:21°C, Humi:30%



Test Mode : Felica

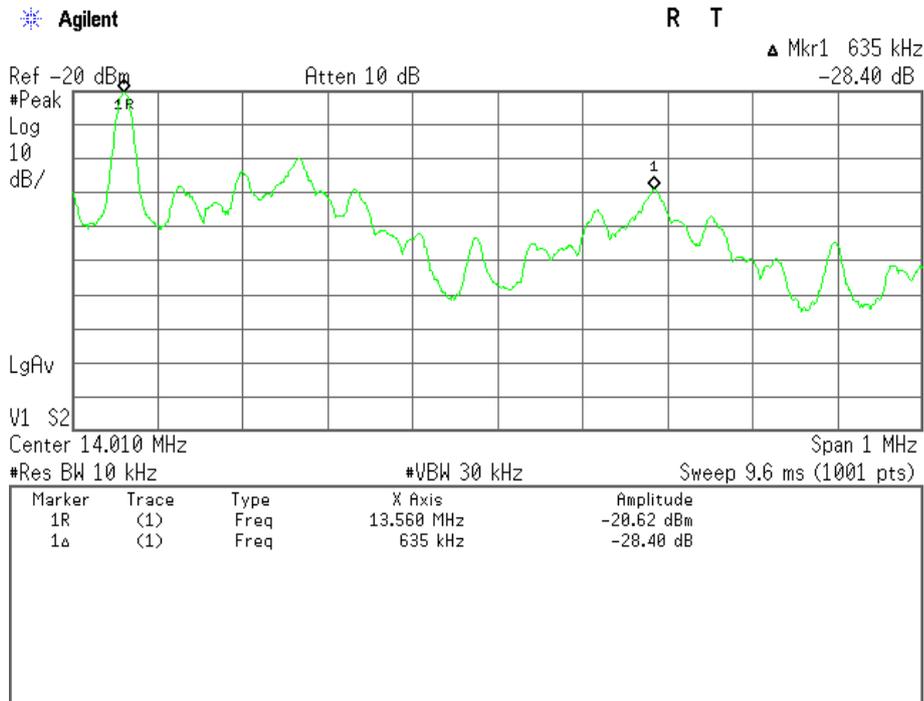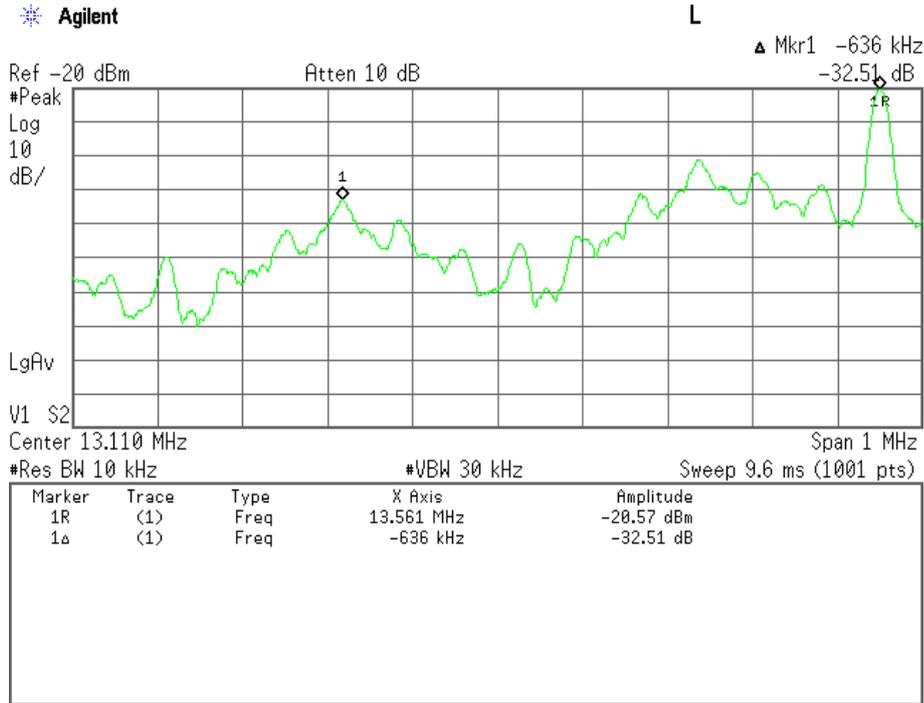

Test Mode : ISO/IEC14443 Type A

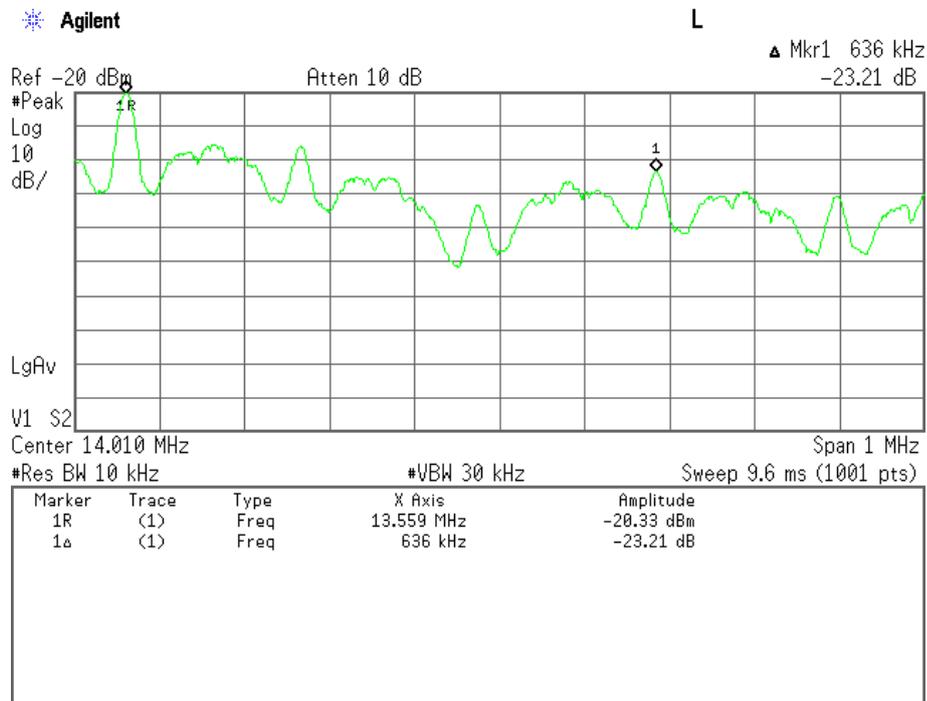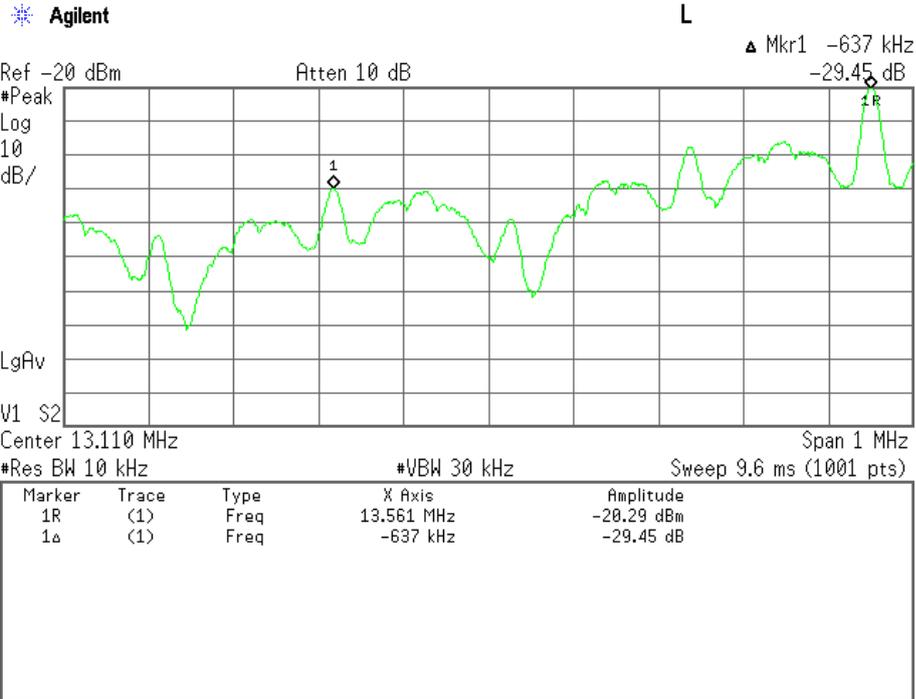

Test Mode : ISO/IEC14443 Type B

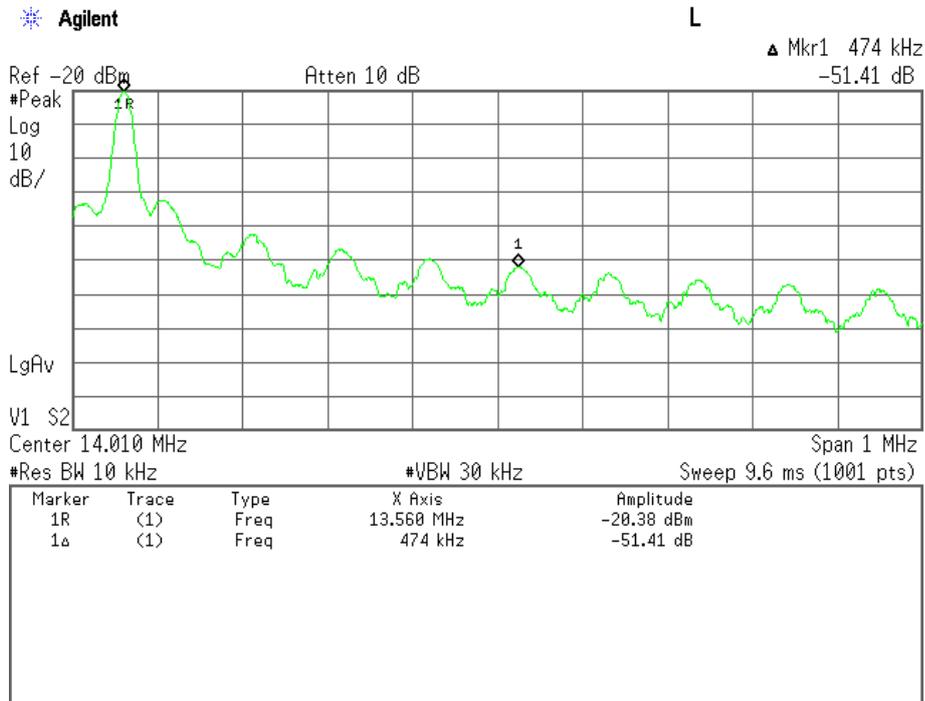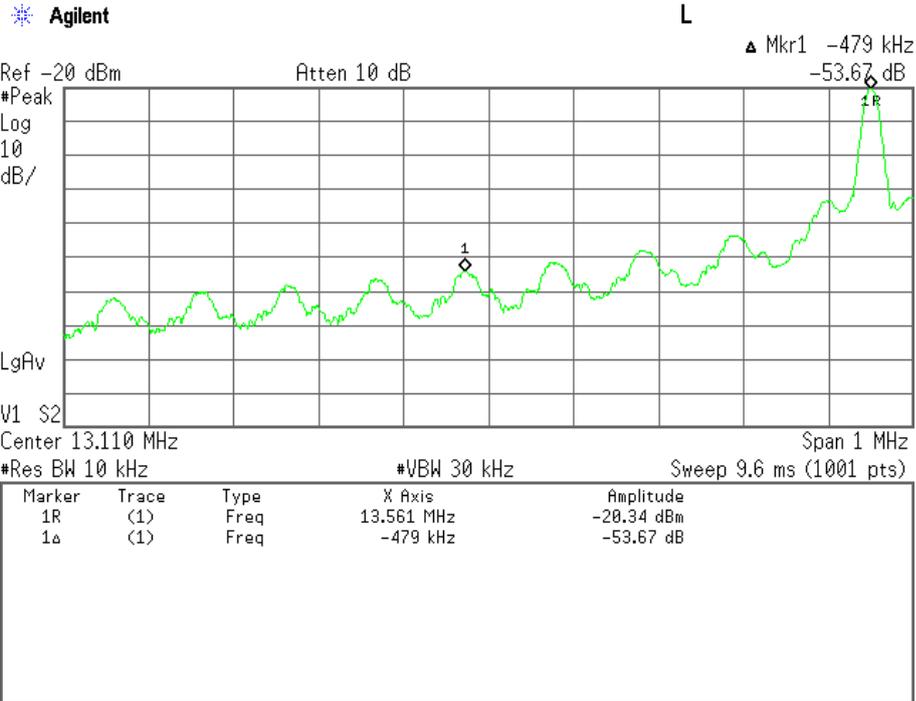

**7.5 Frequency Stability**

For the requirements,  - Applicable  - Tested.  - Not tested by applicant request.]  
 - Not Applicable

For the limits,  - Passed  - Failed  - Not judged

**7.5.1 Worst Point and Measurement Uncertainty**

The Frequency Stability level is +0.000715 % at 13.560 MHz

Min. Limit Margin +0.009285 % at 13.560 MHz

Uncertainty of Measurement Results +/-1.6 ppm(2σ)

Remarks : \_\_\_\_\_

**7.5.2 Test Site**

KITA-KANSAI Testing Center

Test site : SAITO  - Environment Testing Room  
 MINOH  - Environment Testing Room


**7.5.3 Test Instruments**

| Type                  | Model   | Manufacturer    | ID No. | Last Cal. | Interval |
|-----------------------|---------|-----------------|--------|-----------|----------|
| Spectrum Analyzer     | FSL3    | Rohde & Schwarz | A-40   | 2013/3    | 1 Year   |
| Loop Antenna          | LU-100A | TEXIO           | C-33   | N/A       | N/A      |
| DC Voltage Meter      | 2011-39 | YEW             | B-33   | 2013/4    | 1 Year   |
| Environmental Chamber | SH-641  | ESPEC           | F-32   | 2013/7    | 1 Year   |

**7.5.4 Test Method and Test Setup (Diagrammatic illustration)**

**Frequency Stability versus Temperature**

The EUT was placed in an environmental chamber and was tested in the range from -30 to +50 degrees Celsius. The EUT was stabilized at each temperature. The power (4.0VDC) supplied was applied to the transmitter and allowed to stabilize for 10 minutes. The transmitting frequency was measured at startup and 2 minutes, 5 minutes and 10 minutes after startup. This procedure was repeated from -20, +20 and +50 degrees Celsius.

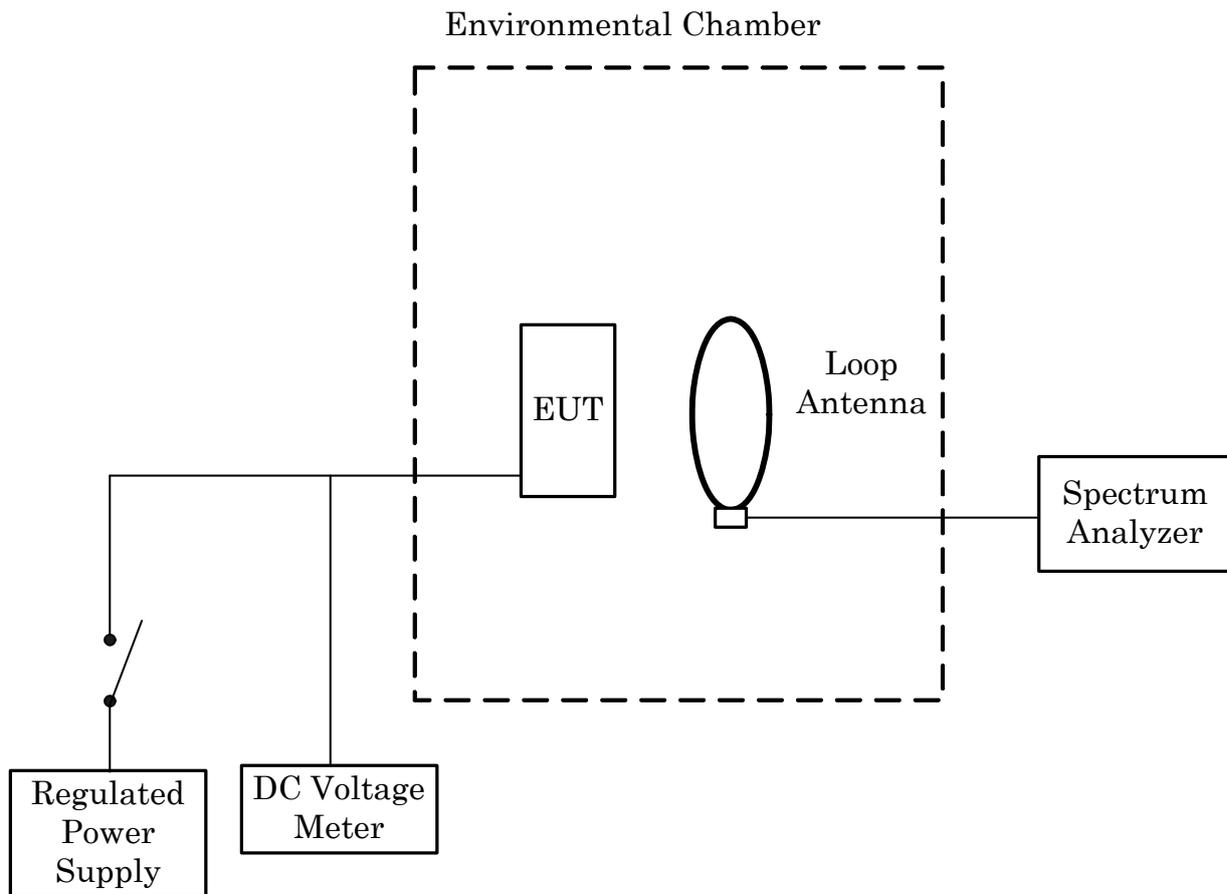

7.5.5 Test Data

Frequency Stability Measurement

Test Date: November 29, 2013  
- December 2, 2013

Transmitting Frequency : 13.560 MHz  
 DC Supply Voltage : 4.0 VDC

| Ambient Temperature [°C] | Startup   | Frequency with time elapse[MHz] |           |            |
|--------------------------|-----------|---------------------------------|-----------|------------|
|                          |           | 2 minutes                       | 5 minutes | 10 minutes |
| -20                      | 13.560008 | 13.560011                       | 13.560004 | 13.560000  |
| 20                       | 13.560097 | 13.560090                       | 13.560090 | 13.560088  |
| 50                       | 13.559937 | 13.559936                       | 13.559936 | 13.559932  |

| Ambient Temperature [°C] | Startup           | Diviation with time elapse[%] |            |            | Limits [%] | Margin [%] |
|--------------------------|-------------------|-------------------------------|------------|------------|------------|------------|
|                          |                   | 2 minutes                     | 5 minutes  | 10 minutes |            |            |
| -20                      | + 0.000059        | + 0.000081                    | + 0.000029 | + 0.000000 | 0.01       | + 0.009919 |
| 20                       | <b>+ 0.000715</b> | + 0.000664                    | + 0.000664 | + 0.000649 | 0.01       | + 0.009285 |
| 50                       | - 0.000465        | - 0.000472                    | - 0.000472 | - 0.000501 | 0.01       | + 0.009499 |

Sample of calculated result at 13.560 MHz, as the Minimum Margin point:

Ambient Temperature : 20 °C / Startup  
 DC Supply Voltage 4.0V

Minimum Margin: 0.010000 - 0.000715 = 0.009285 (%)

The point shown on “ **\_\_\_\_\_** ” is the Minimum Margin Point. The Maximum Deviation Point is shown on a thick letter.

Note: The measurement were made after all of components of the oscillator sufficiently stabilized at each temperature.