

## TEST REPORT (SAR EVALUATION)

**Applicant** : Sharp Corporation, Consumer Electronics Company,  
Communication Systems Division

**Address** : 2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, Japan

**Products** : Smart Phone

**Model No.** : 506SH

**Serial No.** : 004401/11/570769/3

**FCC ID** : APYHRO00233

**Test Standard** : FCC Rules and Regulations Title 47 CFR Part 2

**Test Results** : **Passed**

**Date of Test** : March 19 ~ April 9, 2016



A handwritten signature in black ink, appearing to read 'K. Shibata'.

Kousei Shibata  
Manager  
Japan Quality Assurance Organization  
KITA-KANSAI Testing Center  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan, National Institute of Information and Communications Technology (NICT) of Japan , and Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zürich, Switzerland.
- The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
- The test results presented in this report relate only to the offered test sample.
- The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
- This test report shall not be reproduced except in full without the written approval of JQA.
- VLAC does not approve, certify or warrant the product by this test report.

**TABLE OF CONTENTS**

|                                                    | <b>Page</b> |
|----------------------------------------------------|-------------|
| 1 Description of the Device Under Test (DUT) ..... | 3           |
| 2 Summary of Test Results .....                    | 7           |
| 3 Test Procedure.....                              | 8           |
| 4 Test Location .....                              | 8           |
| 5 Recognition of Test Laboratory .....             | 8           |
| 6 Measurement System Diagram.....                  | 9           |
| 7 System Components .....                          | 10          |
| 8 Measurement Process.....                         | 13          |
| 9 Measurement Uncertainties.....                   | 14          |
| 10 Test Arrangement .....                          | 16          |
| 11 Tissue Verification.....                        | 20          |
| 12 System Performance Check.....                   | 26          |
| 13 RF Output Power Measurements.....               | 28          |
| 14 SAR Measurements .....                          | 42          |
| 15 Test Setup Photographs .....                    | 56          |
| 16 Test Instruments .....                          | 61          |
| 17 Appendix.....                                   | 62          |

## 1 Description of the Device Under Test (DUT)

### 1.1 General Information

1. Manufacturer : Sharp Corporation, Consumer Electronics Company,  
Communication Systems Division  
2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,  
739-0192, Japan
2. Products : Smart Phone
3. Model No. : 506SH
4. Serial No. : 004401/11/570769/3
5. Product Type : Pre-production
6. Date of Manufacture : February, 2016
7. Transmitting Frequency : GSM 850 (824 MHz – 849 MHz)  
PCS 1900 (1850 MHz – 1910 MHz)  
W-CDMA Band II (1850 MHz – 1910 MHz)  
W-CDMA Band IV (1710 MHz – 1755 MHz)  
LTE Band 2 (1850 MHz – 1910 MHz)  
LTE Band 4 (1710 MHz – 1755 MHz)  
WLAN 2.4 GHz (DTS : 2412 MHz – 2462 MHz)  
WLAN 5 GHz (U-NII 1 : 5150 MHz – 5250 MHz)  
WLAN 5 GHz (U-NII 2A : 5250 MHz – 5350 MHz)  
WLAN 5 GHz (U-NII 2C : 5470 MHz – 5725 MHz)  
Bluetooth (2402 MHz – 2480 MHz)
8. Battery Option : Lithium-ion Battery Pack UBATIA269AFN1 (3000mAh)
9. Power Rating : 4.0VDC
10. DUT Grounding : None
11. Device Category : Portable Device (§2.1093)
12. Exposure Category : General Population/Uncontrolled Exposure
13. FCC Rule Part(s) : 22(H), 24(E), 27(L), 15.247, 15.407
14. DUT Authorization : Certification
15. Received Date of DUT : March 18, 2016

## 1.2 Wireless Technologies

| Air Interface | Description                           |                                                                                                         |
|---------------|---------------------------------------|---------------------------------------------------------------------------------------------------------|
| GSM           | Frequency band(s)                     | 850, 1900                                                                                               |
|               | Operating mode                        | GSM (GMSK)<br>GPRS (GMSK)                                                                               |
|               | GPRS Multi-Slot Class                 | Class 12 – Four Up                                                                                      |
|               | VoIP                                  | Supported                                                                                               |
|               | DTM (Dual Transfer Mode)              | Not supported                                                                                           |
| W-CDMA        | Frequency band(s)                     | Band II, IV                                                                                             |
|               | Operating mode                        | UMTS Rel.99 (Voice & Data)<br>HSDPA Rel.8<br>HSUPA Rel.8                                                |
|               | VoIP                                  | Supported                                                                                               |
| LTE (FDD)     | Frequency band(s)                     | Band 2, 4                                                                                               |
|               | Operating mode                        | QPSK<br>16QAM                                                                                           |
|               | VoLTE                                 | Supported                                                                                               |
|               | Carrier Aggregation                   | Not supported                                                                                           |
| WLAN (DTS)    | Frequency band(s)                     | 2.4 GHz                                                                                                 |
|               | Operating mode                        | 802.11b<br>802.11g<br>802.11n [HT20]                                                                    |
|               | VoIP                                  | Supported                                                                                               |
|               | Wireless Router (Hotspot)             | Supported                                                                                               |
|               | Wi-Fi Direct                          | Supported                                                                                               |
|               | Tx Diversity Configuration            | 2Tx CDD (802.11b/g)<br>2Tx MIMO (802.11n)                                                               |
| WLAN (U-NII)  | Frequency band(s)                     | 5 GHz                                                                                                   |
|               | Operating mode                        | 802.11a<br>802.11n [HT20]<br>802.11n [HT40]<br>802.11ac [VHT20]<br>802.11ac [VHT40]<br>802.11ac [VHT80] |
|               | VoIP                                  | Supported                                                                                               |
|               | Wireless Router (Hotspot)             | Not supported                                                                                           |
|               | Wi-Fi Direct                          | Not supported                                                                                           |
|               | TDWR (Terminal Doppler Weather Rader) | Supported                                                                                               |
|               | Band gap channel                      | Not supported                                                                                           |
|               | Tx Diversity Configuration            | 2Tx CDD (802.11a)<br>2Tx MIMO (802.11n/ac)                                                              |
|               |                                       |                                                                                                         |
| Bluetooth     | Frequency band(s)                     | 2.4 GHz                                                                                                 |
|               | Operating mode                        | Version 4.2+EDR<br>Version 4.2 LE                                                                       |

### 1.3 Maximum Output Power

| Mode              |              | Max. Tune-up Limit (dBm) |
|-------------------|--------------|--------------------------|
| GSM 850           | Voice        | 33.3                     |
|                   | GPRS 1 slot  | 33.3                     |
|                   | GPRS 2 slots | 31.0                     |
|                   | GPRS 3 slots | 29.3                     |
|                   | GPRS 4 slots | 28.5                     |
| PCS 1900          | Voice        | 30.3                     |
|                   | GPRS 1 slot  | 30.3                     |
|                   | GPRS 2 slots | 27.9                     |
|                   | GPRS 3 slots | 26.0                     |
|                   | GPRS 4 slots | 25.1                     |
| W-CDMA<br>Band II | Rel. 99      | 23.5                     |
|                   | HSDPA        | 23.3                     |
|                   | HSUPA        | 23.3                     |
| W-CDMA<br>Band IV | Rel. 99      | 23.5                     |
|                   | HSDPA        | 23.3                     |
|                   | HSUPA        | 23.3                     |
| LTE Band 2        | QPSK         | 23.3                     |
| LTE Band 4        | QPSK         | 23.5                     |

| Mode                  |                | Max. Tune-up Limit (dBm) |       |
|-----------------------|----------------|--------------------------|-------|
|                       |                | ANT 0                    | ANT 1 |
| WLAN 2.4 GHz<br>(DTS) | 802.11b        | 11.0                     | 11.0  |
|                       | 802.11g        | 10.0                     | 10.0  |
|                       | 802.11n HT20   | 10.0                     | 10.0  |
| WLAN 5 GHz<br>(U-NII) | 802.11a        | 12.0                     | 12.0  |
|                       | 802.11n HT20   | 12.0                     | 12.0  |
|                       | 802.11n HT40   | 12.0                     | 12.0  |
|                       | 802.11ac VHT20 | 11.0                     | 11.0  |
|                       | 802.11ac VHT40 | 11.0                     | 11.0  |
|                       | 802.11ac VHT80 | 11.0                     | 11.0  |

| Mode         | Max. Tune-up Limit (dBm) |
|--------------|--------------------------|
| Bluetooth    | 7.5                      |
| Bluetooth LE | 7.5                      |

#### 1.4 General LTE SAR Test and Reporting Considerations

| Item                                       | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                        |                        |                        |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------|------------------------|------------|---------------------------------------------------------------|----------|--|--|--|--|----------|---------|---------|-------|--------|--------|--------|------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|--------|-----|-----|-----|------|------|------|-----|
| Frequency range and channel bandwidth      | LTE Band 2 (1850 MHz – 1910 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                        |                        |                        |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Low                    | Mid                    | High                   |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 1.4 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 18607 ch<br>1850.7 MHz | 18900 ch<br>1880.0 MHz | 19193 ch<br>1909.3 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 3 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 18615 ch<br>1851.5 MHz | 18900 ch<br>1880.0 MHz | 19185 ch<br>1908.5 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 5 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 18625 ch<br>1852.5 MHz | 18900 ch<br>1880.0 MHz | 19175 ch<br>1907.5 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 10 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 18650 ch<br>1855.0 MHz | 18900 ch<br>1880.0 MHz | 19150 ch<br>1905.0 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 15 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 18675 ch<br>1857.5 MHz | 18900 ch<br>1880.0 MHz | 19125 ch<br>1902.5 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 18700 ch<br>1860.0 MHz | 18900 ch<br>1880.0 MHz | 19100 ch<br>1900.0 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | LTE Band 4 (1710 MHz – 1755 MHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                        |                        |                        |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | Bandwidth                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Low                    | Mid                    | High                   |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 1.4 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 19957 ch<br>1710.7 MHz | 20175 ch<br>1732.5 MHz | 20393 ch<br>1754.3 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 3 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 19965 ch<br>1711.5 MHz | 20175 ch<br>1732.5 MHz | 20385 ch<br>1753.5 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 5 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 19975 ch<br>1712.5 MHz | 20175 ch<br>1732.5 MHz | 20375 ch<br>1752.5 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 10 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 20000 ch<br>1715.0 MHz | 20175 ch<br>1732.5 MHz | 20350 ch<br>1750.0 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 15 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 20025 ch<br>1717.5 MHz | 20175 ch<br>1732.5 MHz | 20325 ch<br>1747.5 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 20 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 20050 ch<br>1720.0 MHz | 20175 ch<br>1732.5 MHz | 20300 ch<br>1745.0 MHz |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| LTE transmitter and antenna implementation | LTE has one (1) Tx/Rx antenna and one (1) RX antenna.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                        |                        |                        |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| Maximum power reduction (MPR)              | <div>Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3</div> <table><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (N<sub>RB</sub>)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>&gt; 5</td><td>&gt; 4</td><td>&gt; 8</td><td>&gt; 12</td><td>&gt; 16</td><td>&gt; 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>&gt; 5</td><td>&gt; 4</td><td>&gt; 8</td><td>&gt; 12</td><td>&gt; 16</td><td>&gt; 18</td><td>≤ 2</td></tr></table> <div>MPR Built-in by design</div> <div>A-MPR (additional MPR) was disabled during SAR testing.</div> |                        |                        |                        | Modulation | Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> ) |          |  |  |  |  | MPR (dB) | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 | 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 | 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |
| Modulation                                 | Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                        |                        |            |                                                               | MPR (dB) |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
|                                            | 1.4 MHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3.0 MHz                | 5 MHz                  | 10 MHz                 | 15 MHz     | 20 MHz                                                        |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| QPSK                                       | > 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | > 4                    | > 8                    | > 12                   | > 16       | > 18                                                          | ≤ 1      |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| 16 QAM                                     | ≤ 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | ≤ 4                    | ≤ 8                    | ≤ 12                   | ≤ 16       | ≤ 18                                                          | ≤ 1      |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| 16 QAM                                     | > 5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | > 4                    | > 8                    | > 12                   | > 16       | > 18                                                          | ≤ 2      |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| Power reduction                            | No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                        |                        |                        |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |
| Spectrum plots for RB configurations       | A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                        |                        |                        |            |                                                               |          |  |  |  |  |          |         |         |       |        |        |        |      |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |        |     |     |     |      |      |      |     |

## 2 Summary of Test Results

Applied Standard : FCC Rules and Regulations Title 47 CFR Part 2 – Frequency Allocations and Radio Treaty Matters; General Rules and Regulations  
§2.1093 Radiofrequency radiation exposure evaluation: portable devices

| Test Configuration        | Reported 1 g SAR (W/kg) |        |        | Limit (W/kg) |
|---------------------------|-------------------------|--------|--------|--------------|
|                           | Licensed                | DTS    | U-NII  |              |
| Head                      | 0.50                    | 0.32   | 0.11   | 1.6          |
| Body-worn Accessory       | 0.54                    | < 0.10 | < 0.10 |              |
| Wireless Router (Hotspot) | 0.55                    | < 0.10 | N/A    |              |
| Simultaneous Transmission | 1.03                    | 1.03   | 0.70   |              |

The test results are **passed** for exposure limits specified in ANSI/IEEE Std. C95.1.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by:

Tested by:



Shigeru Kinoshita  
Assistant Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch



Takeshi Choda  
Assistant Manager  
JQA KITA-KANSAI Testing Center  
SAITO EMC Branch

### 3 Test Procedure

The tests documented in this report were performed in accordance with FCC 47 CFR §2.1093, IEEE Std.1528–2013 and the following KDB Procedures.

- # 248227 D01 802.11 Wi-Fi SAR v02r02
- # 447498 D01 General RF Exposure Guidance v06
- # 648474 D04 SAR Handset SAR v01r03
- # 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- # 865664 D02 RF Exposure Reporting v01r02
- # 941225 D01 3G SAR Procedures v03r01
- # 941225 D05 SAR for LTE Devices v02r04
- # 941225 D06 Hot Spot SAR v02r01

### 4 Test Location

Japan Quality Assurance Organization (JQA)  
KITA-KANSAI Testing Center  
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan  
SAITO EMC Branch  
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

### 5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

- VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2018)
- VCCI Registration No. : A-0002 (Expiry date : March 30, 2018)
- BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006  
(Expiry date : September 14, 2016)
- IC Registration No. : 2079E-3, 2079E-4 (Expiry date : July 16, 2017)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.  
(Expiry date : February 22, 2019)





## 7 System Components

### 7.1 Probe Specification ET3DV6

Construction : Symmetrical design with triangular core  
Built-in optical fiber for surface detection system  
Built-in shielding against static charges  
PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration : In air from 10 MHz to 2.3 GHz  
In head tissue simulating liquid (HSL) and muscle tissue simulating liquid  
835 MHz (accuracy  $\pm 12.0\%$ ;  $k=2$ )  
900 MHz (accuracy  $\pm 12.0\%$ ;  $k=2$ )  
1450 MHz (accuracy  $\pm 12.0\%$ ;  $k=2$ )  
1750 MHz (accuracy  $\pm 12.0\%$ ;  $k=2$ )  
1900 MHz (accuracy  $\pm 12.0\%$ ;  $k=2$ )  
1950 MHz (accuracy  $\pm 12.0\%$ ;  $k=2$ )



Frequency : 10 MHz to 2.3 GHz  
Linearity:  $\pm 0.2$  dB (30 MHz to 2.3 GHz)

Directivity :  $\pm 0.2$  dB in HSL (rotation around probe axis)  
 $\pm 0.4$  dB in HSL (rotation normal to probe axis)

Dynamic Range : 5  $\mu$ W/g to >100 mW/g; Linearity:  $\pm 0.2$  dB

Surface Detection :  $\pm 0.2$  mm repeatability in air and clear liquids over diffuse reflecting surfaces

Dimensions : Overall length 337 mm  
Tip length 16 mm  
Body diameter 12 mm  
Tip diameter 6.8 mm  
Distance from probe tip to dipole centers 2.7 mm

## 7.2 Probe Specification EX3DV4

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Construction  | : Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE)                                                                                                                                                                                                                                                                          |
| Calibration   | : In air form 10 MHz to 6 GHz<br>In head tissue simulating liquid (HSL) and muscle tissue simulating liquid<br>2450 MHz (accuracy $\pm 12.0\%$ ; $k=2$ )<br>2600 MHz (accuracy $\pm 12.0\%$ ; $k=2$ )<br>5200 MHz (accuracy $\pm 13.1\%$ ; $k=2$ )<br>5300 MHz (accuracy $\pm 13.1\%$ ; $k=2$ )<br>5500 MHz (accuracy $\pm 13.1\%$ ; $k=2$ )<br>5600 MHz (accuracy $\pm 13.1\%$ ; $k=2$ )<br>5800 MHz (accuracy $\pm 13.1\%$ ; $k=2$ ) |
| Frequency     | : 10 MHz to 6 GHz<br>Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)                                                                                                                                                                                                                                                                                                                                                                         |
| Directivity   | : $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                                                                                                                                                                                                                                                                                                  |
| Dynamic Range | : 10 $\mu$ W/g to >100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)                                                                                                                                                                                                                                                                                                                                                  |
| Dimensions    | : Overall length 337 mm<br>Tip length 20 mm<br>Body diameter 12 mm<br>Tip diameter 2.5 mm<br>Distance from probe tip to dipole centers 1 mm                                                                                                                                                                                                                                                                                            |



### 7.3 Twin SAM Phantom


The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.



Shell Thickness :  $2 \pm 0.2$  mm; Center ear point:  $6 \pm 0.2$  mm  
Filling Volume : Volume Approx. 25 liters  
Dimensions :  $810 \times 1000 \times 500$  mm (H  $\times$  L  $\times$  W)

### 7.4 ELI4 Flat Phantom

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

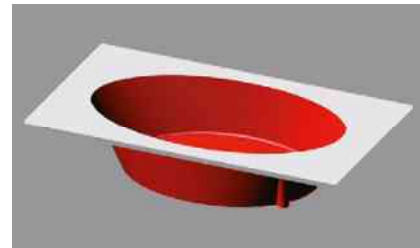

Shell Thickness :  $2 \pm 0.2$  mm (sagging: <1%)  
Filling Volume : Volume Approx. 30 liters  
Dimensions : Major ellipse axis : 600 mm  
Minor axis : 400 mm

### 7.5 Mounting Device for Transmitters

In combination with the Twin SAM Phantom V4.0/V4.0c or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat point).



## **8 Measurement Process**

### **Step 1 : Power Reference Measurement**

The power reference job measures the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method. The minimum distance of probe sensors to surface set to 4 mm for an ET3DV6 probe, or 2 mm for EX3DV4 probe. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### **Step 2 : Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations in relatively coarse grids. When an area scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. If only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maxima within 2 dB of the maximum SAR value are detected, the number of zoom scans has to be increased accordingly.

### **Step 3 : Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The zoom scan measures points specified in standards within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure.

### **Step 4 : Z Scan**

The Z scan measures points along a vertical straight line. The line runs along the Z axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

### **Step 5 : Power Drift Measurement**

The power drift measurement measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The power drift measurement gives the field difference in dB from the reading conducted within the last power reference measurement. The power reference measurement and power drift measurement are for monitoring the power drift of the device under test in the batch process.

## 9 Measurement Uncertainties

### 9.1 300 MHz to 3 GHz

| Uncertainty Component                                                                                                                                                                                                                                                                                                                                   | Tol.<br>(± %) | Prob.<br>Dist. | Div. | $c_i$<br>(1g) | $c_i$<br>(10g) | Std. Unc. (± %) |             | $v_i$ |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------|------|---------------|----------------|-----------------|-------------|-------|
|                                                                                                                                                                                                                                                                                                                                                         |               |                |      |               |                | 1g              | 10g         |       |
| <b>Measurement System</b>                                                                                                                                                                                                                                                                                                                               |               |                |      |               |                |                 |             |       |
| Probe calibration                                                                                                                                                                                                                                                                                                                                       | 6.0           | N              | 1    | 1             | 1              | 6.0             | 6.0         | ∞     |
| Axial isotropy                                                                                                                                                                                                                                                                                                                                          | 4.7           | R              | √3   | 0.7           | 0.7            | 1.9             | 1.9         | ∞     |
| Hemispherical isotropy                                                                                                                                                                                                                                                                                                                                  | 9.6           | R              | √3   | 0.7           | 0.7            | 3.9             | 3.9         | ∞     |
| Boundary effects                                                                                                                                                                                                                                                                                                                                        | 1.0           | R              | √3   | 1             | 1              | 0.6             | 0.6         | ∞     |
| Linearity                                                                                                                                                                                                                                                                                                                                               | 4.7           | R              | √3   | 1             | 1              | 2.7             | 2.7         | ∞     |
| System detection limits                                                                                                                                                                                                                                                                                                                                 | 1.0           | R              | √3   | 1             | 1              | 0.6             | 0.6         | ∞     |
| Modulation response                                                                                                                                                                                                                                                                                                                                     | 2.4           | R              | √3   | 1             | 1              | 1.4             | 1.4         | ∞     |
| Readout electronics                                                                                                                                                                                                                                                                                                                                     | 0.3           | N              | 1    | 1             | 1              | 0.3             | 0.3         | ∞     |
| Response time                                                                                                                                                                                                                                                                                                                                           | 0.8           | R              | √3   | 1             | 1              | 0.5             | 0.5         | ∞     |
| Integration time                                                                                                                                                                                                                                                                                                                                        | 2.6           | R              | √3   | 1             | 1              | 1.5             | 1.5         | ∞     |
| RF ambient conditions – noise                                                                                                                                                                                                                                                                                                                           | 3.0           | R              | √3   | 1             | 1              | 1.7             | 1.7         | ∞     |
| RF ambient conditions – reflections                                                                                                                                                                                                                                                                                                                     | 3.0           | R              | √3   | 1             | 1              | 1.7             | 1.7         | ∞     |
| Probe positioner mechanical tolerance                                                                                                                                                                                                                                                                                                                   | 0.4           | R              | √3   | 1             | 1              | 0.2             | 0.2         | ∞     |
| Probe positioning with respect to phantom shell                                                                                                                                                                                                                                                                                                         | 2.9           | R              | √3   | 1             | 1              | 1.7             | 1.7         | ∞     |
| Extrapolation, interpolation and integration algorithms for max. SAR evaluation                                                                                                                                                                                                                                                                         | 2.0           | R              | √3   | 1             | 1              | 1.2             | 1.2         | ∞     |
| <b>Test Sample Related</b>                                                                                                                                                                                                                                                                                                                              |               |                |      |               |                |                 |             |       |
| Device holder uncertainty                                                                                                                                                                                                                                                                                                                               | 2.9           | N              | 1    | 1             | 1              | 2.9             | 2.9         | 5     |
| Test sample positioning                                                                                                                                                                                                                                                                                                                                 | 3.4           | N              | 1    | 1             | 1              | 3.4             | 3.4         | 23    |
| Output power variation – SAR drift measurement                                                                                                                                                                                                                                                                                                          | 5.0           | R              | √3   | 1             | 1              | 2.9             | 2.9         | ∞     |
| Power Scaling                                                                                                                                                                                                                                                                                                                                           | 0.0           | R              | √3   | 1             | 1              | 0.0             | 0.0         | ∞     |
| <b>Phantom and Tissue Parameters</b>                                                                                                                                                                                                                                                                                                                    |               |                |      |               |                |                 |             |       |
| Phantom uncertainty                                                                                                                                                                                                                                                                                                                                     | 6.1           | R              | √3   | 1             | 1              | 3.5             | 3.5         | ∞     |
| Algorithms for correcting SAR for deviations                                                                                                                                                                                                                                                                                                            | 1.9           | R              | √3   | 1             | 0.84           | 1.1             | 0.9         | ∞     |
| Liquid Conductivity – measurement uncertainty                                                                                                                                                                                                                                                                                                           | 3.2           | N              | 1    | 0.78          | 0.71           | 2.5             | 2.3         | 5     |
| Liquid Permittivity – measurement uncertainty                                                                                                                                                                                                                                                                                                           | 3.0           | N              | 1    | 0.26          | 0.26           | 0.8             | 0.8         | 5     |
| Liquid Conductivity – temperature uncertainty                                                                                                                                                                                                                                                                                                           | 5.2           | R              | √3   | 0.78          | 0.71           | 2.3             | 2.1         | ∞     |
| Liquid Permittivity – temperature uncertainty                                                                                                                                                                                                                                                                                                           | 0.8           | R              | √3   | 0.23          | 0.26           | 0.1             | 0.1         | ∞     |
| <b>Combined Standard Uncertainty</b>                                                                                                                                                                                                                                                                                                                    |               | RSS            |      |               |                | 11.5            | 11.4        |       |
| <b>Expanded Uncertainty (95% Confidence Interval)</b>                                                                                                                                                                                                                                                                                                   |               | k=2            |      |               |                | <b>22.9</b>     | <b>22.7</b> |       |
| NOTES<br>1. Tol. : tolerance in influence quantity<br>2. Prob. Dist. : probability distributions<br>3. N, R : normal, rectangular<br>4. Div. : divisor used to obtain standard uncertainty<br>5. $c_i$ : sensitivity coefficient<br>6. Std. Unc. : standard uncertainty<br>7. Measurement uncertainties are according to IEEE Std.1528 and IEC 62209-1. |               |                |      |               |                |                 |             |       |

## 9.2 3 GHz to 6 GHz



| Uncertainty Component                                                                                                                                                                                                                                                                                                                                   | Tol.<br>(± %) | Prob.<br>Dist. | Div.       | $c_i$<br>(1g) | $c_i$<br>(10g) | Std. Unc. (± %) |             | $v_i$ |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------|------------|---------------|----------------|-----------------|-------------|-------|
|                                                                                                                                                                                                                                                                                                                                                         |               |                |            |               |                | 1g              | 10g         |       |
| <b>Measurement System</b>                                                                                                                                                                                                                                                                                                                               |               |                |            |               |                |                 |             |       |
| Probe calibration                                                                                                                                                                                                                                                                                                                                       | 6.6           | N              | 1          | 1             | 1              | 6.6             | 6.6         | ∞     |
| Axial isotropy                                                                                                                                                                                                                                                                                                                                          | 4.7           | R              | $\sqrt{3}$ | 0.7           | 0.7            | 1.9             | 1.9         | ∞     |
| Hemispherical isotropy                                                                                                                                                                                                                                                                                                                                  | 9.6           | R              | $\sqrt{3}$ | 0.7           | 0.7            | 3.9             | 3.9         | ∞     |
| Boundary effects                                                                                                                                                                                                                                                                                                                                        | 2.0           | R              | $\sqrt{3}$ | 1             | 1              | 1.2             | 1.2         | ∞     |
| Linearity                                                                                                                                                                                                                                                                                                                                               | 4.7           | R              | $\sqrt{3}$ | 1             | 1              | 2.7             | 2.7         | ∞     |
| System detection limits                                                                                                                                                                                                                                                                                                                                 | 1.0           | R              | $\sqrt{3}$ | 1             | 1              | 0.6             | 0.6         | ∞     |
| Modulation response                                                                                                                                                                                                                                                                                                                                     | 2.4           | R              | $\sqrt{3}$ | 1             | 1              | 1.4             | 1.4         | ∞     |
| Readout electronics                                                                                                                                                                                                                                                                                                                                     | 0.3           | N              | 1          | 1             | 1              | 0.3             | 0.3         | ∞     |
| Response time                                                                                                                                                                                                                                                                                                                                           | 0.8           | R              | $\sqrt{3}$ | 1             | 1              | 0.5             | 0.5         | ∞     |
| Integration time                                                                                                                                                                                                                                                                                                                                        | 2.6           | R              | $\sqrt{3}$ | 1             | 1              | 1.5             | 1.5         | ∞     |
| RF ambient conditions – noise                                                                                                                                                                                                                                                                                                                           | 3.0           | R              | $\sqrt{3}$ | 1             | 1              | 1.7             | 1.7         | ∞     |
| RF ambient conditions – reflections                                                                                                                                                                                                                                                                                                                     | 3.0           | R              | $\sqrt{3}$ | 1             | 1              | 1.7             | 1.7         | ∞     |
| Probe positioner mechanical tolerance                                                                                                                                                                                                                                                                                                                   | 0.8           | R              | $\sqrt{3}$ | 1             | 1              | 0.5             | 0.5         | ∞     |
| Probe positioning with respect to phantom shell                                                                                                                                                                                                                                                                                                         | 6.7           | R              | $\sqrt{3}$ | 1             | 1              | 3.9             | 3.9         | ∞     |
| Extrapolation, interpolation and integration algorithms for max. SAR evaluation                                                                                                                                                                                                                                                                         | 4.0           | R              | $\sqrt{3}$ | 1             | 1              | 2.3             | 2.3         | ∞     |
| <b>Test Sample Related</b>                                                                                                                                                                                                                                                                                                                              |               |                |            |               |                |                 |             |       |
| Device holder uncertainty                                                                                                                                                                                                                                                                                                                               | 2.9           | N              | 1          | 1             | 1              | 2.9             | 2.9         | 5     |
| Test sample positioning                                                                                                                                                                                                                                                                                                                                 | 3.4           | N              | 1          | 1             | 1              | 3.4             | 3.4         | 23    |
| Output power variation – SAR drift measurement                                                                                                                                                                                                                                                                                                          | 5.0           | R              | $\sqrt{3}$ | 1             | 1              | 2.9             | 2.9         | ∞     |
| Power Scaling                                                                                                                                                                                                                                                                                                                                           | 0.0           | R              | $\sqrt{3}$ | 1             | 1              | 0.0             | 0.0         | ∞     |
| <b>Phantom and Tissue Parameters</b>                                                                                                                                                                                                                                                                                                                    |               |                |            |               |                |                 |             |       |
| Phantom uncertainty                                                                                                                                                                                                                                                                                                                                     | 6.6           | R              | $\sqrt{3}$ | 1             | 1              | 3.8             | 3.8         | ∞     |
| Algorithms for correcting SAR for deviations                                                                                                                                                                                                                                                                                                            | 1.9           | R              | $\sqrt{3}$ | 1             | 0.84           | 1.1             | 0.9         | ∞     |
| Liquid Conductivity – measurement uncertainty                                                                                                                                                                                                                                                                                                           | 3.2           | N              | 1          | 0.78          | 0.71           | 2.5             | 2.3         | 5     |
| Liquid Permittivity – measurement uncertainty                                                                                                                                                                                                                                                                                                           | 3.0           | N              | 1          | 0.26          | 0.26           | 0.8             | 0.8         | 5     |
| Liquid Conductivity – temperature uncertainty                                                                                                                                                                                                                                                                                                           | 3.4           | R              | $\sqrt{3}$ | 0.78          | 0.71           | 1.5             | 1.4         | ∞     |
| Liquid Permittivity – temperature uncertainty                                                                                                                                                                                                                                                                                                           | 0.4           | R              | $\sqrt{3}$ | 0.23          | 0.26           | 0.1             | 0.1         | ∞     |
| <b>Combined Standard Uncertainty</b>                                                                                                                                                                                                                                                                                                                    |               | RSS            |            |               |                | 12.5            | 12.4        |       |
| <b>Expanded Uncertainty (95% Confidence Interval)</b>                                                                                                                                                                                                                                                                                                   |               | k=2            |            |               |                | <b>24.9</b>     | <b>24.8</b> |       |
| NOTES<br>1. Tol. : tolerance in influence quantity<br>2. Prob. Dist. : probability distributions<br>3. N, R : normal, rectangular<br>4. Div. : divisor used to obtain standard uncertainty<br>5. $c_i$ : sensitivity coefficient<br>6. Std. Unc. : standard uncertainty<br>7. Measurement uncertainties are according to IEEE Std.1528 and IEC 62209-1. |               |                |            |               |                |                 |             |       |

## 10 Test Arrangement

### 10.1 Head Exposure Conditions


#### 10.1.1 Cheek-Touch Position

1. Position the device with the vertical center line of the body of the device and the horizontal line crossing the center of the ear piece in a plane parallel to the sagittal plane of the phantom.
2. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the center of the ear piece with the line RE-LE.
3. Translate the mobile phone box towards the phantom with the ear piece aligned with the line RE-LE until the phone touches the ear.
4. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

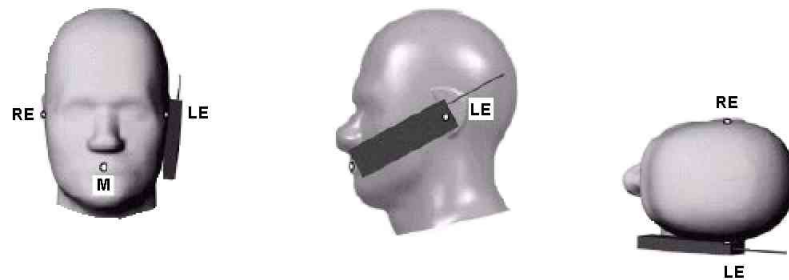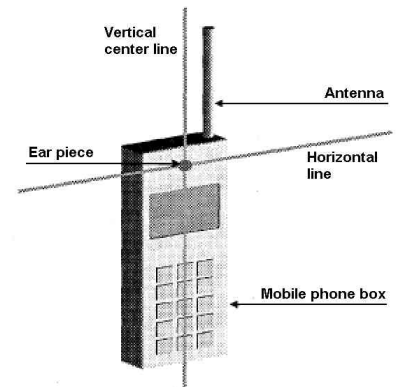

#### 10.1.2 Ear-Tilt Position

1. Position the device in the "Cheek-Touch Position".
2. While maintaining the device in the reference plane and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

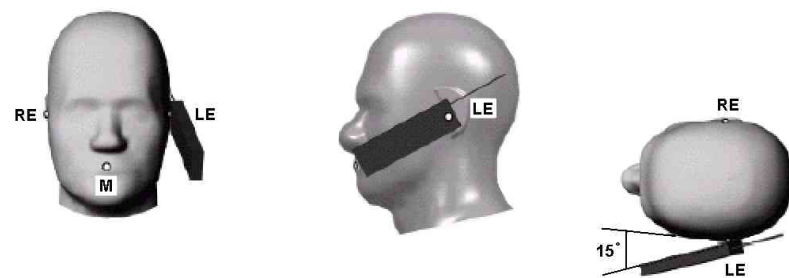




## 10.2 Body-worn Accessory Exposure Conditions

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Both the physical spacing to the body of the user as dictated by the accessory and the materials used in an accessory affect the SAR produced by the transmitting device. For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do.

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the surface of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

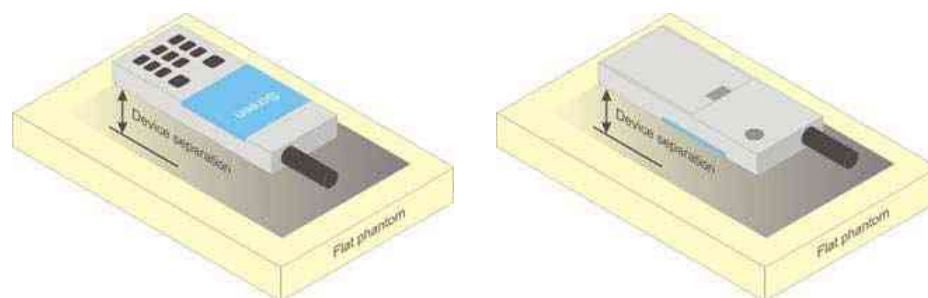

## 10.3 Hotspot Mode Exposure Conditions

For cell phones that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm × 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

#### 10.4 RF Exposure Conditions


Handsets are tested for SAR compliance in head, body-worn accessory and other use configurations according to the procedures described in KDB 648474 D04.

| RF Exposure Conditions | DUT-to-User Separation | Wireless Technologies        | Test Position    | Antenna-to-edge/surface | SAR Required | Note |
|------------------------|------------------------|------------------------------|------------------|-------------------------|--------------|------|
| Head                   | 0 mm                   | All Tx                       | Left Touch       | N/A                     | YES          |      |
|                        |                        |                              | Left Tilt (15°)  | N/A                     | YES          |      |
|                        |                        |                              | Right Touch      | N/A                     | YES          |      |
|                        |                        |                              | Right Tilt (15°) | N/A                     | YES          |      |
| Body-worn              | 10 mm                  | All Tx                       | Rear             | N/A                     | YES          |      |
|                        |                        |                              | Front            | N/A                     | YES          |      |
| Hotspot                | 10 mm                  | GSM<br>W-CDMA<br>LTE         | Rear             | < 25 mm                 | YES          |      |
|                        |                        |                              | Front            | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 1 (Top)     | > 25 mm                 | NO           | 1    |
|                        |                        |                              | Edge 2 (Right)   | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 3 (Bottom)  | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 4 (Left)    | < 25 mm                 | YES          |      |
|                        |                        | WLAN<br>Bluetooth<br>(ANT 0) | Rear             | < 25 mm                 | YES          |      |
|                        |                        |                              | Front            | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 1 (Top)     | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 2 (Right)   | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 3 (Bottom)  | > 25 mm                 | NO           | 1    |
|                        |                        |                              | Edge 4 (Left)    | > 25 mm                 | NO           | 1    |
|                        |                        | WLAN<br>(ANT 1)              | Rear             | < 25 mm                 | YES          |      |
|                        |                        |                              | Front            | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 1 (Top)     | < 25 mm                 | YES          |      |
|                        |                        |                              | Edge 2 (Right)   | > 25 mm                 | NO           | 1    |
|                        |                        |                              | Edge 3 (Bottom)  | > 25 mm                 | NO           | 1    |
|                        |                        |                              | Edge 4 (Left)    | < 25 mm                 | YES          |      |

Note(s):

1. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06.

**Antenna Location and Separation Distances**

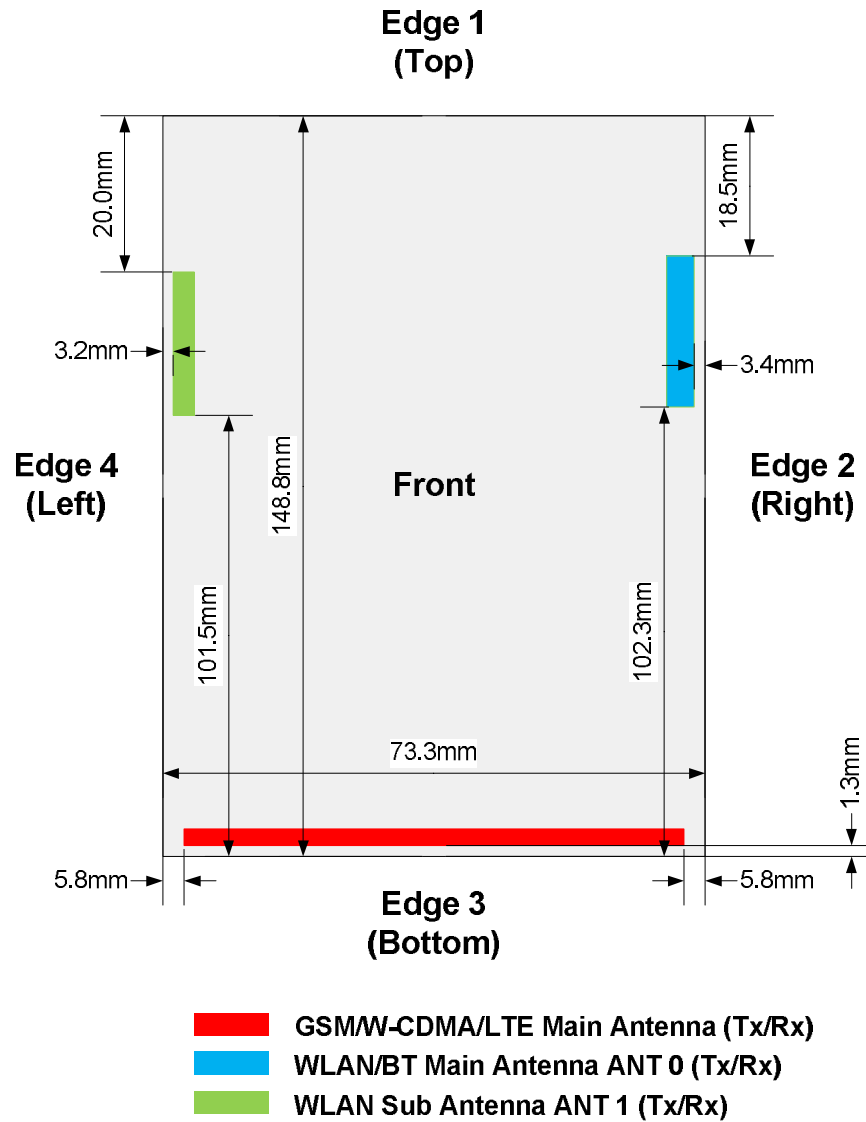


## 11 Tissue Verification

### 11.1 Tissue Verification Measurement Condition

The tissue dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use, or earlier if dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

The temperature of the tissue-equivalent medium used during measurement must be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.

It is verified by using the dielectric probe and the network analyzer.

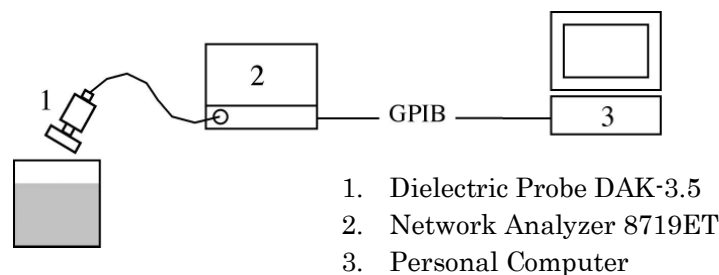

### 11.2 Tissue Dielectric Properties

The tissue dielectric properties are specified in KDB 865664 D01.

| Target Frequency<br>[MHz] | Head                          |                           | Body                          |                           |
|---------------------------|-------------------------------|---------------------------|-------------------------------|---------------------------|
|                           | Permittivity ( $\epsilon_r$ ) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | Conductivity ( $\sigma$ ) |
| 150                       | 52.3                          | 0.76                      | 61.9                          | 0.80                      |
| 300                       | 45.3                          | 0.87                      | 58.2                          | 0.92                      |
| 450                       | 43.5                          | 0.87                      | 56.7                          | 0.94                      |
| 835                       | 41.5                          | 0.90                      | 55.2                          | 0.97                      |
| 900                       | 41.5                          | 0.97                      | 55.0                          | 1.05                      |
| 915                       | 41.5                          | 0.98                      | 55.0                          | 1.06                      |
| 1450                      | 40.5                          | 1.20                      | 54.0                          | 1.30                      |
| 1610                      | 40.3                          | 1.29                      | 53.8                          | 1.40                      |
| 1800 – 2000               | 40.0                          | 1.40                      | 53.3                          | 1.52                      |
| 2450                      | 39.2                          | 1.80                      | 52.7                          | 1.95                      |
| 3000                      | 38.5                          | 2.40                      | 52.0                          | 2.73                      |
| 5800                      | 35.3                          | 5.27                      | 48.2                          | 6.00                      |

For tissue dielectric properties at other frequencies within the range, a linear interpolation method shall be used.

### 11.3 Composition of Ingredients for the Tissue Material Used in the SAR Tests

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

### Head and Body Liquids (Below 1 GHz)

| Item                   | Head and Muscle Tissue Simulation Liquids<br>HSL/MSL 750, HSL/MSL 900                                                                                |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| H <sub>2</sub> O       | Water, 35 – 58 %                                                                                                                                     |
| Sucrose                | Sugar, white, refined, 40 – 60 %                                                                                                                     |
| NaCl                   | Sodium Chloride, 0 – 6 %                                                                                                                             |
| Hydroxyethyl-cellulose | Medium Viscosity (CAS# 9004-62-0), < 0.3 %                                                                                                           |
| Preventol-D7           | Preservative: aqueous preparation, (CAS# 55965-84-9), containing 5-chloro-2-methyl-3(2H)-isothiazolone and 2-methyl-3(2H)-isothiazolone, 0.1 – 0.7 % |

### Head and Body Liquids (1 to 3 GHz)

| Item                                          | Head and Muscle Tissue Simulation Liquids<br>HSL/MSL 1750, HSL/MSL 1900, HSL/MSL 2450                                 |
|-----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| H <sub>2</sub> O                              | Water, 52 – 75 %                                                                                                      |
| C <sub>8</sub> H <sub>18</sub> O <sub>3</sub> | Diethylene glycol monobutyl ether (DGBE), 25 – 48%<br>(CAS-No. 112-34-5, EC-No. 203-961-6, EC-index-No. 603-096-00-8) |
| NaCl                                          | Sodium Chloride, < 1.0 %                                                                                              |

## Head Liquids (3 to 6 GHz)

| Item                                                    | Head Broad Band Tissue Simulation Liquids HBBL 3500-5800 |                                                  |
|---------------------------------------------------------|----------------------------------------------------------|--------------------------------------------------|
| Water                                                   | 50 – 65 %                                                |                                                  |
| Mineral oil                                             | 10 – 30 %                                                |                                                  |
| Emulsifiers                                             | 8 – 25 %                                                 |                                                  |
| Sodium salt                                             | 0 – 1.5 %                                                |                                                  |
| Safety relevant ingredients according to EU directives: |                                                          |                                                  |
| EINECS-No 203-489-0                                     | 1.0 – 2.8 %                                              | 2-Methyl-pentane-2,4-diol (Hexylene Glycol):     |
| CAS-No 107-41-5                                         |                                                          | (Xi irritant, R36/38 irritant for eyes and skin) |

### Body Liquids (3 to 6 GHz)

| Item                                                         | Muscle Broad Band Tissue Simulation Liquids MBBL 3500-5800 |
|--------------------------------------------------------------|------------------------------------------------------------|
| Water                                                        | 60 – 80 %                                                  |
| Esters, Emulsifiers, Inhibitors                              | 20 – 40 %                                                  |
| Sodium salt                                                  | 0 – 1,5 %                                                  |
| Safety relevant ingredients according to EU directives: none |                                                            |
| Safety relevant ingredients according to other directives:   |                                                            |
| CAS-No 26399-02-0                                            | 10 – 28 %      Oleic acid, alkylester                      |

#### 11.4 Tissue Verification Results

Tissue dielectric parameters are measured at the low, middle and high frequency of each operating frequency range of the test device.

| Date      | Liquid | Frequency [MHz] | Parameters                    | Target | Measured | Deviation [%] | Limit [%] |
|-----------|--------|-----------------|-------------------------------|--------|----------|---------------|-----------|
| 3/19/2016 | Head   | 1710            | Permittivity ( $\epsilon_r$ ) | 40.1   | 39.35    | -1.87         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.35   | 1.320    | -2.22         | $\pm 5$   |
|           |        | 1750            | Permittivity ( $\epsilon_r$ ) | 40.1   | 39.15    | -2.37         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.37   | 1.359    | -0.80         | $\pm 5$   |
|           |        | 1755            | Permittivity ( $\epsilon_r$ ) | 40.1   | 39.15    | -2.37         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.37   | 1.363    | -0.51         | $\pm 5$   |
| 3/20/2016 | Body   | 1710            | Permittivity ( $\epsilon_r$ ) | 53.5   | 53.00    | -0.93         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.46   | 1.444    | -1.10         | $\pm 5$   |
|           |        | 1750            | Permittivity ( $\epsilon_r$ ) | 53.4   | 52.86    | -1.01         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.49   | 1.486    | -0.27         | $\pm 5$   |
|           |        | 1755            | Permittivity ( $\epsilon_r$ ) | 53.4   | 52.85    | -1.03         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.49   | 1.489    | -0.07         | $\pm 5$   |
| 3/28/2016 | Body   | 1850            | Permittivity ( $\epsilon_r$ ) | 53.3   | 52.85    | -0.84         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.52   | 1.513    | -0.46         | $\pm 5$   |
|           |        | 1900            | Permittivity ( $\epsilon_r$ ) | 53.3   | 52.71    | -1.11         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.52   | 1.572    | +3.42         | $\pm 5$   |
|           |        | 1910            | Permittivity ( $\epsilon_r$ ) | 53.3   | 52.63    | -1.26         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.52   | 1.584    | +4.21         | $\pm 5$   |
| 3/29/2016 | Body   | 1850            | Permittivity ( $\epsilon_r$ ) | 53.3   | 53.03    | -0.51         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.52   | 1.515    | -0.33         | $\pm 5$   |
|           |        | 1900            | Permittivity ( $\epsilon_r$ ) | 53.3   | 52.87    | -0.81         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.52   | 1.567    | +3.09         | $\pm 5$   |
|           |        | 1910            | Permittivity ( $\epsilon_r$ ) | 53.3   | 52.81    | -0.92         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.52   | 1.583    | +4.14         | $\pm 5$   |
| 3/29/2016 | Head   | 1850            | Permittivity ( $\epsilon_r$ ) | 40.0   | 39.96    | -0.10         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.40   | 1.363    | -2.64         | $\pm 5$   |
|           |        | 1900            | Permittivity ( $\epsilon_r$ ) | 40.0   | 39.76    | -0.60         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.40   | 1.415    | +1.07         | $\pm 5$   |
|           |        | 1910            | Permittivity ( $\epsilon_r$ ) | 40.0   | 39.71    | -0.72         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.40   | 1.425    | +1.79         | $\pm 5$   |
| 3/30/2016 | Head   | 1850            | Permittivity ( $\epsilon_r$ ) | 40.0   | 39.69    | -0.78         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.40   | 1.345    | -3.93         | $\pm 5$   |
|           |        | 1900            | Permittivity ( $\epsilon_r$ ) | 40.0   | 39.49    | -1.28         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.40   | 1.398    | -0.14         | $\pm 5$   |
|           |        | 1910            | Permittivity ( $\epsilon_r$ ) | 40.0   | 39.45    | -1.37         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.40   | 1.408    | +0.57         | $\pm 5$   |

### Tissue Verification Results (continued)

| Date      | Liquid | Frequency [MHz] | Parameters                    | Target | Measured | Deviation [%] | Limit [%] |
|-----------|--------|-----------------|-------------------------------|--------|----------|---------------|-----------|
| 3/30/2016 | Body   | 820             | Permittivity ( $\epsilon_r$ ) | 55.3   | 55.06    | -0.43         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 0.97   | 0.987    | +1.75         | $\pm 5$   |
|           |        | 835             | Permittivity ( $\epsilon_r$ ) | 55.2   | 54.98    | -0.40         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 0.97   | 1.003    | +3.40         | $\pm 5$   |
|           |        | 850             | Permittivity ( $\epsilon_r$ ) | 55.2   | 54.83    | -0.67         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 0.99   | 1.019    | +2.93         | $\pm 5$   |
| 3/31/2016 | Head   | 820             | Permittivity ( $\epsilon_r$ ) | 41.6   | 41.80    | +0.48         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 0.90   | 0.907    | +0.78         | $\pm 5$   |
|           |        | 835             | Permittivity ( $\epsilon_r$ ) | 41.5   | 41.64    | +0.34         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 0.90   | 0.921    | +2.33         | $\pm 5$   |
|           |        | 850             | Permittivity ( $\epsilon_r$ ) | 41.5   | 41.46    | -0.10         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 0.92   | 0.937    | +1.85         | $\pm 5$   |
| 3/31/2016 | Body   | 2410            | Permittivity ( $\epsilon_r$ ) | 52.8   | 52.20    | -1.14         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.91   | 1.968    | +3.04         | $\pm 5$   |
|           |        | 2450            | Permittivity ( $\epsilon_r$ ) | 52.7   | 52.05    | -1.23         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.95   | 2.022    | +3.69         | $\pm 5$   |
|           |        | 2475            | Permittivity ( $\epsilon_r$ ) | 52.7   | 51.96    | -1.40         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.99   | 2.058    | +3.42         | $\pm 5$   |
| 4/1/2016  | Body   | 2410            | Permittivity ( $\epsilon_r$ ) | 52.8   | 51.97    | -1.57         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.91   | 1.877    | -1.73         | $\pm 5$   |
|           |        | 2450            | Permittivity ( $\epsilon_r$ ) | 52.7   | 51.83    | -1.65         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.95   | 1.933    | -0.87         | $\pm 5$   |
|           |        | 2475            | Permittivity ( $\epsilon_r$ ) | 52.7   | 51.74    | -1.82         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.99   | 1.968    | -1.11         | $\pm 5$   |
| 4/4/2016  | Head   | 2410            | Permittivity ( $\epsilon_r$ ) | 39.3   | 38.25    | -2.67         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.76   | 1.801    | +2.33         | $\pm 5$   |
|           |        | 2450            | Permittivity ( $\epsilon_r$ ) | 39.2   | 38.07    | -2.88         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.80   | 1.846    | +2.56         | $\pm 5$   |
|           |        | 2475            | Permittivity ( $\epsilon_r$ ) | 39.2   | 37.97    | -3.14         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 1.83   | 1.877    | +2.57         | $\pm 5$   |
| 4/5/2016  | Body   | 5180            | Permittivity ( $\epsilon_r$ ) | 49.0   | 47.97    | -2.10         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 5.28   | 5.346    | +1.25         | $\pm 5$   |
|           |        | 5250            | Permittivity ( $\epsilon_r$ ) | 48.9   | 47.85    | -2.15         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 5.36   | 5.435    | +1.40         | $\pm 5$   |
|           |        | 5320            | Permittivity ( $\epsilon_r$ ) | 48.9   | 47.72    | -2.41         | $\pm 5$   |
|           |        |                 | Conductivity ( $\sigma$ )     | 5.44   | 5.523    | +1.53         | $\pm 5$   |

### Tissue Verification Results (continued)

| Date     | Liquid | Frequency [MHz] | Parameters                    | Target | Measured | Deviation [%] | Limit [%] |
|----------|--------|-----------------|-------------------------------|--------|----------|---------------|-----------|
| 4/5/2016 | Body   | 5500            | Permittivity ( $\epsilon_r$ ) | 48.6   | 47.43    | -2.41         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.65   | 5.751    | +1.79         | $\pm 5$   |
|          |        | 5600            | Permittivity ( $\epsilon_r$ ) | 48.5   | 47.26    | -2.56         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.77   | 5.886    | +2.01         | $\pm 5$   |
|          |        | 5700            | Permittivity ( $\epsilon_r$ ) | 48.3   | 47.08    | -2.53         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.88   | 6.016    | +2.31         | $\pm 5$   |
| 4/6/2016 | Body   | 5180            | Permittivity ( $\epsilon_r$ ) | 49.0   | 47.96    | -2.12         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.28   | 5.401    | +2.29         | $\pm 5$   |
|          |        | 5250            | Permittivity ( $\epsilon_r$ ) | 48.9   | 47.85    | -2.15         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.36   | 5.496    | +2.54         | $\pm 5$   |
|          |        | 5320            | Permittivity ( $\epsilon_r$ ) | 48.9   | 47.71    | -2.43         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.44   | 5.583    | +2.63         | $\pm 5$   |
| 4/6/2016 | Body   | 5500            | Permittivity ( $\epsilon_r$ ) | 48.6   | 47.44    | -2.39         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.65   | 5.810    | +2.83         | $\pm 5$   |
|          |        | 5600            | Permittivity ( $\epsilon_r$ ) | 48.5   | 47.29    | -2.49         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.77   | 5.951    | +3.14         | $\pm 5$   |
|          |        | 5700            | Permittivity ( $\epsilon_r$ ) | 48.3   | 47.12    | -2.44         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.88   | 6.089    | +3.55         | $\pm 5$   |
| 4/7/2016 | Body   | 5500            | Permittivity ( $\epsilon_r$ ) | 48.6   | 47.19    | -2.90         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.65   | 5.753    | +1.82         | $\pm 5$   |
|          |        | 5600            | Permittivity ( $\epsilon_r$ ) | 48.5   | 47.04    | -3.01         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.77   | 5.893    | +2.13         | $\pm 5$   |
|          |        | 5700            | Permittivity ( $\epsilon_r$ ) | 48.3   | 46.86    | -2.98         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.88   | 6.028    | +2.52         | $\pm 5$   |
| 4/8/2016 | Head   | 5500            | Permittivity ( $\epsilon_r$ ) | 35.6   | 34.69    | -2.56         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 4.96   | 4.791    | -3.41         | $\pm 5$   |
|          |        | 5600            | Permittivity ( $\epsilon_r$ ) | 35.5   | 34.56    | -2.65         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.07   | 4.895    | -3.45         | $\pm 5$   |
|          |        | 5700            | Permittivity ( $\epsilon_r$ ) | 35.4   | 34.42    | -2.77         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 5.17   | 4.992    | -3.44         | $\pm 5$   |
| 4/9/2016 | Head   | 5180            | Permittivity ( $\epsilon_r$ ) | 36.0   | 36.21    | +0.58         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 4.63   | 4.541    | -1.92         | $\pm 5$   |
|          |        | 5250            | Permittivity ( $\epsilon_r$ ) | 35.9   | 36.10    | +0.56         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 4.71   | 4.608    | -2.17         | $\pm 5$   |
|          |        | 5320            | Permittivity ( $\epsilon_r$ ) | 35.8   | 36.01    | +0.59         | $\pm 5$   |
|          |        |                 | Conductivity ( $\sigma$ )     | 4.78   | 4.675    | -2.20         | $\pm 5$   |



### Tissue Verification Results (continued)


| Date     | Liquid | Frequency<br>[MHz] | Parameters                    | Target | Measured | Deviation<br>[%] | Limit<br>[%] |
|----------|--------|--------------------|-------------------------------|--------|----------|------------------|--------------|
| 4/9/2016 | Head   | 5500               | Permittivity ( $\epsilon_r$ ) | 35.6   | 35.78    | +0.51            | $\pm 5$      |
|          |        |                    | Conductivity ( $\sigma$ )     | 4.96   | 4.855    | -2.12            | $\pm 5$      |
|          |        | 5600               | Permittivity ( $\epsilon_r$ ) | 35.5   | 35.63    | +0.37            | $\pm 5$      |
|          |        |                    | Conductivity ( $\sigma$ )     | 5.07   | 4.960    | -2.17            | $\pm 5$      |
|          |        | 5700               | Permittivity ( $\epsilon_r$ ) | 35.4   | 35.48    | +0.23            | $\pm 5$      |
|          |        |                    | Conductivity ( $\sigma$ )     | 5.17   | 5.058    | -2.17            | $\pm 5$      |

## 12 System Performance Check

### 12.1 System Performance Check Measurement Condition

The power meter PM1 (including Attenuator) measures the forward power at the location of the validation dipole connector. The signal generator is adjusted for 250 mW (100 mW for 3 to 6 GHz) at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

The dipole antenna is matched to be used near flat phantom filled with tissue simulating solution. A specific distance holder is used in the positioning of the antenna to ensure correct spacing between the phantom and the dipole.

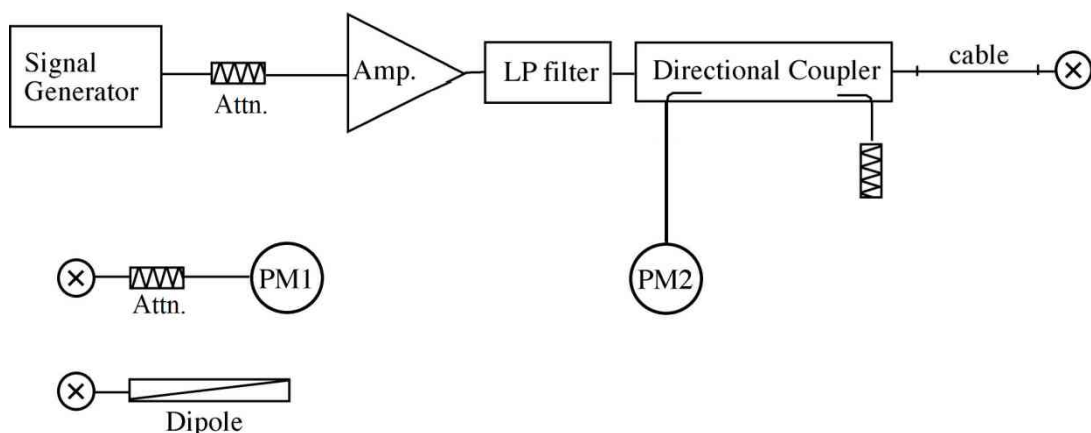

### 12.2 Target SAR Values for System Performance Check

The target SAR values can be obtained from the calibration certificate of system validation dipoles.

| System Dipole |        | Cal. Date  | Frequency [MHz] | Target SAR Values [W/kg] |      |      |
|---------------|--------|------------|-----------------|--------------------------|------|------|
| Type          | Serial |            |                 | 1g/10g                   | Head | Body |
| D835V2        | 4d081  | 8/10/2015  | 835             | 1g                       | 9.23 | 9.28 |
|               |        |            |                 | 10g                      | 6.01 | 6.11 |
| D1750V2       | 1012   | 8/11/2015  | 1750            | 1g                       | 37.0 | 37.4 |
|               |        |            |                 | 10g                      | 19.8 | 20.2 |
| D1900V2       | 5d112  | 8/11/2015  | 1900            | 1g                       | 41.1 | 40.4 |
|               |        |            |                 | 10g                      | 21.5 | 21.6 |
| D2450V2       | 714    | 11/10/2015 | 2450            | 1g                       | 53.5 | 53.1 |
|               |        |            |                 | 10g                      | 25.0 | 25.1 |
| D5GHzV2       | 1111   | 9/16/2015  | 5250            | 1g                       | 83.2 | 77.0 |
|               |        |            |                 | 10g                      | 23.9 | 21.6 |
|               |        |            | 5600            | 1g                       | 85.1 | 82.2 |
|               |        |            |                 | 10g                      | 24.4 | 22.9 |
|               |        |            | 5750            | 1g                       | 81.1 | 77.6 |
|               |        |            |                 | 10g                      | 23.2 | 21.6 |

### 12.3 System Performance Check Results

The SAR measured with a system validation dipole, using the required tissue-equivalent medium at the test frequency, must be within 10 % of the manufacturer calibrated dipole SAR target.

| Date      | System Dipole        |        | Liquid | Measured SAR [W/kg]<br>(Normalized to 1 W) |       | Target | Deviation<br>[%] | Limit<br>[%] |
|-----------|----------------------|--------|--------|--------------------------------------------|-------|--------|------------------|--------------|
|           | Type                 | Serial |        |                                            |       |        |                  |              |
| 3/19/2016 | D1750V2              | 1012   | Head   | 1 g                                        | 35.60 | 37.0   | -3.78            | ± 10         |
|           |                      |        |        | 10 g                                       | 19.32 | 19.8   | -2.42            | ± 10         |
| 3/20/2016 | D1750V2              | 1012   | Body   | 1 g                                        | 35.68 | 37.4   | -4.60            | ± 10         |
|           |                      |        |        | 10 g                                       | 19.76 | 20.2   | -2.18            | ± 10         |
| 3/28/2016 | D1900V2              | 5d112  | Body   | 1 g                                        | 39.96 | 40.4   | -1.09            | ± 10         |
|           |                      |        |        | 10 g                                       | 21.52 | 21.6   | -0.37            | ± 10         |
| 3/29/2016 | D1900V2              | 5d112  | Body   | 1 g                                        | 39.84 | 40.4   | -1.39            | ± 10         |
|           |                      |        |        | 10 g                                       | 21.48 | 21.6   | -0.56            | ± 10         |
| 3/29/2016 | D1900V2              | 5d112  | Head   | 1 g                                        | 38.08 | 41.1   | -7.35            | ± 10         |
|           |                      |        |        | 10 g                                       | 20.28 | 21.5   | -5.67            | ± 10         |
| 3/30/2016 | D1900V2              | 5d112  | Head   | 1 g                                        | 37.92 | 41.1   | -7.74            | ± 10         |
|           |                      |        |        | 10 g                                       | 20.16 | 21.5   | -6.23            | ± 10         |
| 3/30/2016 | D835V2               | 4d081  | Body   | 1 g                                        | 9.84  | 9.28   | +6.03            | ± 10         |
|           |                      |        |        | 10 g                                       | 6.52  | 6.11   | +6.71            | ± 10         |
| 3/31/2016 | D835V2               | 4d081  | Head   | 1 g                                        | 9.68  | 9.23   | +4.88            | ± 10         |
|           |                      |        |        | 10 g                                       | 6.36  | 6.01   | +5.82            | ± 10         |
| 3/31/2016 | D2450V2              | 714    | Body   | 1 g                                        | 49.60 | 53.1   | -6.59            | ± 10         |
|           |                      |        |        | 10 g                                       | 23.12 | 25.1   | -7.89            | ± 10         |
| 4/1/2016  | D2450V2              | 714    | Body   | 1 g                                        | 48.00 | 53.1   | -9.60            | ± 10         |
|           |                      |        |        | 10 g                                       | 22.80 | 25.1   | -9.16            | ± 10         |
| 4/4/2016  | D2450V2              | 714    | Head   | 1 g                                        | 52.80 | 53.5   | -1.31            | ± 10         |
|           |                      |        |        | 10 g                                       | 24.52 | 25.0   | -1.92            | ± 10         |
| 4/5/2016  | D5GHzV2<br>(5.25GHz) | 1111   | Body   | 1 g                                        | 71.70 | 77.0   | -6.88            | ± 10         |
|           |                      |        |        | 10 g                                       | 20.20 | 21.6   | -6.48            | ± 10         |
| 4/5/2016  | D5GHzV2<br>(5.60GHz) | 1111   | Body   | 1 g                                        | 78.90 | 82.2   | -4.01            | ± 10         |
|           |                      |        |        | 10 g                                       | 22.00 | 22.9   | -3.93            | ± 10         |
| 4/6/2016  | D5GHzV2<br>(5.25GHz) | 1111   | Body   | 1 g                                        | 75.00 | 77.0   | -2.60            | ± 10         |
|           |                      |        |        | 10 g                                       | 21.20 | 21.6   | -1.85            | ± 10         |
| 4/6/2016  | D5GHzV2<br>(5.60GHz) | 1111   | Body   | 1 g                                        | 83.90 | 82.2   | +2.07            | ± 10         |
|           |                      |        |        | 10 g                                       | 23.40 | 22.9   | +2.18            | ± 10         |
| 4/7/2016  | D5GHzV2<br>(5.60GHz) | 1111   | Body   | 1 g                                        | 80.30 | 82.2   | -2.31            | ± 10         |
|           |                      |        |        | 10 g                                       | 22.50 | 22.9   | -1.75            | ± 10         |
| 4/8/2016  | D5GHzV2<br>(5.60GHz) | 1111   | Head   | 1 g                                        | 87.40 | 85.1   | +2.70            | ± 10         |
|           |                      |        |        | 10 g                                       | 24.50 | 24.4   | +0.41            | ± 10         |
| 4/9/2016  | D5GHzV2<br>(5.25GHz) | 1111   | Head   | 1 g                                        | 81.50 | 83.2   | -2.04            | ± 10         |
|           |                      |        |        | 10 g                                       | 23.20 | 23.9   | -2.93            | ± 10         |
| 4/9/2016  | D5GHzV2<br>(5.60GHz) | 1111   | Head   | 1 g                                        | 86.40 | 85.1   | +1.53            | ± 10         |
|           |                      |        |        | 10 g                                       | 24.30 | 24.4   | -0.41            | ± 10         |

### 13 RF Output Power Measurements

#### 13.1 GSM

| Settings               | Mode                | Parameter                  |            |
|------------------------|---------------------|----------------------------|------------|
| General Settings       | Band Indicator      | GSM 850                    | PCS 1900   |
|                        | Power Control Level | 5 (33 dBm)                 | 0 (30 dBm) |
| GPRS Specific Settings | Connection Type     | Test Mode A                |            |
|                        | Multi Slot Class    | 12 (4 down / 4 up / 5 sum) |            |
|                        | Coding Scheme       | CS1 (GMSK)                 |            |

#### GSM 850 Results

| Mode |         | Conducted Average Power (dBm) |       |                       |       |                       |       |                          |
|------|---------|-------------------------------|-------|-----------------------|-------|-----------------------|-------|--------------------------|
|      |         | 128 ch<br>(824.2 MHz)         |       | 189 ch<br>(836.4 MHz) |       | 251 ch<br>(848.8 MHz) |       | Sepc.<br>Max.<br>(Frame) |
|      |         | Burst                         | Frame | Burst                 | Frame | Burst                 | Frame |                          |
| GSM  | Voice   | 32.24                         | 23.21 | 32.28                 | 23.25 | 32.31                 | 23.28 | 24.27                    |
| GPRS | 1 slot  | 32.26                         | 23.23 | 32.30                 | 23.27 | 32.32                 | 23.29 | 24.27                    |
|      | 2 slots | 30.24                         | 24.22 | 30.30                 | 24.28 | 30.15                 | 24.13 | 24.98                    |
|      | 3slots  | 28.36                         | 24.10 | 28.36                 | 24.10 | 28.40                 | 24.14 | 25.04                    |
|      | 4 slots | 27.79                         | 24.78 | 27.76                 | 24.75 | 27.67                 | 24.66 | 25.49                    |

Note(s):

KDB 941225 D01 – The worst-case configuration for SAR testing is determined to be as follows.

1. Body : GPRS mode with 4 time slots, based on the output power above
2. Head : Same mode as Body SAR testing (VoIP applicable using GPRS multi-slot)

#### PCS 1900 Results

| Mode |         | Conducted Average Power (dBm) |       |                        |       |                        |       |                          |
|------|---------|-------------------------------|-------|------------------------|-------|------------------------|-------|--------------------------|
|      |         | 512 ch<br>(1850.2 MHz)        |       | 661 ch<br>(1880.0 MHz) |       | 810 ch<br>(1909.8 MHz) |       | Sepc.<br>Max.<br>(Frame) |
|      |         | Burst                         | Frame | Burst                  | Frame | Burst                  | Frame |                          |
| GSM  | Voice   | 29.14                         | 20.11 | 29.19                  | 20.16 | 29.26                  | 20.23 | 21.27                    |
| GPRS | 1 slot  | 29.15                         | 20.12 | 29.20                  | 20.17 | 29.28                  | 20.25 | 21.27                    |
|      | 2 slots | 27.02                         | 21.00 | 26.99                  | 20.97 | 27.00                  | 20.98 | 21.88                    |
|      | 3slots  | 25.10                         | 20.84 | 24.78                  | 20.52 | 24.89                  | 20.63 | 21.74                    |
|      | 4 slots | 24.71                         | 21.70 | 24.46                  | 21.45 | 24.54                  | 21.53 | 22.09                    |

Note(s):

KDB 941225 D01 – The worst-case configuration for SAR testing is determined to be as follows.

1. Body : GPRS mode with 4 time slots, based on the output power above
2. Head : Same mode as Body SAR testing (VoIP applicable using GPRS multi-slot)

## 13.2 W-CDMA

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification.

### Release 99 W-CDMA

| Settings             | Release 99   |           |
|----------------------|--------------|-----------|
| Loopback Mode        | Mode 1       | OFF       |
| Channel Coding       | 12.2kbps RMC | Voice AMR |
| TPC Bit Pattern      | All 1        |           |
| Power Tolerance (dB) | +1.7/-3.7    |           |

### HSDPA

| Settings                   | Release 8 HSDPA                |           |           |           |
|----------------------------|--------------------------------|-----------|-----------|-----------|
| Sub-test                   | 1                              | 2         | 3         | 4         |
| Loopback Mode              | Mode 1                         |           |           |           |
| Channel Coding             | Fixed Reference Channel (QPSK) |           |           |           |
| TPC Algorithm              | 2                              |           |           |           |
| TPC Bit Pattern            | All 1                          |           |           |           |
| Beta C                     | 2                              | 11        | 15        | 15        |
| Beta D                     | 15                             | 15        | 8         | 4         |
| Delta ACK                  | 8                              |           |           |           |
| Delta NACK                 | 8                              |           |           |           |
| Delta CQI                  | 8                              |           |           |           |
| CQI Feedback Cycle         | 4 ms                           |           |           |           |
| Ack-Nack Repetition Factor | 3                              |           |           |           |
| CQI Repetition Factor      | 2                              |           |           |           |
| MPR (dB)                   | 0                              | 0         | 0.5       | 0.5       |
| Power Tolerance (dB)       | +1.7/-3.7                      | +1.7/-3.7 | +2.7/-3.7 | +3.7/-3.7 |

### HSPA (HSDPA & HSUPA)

| Settings                   | Release 8 HSPA                     |           |           |           |           |
|----------------------------|------------------------------------|-----------|-----------|-----------|-----------|
| Sub-test                   | 1                                  | 2         | 3         | 4         | 5         |
| Loopback Mode              | Mode 1                             |           |           |           |           |
| Channel Coding             | E-DCH RF Test with TTI 10ms (QPSK) |           |           |           |           |
| TPC Algorithm              | 2                                  |           |           |           | 1         |
| TPC Bit Pattern            | Inner Loop Power Control           |           |           |           | All 1     |
| Beta C                     | 10                                 | 6         | 15        | 2         | 15        |
| Beta D                     | 15                                 | 15        | 9         | 15        | 0         |
| Delta ACK                  | 8                                  |           |           |           | 0         |
| Delta NACK                 | 8                                  |           |           |           | 0         |
| Delta CQI                  | 8                                  |           |           |           | 0         |
| CQI Feedback Cycle         | 4 ms                               |           |           |           |           |
| Ack-Nack Repetition Factor | 3                                  |           |           |           |           |
| CQI Repetition Factor      | 2                                  |           |           |           |           |
| Delta E-DPCCH              | 6                                  | 8         | 8         | 5         | 0         |
| Absolute Grant Value       | 20                                 | 12        | 15        | 17        | 12        |
| E-TFCI                     | 75                                 | 67        | 92        | 71        | 67        |
| MPR (dB)                   | 0                                  | 2         | 1         | 2         | 0         |
| Power Tolerance (dB)       | +1.7/-6.7                          | +3.7/-5.2 | +2.7/-5.2 | +3.7/-5.2 | +1.7/-3.7 |

### Band II Results

| Mode   |               | Conducted Average Power (dBm) |                         |                         | MPR |
|--------|---------------|-------------------------------|-------------------------|-------------------------|-----|
|        |               | 9262 ch<br>(1852.4 MHz)       | 9400 ch<br>(1880.0 MHz) | 9538 ch<br>(1907.6 MHz) |     |
| Rel.99 | 12.2 kbps RMC | 22.65                         | 22.54                   | 22.54                   | --  |
|        | 64 kbps RMC   | 22.65                         | 22.52                   | 22.52                   | --  |
|        | 144 kbps RMC  | 22.64                         | 22.54                   | 22.54                   | --  |
|        | 384 kbps RMC  | 22.64                         | 22.53                   | 22.52                   | --  |
|        | Voice AMR     | 22.63                         | 22.51                   | 22.51                   | --  |
| HSDPA  | Sub-test 1    | 21.66                         | 21.54                   | 21.53                   | 0   |
|        | Sub-test 2    | 21.65                         | 21.52                   | 21.51                   | 0   |
|        | Sub-test 3    | 21.19                         | 21.06                   | 21.04                   | 0.5 |
|        | Sub-test 4    | 21.19                         | 21.05                   | 21.05                   | 0.5 |
| HSPA   | Sub-test 1    | 21.63                         | 21.50                   | 21.48                   | 0   |
|        | Sub-test 2    | 19.65                         | 19.47                   | 19.51                   | 2   |
|        | Sub-test 3    | 20.74                         | 20.59                   | 20.51                   | 1   |
|        | Sub-test 4    | 19.64                         | 19.48                   | 19.49                   | 2   |
|        | Sub-test 5    | 21.63                         | 21.48                   | 21.48                   | 0   |

### Band IV Results

| Mode   |               | Conducted Average Power (dBm) |                         |                         | MPR |
|--------|---------------|-------------------------------|-------------------------|-------------------------|-----|
|        |               | 1312 ch<br>(1712.4 MHz)       | 1413 ch<br>(1732.6 MHz) | 1513 ch<br>(1752.6 MHz) |     |
| Rel.99 | 12.2 kbps RMC | 23.37                         | 23.33                   | 23.37                   | --  |
|        | 64 kbps RMC   | 23.37                         | 23.35                   | 23.38                   | --  |
|        | 144 kbps RMC  | 23.36                         | 23.32                   | 23.35                   | --  |
|        | 384 kbps RMC  | 23.37                         | 23.34                   | 23.36                   | --  |
|        | Voice AMR     | 23.37                         | 23.32                   | 23.36                   | --  |
| HSDPA  | Sub-test 1    | 22.38                         | 22.33                   | 22.38                   | 0   |
|        | Sub-test 2    | 22.36                         | 22.30                   | 22.35                   | 0   |
|        | Sub-test 3    | 21.92                         | 21.83                   | 21.89                   | 0.5 |
|        | Sub-test 4    | 21.89                         | 21.82                   | 21.89                   | 0.5 |
| HSPA   | Sub-test 1    | 22.31                         | 22.27                   | 22.30                   | 0   |
|        | Sub-test 2    | 20.34                         | 20.26                   | 20.34                   | 2   |
|        | Sub-test 3    | 21.30                         | 21.26                   | 21.31                   | 1   |
|        | Sub-test 4    | 20.33                         | 20.29                   | 20.28                   | 2   |
|        | Sub-test 5    | 22.34                         | 22.29                   | 22.33                   | 0   |

### 13.3 LTE

The following tests were completed according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

For UE power class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3**

| Modulation | Channel bandwidth / Transmission bandwidth ( $N_{RB}$ ) |         |       |        |        |        | MPR (dB) |
|------------|---------------------------------------------------------|---------|-------|--------|--------|--------|----------|
|            | 1.4 MHz                                                 | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz |          |
| QPSK       | > 5                                                     | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 1      |
| 16 QAM     | ≤ 5                                                     | ≤ 4     | ≤ 8   | ≤ 12   | ≤ 16   | ≤ 18   | ≤ 1      |
| 16 QAM     | > 5                                                     | > 4     | > 8   | > 12   | > 16   | > 18   | ≤ 2      |

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of “NS\_01”.

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

| Network Signalling value | Requirements (subclause) | E-UTRA Band              | Channel bandwidth (MHz) | Resources Blocks ( $N_{RB}$ ) | A-MPR (dB) |
|--------------------------|--------------------------|--------------------------|-------------------------|-------------------------------|------------|
| NS_01                    | 6.6.2.1.1                | Table 5.5-1              | 1.4, 3, 5, 10, 15, 20   | Table 5.6-1                   | N/A        |
| NS_03                    | 6.6.2.2.1                | 2, 4, 10, 23, 25, 35, 36 | 3                       | >5                            | ≤ 1        |
|                          |                          |                          | 5                       | >6                            | ≤ 1        |
|                          |                          |                          | 10                      | >6                            | ≤ 1        |
|                          |                          |                          | 15                      | >8                            | ≤ 1        |
|                          |                          |                          | 20                      | >10                           | ≤ 1        |
| NS_04                    | 6.6.2.2.2                | 41                       | 5                       | >6                            | ≤ 1        |
|                          |                          |                          | 10, 15, 20              | Table 6.2.4-4                 |            |
| NS_05                    | 6.6.3.3.1                | 1                        | 10, 15, 20              | ≥ 50                          | ≤ 1        |
| NS_06                    | 6.6.2.2.3                | 12, 13, 14, 17           | 1.4, 3, 5, 10           | Table 5.6-1                   | N/A        |
| NS_07                    | 6.6.2.2.3<br>6.6.3.3.2   | 13                       | 10                      | Table 6.2.4-2                 |            |
| NS_08                    | 6.6.3.3.3                | 19                       | 10, 15                  | > 44                          | ≤ 3        |
| NS_09                    | 6.6.3.3.4                | 21                       | 10, 15                  | > 40                          | ≤ 1        |
|                          |                          |                          |                         | > 55                          | ≤ 2        |
| NS_10                    |                          | 20                       | 15, 20                  | Table 6.2.4-3                 |            |
| NS_11                    | 6.6.2.2.1                | 23                       | 1.4, 3, 5, 10, 15, 20   | Table 6.2.4-5                 |            |
| ...                      |                          |                          |                         |                               |            |
| NS_32                    | -                        | -                        | -                       | -                             | -          |

### Band 2 Results

| Mode        |            |               |        | Conducted Average Power (dBm) |              |              | MPR |
|-------------|------------|---------------|--------|-------------------------------|--------------|--------------|-----|
| BW<br>[MHz] | Modulation | RB Allocation |        | 18607 ch                      | 18900 ch     | 19193 ch     |     |
|             |            | RB#           | Offset | (1850.7 MHz)                  | (1880.0 MHz) | (1909.3 MHz) |     |
| 1.4         | QPSK       | 1             | 0      | 22.33                         | 22.22        | 21.89        | 0   |
|             |            | 1             | 3      | 22.29                         | 22.27        | 21.79        | 0   |
|             |            | 1             | 5      | 22.32                         | 22.22        | 21.64        | 0   |
|             |            | 3             | 0      | 22.43                         | 22.29        | 21.81        | 0   |
|             |            | 3             | 2      | 22.50                         | 22.38        | 21.77        | 0   |
|             |            | 3             | 3      | 22.41                         | 22.31        | 21.68        | 0   |
|             |            | 6             | 0      | 21.37                         | 21.23        | 20.80        | 1   |
|             | 16QAM      | 1             | 0      | 21.43                         | 21.29        | 21.02        | 1   |
|             |            | 1             | 3      | 21.47                         | 21.38        | 20.96        | 1   |
|             |            | 1             | 5      | 21.44                         | 21.30        | 20.80        | 1   |
|             |            | 3             | 0      | 21.44                         | 21.29        | 20.92        | 1   |
|             |            | 3             | 2      | 21.46                         | 21.33        | 20.87        | 1   |
|             |            | 3             | 3      | 21.43                         | 21.28        | 20.79        | 1   |
|             |            | 6             | 0      | 20.32                         | 20.18        | 19.61        | 2   |
| Mode        |            |               |        | Conducted Average Power (dBm) |              |              | MPR |
| BW<br>[MHz] | Modulation | RB Allocation |        | 18615 ch                      | 18900 ch     | 19185 ch     |     |
|             |            | RB#           | Offset | (1851.5 MHz)                  | (1880.0 MHz) | (1908.5 MHz) |     |
| 3           | QPSK       | 1             | 0      | 22.23                         | 22.34        | 22.16        | 0   |
|             |            | 1             | 8      | 22.42                         | 22.28        | 21.91        | 0   |
|             |            | 1             | 14     | 22.28                         | 22.25        | 21.66        | 0   |
|             |            | 8             | 0      | 21.41                         | 21.27        | 21.01        | 1   |
|             |            | 8             | 4      | 21.45                         | 21.29        | 20.99        | 1   |
|             |            | 8             | 7      | 21.42                         | 21.27        | 20.77        | 1   |
|             |            | 15            | 0      | 21.42                         | 21.27        | 20.86        | 1   |
|             | 16QAM      | 1             | 0      | 21.46                         | 21.49        | 21.39        | 1   |
|             |            | 1             | 8      | 21.59                         | 21.45        | 21.07        | 1   |
|             |            | 1             | 14     | 21.48                         | 21.49        | 20.90        | 1   |
|             |            | 8             | 0      | 20.40                         | 20.29        | 20.07        | 2   |
|             |            | 8             | 4      | 20.43                         | 20.31        | 19.98        | 2   |
|             |            | 8             | 7      | 20.42                         | 20.29        | 19.82        | 2   |
|             |            | 15            | 0      | 20.35                         | 20.25        | 19.87        | 2   |



| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
|-------------|------------|---------------|--------|-------------------------------|--------------------------|--------------------------|-----|
| BW<br>[MHz] | Modulation | RB Allocation |        | 18625 ch<br>(1852.5 MHz)      | 18900 ch<br>(1880.0 MHz) | 19175 ch<br>(1907.5 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 5           | QPSK       | 1             | 0      | 22.55                         | 22.53                    | 22.37                    | 0   |
|             |            | 1             | 13     | 22.55                         | 22.42                    | 22.09                    | 0   |
|             |            | 1             | 24     | 22.31                         | 22.49                    | 21.64                    | 0   |
|             |            | 12            | 0      | 21.46                         | 21.29                    | 21.29                    | 1   |
|             |            | 12            | 7      | 21.48                         | 21.30                    | 21.22                    | 1   |
|             |            | 12            | 13     | 21.43                         | 21.30                    | 20.90                    | 1   |
|             |            | 25            | 0      | 21.46                         | 21.27                    | 21.08                    | 1   |
|             | 16QAM      | 1             | 0      | 21.76                         | 21.68                    | 21.60                    | 1   |
|             |            | 1             | 13     | 21.76                         | 21.58                    | 21.31                    | 1   |
|             |            | 1             | 24     | 21.52                         | 21.52                    | 20.85                    | 1   |
|             |            | 12            | 0      | 20.40                         | 20.27                    | 20.26                    | 2   |
|             |            | 12            | 7      | 20.46                         | 20.29                    | 20.08                    | 2   |
|             |            | 12            | 13     | 20.38                         | 20.27                    | 19.84                    | 2   |
|             |            | 25            | 0      | 20.44                         | 20.28                    | 20.07                    | 2   |
| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
| BW<br>[MHz] | Modulation | RB Allocation |        | 18650 ch<br>(1855.0 MHz)      | 18900 ch<br>(1880.0 MHz) | 19150 ch<br>(1905.0 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 10          | QPSK       | 1             | 0      | 22.45                         | 22.53                    | 22.47                    | 0   |
|             |            | 1             | 25     | 22.33                         | 22.30                    | 22.34                    | 0   |
|             |            | 1             | 49     | 22.30                         | 22.30                    | 21.67                    | 0   |
|             |            | 25            | 0      | 21.43                         | 21.45                    | 21.47                    | 1   |
|             |            | 25            | 13     | 21.40                         | 21.35                    | 21.42                    | 1   |
|             |            | 25            | 25     | 21.34                         | 21.37                    | 21.07                    | 1   |
|             |            | 50            | 0      | 21.40                         | 21.36                    | 21.25                    | 1   |
|             | 16QAM      | 1             | 0      | 21.69                         | 21.76                    | 21.69                    | 1   |
|             |            | 1             | 25     | 21.43                         | 21.36                    | 21.50                    | 1   |
|             |            | 1             | 49     | 21.53                         | 21.50                    | 20.90                    | 1   |
|             |            | 25            | 0      | 20.40                         | 20.41                    | 20.41                    | 2   |
|             |            | 25            | 13     | 20.33                         | 20.33                    | 20.40                    | 2   |
|             |            | 25            | 25     | 20.30                         | 20.33                    | 20.13                    | 2   |
|             |            | 50            | 0      | 20.34                         | 20.32                    | 20.32                    | 2   |

| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
|-------------|------------|---------------|--------|-------------------------------|--------------------------|--------------------------|-----|
| BW<br>[MHz] | Modulation | RB Allocation |        | 18675 ch<br>(1857.5 MHz)      | 18900 ch<br>(1880.0 MHz) | 19125 ch<br>(1902.5 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 15          | QPSK       | 1             | 0      | 22.31                         | 22.49                    | 22.52                    | 0   |
|             |            | 1             | 38     | 22.20                         | 22.31                    | 22.37                    | 0   |
|             |            | 1             | 74     | 22.13                         | 22.30                    | 21.76                    | 0   |
|             |            | 36            | 0      | 21.27                         | 21.43                    | 21.40                    | 1   |
|             |            | 36            | 20     | 21.26                         | 21.35                    | 21.43                    | 1   |
|             |            | 36            | 39     | 21.24                         | 21.38                    | 21.20                    | 1   |
|             |            | 75            | 0      | 21.21                         | 21.37                    | 21.43                    | 1   |
|             | 16QAM      | 1             | 0      | 21.46                         | 21.71                    | 21.66                    | 1   |
|             |            | 1             | 38     | 21.23                         | 21.43                    | 21.49                    | 1   |
|             |            | 1             | 74     | 21.31                         | 21.44                    | 21.02                    | 1   |
|             |            | 36            | 0      | 20.19                         | 20.39                    | 20.32                    | 2   |
|             |            | 36            | 20     | 20.23                         | 20.33                    | 20.39                    | 2   |
|             |            | 36            | 39     | 20.19                         | 20.33                    | 20.21                    | 2   |
|             |            | 75            | 0      | 20.14                         | 20.29                    | 20.40                    | 2   |
| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
| BW<br>[MHz] | Modulation | RB Allocation |        | 18700 ch<br>(1860.0 MHz)      | 18900 ch<br>(1880.0 MHz) | 19100 ch<br>(1900.0 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 20          | QPSK       | 1             | 0      | 22.46                         | 22.53                    | 22.52                    | 0   |
|             |            | 1             | 50     | 22.30                         | 22.34                    | 22.26                    | 0   |
|             |            | 1             | 99     | 22.15                         | 22.18                    | 21.78                    | 0   |
|             |            | 50            | 0      | 21.41                         | 21.46                    | 21.38                    | 1   |
|             |            | 50            | 25     | 21.33                         | 21.36                    | 21.32                    | 1   |
|             |            | 50            | 50     | 21.35                         | 21.30                    | 21.33                    | 1   |
|             |            | 100           | 0      | 21.35                         | 21.38                    | 21.34                    | 1   |
|             | 16QAM      | 1             | 0      | 21.58                         | 21.57                    | 21.63                    | 1   |
|             |            | 1             | 50     | 21.39                         | 21.40                    | 21.42                    | 1   |
|             |            | 1             | 99     | 21.28                         | 21.31                    | 21.05                    | 1   |
|             |            | 50            | 0      | 20.37                         | 20.41                    | 20.33                    | 2   |
|             |            | 50            | 25     | 20.28                         | 20.32                    | 20.26                    | 2   |
|             |            | 50            | 50     | 20.26                         | 20.27                    | 20.25                    | 2   |
|             |            | 100           | 0      | 20.31                         | 20.35                    | 20.31                    | 2   |

### Band 4 Results

| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
|-------------|------------|---------------|--------|-------------------------------|--------------------------|--------------------------|-----|
| BW<br>[MHz] | Modulation | RB Allocation |        | 19957 ch<br>(1710.7 MHz)      | 20175 ch<br>(1732.5 MHz) | 20393 ch<br>(1754.3 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 1.4         | QPSK       | 1             | 0      | 23.22                         | 23.13                    | 23.08                    | 0   |
|             |            | 1             | 3      | 23.09                         | 23.07                    | 23.04                    | 0   |
|             |            | 1             | 5      | 23.11                         | 23.16                    | 23.04                    | 0   |
|             |            | 3             | 0      | 23.21                         | 23.21                    | 23.12                    | 0   |
|             |            | 3             | 2      | 23.29                         | 23.25                    | 23.18                    | 0   |
|             |            | 3             | 3      | 23.24                         | 23.20                    | 23.10                    | 0   |
|             |            | 6             | 0      | 22.21                         | 22.16                    | 22.11                    | 1   |
|             | 16QAM      | 1             | 0      | 22.40                         | 22.29                    | 22.21                    | 1   |
|             |            | 1             | 3      | 22.23                         | 22.28                    | 22.16                    | 1   |
|             |            | 1             | 5      | 22.27                         | 22.28                    | 22.22                    | 1   |
|             |            | 3             | 0      | 22.23                         | 22.22                    | 22.17                    | 1   |
|             |            | 3             | 2      | 22.36                         | 22.30                    | 22.20                    | 1   |
|             |            | 3             | 3      | 22.28                         | 22.17                    | 22.11                    | 1   |
|             |            | 6             | 0      | 21.15                         | 21.16                    | 21.06                    | 2   |
| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
| BW<br>[MHz] | Modulation | RB Allocation |        | 19965 ch<br>(1711.5 MHz)      | 20175 ch<br>(1732.5 MHz) | 20385 ch<br>(1753.5 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 3           | QPSK       | 1             | 0      | 23.17                         | 23.10                    | 23.03                    | 0   |
|             |            | 1             | 8      | 23.25                         | 23.21                    | 23.13                    | 0   |
|             |            | 1             | 14     | 23.13                         | 23.07                    | 23.15                    | 0   |
|             |            | 8             | 0      | 22.31                         | 22.22                    | 22.19                    | 1   |
|             |            | 8             | 4      | 22.19                         | 22.25                    | 22.20                    | 1   |
|             |            | 8             | 7      | 22.23                         | 22.21                    | 22.16                    | 1   |
|             |            | 15            | 0      | 22.26                         | 22.21                    | 22.17                    | 1   |
|             | 16QAM      | 1             | 0      | 22.39                         | 22.50                    | 22.27                    | 1   |
|             |            | 1             | 8      | 22.43                         | 22.36                    | 22.32                    | 1   |
|             |            | 1             | 14     | 22.23                         | 22.49                    | 22.29                    | 1   |
|             |            | 8             | 0      | 21.33                         | 21.21                    | 21.18                    | 2   |
|             |            | 8             | 4      | 21.18                         | 21.26                    | 21.20                    | 2   |
|             |            | 8             | 7      | 21.21                         | 21.24                    | 21.12                    | 2   |
|             |            | 15            | 0      | 21.22                         | 21.18                    | 21.13                    | 2   |

| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
|-------------|------------|---------------|--------|-------------------------------|--------------------------|--------------------------|-----|
| BW<br>[MHz] | Modulation | RB Allocation |        | 19975 ch<br>(1712.5 MHz)      | 20175 ch<br>(1732.5 MHz) | 20375 ch<br>(1752.5 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 5           | QPSK       | 1             | 0      | 23.53                         | 23.39                    | 23.12                    | 0   |
|             |            | 1             | 13     | 23.26                         | 23.30                    | 23.25                    | 0   |
|             |            | 1             | 24     | 23.06                         | 23.27                    | 23.19                    | 0   |
|             |            | 12            | 0      | 22.31                         | 22.25                    | 22.30                    | 1   |
|             |            | 12            | 7      | 22.31                         | 22.25                    | 22.24                    | 1   |
|             |            | 12            | 13     | 22.23                         | 22.17                    | 22.18                    | 1   |
|             |            | 25            | 0      | 22.30                         | 22.25                    | 22.23                    | 1   |
|             | 16QAM      | 1             | 0      | 22.49                         | 22.50                    | 22.32                    | 1   |
|             |            | 1             | 13     | 22.39                         | 22.47                    | 22.44                    | 1   |
|             |            | 1             | 24     | 22.31                         | 22.28                    | 22.27                    | 1   |
|             |            | 12            | 0      | 21.26                         | 21.24                    | 21.23                    | 2   |
|             |            | 12            | 7      | 21.29                         | 21.25                    | 21.17                    | 2   |
|             |            | 12            | 13     | 21.21                         | 21.13                    | 21.14                    | 2   |
|             |            | 25            | 0      | 21.25                         | 21.24                    | 21.19                    | 2   |
| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
| BW<br>[MHz] | Modulation | RB Allocation |        | 20000 ch<br>(1715.0 MHz)      | 20175 ch<br>(1732.5 MHz) | 20350 ch<br>(1750.0 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 10          | QPSK       | 1             | 0      | 23.40                         | 23.36                    | 23.30                    | 0   |
|             |            | 1             | 25     | 23.21                         | 23.25                    | 23.16                    | 0   |
|             |            | 1             | 49     | 23.48                         | 23.41                    | 23.33                    | 0   |
|             |            | 25            | 0      | 22.38                         | 22.24                    | 22.30                    | 1   |
|             |            | 25            | 13     | 22.28                         | 22.32                    | 22.21                    | 1   |
|             |            | 25            | 25     | 22.36                         | 22.26                    | 22.32                    | 1   |
|             |            | 50            | 0      | 22.34                         | 22.32                    | 22.29                    | 1   |
|             | 16QAM      | 1             | 0      | 22.42                         | 22.34                    | 22.32                    | 1   |
|             |            | 1             | 25     | 22.33                         | 22.33                    | 22.28                    | 1   |
|             |            | 1             | 49     | 22.47                         | 22.45                    | 22.34                    | 1   |
|             |            | 25            | 0      | 21.33                         | 21.26                    | 21.27                    | 2   |
|             |            | 25            | 13     | 21.27                         | 21.31                    | 21.23                    | 2   |
|             |            | 25            | 25     | 21.33                         | 21.27                    | 21.28                    | 2   |
|             |            | 50            | 0      | 21.35                         | 21.30                    | 21.25                    | 2   |

| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
|-------------|------------|---------------|--------|-------------------------------|--------------------------|--------------------------|-----|
| BW<br>[MHz] | Modulation | RB Allocation |        | 20025 ch<br>(1717.5 MHz)      | 20175 ch<br>(1732.5 MHz) | 20325 ch<br>(1747.5 MHz) |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 15          | QPSK       | 1             | 0      | 23.34                         | 23.33                    | 23.39                    | 0   |
|             |            | 1             | 38     | 23.19                         | 23.21                    | 23.18                    | 0   |
|             |            | 1             | 74     | 23.18                         | 23.27                    | 23.22                    | 0   |
|             |            | 36            | 0      | 22.30                         | 22.28                    | 22.26                    | 1   |
|             |            | 36            | 20     | 22.22                         | 22.29                    | 22.22                    | 1   |
|             |            | 36            | 39     | 22.17                         | 22.28                    | 22.26                    | 1   |
|             |            | 75            | 0      | 22.28                         | 22.21                    | 22.23                    | 1   |
|             | 16QAM      | 1             | 0      | 22.51                         | 22.48                    | 22.55                    | 1   |
|             |            | 1             | 38     | 22.32                         | 22.35                    | 22.29                    | 1   |
|             |            | 1             | 74     | 22.41                         | 22.49                    | 22.46                    | 1   |
|             |            | 36            | 0      | 21.23                         | 21.24                    | 21.22                    | 2   |
|             |            | 36            | 20     | 21.21                         | 21.28                    | 21.23                    | 2   |
|             |            | 36            | 39     | 21.13                         | 21.24                    | 21.21                    | 2   |
|             |            | 75            | 0      | 21.25                         | 21.20                    | 21.20                    | 2   |
| Mode        |            |               |        | Conducted Average Power (dBm) |                          |                          | MPR |
| BW<br>[MHz] | Modulation | RB Allocation |        | 20175 ch<br>(1732.5 MHz)      |                          |                          |     |
|             |            | RB#           | Offset |                               |                          |                          |     |
| 20          | QPSK       | 1             | 0      | 23.34                         |                          |                          | 0   |
|             |            | 1             | 50     | 23.27                         |                          |                          | 0   |
|             |            | 1             | 99     | 23.41                         |                          |                          | 0   |
|             |            | 50            | 0      | 22.22                         |                          |                          | 1   |
|             |            | 50            | 25     | 22.28                         |                          |                          | 1   |
|             |            | 50            | 50     | 22.35                         |                          |                          | 1   |
|             |            | 100           | 0      | 22.29                         |                          |                          | 1   |
|             | 16QAM      | 1             | 0      | 22.35                         |                          |                          | 1   |
|             |            | 1             | 50     | 22.31                         |                          |                          | 1   |
|             |            | 1             | 99     | 22.40                         |                          |                          | 1   |
|             |            | 50            | 0      | 21.21                         |                          |                          | 2   |
|             |            | 50            | 25     | 21.22                         |                          |                          | 2   |
|             |            | 50            | 50     | 21.21                         |                          |                          | 2   |
|             |            | 100           | 0      | 21.29                         |                          |                          | 2   |

Note(s):

LTE Band 4 does not support three non-overlapping channels in 20 MHz channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing per KDB 941225 D05 SAR for LTE Devices

### 13.4 WLAN (DTS Band)

#### DTS Band Results (ANT 0)

| Band          | Mode           | Data Rate | Ch# | Frequency (MHz) | Average Power (dBm) |            |
|---------------|----------------|-----------|-----|-----------------|---------------------|------------|
|               |                |           |     |                 | Measred             | Spec. Max. |
| 2.4 GHz (DTS) | 802.11b        | 1 Mbps    | 1   | 2412            | 9.89                | 11.0       |
|               |                |           | 6   | 2437            | 9.83                |            |
|               |                |           | 11  | 2462            | 9.80                |            |
|               | 802.11g        | 6 Mbps    | 1   | 2412            | 8.62                | 10.0       |
|               |                |           | 6   | 2437            | 8.50                |            |
|               |                |           | 11  | 2462            | 8.60                |            |
|               | 802.11n [HT20] | MCS 0     | 1   | 2412            | 8.45                | 10.0       |
|               |                |           | 6   | 2437            | 8.35                |            |
|               |                |           | 11  | 2462            | 8.48                |            |

#### DTS Band Results (ANT 1)

| Band          | Mode           | Data Rate | Ch# | Frequency (MHz) | Average Power (dBm) |            |
|---------------|----------------|-----------|-----|-----------------|---------------------|------------|
|               |                |           |     |                 | Measred             | Spec. Max. |
| 2.4 GHz (DTS) | 802.11b        | 1 Mbps    | 1   | 2412            | 9.92                | 11.0       |
|               |                |           | 6   | 2437            | 9.94                |            |
|               |                |           | 11  | 2462            | 9.91                |            |
|               | 802.11g        | 6 Mbps    | 1   | 2412            | 8.69                | 10.0       |
|               |                |           | 6   | 2437            | 8.68                |            |
|               |                |           | 11  | 2462            | 8.61                |            |
|               | 802.11n [HT20] | MCS 0     | 1   | 2412            | 8.51                | 10.0       |
|               |                |           | 6   | 2437            | 8.53                |            |
|               |                |           | 11  | 2462            | 8.44                |            |

Note(s):

Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units. (802.11b DSSS and 802.11g/n OFDM configurations are considered separately.)

- When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
- When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

### 13.5 WLAN (U-NII Band)

#### U-NII Band Results (ANT 0)

| Band               | Mode             | Data Rate | Ch#       | Frequency (MHz) | Average Power (dBm) |            |
|--------------------|------------------|-----------|-----------|-----------------|---------------------|------------|
|                    |                  |           |           |                 | Measred             | Spec. Max. |
| 5.2 GHz (U-NII 1)  | 802.11a          | 6 Mbps    | 36 – 48   | 5180 – 5240     | Not                 | 12.0       |
|                    | 802.11n [HT20]   | MCS 0     | 36 – 48   | 5180 – 5240     | Required            | 12.0       |
|                    | 802.11n [HT40]   | MCS 0     | 38        | 5190            | 11.22               | 12.0       |
|                    |                  |           | 46        | 5230            | 11.15               |            |
|                    | 802.11ac [VHT20] | MCS 0     | 36 – 48   | 5180 – 5240     | Not Required        | 11.0       |
|                    | 802.11ac [VHT40] | MCS 0     | 38 – 46   | 5190 – 5230     |                     | 11.0       |
|                    | 802.11ac [VHT80] | MCS 0     | 42        | 5210            |                     | 11.0       |
| 5.3 GHz (U-NII 2A) | 802.11a          | 6 Mbps    | 52 – 64   | 5260 – 5320     | Not                 | 12.0       |
|                    | 802.11n [HT20]   | MCS 0     | 52 – 64   | 5260 – 5320     | Required            | 12.0       |
|                    | 802.11n [HT40]   | MCS 0     | 54        | 5270            | 11.07               | 12.0       |
|                    |                  |           | 62        | 5310            | 11.19               |            |
|                    | 802.11ac [VHT20] | MCS 0     | 52 – 64   | 5260 – 5320     | Not Required        | 11.0       |
|                    | 802.11ac [VHT40] | MCS 0     | 54 – 62   | 5270 – 5310     |                     | 11.0       |
|                    | 802.11ac [VHT80] | MCS 0     | 58        | 5290            |                     | 11.0       |
| 5.6 GHz (U-NII 2C) | 802.11a          | 6 Mbps    | 100 – 140 | 5500 – 5700     | Not                 | 12.0       |
|                    | 802.11n [HT20]   | MCS 0     | 100 – 140 | 5500 – 5700     | Required            | 12.0       |
|                    | 802.11n [HT40]   | MCS 0     | 102       | 5510            | 11.00               | 12.0       |
|                    |                  |           | 118       | 5590            | 10.91               |            |
|                    |                  |           | 134       | 5670            | 10.70               |            |
|                    | 802.11ac [VHT20] | MCS 0     | 100 – 140 | 5500 – 5700     | Not Required        | 11.0       |
|                    | 802.11ac [VHT40] | MCS 0     | 102 – 134 | 5510 – 5670     |                     | 11.0       |
|                    | 802.11ac [VHT80] | MCS 0     | 106 – 122 | 5530 – 5610     |                     | 11.0       |

### U-NII Band Results (ANT 1)

| Band               | Mode             | Data Rate | Ch#       | Frequency (MHz) | Average Power (dBm) |            |
|--------------------|------------------|-----------|-----------|-----------------|---------------------|------------|
|                    |                  |           |           |                 | Measred             | Spec. Max. |
| 5.2 GHz (U-NII 1)  | 802.11a          | 6 Mbps    | 36 – 48   | 5180 – 5240     | Not                 | 12.0       |
|                    | 802.11n [HT20]   | MCS 0     | 36 – 48   | 5180 – 5240     | Required            | 12.0       |
|                    | 802.11n [HT40]   | MCS 0     | 38        | 5190            | 11.50               | 12.0       |
|                    |                  |           | 46        | 5230            | 11.44               |            |
|                    | 802.11ac [VHT20] | MCS 0     | 36 – 48   | 5180 – 5240     | Not Required        | 11.0       |
|                    | 802.11ac [VHT40] | MCS 0     | 38 – 46   | 5190 – 5230     |                     | 11.0       |
|                    | 802.11ac [VHT80] | MCS 0     | 42        | 5210            |                     | 11.0       |
| 5.3 GHz (U-NII 2A) | 802.11a          | 6 Mbps    | 52 – 64   | 5260 – 5320     | Not                 | 12.0       |
|                    | 802.11n [HT20]   | MCS 0     | 52 – 64   | 5260 – 5320     | Required            | 12.0       |
|                    | 802.11n [HT40]   | MCS 0     | 54        | 5270            | 11.38               | 12.0       |
|                    |                  |           | 62        | 5310            | 11.43               |            |
|                    | 802.11ac [VHT20] | MCS 0     | 52 – 64   | 5260 – 5320     | Not Required        | 11.0       |
|                    | 802.11ac [VHT40] | MCS 0     | 54 – 62   | 5270 – 5310     |                     | 11.0       |
|                    | 802.11ac [VHT80] | MCS 0     | 58        | 5290            |                     | 11.0       |
| 5.6 GHz (U-NII 2C) | 802.11a          | 6 Mbps    | 100 – 140 | 5500 – 5700     | Not                 | 12.0       |
|                    | 802.11n [HT20]   | MCS 0     | 100 – 140 | 5500 – 5700     | Required            | 12.0       |
|                    | 802.11n [HT40]   | MCS 0     | 102       | 5510            | 11.39               | 12.0       |
|                    |                  |           | 118       | 5590            | 11.44               |            |
|                    |                  |           | 134       | 5670            | 11.27               |            |
|                    | 802.11ac [VHT20] | MCS 0     | 100 – 140 | 5500 – 5700     | Not Required        | 11.0       |
|                    | 802.11ac [VHT40] | MCS 0     | 102 – 134 | 5510 – 5670     |                     | 11.0       |
|                    | 802.11ac [VHT80] | MCS 0     | 106 – 122 | 5530 – 5610     |                     | 11.0       |

#### Note(s):

Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

- When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
- When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.



### 13.6 Bluetooth

Maximum tune-up tolerance limit is 7.5 dBm from the rated nominal maximum output power.  
This power level qualifies for exclusion of SAR testing.

### 13.7 Standalone SAR Test Exclusion Considerations (KDB 447498 D01)

The 1 g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances*  $\leq 50$  mm are determined by;

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0$  for 1 g SAR and  $\leq 7.5$  for 10 g extremity SAR, where

- $f_{\text{(GHz)}}$  is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison.
- When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied.

| Band            |       | Freq.<br>(MHz) | Max. Power |      | Test<br>Position | Distance<br>(mm) | Threshold | Test<br>Exclusion |
|-----------------|-------|----------------|------------|------|------------------|------------------|-----------|-------------------|
|                 |       |                | (dBm)      | (mW) |                  |                  |           |                   |
| WLAN<br>(DTS)   | ANT 0 | 2462           | 11.0       | 13   | Head             | < 5              | 4.1       | NO                |
|                 |       |                |            |      | Body             | 10               | 2.0       | YES *             |
|                 | ANT 1 | 2462           | 11.0       | 13   | Head             | < 5              | 4.1       | NO                |
|                 |       |                |            |      | Body             | 10               | 2.0       | YES *             |
| WLAN<br>(U-NII) | ANT 0 | 5700           | 12.0       | 16   | Head             | < 5              | 7.6       | NO                |
|                 |       |                |            |      | Body             | 10               | 3.8       | NO                |
|                 | ANT 1 | 5700           | 12.0       | 16   | Head             | < 5              | 7.6       | NO                |
|                 |       |                |            |      | Body             | 10               | 3.8       | NO                |
| Bluetooth       |       | 2480           | 7.5        | 6    | Head             | < 5              | 1.9       | YES               |
|                 |       |                |            |      | Body             | 10               | 0.9       | YES               |

\* Standalone SAR measurement was performed because of the overly conservative estimated SAR to determine simultaneous transmission SAR test exclusion.

## 14 SAR Measurements

SAR test reduction criteria are as follows:

When 10 g extremity SAR is required, SAR values indicated below are multiplied by 2.5, i.e. the ratio of the 1 g and extremity 10 g SAR limit.

### KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1 g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg when the transmission band is  $\geq 200$  MHz

### KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

### KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

For phablets, when hotspot mode applies, the UMPC mini-tablet 10 g extremity SAR is not required for the surfaces and edges with hotspot mode 1 g reported SAR  $\leq 1.2$  W/kg.

### KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is  $> 0.8$  W/kg, testing for other Channels is performed at the highest output power level for 1 RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are  $> 0.8$  W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation  $< 1.45$  W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is  $< 1.45$  W/Kg and its output power is not more than  $\frac{1}{2}$  dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is  $< 1.45$  W/Kg and its output power is not more than  $\frac{1}{2}$  dB higher than that of the highest channel bandwidth.

**KDB 248227 D01 802.11 Wi-Fi SAR:**

SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM in both 2.4 GHz and 5 GHz bands, an initial test configuration is first determined for each standalone and aggregated frequency band according to the maximum output power and tune-up tolerance specified for production units. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

SAR is measured using the highest measured maximum output power channel for the determined exposure configurations. When there are multiple test channels with the same measured maximum output power, the channel closest to mid-band frequency is selected for SAR measurement. When there are multiple test channels with the same measured maximum output power and equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

An initial test position is applied to further reduce the number of SAR tests for devices operating in next to the ear, UMPC mini-tablet or hotspot mode exposure configurations that require multiple test positions SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration according to the OFDM procedures. The initial test position procedure is described in the following:

- When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combination within the frequency band or aggregated band.
- When the reported SAR of the initial test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1 g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested.

To determine the initial test position, Area Scans were performed to determine the position with the estimated 1 g SAR (fast SAR). The position that produced the highest fast SAR is considered the worst case position; thus used as the initial test position. The averaged fast SAR is scaled according to reported SAR requirements.

## 14.1 GSM 850

| GPRS 4 slots (CS1) – Duty Cycle 48.0% |               |            |     |             |               |       |                |              |          |
|---------------------------------------|---------------|------------|-----|-------------|---------------|-------|----------------|--------------|----------|
| RF Exposure Conditions                | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Power [dBm]   |       | 1 g SAR [W/kg] |              | Plot No. |
|                                       |               |            |     |             | Tune-up Limit | Meas. | Meas.          | Scaled       |          |
| Head                                  | Left Touch    | 0          | 189 | 836.4       | 28.5          | 27.76 | 0.418          | <b>0.496</b> | 1        |
|                                       | Left Tilt     | 0          | 189 | 836.4       | 28.5          | 27.76 | 0.231          | <b>0.274</b> |          |
|                                       | Right Touch   | 0          | 189 | 836.4       | 28.5          | 27.76 | 0.356          | <b>0.422</b> |          |
|                                       | Right Tilt    | 0          | 189 | 836.4       | 28.5          | 27.76 | 0.264          | <b>0.313</b> |          |
| Body-worn & Hotspot                   | Rear          | 10         | 189 | 836.4       | 28.5          | 27.76 | 0.427          | <b>0.506</b> |          |
|                                       | Front         | 10         | 189 | 836.4       | 28.5          | 27.76 | 0.441          | <b>0.523</b> | 2        |
| Hotspot                               | Edge 2        | 10         | 189 | 836.4       | 28.5          | 27.76 | 0.265          | <b>0.314</b> |          |
|                                       | Edge 3        | 10         | 189 | 836.4       | 28.5          | 27.76 | 0.091          | <b>0.108</b> |          |
|                                       | Edge 4        | 10         | 189 | 836.4       | 28.5          | 27.76 | 0.467          | <b>0.554</b> | 3        |

## 14.2 PCS 1900

| GPRS 4 slots (CS1) – Duty Cycle 48.0% |               |            |     |             |               |       |                |              |          |
|---------------------------------------|---------------|------------|-----|-------------|---------------|-------|----------------|--------------|----------|
| RF Exposure Conditions                | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Power [dBm]   |       | 1 g SAR [W/kg] |              | Plot No. |
|                                       |               |            |     |             | Tune-up Limit | Meas. | Meas.          | Scaled       |          |
| Head                                  | Left Touch    | 0          | 661 | 1880.0      | 25.1          | 24.46 | 0.145          | <b>0.168</b> |          |
|                                       | Left Tilt     | 0          | 661 | 1880.0      | 25.1          | 24.46 | 0.195          | <b>0.226</b> |          |
|                                       | Right Touch   | 0          | 661 | 1880.0      | 25.1          | 24.46 | 0.288          | <b>0.334</b> | 4        |
|                                       | Right Tilt    | 0          | 661 | 1880.0      | 25.1          | 24.46 | 0.158          | <b>0.183</b> |          |
| Body-worn & Hotspot                   | Rear          | 10         | 661 | 1880.0      | 25.1          | 24.46 | 0.273          | <b>0.316</b> |          |
|                                       | Front         | 10         | 661 | 1880.0      | 25.1          | 24.46 | 0.299          | <b>0.346</b> | 5        |
| Hotspot                               | Edge 2        | 10         | 661 | 1880.0      | 25.1          | 24.46 | 0.260          | <b>0.301</b> |          |
|                                       | Edge 3        | 10         | 661 | 1880.0      | 25.1          | 24.46 | 0.265          | <b>0.307</b> |          |
|                                       | Edge 4        | 10         | 661 | 1880.0      | 25.1          | 24.46 | 0.055          | <b>0.064</b> |          |

### 14.3 W-CDMA Band II

| Rel.99 12.2kbps RMC – Duty Cycle 100% |               |            |      |             |               |       |                |              |          |
|---------------------------------------|---------------|------------|------|-------------|---------------|-------|----------------|--------------|----------|
| RF Exposure Conditions                | Test Position | Dist. [mm] | Ch#  | Freq. [MHz] | Power [dBm]   |       | 1 g SAR [W/kg] |              | Plot No. |
|                                       |               |            |      |             | Tune-up Limit | Meas. | Meas.          | Scaled       |          |
| Head                                  | Left Touch    | 0          | 9400 | 1880.0      | 23.5          | 22.54 | 0.190          | <b>0.237</b> |          |
|                                       | Left Tilt     | 0          | 9400 | 1880.0      | 23.5          | 22.54 | 0.277          | <b>0.346</b> |          |
|                                       | Right Touch   | 0          | 9400 | 1880.0      | 23.5          | 22.54 | 0.374          | <b>0.467</b> | 6        |
|                                       | Right Tilt    | 0          | 9400 | 1880.0      | 23.5          | 22.54 | 0.213          | <b>0.266</b> |          |
| Body-worn & Hotspot                   | Rear          | 10         | 9400 | 1880.0      | 23.5          | 22.54 | 0.399          | <b>0.498</b> |          |
|                                       | Front         | 10         | 9400 | 1880.0      | 23.5          | 22.54 | 0.431          | <b>0.538</b> | 7        |
| Hotspot                               | Edge 2        | 10         | 9400 | 1880.0      | 23.5          | 22.54 | 0.333          | <b>0.415</b> |          |
|                                       | Edge 3        | 10         | 9400 | 1880.0      | 23.5          | 22.54 | 0.358          | <b>0.447</b> |          |
|                                       | Edge 4        | 10         | 9400 | 1880.0      | 23.5          | 22.54 | 0.048          | <b>0.060</b> |          |

### 14.4 W-CDMA Band IV

| Rel.99 12.2kbps RMC – Duty Cycle 100% |               |            |      |             |               |       |                |              |          |
|---------------------------------------|---------------|------------|------|-------------|---------------|-------|----------------|--------------|----------|
| RF Exposure Conditions                | Test Position | Dist. [mm] | Ch#  | Freq. [MHz] | Power [dBm]   |       | 1 g SAR [W/kg] |              | Plot No. |
|                                       |               |            |      |             | Tune-up Limit | Meas. | Meas.          | Scaled       |          |
| Head                                  | Left Touch    | 0          | 1413 | 1732.6      | 23.5          | 23.33 | 0.157          | <b>0.163</b> |          |
|                                       | Left Tilt     | 0          | 1413 | 1732.6      | 23.5          | 23.33 | 0.153          | <b>0.159</b> |          |
|                                       | Right Touch   | 0          | 1413 | 1732.6      | 23.5          | 23.33 | 0.333          | <b>0.346</b> | 8        |
|                                       | Right Tilt    | 0          | 1413 | 1732.6      | 23.5          | 23.33 | 0.135          | <b>0.140</b> |          |
| Body-worn & Hotspot                   | Rear          | 10         | 1413 | 1732.6      | 23.5          | 23.33 | 0.453          | <b>0.471</b> | 9        |
|                                       | Front         | 10         | 1413 | 1732.6      | 23.5          | 23.33 | 0.382          | <b>0.397</b> |          |
| Hotspot                               | Edge 2        | 10         | 1413 | 1732.6      | 23.5          | 23.33 | 0.256          | <b>0.266</b> |          |
|                                       | Edge 3        | 10         | 1413 | 1732.6      | 23.5          | 23.33 | 0.423          | <b>0.440</b> |          |
|                                       | Edge 4        | 10         | 1413 | 1732.6      | 23.5          | 23.33 | 0.074          | <b>0.077</b> |          |

## 14.5 LTE Band 2

| QPSK 20 MHz BW – Duty Cycle 100% |               |            |       |             |     |        |               |       |                |              |          |
|----------------------------------|---------------|------------|-------|-------------|-----|--------|---------------|-------|----------------|--------------|----------|
| RF Exposure Conditions           | Test Position | Dist. [mm] | Ch#   | Freq. [MHz] | RB# | Offset | Power [dBm]   |       | 1 g SAR [W/kg] |              | Plot No. |
|                                  |               |            |       |             |     |        | Tune-up Limit | Meas. | Meas.          | Scaled       |          |
| Head                             | Left Touch    | 0          | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.182          | <b>0.217</b> |          |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.143          | <b>0.174</b> |          |
|                                  | Left Tilt     | 0          | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.208          | <b>0.248</b> |          |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.168          | <b>0.204</b> |          |
|                                  | Right Touch   | 0          | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.365          | <b>0.436</b> | 10       |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.284          | <b>0.345</b> |          |
|                                  | Right Tilt    | 0          | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.193          | <b>0.230</b> |          |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.155          | <b>0.188</b> |          |
| Body-worn & Hotspot              | Rear          | 10         | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.344          | <b>0.411</b> |          |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.284          | <b>0.345</b> |          |
|                                  | Front         | 10         | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.396          | <b>0.473</b> | 11       |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.338          | <b>0.410</b> |          |
| Hotspot                          | Edge 2        | 10         | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.321          | <b>0.383</b> |          |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.241          | <b>0.292</b> |          |
|                                  | Edge 3        | 10         | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.313          | <b>0.374</b> |          |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.269          | <b>0.326</b> |          |
|                                  | Edge 4        | 10         | 18900 | 1880.0      | 1   | 0      | 23.3          | 22.53 | 0.045          | <b>0.054</b> |          |
|                                  |               |            |       |             | 50  | 0      | 22.3          | 21.46 | 0.036          | <b>0.044</b> |          |

## 14.6 LTE Band 4

| QPSK 20 MHz BW – Duty Cycle 100% |               |            |       |             |     |        |               |       |                |              |          |
|----------------------------------|---------------|------------|-------|-------------|-----|--------|---------------|-------|----------------|--------------|----------|
| RF Exposure Conditions           | Test Position | Dist. [mm] | Ch#   | Freq. [MHz] | RB# | Offset | Power [dBm]   |       | 1 g SAR [W/kg] |              | Plot No. |
|                                  |               |            |       |             |     |        | Tune-up Limit | Meas. | Meas.          | Scaled       |          |
| Head                             | Left Touch    | 0          | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.168          | <b>0.172</b> |          |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.133          | <b>0.138</b> |          |
|                                  | Left Tilt     | 0          | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.166          | <b>0.169</b> |          |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.136          | <b>0.141</b> |          |
|                                  | Right Touch   | 0          | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.348          | <b>0.355</b> | 12       |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.283          | <b>0.293</b> |          |
|                                  | Right Tilt    | 0          | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.126          | <b>0.129</b> |          |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.108          | <b>0.112</b> |          |
| Body-worn & Hotspot              | Rear          | 10         | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.409          | <b>0.418</b> | 13       |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.359          | <b>0.372</b> |          |
|                                  | Front         | 10         | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.383          | <b>0.391</b> |          |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.314          | <b>0.325</b> |          |
| Hotspot                          | Edge 2        | 10         | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.271          | <b>0.277</b> |          |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.223          | <b>0.231</b> |          |
|                                  | Edge 3        | 10         | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.395          | <b>0.403</b> |          |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.344          | <b>0.356</b> |          |
|                                  | Edge 4        | 10         | 20175 | 1732.5      | 1   | 99     | 23.5          | 23.41 | 0.068          | <b>0.069</b> |          |
|                                  |               |            |       |             | 50  | 50     | 22.5          | 22.35 | 0.058          | <b>0.060</b> |          |

## 14.7 WLAN (DTS Band)

### ANT 0

| 802.11b (1 Mbps) – Duty Cycle 100% |               |            |     |             |                          |               |       |                |        |          |
|------------------------------------|---------------|------------|-----|-------------|--------------------------|---------------|-------|----------------|--------|----------|
| RF Exposure Conditions             | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Averaged Fast SAR [W/kg] | Power [dBm]   |       | 1 g SAR [W/kg] |        | Plot No. |
|                                    |               |            |     |             |                          | Tune-up Limit | Meas. | Meas.          | Scaled |          |
| Head                               | Left Touch    | 0          | 1   | 2412        | 0.356                    | 11.0          | 9.89  | 0.244          | 0.315  | 14       |
|                                    | Left Tilt     | 0          | 1   | 2412        | 0.288                    | 11.0          | 9.89  |                |        |          |
|                                    | Right Touch   | 0          | 1   | 2412        | 0.176                    | 11.0          | 9.89  |                |        |          |
|                                    | Right Tilt    | 0          | 1   | 2412        | 0.151                    | 11.0          | 9.89  |                |        |          |
| Body-worn & Hotspot                | Rear          | 10         | 1   | 2412        | 0.083                    | 11.0          | 9.89  | 0.049          | 0.063  | 15       |
|                                    | Front         | 10         | 1   | 2412        | 0.075                    | 11.0          | 9.89  |                |        |          |
| Hotspot                            | Edge 1        | 10         | 1   | 2412        | 0.116                    | 11.0          | 9.89  | 0.071          | 0.092  | 16       |
|                                    | Edge 2        | 10         | 1   | 2412        | 0.032                    | 11.0          | 9.89  |                |        |          |

### ANT 1

| 802.11b (1 Mbps) – Duty Cycle 100% |               |            |     |             |                          |               |       |                |        |          |
|------------------------------------|---------------|------------|-----|-------------|--------------------------|---------------|-------|----------------|--------|----------|
| RF Exposure Conditions             | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Averaged Fast SAR [W/kg] | Power [dBm]   |       | 1 g SAR [W/kg] |        | Plot No. |
|                                    |               |            |     |             |                          | Tune-up Limit | Meas. | Meas.          | Scaled |          |
| Head                               | Left Touch    | 0          | 6   | 2437        | 0.056                    | 11.0          | 9.94  |                |        |          |
|                                    | Left Tilt     | 0          | 6   | 2437        | 0.035                    | 11.0          | 9.94  |                |        |          |
|                                    | Right Touch   | 0          | 6   | 2437        | 0.185                    | 11.0          | 9.94  | 0.172          | 0.220  | 17       |
|                                    | Right Tilt    | 0          | 6   | 2437        | 0.131                    | 11.0          | 9.94  |                |        |          |
| Body-worn & Hotspot                | Rear          | 10         | 6   | 2437        | 0.021                    | 11.0          | 9.94  |                |        |          |
|                                    | Front         | 10         | 6   | 2437        | 0.024                    | 11.0          | 9.94  | 0.016          | 0.020  | 18       |
| Hotspot                            | Edge 1        | 10         | 6   | 2437        | 0.008                    | 11.0          | 9.94  |                |        |          |
|                                    | Edge 4        | 10         | 6   | 2437        | 0.021                    | 11.0          | 9.94  |                |        |          |

Note(s):

SAR is not required for 802.11g/n OFDM configurations when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.



## 14.8 WLAN (U-NII Band)

### 14.8.1 5.2 GHz Band (U-NII 1)

The same maximum output power is specified for U-NII 1 and U-NII 2A band, therefore begin SAR measurement in U-NII 2A band by applying the OFDM SAR requirements.

The highest reported SAR for U-NII 2A band is  $\leq 1.2$  W/kg, then the SAR is not required for U-NII 1 band.

### 14.8.2 5.3 GHz Band (U-NII 2A)

#### ANT 0

| 802.11n [HT40] – Duty Cycle 100% |               |            |     |             |                          |               |       |                |        |          |
|----------------------------------|---------------|------------|-----|-------------|--------------------------|---------------|-------|----------------|--------|----------|
| RF Exposure Conditions           | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Averaged Fast SAR [W/kg] | Power [dBm]   |       | 1 g SAR [W/kg] |        | Plot No. |
|                                  |               |            |     |             |                          | Tune-up Limit | Meas. | Meas.          | Scaled |          |
| Head                             | Left Touch    | 0          | 62  | 5310        | 0.116                    | 12.0          | 11.19 | 0.087          | 0.105  | 19       |
|                                  | Left Tilt     | 0          | 62  | 5310        | 0.083                    | 12.0          | 11.19 |                |        |          |
|                                  | Right Touch   | 0          | 62  | 5310        | 0.025                    | 12.0          | 11.19 |                |        |          |
|                                  | Right Tilt    | 0          | 62  | 5310        | 0.025                    | 12.0          | 11.19 |                |        |          |
| Body-worn                        | Rear          | 10         | 62  | 5310        | 0.102                    | 12.0          | 11.19 | 0.063          | 0.076  | 20       |
|                                  | Front         | 10         | 62  | 5310        | 0.000                    | 12.0          | 11.19 |                |        |          |

#### ANT 1

| 802.11n [HT40] – Duty Cycle 100% |               |            |     |             |                          |               |       |                |        |          |
|----------------------------------|---------------|------------|-----|-------------|--------------------------|---------------|-------|----------------|--------|----------|
| RF Exposure Conditions           | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Averaged Fast SAR [W/kg] | Power [dBm]   |       | 1 g SAR [W/kg] |        | Plot No. |
|                                  |               |            |     |             |                          | Tune-up Limit | Meas. | Meas.          | Scaled |          |
| Head                             | Left Touch    | 0          | 62  | 5310        | 0.055                    | 12.0          | 11.43 |                |        |          |
|                                  | Left Tilt     | 0          | 62  | 5310        | 0.036                    | 12.0          | 11.43 |                |        |          |
|                                  | Right Touch   | 0          | 62  | 5310        | 0.102                    | 12.0          | 11.43 | 0.087          | 0.099  | 21       |
|                                  | Right Tilt    | 0          | 62  | 5310        | 0.057                    | 12.0          | 11.43 |                |        |          |
| Body-worn                        | Rear          | 10         | 62  | 5310        | 0.057                    | 12.0          | 11.43 | 0.027          | 0.031  | 22       |
|                                  | Front         | 10         | 62  | 5310        | 0.000                    | 12.0          | 11.43 |                |        |          |

Note(s):

SAR is not required for subsequent test configurations when the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

## 14.8.3 5.6 GHz Band (U-NII 2C)

ANT 0

| 802.11n [HT40] – Duty Cycle 100% |               |            |     |             |                          |               |       |                |        |          |
|----------------------------------|---------------|------------|-----|-------------|--------------------------|---------------|-------|----------------|--------|----------|
| RF Exposure Conditions           | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Averaged Fast SAR [W/kg] | Power [dBm]   |       | 1 g SAR [W/kg] |        | Plot No. |
|                                  |               |            |     |             |                          | Tune-up Limit | Meas. | Meas.          | Scaled |          |
| Head                             | Left Touch    | 0          | 102 | 5510        | 0.055                    | 12.0          | 11.00 | 0.062          | 0.078  | 23       |
|                                  | Left Tilt     | 0          | 102 | 5510        | 0.082                    | 12.0          | 11.00 | 0.043          | 0.054  |          |
|                                  | Right Touch   | 0          | 102 | 5510        | 0.008                    | 12.0          | 11.00 |                |        |          |
|                                  | Right Tilt    | 0          | 102 | 5510        | 0.012                    | 12.0          | 11.00 |                |        |          |
| Body-worn                        | Rear          | 10         | 102 | 5510        | 0.092                    | 12.0          | 11.00 | 0.064          | 0.081  | 24       |
|                                  | Front         | 10         | 102 | 5510        | 0.000                    | 12.0          | 11.00 |                |        |          |

ANT 1

| 802.11n [HT40] – Duty Cycle 100% |               |            |     |             |                          |               |       |                |        |          |
|----------------------------------|---------------|------------|-----|-------------|--------------------------|---------------|-------|----------------|--------|----------|
| RF Exposure Conditions           | Test Position | Dist. [mm] | Ch# | Freq. [MHz] | Averaged Fast SAR [W/kg] | Power [dBm]   |       | 1 g SAR [W/kg] |        | Plot No. |
|                                  |               |            |     |             |                          | Tune-up Limit | Meas. | Meas.          | Scaled |          |
| Head                             | Left Touch    | 0          | 118 | 5590        | 0.007                    | 12.0          | 11.44 |                |        |          |
|                                  | Left Tilt     | 0          | 118 | 5590        | 0.000                    | 12.0          | 11.44 |                |        |          |
|                                  | Right Touch   | 0          | 118 | 5590        | 0.079                    | 12.0          | 11.44 | 0.071          | 0.081  | 25       |
|                                  | Right Tilt    | 0          | 118 | 5590        | 0.032                    | 12.0          | 11.44 |                |        |          |
| Body-worn                        | Rear          | 10         | 118 | 5590        | 0.018                    | 12.0          | 11.44 | 0.014          | 0.016  | 26       |
|                                  | Front         | 10         | 118 | 5590        | 0.001                    | 12.0          | 11.44 |                |        |          |

Note(s):

SAR is not required for subsequent test configurations when the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

## 14.9 SAR Measurement Variability

In accordance with the KDB 865664 D01, these additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The DUT should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a 2nd repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a 3rd repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

### 14.9.1 Highest Measured SAR Configuration in Each Frequency Band

| Frequency Band [MHz] | Air Interface  | Standalone SAR [W/kg] |       |
|----------------------|----------------|-----------------------|-------|
|                      |                | Head                  | Body  |
| 850                  | GSM 850        | 0.418                 | 0.467 |
| 1750                 | W-CDMA Band IV | 0.333                 | 0.453 |
|                      | LTE Band 4     | 0.348                 | 0.409 |
| 1900                 | PCS 1900       | 0.288                 | 0.299 |
|                      | W-CDMA Band II | 0.374                 | 0.431 |
|                      | LTE Band 2     | 0.365                 | 0.396 |
| 2450                 | WLAN 802.11b   | 0.244                 | 0.071 |
| 5250                 | WLAN 802.11a   | 0.087                 | 0.063 |
| 5600                 | WLAN 802.11a   | 0.071                 | 0.064 |

### 14.9.2 Repeated SAR Measurement Results

Repeated SAR measurement is not required because the highest measured SAR is  $< 0.80$  W/kg.

## 14.10 Simultaneous Transmission SAR Analysis

### 14.10.1 Simultaneous Transmission Condition

WWAN can transmit simultaneously with WLAN/Bluetooth.

WLAN cannot transmit simultaneously with Bluetooth since they share an antenna port.

| No. | Conditions            | Head | Body | Hotspot |
|-----|-----------------------|------|------|---------|
| 1   | GSM + WLAN 2.4 GHz    | YES  | YES  | YES     |
| 2   | W-CDMA + WLAN 2.4 GHz | YES  | YES  | YES     |
| 3   | LTE + WLAN 2.4 GHz    | YES  | YES  | YES     |
| 4   | GSM + WLAN 5 GHz      | YES  | YES  | NO      |
| 5   | W-CDMA + WLAN 5 GHz   | YES  | YES  | NO      |
| 6   | LTE + WLAN 5 GHz      | YES  | YES  | NO      |
| 7   | GSM + Bluetooth       | YES  | YES  | NO      |
| 8   | W-CDMA + Bluetooth    | YES  | YES  | NO      |
| 9   | LTE + Bluetooth       | YES  | YES  | NO      |

### 14.10.2 Standalone SAR Estimation

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f_{\text{(GHz)}}} / 7.5] \text{ W/kg for 1 g SAR, test separation distances} \leq 50 \text{ mm, or}$

$0.4 \text{ W/kg for 1 g SAR, test separation distances} > 50 \text{ mm}$

When the minimum test separation distance is  $< 5 \text{ mm}$ , a distance of  $5 \text{ mm}$  is applied.

| Band      | Frequency<br>(MHz) | Max. Power |      | Test<br>Position | Distance<br>(mm) | Estimated SAR<br>(W/kg) |
|-----------|--------------------|------------|------|------------------|------------------|-------------------------|
|           |                    | (dBm)      | (mW) |                  |                  |                         |
| Bluetooth | 2480               | 7.5        | 6    | Head             | $< 5$            | 0.252                   |
|           |                    |            |      | Body             | 10               | 0.126                   |

### 14.10.3 Sum of the SAR for GSM 850, WLAN & Bluetooth

| RF Exposure<br>Conditions | Simultaneous Transmission Scenario |       |       |       |       |       | Σ 1 g SAR<br>(W/kg) |
|---------------------------|------------------------------------|-------|-------|-------|-------|-------|---------------------|
|                           | GSM 850                            | DTS   |       | U-NII |       | BT    |                     |
|                           |                                    | ANT 0 | ANT 1 | ANT 0 | ANT 1 |       |                     |
| Head                      | 0.496                              | 0.315 | 0.220 |       |       |       | 1.031               |
|                           | 0.496                              |       |       | 0.105 | 0.081 |       | 0.682               |
|                           | 0.496                              |       |       |       |       | 0.252 | 0.748               |
| Body-worn                 | 0.523                              | 0.063 | 0.020 |       |       |       | 0.606               |
|                           | 0.523                              |       |       | 0.076 | 0.081 |       | 0.680               |
|                           | 0.523                              |       |       |       |       | 0.126 | 0.649               |
| Hotspot                   | 0.554                              | 0.092 | 0.020 |       |       |       | 0.666               |

#### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

### 14.10.4 Sum of the SAR for PCS 1900, WLAN & Bluetooth

| RF Exposure Conditions | Simultaneous Transmission Scenario |       |       |       |       |       | $\Sigma$ 1 g SAR (W/kg) |
|------------------------|------------------------------------|-------|-------|-------|-------|-------|-------------------------|
|                        | PCS 1900                           | DTS   |       | U-NII |       | BT    |                         |
|                        |                                    | ANT 0 | ANT 1 | ANT 0 | ANT 1 |       |                         |
| Head                   | 0.334                              | 0.315 | 0.220 |       |       |       | <b>0.869</b>            |
|                        | 0.334                              |       |       | 0.105 | 0.081 |       | <b>0.520</b>            |
|                        | 0.334                              |       |       |       |       | 0.252 | <b>0.586</b>            |
| Body-worn              | 0.346                              | 0.063 | 0.020 |       |       |       | <b>0.429</b>            |
|                        | 0.346                              |       |       | 0.076 | 0.081 |       | <b>0.503</b>            |
|                        | 0.346                              |       |       |       |       | 0.126 | <b>0.472</b>            |
| Hotspot                | 0.346                              | 0.092 | 0.020 |       |       |       | <b>0.458</b>            |

#### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.10.5 Sum of the SAR for W-CDMA Band II, WLAN & Bluetooth

| RF Exposure Conditions | Simultaneous Transmission Scenario |       |       |       |       |       | $\Sigma$ 1 g SAR (W/kg) |
|------------------------|------------------------------------|-------|-------|-------|-------|-------|-------------------------|
|                        | W-CDMA Band II                     | DTS   |       | U-NII |       | BT    |                         |
|                        |                                    | ANT 0 | ANT 1 | ANT 0 | ANT 1 |       |                         |
| Head                   | 0.467                              | 0.315 | 0.220 |       |       |       | 1.002                   |
|                        | 0.467                              |       |       | 0.105 | 0.081 |       | 0.653                   |
|                        | 0.467                              |       |       |       |       | 0.252 | 0.719                   |
| Body-worn              | 0.538                              | 0.063 | 0.020 |       |       |       | 0.621                   |
|                        | 0.538                              |       |       | 0.076 | 0.081 |       | 0.695                   |
|                        | 0.538                              |       |       |       |       | 0.126 | 0.664                   |
| Hotspot                | 0.538                              | 0.092 | 0.020 |       |       |       | 0.650                   |

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.10.6 Sum of the SAR for W-CDMA Band IV, WLAN & Bluetooth

| RF Exposure<br>Conditions | Simultaneous Transmission Scenario |       |       |       |       |       | $\Sigma$ 1 g SAR<br>(W/kg) |
|---------------------------|------------------------------------|-------|-------|-------|-------|-------|----------------------------|
|                           | W-CDMA<br>Band IV                  | DTS   |       | U-NII |       | BT    |                            |
|                           |                                    | ANT 0 | ANT 1 | ANT 0 | ANT 1 |       |                            |
| Head                      | 0.346                              | 0.315 | 0.220 |       |       |       | <b>0.881</b>               |
|                           | 0.346                              |       |       | 0.105 | 0.081 |       | <b>0.532</b>               |
|                           | 0.346                              |       |       |       |       | 0.252 | <b>0.598</b>               |
| Body-worn                 | 0.471                              | 0.063 | 0.020 |       |       |       | <b>0.554</b>               |
|                           | 0.471                              |       |       | 0.076 | 0.081 |       | <b>0.628</b>               |
|                           | 0.471                              |       |       |       |       | 0.126 | <b>0.597</b>               |
| Hotspot                   | 0.471                              | 0.092 | 0.020 |       |       |       | <b>0.583</b>               |

##### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

##### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.10.7 Sum of the SAR for LTE Band 2, WLAN & Bluetooth

| RF Exposure Conditions | Simultaneous Transmission Scenario |       |       |       |       |       | $\Sigma$ 1 g SAR (W/kg) |
|------------------------|------------------------------------|-------|-------|-------|-------|-------|-------------------------|
|                        | LTE Band 2                         | DTS   |       | U-NII |       | BT    |                         |
|                        |                                    | ANT 0 | ANT 1 | ANT 0 | ANT 1 |       |                         |
| Head                   | 0.436                              | 0.315 | 0.220 |       |       |       | <b>0.971</b>            |
|                        | 0.436                              |       |       | 0.105 | 0.081 |       | <b>0.622</b>            |
|                        | 0.436                              |       |       |       |       | 0.252 | <b>0.688</b>            |
| Body-worn              | 0.473                              | 0.063 | 0.020 |       |       |       | <b>0.556</b>            |
|                        | 0.473                              |       |       | 0.076 | 0.081 |       | <b>0.630</b>            |
|                        | 0.473                              |       |       |       |       | 0.126 | <b>0.599</b>            |
| Hotspot                | 0.473                              | 0.092 | 0.020 |       |       |       | <b>0.585</b>            |

#### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

#### 14.10.8 Sum of the SAR for LTE Band 4, WLAN & Bluetooth

| RF Exposure<br>Conditions | Simultaneous Transmission Scenario |       |       |       |       |       | $\Sigma$ 1 g SAR<br>(W/kg) |
|---------------------------|------------------------------------|-------|-------|-------|-------|-------|----------------------------|
|                           | LTE Band 4                         | DTS   |       | U-NII |       | BT    |                            |
|                           |                                    | ANT 0 | ANT 1 | ANT 0 | ANT 1 |       |                            |
| Head                      | 0.355                              | 0.315 | 0.220 |       |       |       | <b>0.890</b>               |
|                           | 0.355                              |       |       | 0.105 | 0.081 |       | <b>0.541</b>               |
|                           | 0.355                              |       |       |       |       | 0.252 | <b>0.607</b>               |
| Body-worn                 | 0.418                              | 0.063 | 0.020 |       |       |       | <b>0.501</b>               |
|                           | 0.418                              |       |       | 0.076 | 0.081 |       | <b>0.575</b>               |
|                           | 0.418                              |       |       |       |       | 0.126 | <b>0.544</b>               |
| Hotspot                   | 0.418                              | 0.092 | 0.020 |       |       |       | <b>0.530</b>               |

#### SAR to Peak Location Separation Ratio (SPLSR)

As the sum of the 1 g SAR is < 1.6 W/kg, SPLSR assessment is not required.

#### Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because the sum of the 1 g SAR is < 1.6 W/kg.

## 16 Test Instruments

| Shielded Room S3       |                  |                       |                 |            |
|------------------------|------------------|-----------------------|-----------------|------------|
| Type                   | Model            | Serial No. (ID)       | Manufacturer    | Cal. Due   |
| E-Field Probe          | ET3DV6           | 1679 (S-2)            | SPEAG           | 2016/08/11 |
| E-Field Probe          | EX3DV4           | 7321 (S-17)           | SPEAG           | 2016/08/17 |
| DAE                    | DAE4             | 508 (S-3)             | SPEAG           | 2016/11/22 |
| Robot                  | RX60L            | F02/5R10A1/A/01 (S-7) | Stäubli         | N/A        |
| Probe Alignment Unit   | LB5/80           | SE UKS 030 AA (S-13)  | SPEAG           | N/A        |
| Network Analyzer       | 8719ET           | MY42000159 (B-53)     | Agilent         | 2016/08/04 |
| Dielectric Probe       | DAK-3.5          | 1124 (S-32)           | SPEAG           | 2016/07/08 |
| 835MHz Dipole          | D835V2           | 4d081 (S-23)          | SPEAG           | 2016/08/09 |
| 1750MHz Dipole         | D1750V2          | 1012 (S-24)           | SPEAG           | 2016/08/10 |
| 1900MHz Dipole         | D1900V2          | 5d112 (S-25)          | SPEAG           | 2016/08/10 |
| 2450MHz Dipole         | D2450V2          | 714 (S-6)             | SPEAG           | 2016/11/09 |
| 5GHz Dipole            | D5GHzV2          | 1111 (S-31)           | SPEAG           | 2016/09/15 |
| Signal Generator       | MG3681A          | 6100216166 (B-3)      | Anritsu         | 2016/08/12 |
| Signal Generator       | E8257D           | MY45140309 (B-39)     | Agilent         | 2016/08/10 |
| RF Power Amplifier     | CGA020M602-2633R | B10840 (A-51)         | R&K             | N/A        |
| Directional Coupler    | 4226-20          | 03736 (D-87)          | Narda Microwave | N/A        |
| Base Station Simulator | MT8820C          | 6200918329 (B-5)      | Anritsu         | 2017/02/22 |
| Power Meter            | E4417A           | GB41290850 (B-51)     | Agilent         | 2016/07/08 |
| Power Sensor           | E9323A           | US40411939 (B-59)     | Agilent         | 2016/07/07 |
| Power Meter            | N1911A           | GB45100291 (B-63)     | Agilent         | 2016/07/16 |
| Power Sensor           | N1921A           | US44510470 (B-64)     | Agilent         | 2016/07/16 |
| Attenuator             | 54A-10           | W5675 (D-28)          | Weinschel       | 2016/08/16 |
| Attenuator             | 2-20             | BY7535 (D-36)         | Weinschel       | 2016/10/12 |

NOTE : The calibration interval of the above test instruments is 12 months.



## 17 Appendix

Refer to separated files for the following appendixes.

**Appendix 1 – System Performance Check Plots**

**Appendix 2 – Highest SAR Test Plots**

**Appendix 3 – Dosimetric E-Field Probe Calibration Data**

**Appendix 4 – System Validation Dipole Calibration Data**