



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS

In accordance with FCC 47 CFR Part 15C (Bluetooth)

COMMERCIAL-IN-CONFIDENCE

FCC ID: APYHRO00243

Document 75935599 Report 17 Issue 1

September 2016



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North, Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS
In accordance with FCC 47 CFR Part 15C (Bluetooth)

Document 75935599 Report 17 Issue 1

September 2016

PREPARED FOR

Sharp Telecommunications of Europe Ltd
Inspired
Easthampstead Road
Bracknell
Berkshire
RG12 1NS

PREPARED BY

Natalie Bennett
Senior Administrator, Project Support

APPROVED BY

Stephen Milliken
Authorised Signatory

DATED

23 September 2016

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

G Lawler

D Ralley





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Product Technical Description 6
1.4	Product Information 6
1.5	Test Conditions 6
1.6	Deviations from the Standard 6
1.7	Modification Record 6
2	TEST DETAILS 7
2.1	AC Line Conducted Emissions 8
2.2	Frequency Hopping Systems - Number of Hopping Channels 11
2.3	Frequency Hopping Systems - 20 dB Bandwidth 14
2.4	Frequency Hopping Systems - Channel Separation 20
2.5	Frequency Hopping Systems - Average Time of Occupancy 24
2.6	Maximum Conducted Output Power 29
2.7	Spurious Radiated Emissions 33
2.8	Restricted Band Edges 46
2.9	Authorised Band Edges 65
3	TEST EQUIPMENT USED 78
3.1	Test Equipment Used 79
3.2	Measurement Uncertainty 83
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 84
4.1	Accreditation, Disclaimers and Copyright 85



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM
(850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN,
SRD(NFC,FeliCa) and GPS
In accordance with FCC 47 CFR Part 15C (Bluetooth)



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show the verification of FCC Testing of the Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS to the requirements of FCC 47 CFR Part 15C.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Sharp Corporation
Serial Number(s)	IMEI 004401115905446 IMEI 004401115905206
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C (2015)
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Order Number	10879
Date	18 July 2016
Start of Test	19 August 2016
Finish of Test	5 September 2016
Name of Engineer(s)	G Lawler D Ralley
Related Document(s)	ANSI C63.10: 2013



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C (Bluetooth) is shown below.

Section	Specification Clause	Test Description	Result	Comments/Base Standard
Bluetooth				
2.1	15.207	AC Line Conducted Emissions	Pass	
2.2	15.247 (a)(1)(iii)	Frequency Hopping Systems - Number of Hopping Channels	Pass	
2.3	15.247 (a)(1)	Frequency Hopping Systems - 20 dB Bandwidth	Pass	
2.4	15.247 (a)(1)	Frequency Hopping Systems - Channel Separation	Pass	
2.5	15.247 (a)(1)(iii)	Frequency Hopping Systems - Average Time of Occupancy	Pass	
2.6	15.247 (b)(3)	Maximum Conducted Output Power	Pass	
2.7	15.247 (d), 15.205 and 15.209	Spurious Radiated Emissions	Pass	
2.8	15.205	Restricted Band Edges	Pass	
2.9	15.247 (d)	Authorised Band Edges	Pass	



Product Service

1.3 PRODUCT TECHNICAL DESCRIPTION

Refer to Model Description APYHRO00243 Rev 4.0 document.

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM (850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN, SRD(NFC,FeliCa) and GPS. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 4.0 V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Sharp Quad-band LTE (B1/ B3/ B17/ B26), Dual-band WCDMA (FDD I / V) , Quad-band GSM
(850/900/1800/1900) & WiMAX2+ (TDD41) multi mode Smart phone with Bluetooth, WLAN,
SRD(NFC,FeliCa) and GPS
In accordance with FCC 47 CFR Part 15C (Bluetooth)



Product Service

2.1 AC LINE CONDUCTED EMISSIONS**2.1.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.207

2.1.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905446 - Modification State 0

2.1.3 Date of Test

5 September 2016

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The test was performed in accordance with ANSI C63.10, Clause 6.2.

Remarks

A mains supply cable of 1 m length was used to supply mains power to the EUT from the LISN.

All final measurements were assessed against the Class B emission limits in FCC 47 CFR Part 15, Clause 15.207.

2.1.6 Environmental Conditions

Ambient Temperature	20.0°C
Relative Humidity	73.0%




2.1.7 Test Results

Bluetooth, Live Line, AC Line Conducted Emissions Result

Frequency (MHz)	QP Level (dBµV)	QP Limit (dBµV)	QP Margin (dBµV)	AV Level (dBµV)	AV Limit (dBµV)	AV Margin (dBµV)
0.150	48.0	66.0	-18.0	27.6	56.0	-28.4
0.187	44.0	64.1	-20.1	27.1	54.1	-27.0
0.853	38.1	56.0	-17.9	26.9	46.0	-19.1
1.069	37.4	56.0	-18.6	26.6	46.0	-19.4
2.018	36.3	56.0	-19.7	24.9	46.0	-21.1
2.265	37.1	56.0	-18.9	25.8	46.0	-20.2
3.226	38.2	56.0	-17.8	24.5	46.0	-21.5
3.432	36.3	56.0	-19.7	23.0	46.0	-23.0

Bluetooth, Live Line, AC Line Conducted Emissions Plot

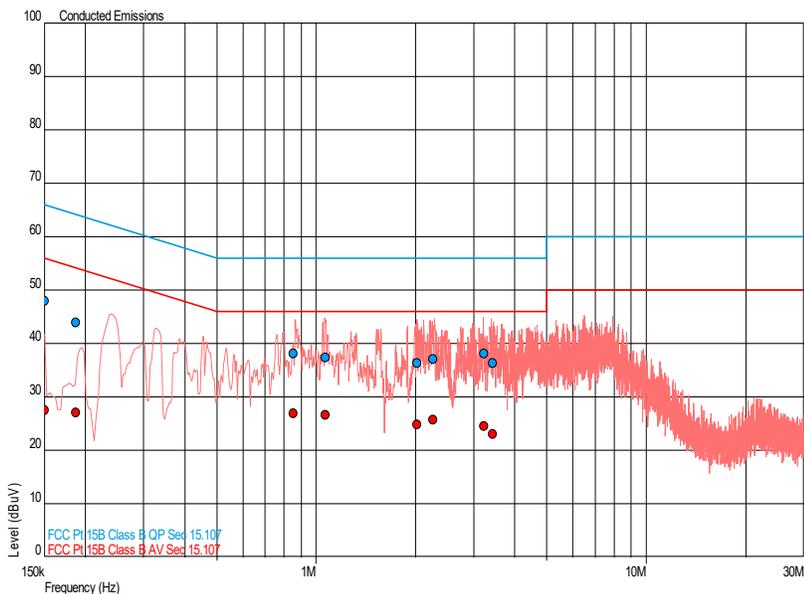




Bluetooth, Neutral Line, AC Line Conducted Emissions Result

Frequency (MHz)	QP Level (dBμV)	QP Limit (dBμV)	QP Margin (dBμV)	AV Level (dBμV)	AV Limit (dBμV)	AV Margin (dBμV)
0.150	46.4	66.0	-19.6	25.7	56.0	-30.3
0.187	43.4	64.2	-20.8	24.9	54.2	-29.3
0.237	37.8	62.2	-24.4	21.0	52.2	-31.2
0.527	31.2	56.0	-24.8	19.5	46.0	-26.5
0.698	29.7	56.0	-26.3	19.3	46.0	-26.7
2.135	29.0	56.0	-27.0	19.3	46.0	-26.7
4.414	26.8	56.0	-29.2	15.9	46.0	-30.1

Bluetooth, Neutral Line, AC Line Conducted Emissions Plot

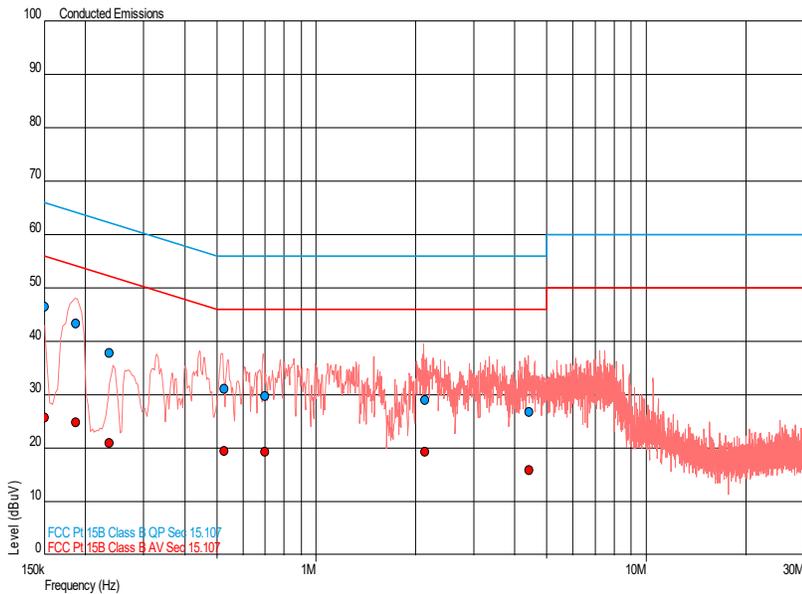

FCC 47 CFR Part 15, Limit Clause 15.207

Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-Peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50

*Decreases with the logarithm of the frequency.



Product Service

2.2 FREQUENCY HOPPING SYSTEMS - NUMBER OF HOPPING CHANNELS

2.2.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)(iii)

2.2.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905206 - Modification State 0

2.2.3 Date of Test

22 August 2016

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 7.8.3

2.2.6 Environmental Conditions

Ambient Temperature	20.9°C
Relative Humidity	68.8%




Product Service

2.2.7 Test Results

Bluetooth, Number of Hopping Channels Results

Number of Hopping Channels: 79


Bluetooth, Segment 1, Number of Hopping Channels Plot

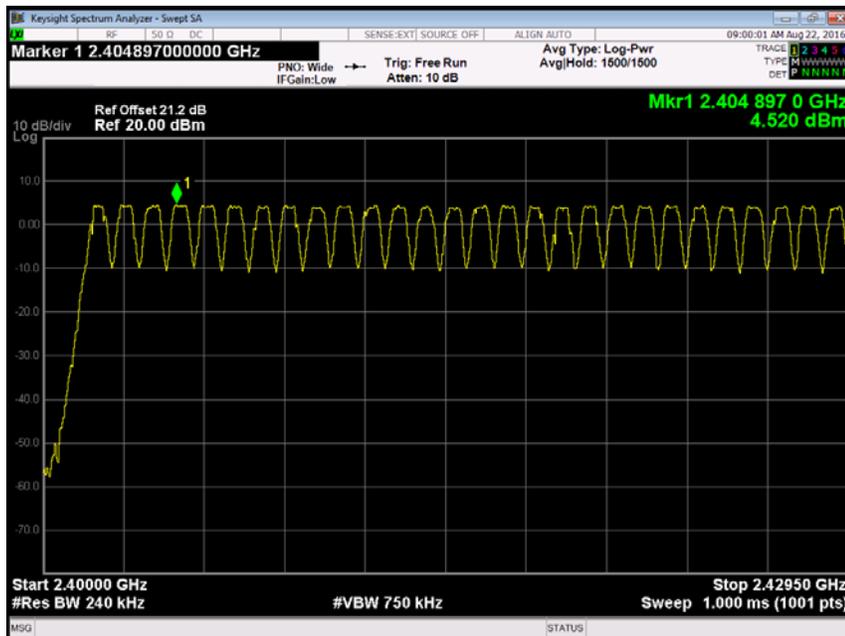




Product Service

Bluetooth, Segment 2, Number of Hopping Channels Plot

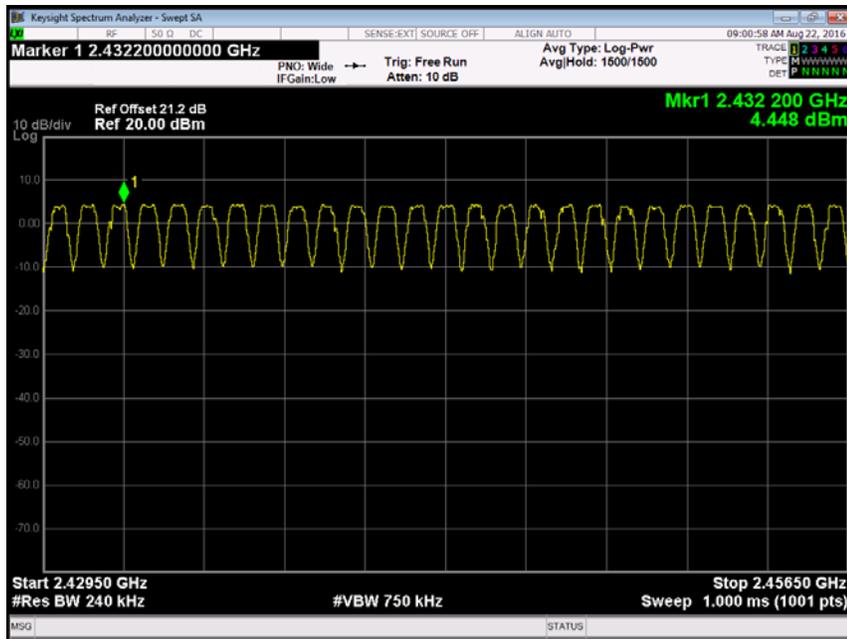

Bluetooth, Segment 3, Number of Hopping Channels Plot

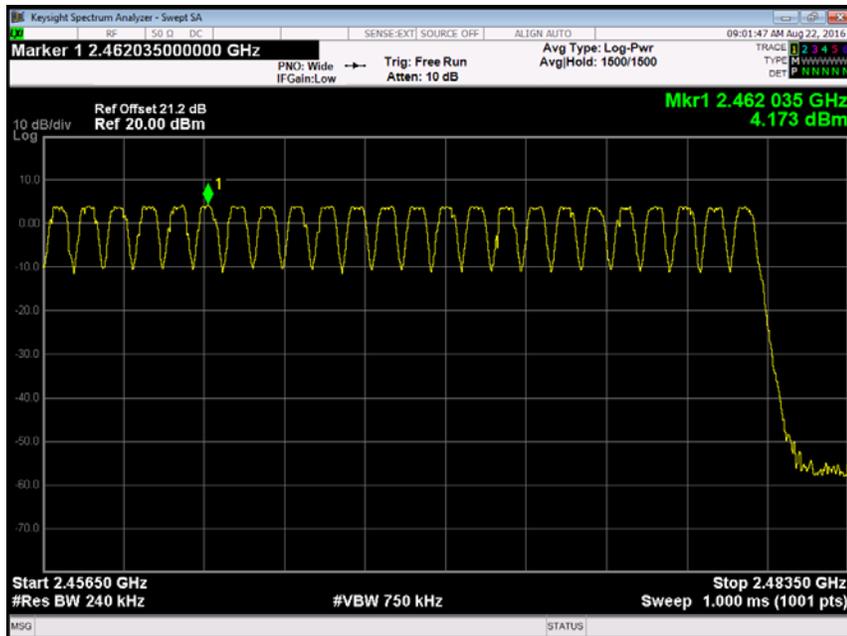

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

≥ 15 channels



Product Service

2.3 FREQUENCY HOPPING SYSTEMS - 20 dB BANDWIDTH

2.3.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)

2.3.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905206 - Modification State 0

2.3.3 Date of Test

19 August 2016

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 6.9.2.

2.3.6 Environmental Conditions

Ambient Temperature	24.7°C
Relative Humidity	59.8%



Product Service


2.3.7 Test Results

4.0 V DC Supply

Bluetooth, 20 dB Bandwidth Results

Modulation	2402 MHz	2441 MHz	2480 MHz
	kHz	kHz	kHz
GFSK	970.44	972.55	972.10
pi/4 DQPSK	1275.11	1275.88	1276.56
8-DPSK	1265.92	1265.82	1265.87


Bluetooth, 2402 MHz, GFSK, 20 dB Bandwidth Plot

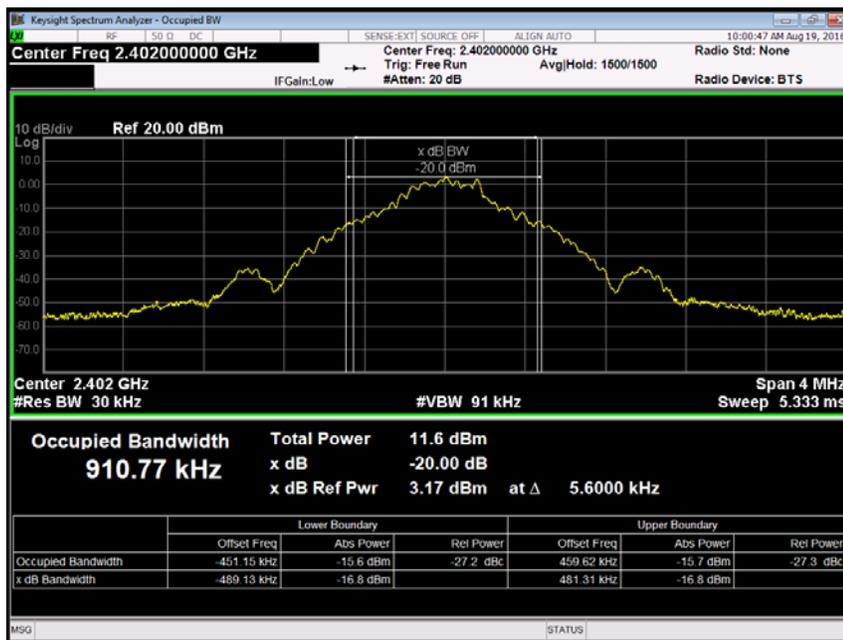




Product Service

Bluetooth, 2402 MHz, pi/4 DQPSK, 20 dB Bandwidth Plot

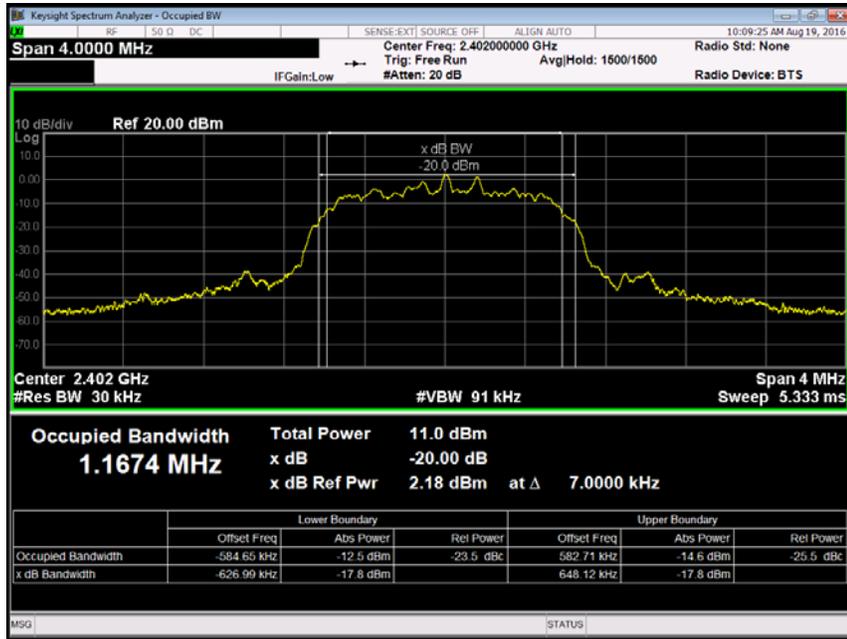


Bluetooth, 2402 MHz, 8-DPSK, 20 dB Bandwidth Plot

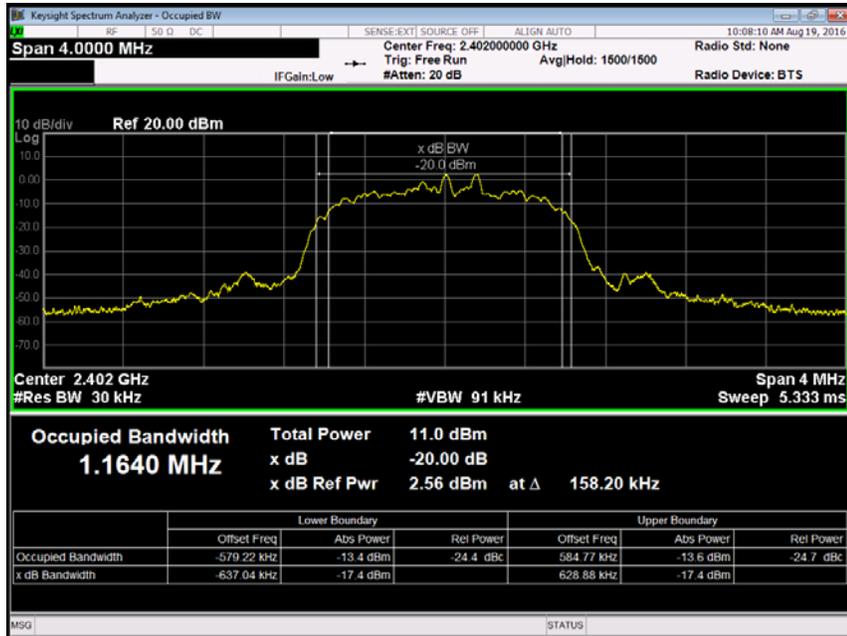




Product Service

Bluetooth, 2441 MHz, GFSK, 20 dB Bandwidth Plot

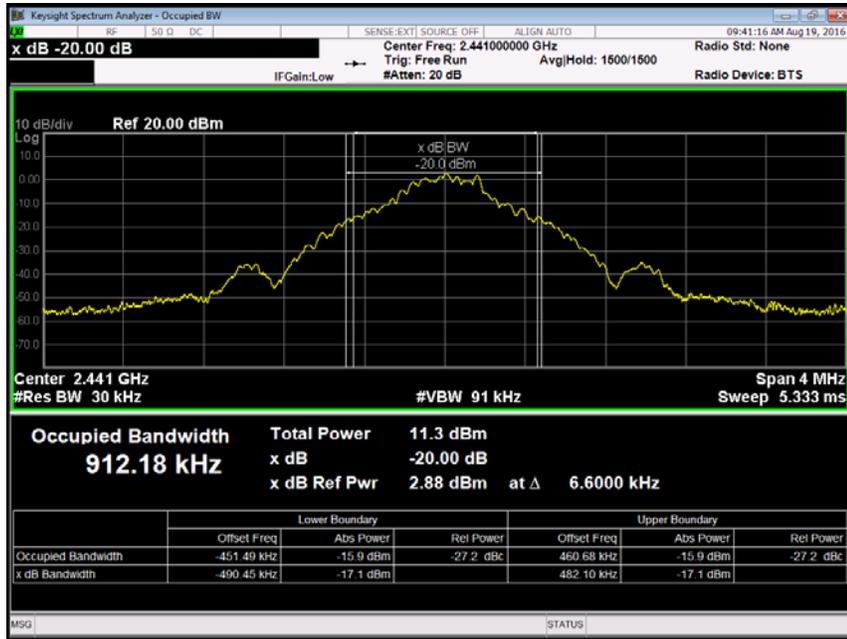


Bluetooth, 2441 MHz, pi/4 DQPSK, 20 dB Bandwidth Plot

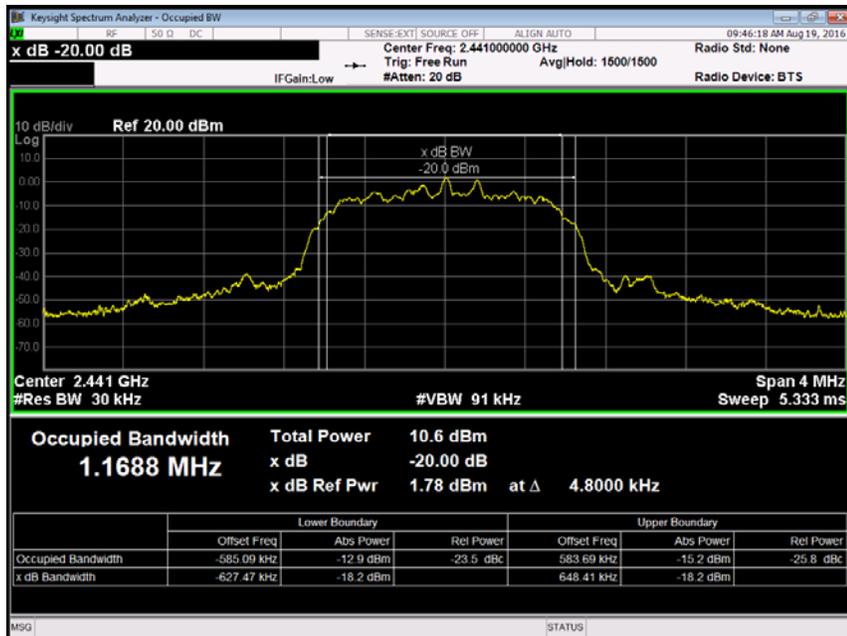




Bluetooth, 2441 MHz, 8-DPSK, 20 dB Bandwidth Plot

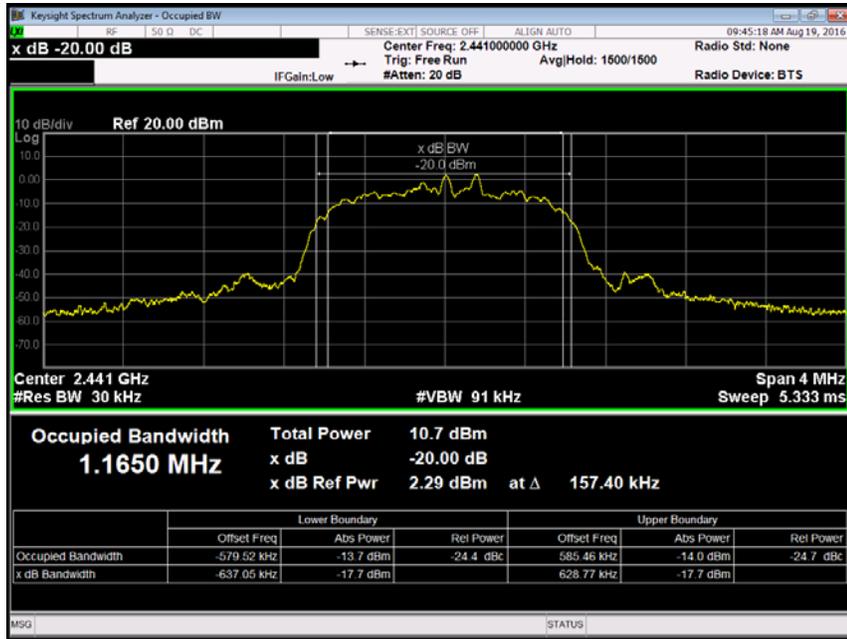


Bluetooth, 2480 MHz, GFSK, 20 dB Bandwidth Plot

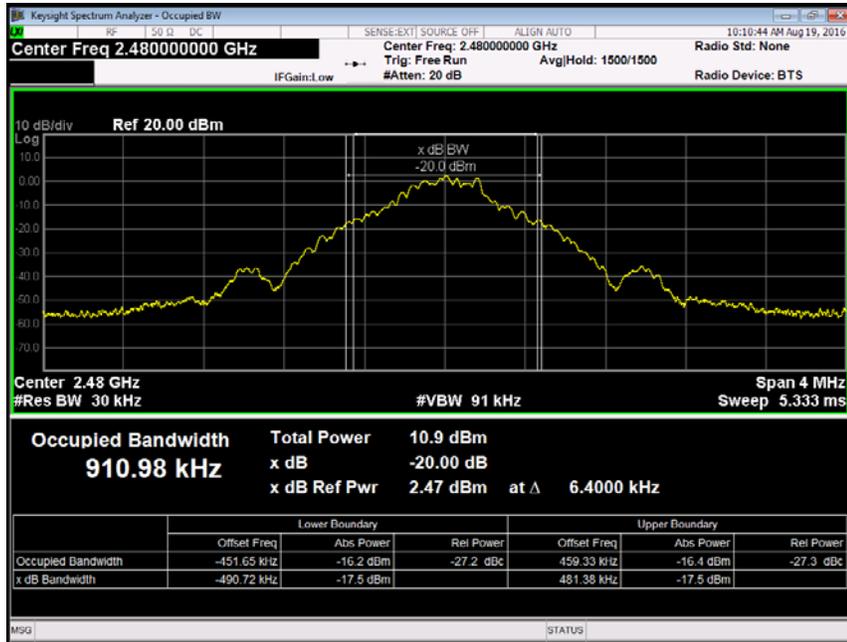




Product Service

Bluetooth, 2480 MHz, pi/4 DQPSK, 20 dB Bandwidth Plot

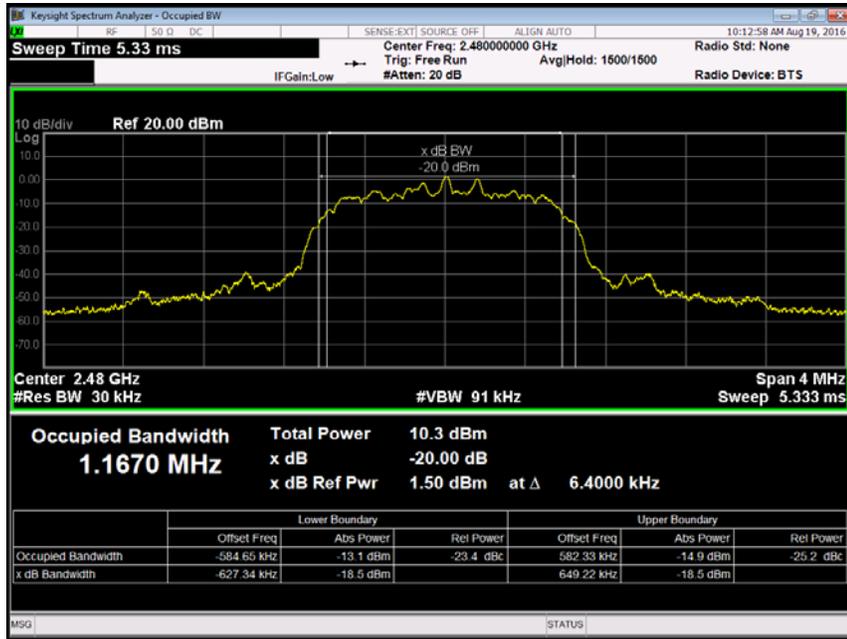

Bluetooth, 2480 MHz, 8-DPSK, 20 dB Bandwidth Plot

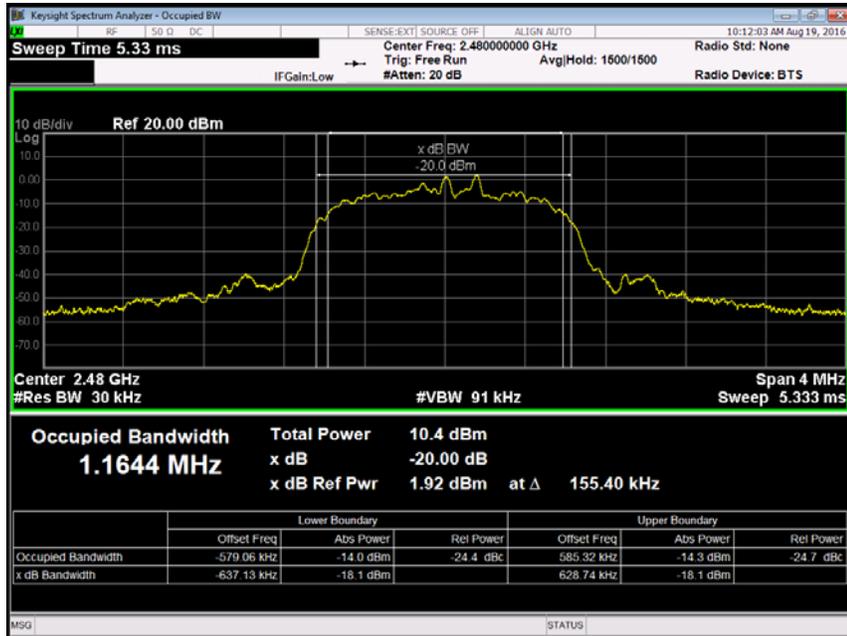

FCC 47 CFR Part 15, Limit Clause

None specified.



Product Service

2.4 FREQUENCY HOPPING SYSTEMS - CHANNEL SEPARATION

2.4.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)

2.4.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905206 - Modification State 0

2.4.3 Date of Test

19 August 2016

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

This test was performed in accordance with ANSI C63.10, clause 7.8.2.

2.4.6 Environmental Conditions

Ambient Temperature	22.6°C
Relative Humidity	67.9%



Product Service

2.4.7 Test Results

4.0 V DC Supply

Bluetooth, Channel Separation Results

Modulation	Frequency Hopping
GFSK	MHz
pi/4 DQPSK	1.00185
8-DPSK	1.00350
	0.84735

Bluetooth, GFSK, Channel Separation Plot






Product Service

Bluetooth, pi/4 DQPSK, Channel Separation Plot



Bluetooth, 8-DPSK, Channel Separation Plot

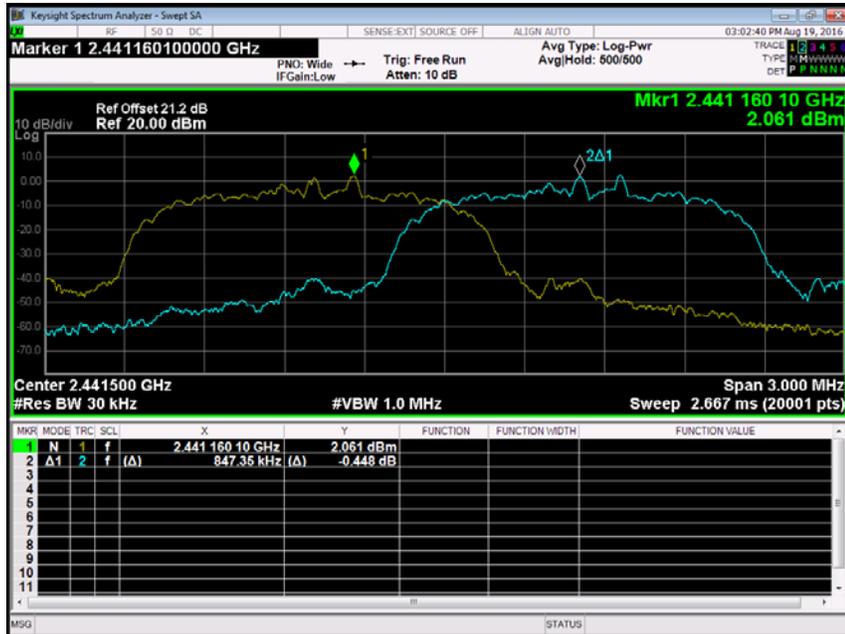



Product Service

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125 W.



Product Service

2.5 FREQUENCY HOPPING SYSTEMS - AVERAGE TIME OF OCCUPANCY**2.5.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(1)(iii)

2.5.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905206 - Modification State 0

2.5.3 Date of Test

23 August 2016

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 7.8.4.

2.5.6 Environmental Conditions

Ambient Temperature	21.0°C
Relative Humidity	65.1%




Product Service

2.5.7 Test Results

Bluetooth, Average Time of Occupancy Results

Packet Type	Dwell Time (ms)	Number of Transmissions	Average Occupancy Time (ms)
DH1	0.396	320	126.82
DH3	1.653	149	246.30
DH5	2.902	111	322.12


Bluetooth, DH1, Average Time of Occupancy Plot

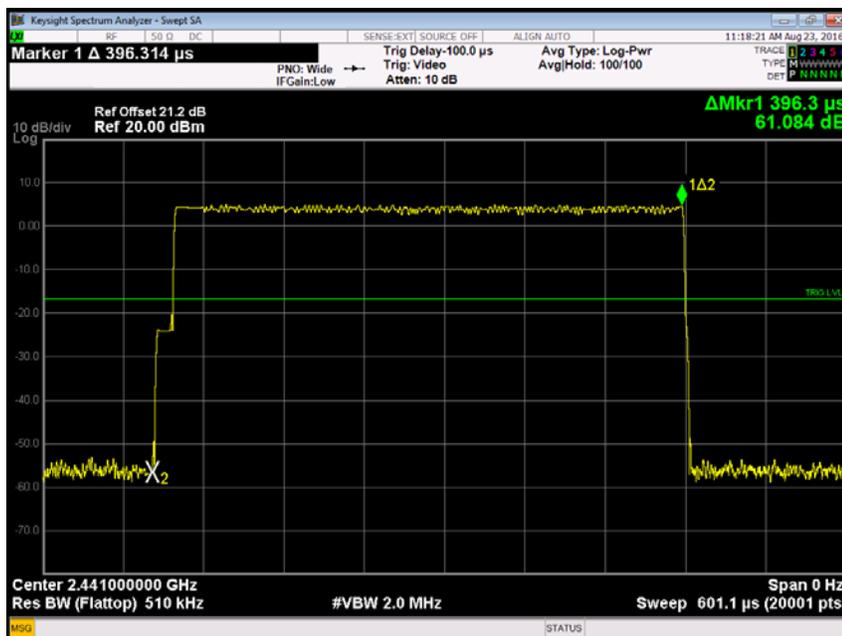




Product Service

Bluetooth, DH1, Total Average Time of Occupancy Plot

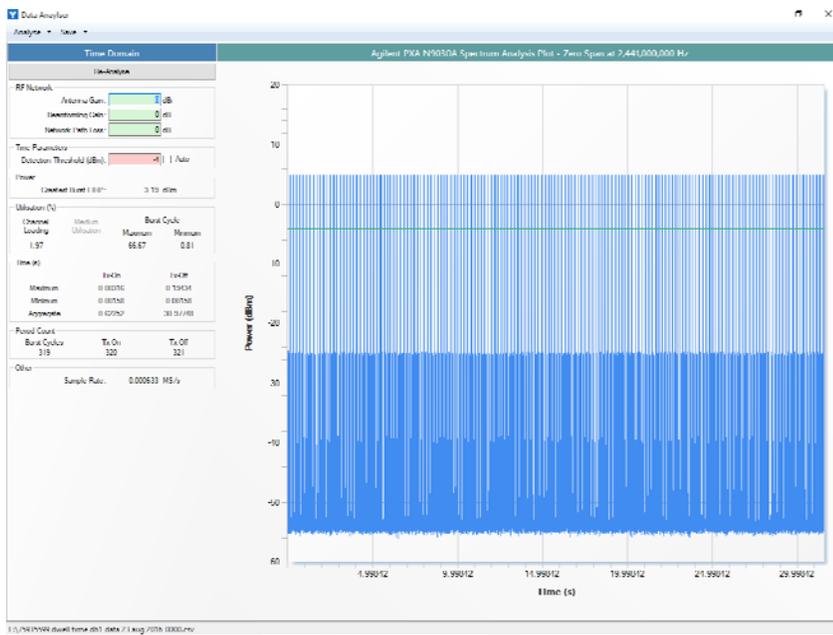


Bluetooth, DH3, Average Time of Occupancy Plot

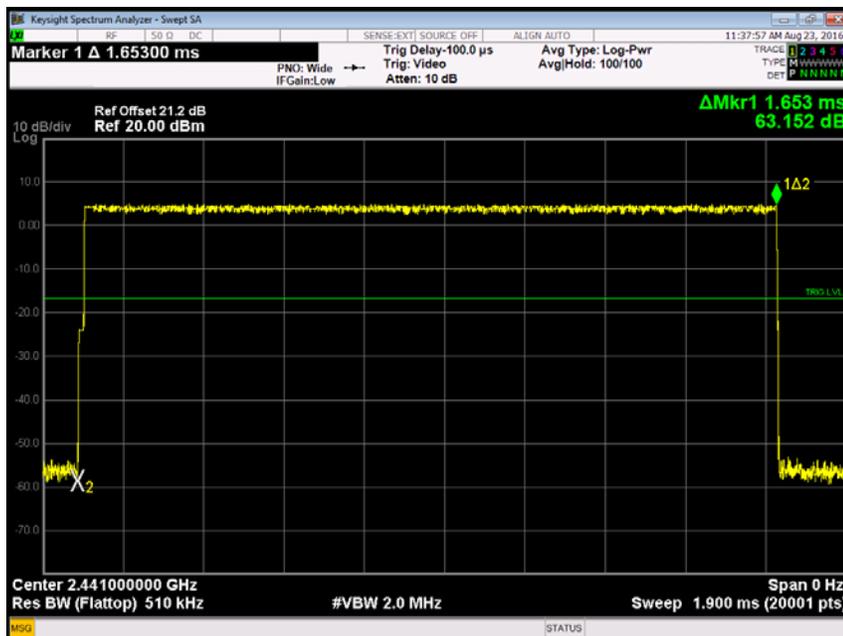




Product Service

Bluetooth, DH3, Total Average Time of Occupancy Plot

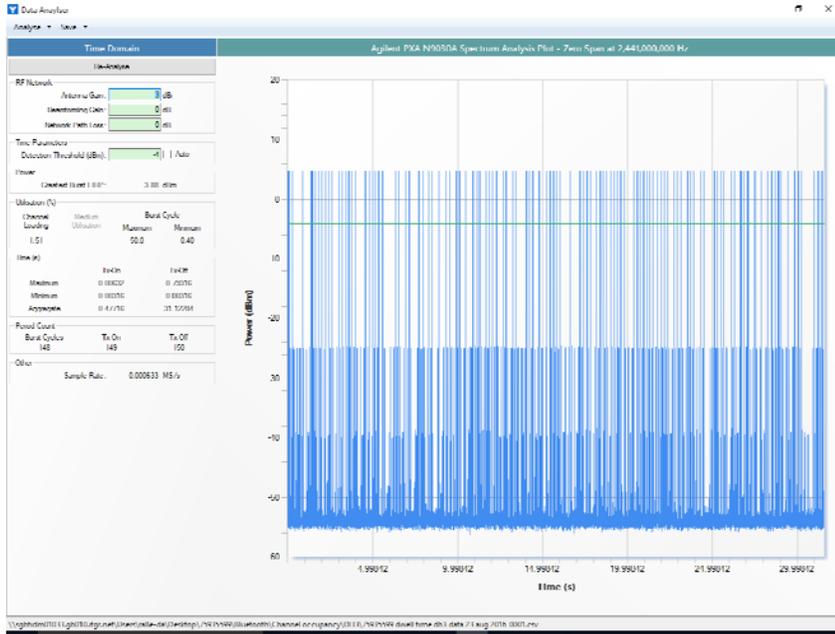


Bluetooth, DH5, Average Time of Occupancy Plot

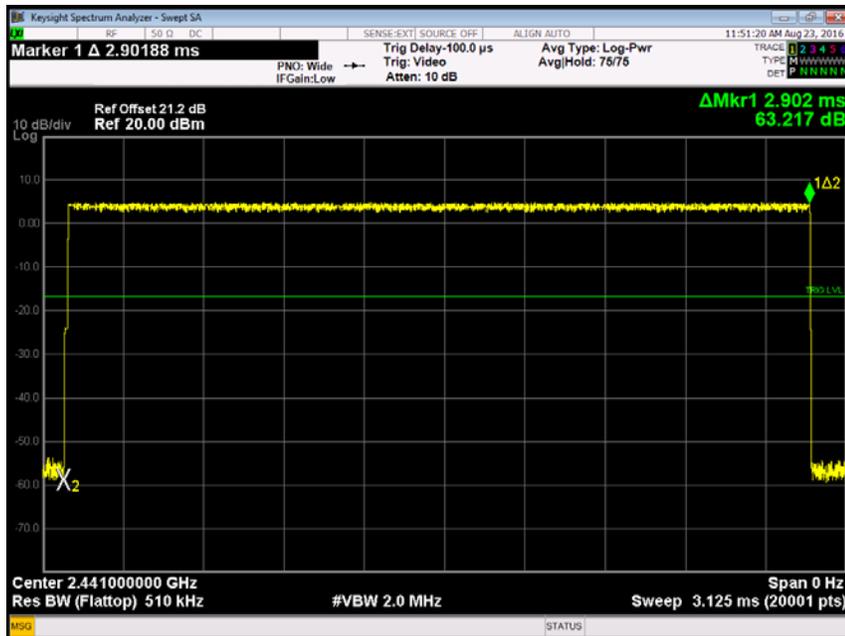



Product Service

Bluetooth, DH5, Total Average Time of Occupancy Plot

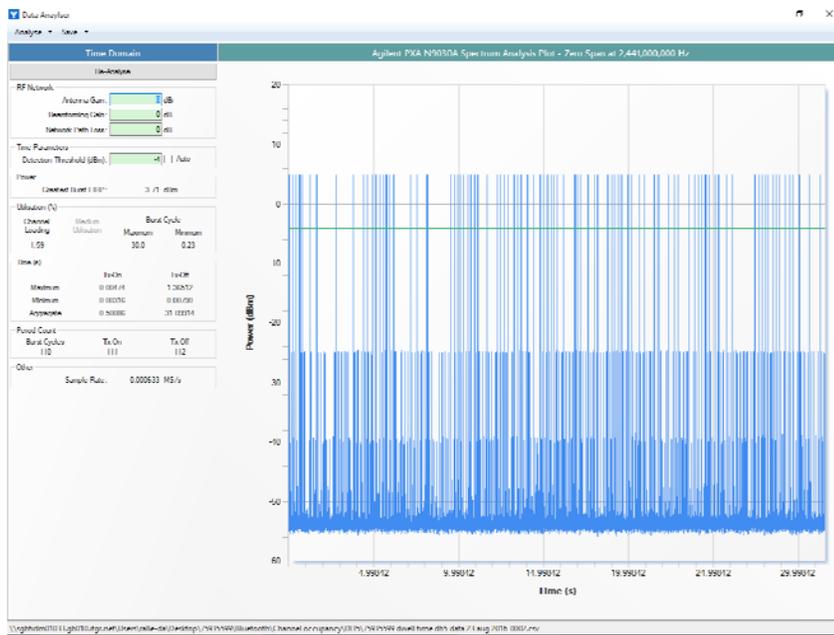

FCC 47 CFR Part 15, Limit Clause 15.247 (a)(1)(iii)

Frequency hopping systems operating in the band 2400-2483.5 MHz shall use at least 15 hopping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Transmissions on particular hopping frequencies may be avoided or suppressed provided that a minimum of 15 hopping channels are used.



Product Service

2.6 MAXIMUM CONDUCTED OUTPUT POWER**2.6.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (b)(3)

2.6.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905206 - Modification State 0

2.6.3 Date of Test

5 September 2016

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Procedure

The test was performed in accordance with ANSI C63.10, clause 11.9.1.1.

2.6.6 Environmental Conditions

Ambient Temperature	24.6°C
Relative Humidity	70.5%



Product Service


2.6.7 Test Results

4.0 V DC Supply

Bluetooth, DH5, Maximum Conducted Output Power Results

2402 MHz		2441 MHz		2480 MHz	
dBm	mW	dBm	mW	dBm	mW
4.875	3.073	4.561	2.858	4.092	2.566


Bluetooth, 2402 MHz, DH5, Maximum Conducted Output Power Plot

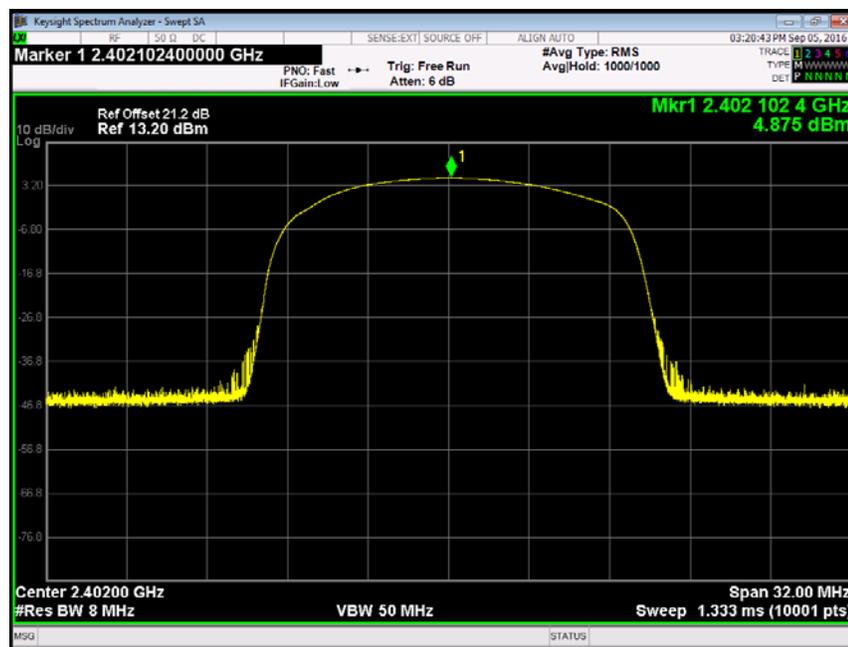




Product Service

Bluetooth, 2441 MHz, DH5, Maximum Conducted Output Power Plot

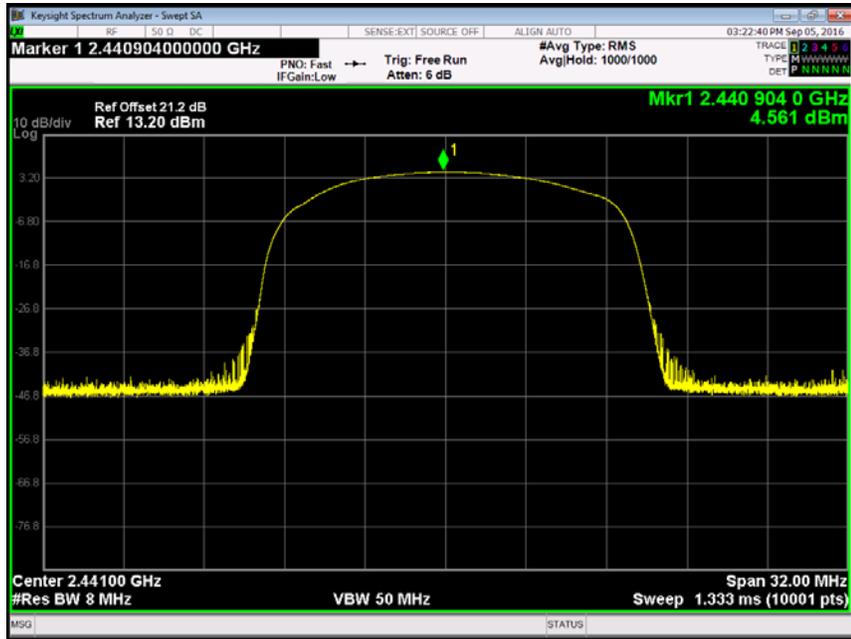

Bluetooth, 2480 MHz, DH5, Maximum Conducted Output Power Plot

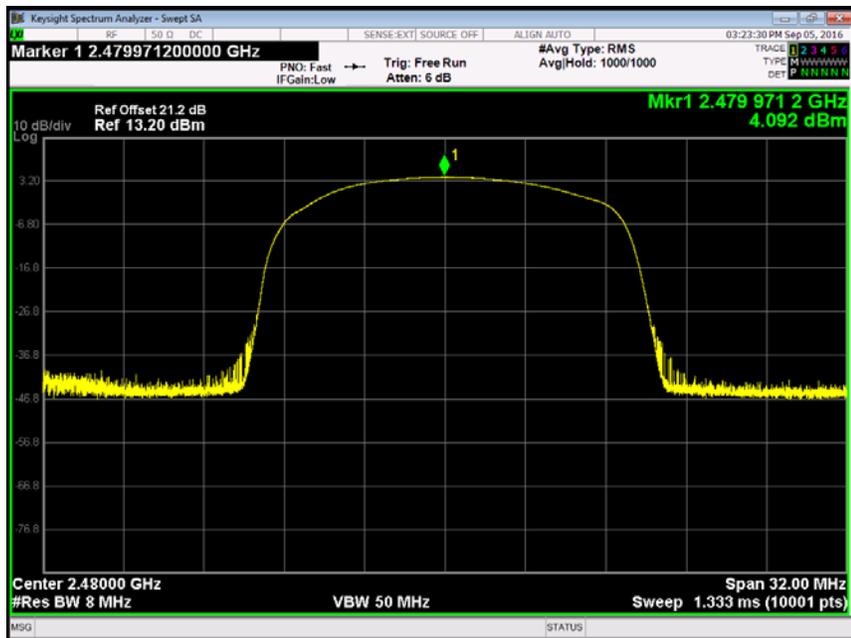



Product Service

FCC 47 CFR Part 15, Limit Clause 15.247 (b)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725-5850MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.



Product Service

2.7 SPURIOUS RADIATED EMISSIONS

2.7.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d), 15.205 and 15.209

2.7.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905446 - Modification State 0

2.7.3 Date of Test

24 August 2016, 28 August 2016, 30 August 2016 & 4 September 2016

2.7.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.5 Test Procedure

Testing was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6

Remarks

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.3
Final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2.

Only the more stringent limit lines as per 15.209 have been shown on the plots. The peak power measured in a 100 kHz bandwidth is shown in section 2.9.

2.7.6 Environmental Conditions

Ambient Temperature	19.6 - 20.9°C
Relative Humidity	54.0 - 69.0%



Product Service


2.7.7 Test Results

4.0 V DC Supply

Bluetooth, 2402 MHz, DH5, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	QP Level (dB μ V/m)	QP Margin (dB μ V/m)	QP Level (μ V/m)	QP Margin (μ V/m)	Angle (°)	Height (m)	Polarisation
31.116	30.1	-9.9	32.0	-68.0	180	1.00	Vertical
32.183	29.8	-10.2	30.9	-69.1	270	1.00	Horizontal
32.619	29.7	-10.3	30.5	-69.5	270	1.00	Horizontal
815.448	33.2	-12.8	45.7	-154.3	270	1.00	Horizontal
891.580	33.9	-12.1	49.5	-150.5	270	1.00	Horizontal
944.235	33.8	-12.2	49.0	-151.0	270	1.00	Horizontal

Bluetooth, 2402 MHz, DH5, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

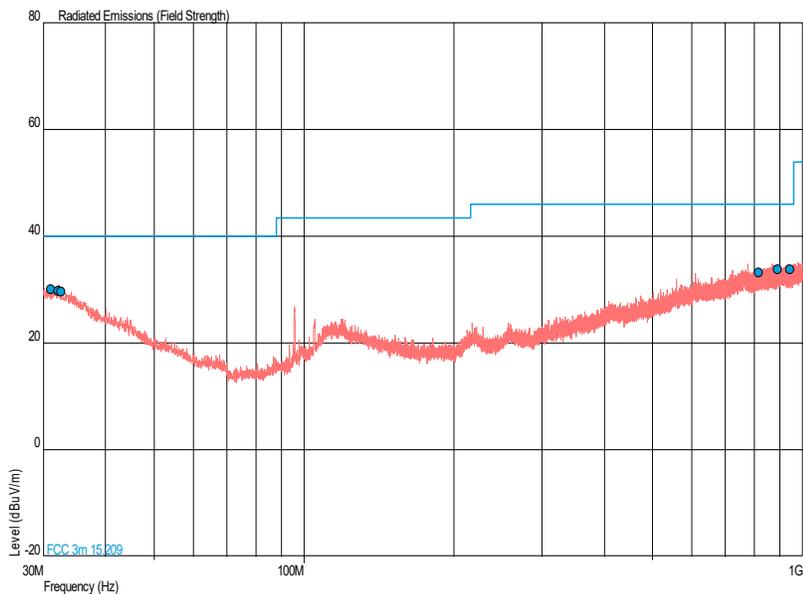




Product Service

Bluetooth, 2402 MHz, DH5, 1 GHz to 25 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (µV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
*							

*No emissions were detected within 10 dB of the limit.

Bluetooth, 2402 MHz, DH5, 1 GHz to 3 GHz, Spurious Radiated Emissions Plot

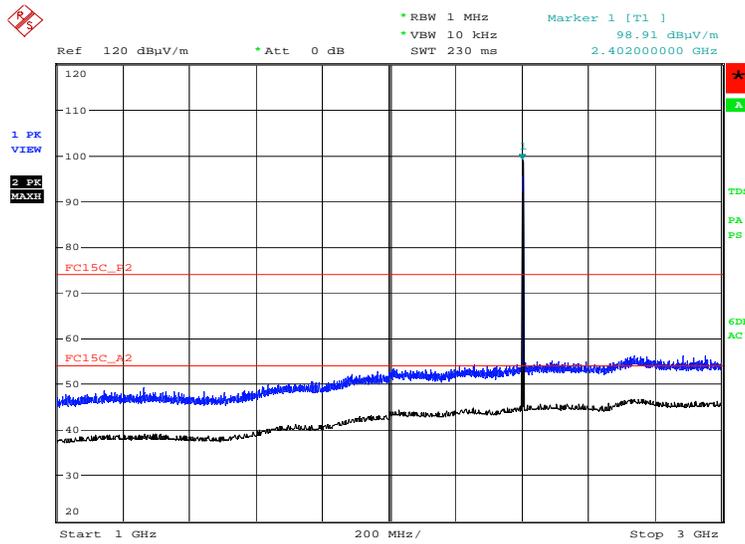


Date: 24.AUG.2016 22:13:30




Product Service

Bluetooth, 2402 MHz, DH5, 3 GHz to 8 GHz, Spurious Radiated Emissions Plot

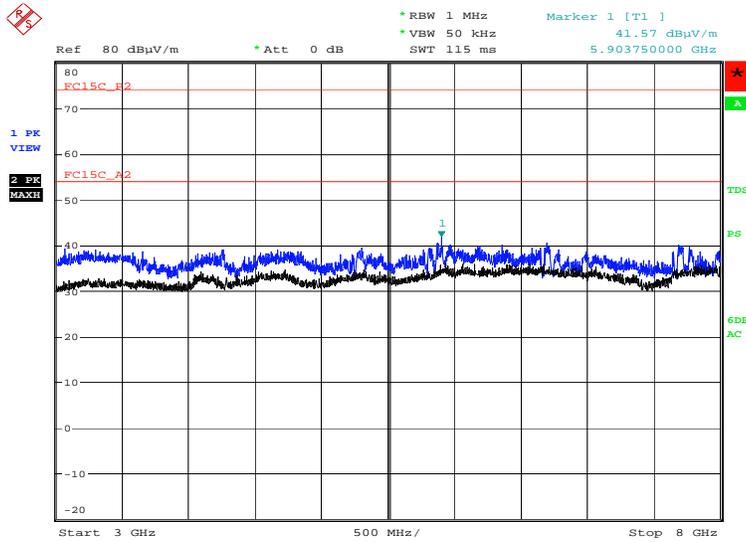

Date: 28.AUG.2016 11:46:53

Bluetooth, 2402 MHz, DH5, 8 GHz to 18 GHz, Spurious Radiated Emissions Plot

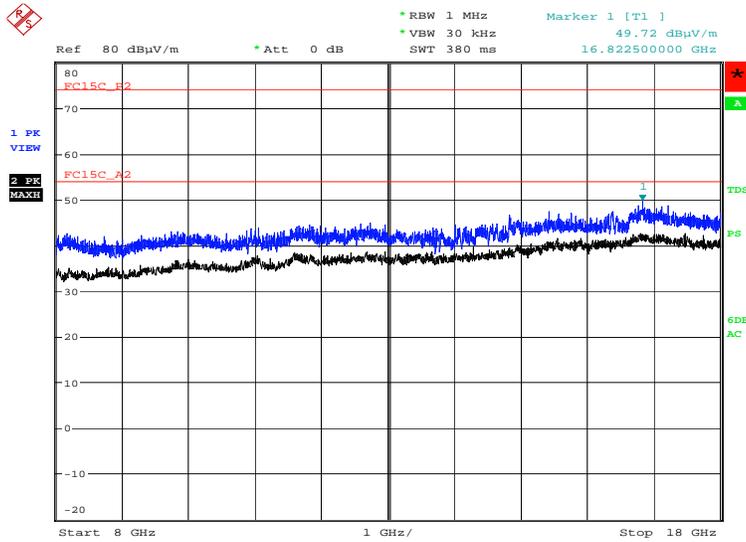


Date: 28.AUG.2016 15:53:36



Product Service

Bluetooth, 2402 MHz, DH5, 18 GHz to 25 GHz, Spurious Radiated Emissions Plot

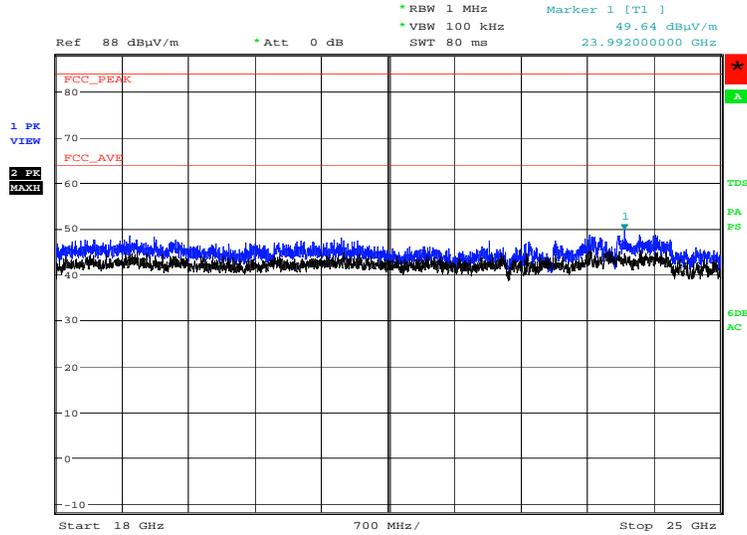

Date: 4.SEP.2016 10:38:16




Product Service

Bluetooth, 2441 MHz, DH5, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	QP Level (dB μ V/m)	QP Margin (dB μ V/m)	QP Level (μ V/m)	QP Margin (μ V/m)	Angle (°)	Height (m)	Polarisation
30.922	30.1	-9.9	32.0	-68.0	180	1.00	Vertical
31.649	30.0	-10.0	31.6	-68.4	0	1.00	Vertical
32.037	29.9	-10.1	31.3	-68.7	90	1.00	Vertical
780.732	32.9	-13.1	44.2	-155.8	180	1.00	Vertical
845.576	33.3	-12.7	46.2	-153.8	180	1.00	Vertical
968.625	34.5	-19.5	53.1	-447.9	180	1.00	Vertical

Bluetooth, 2441 MHz, DH5, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

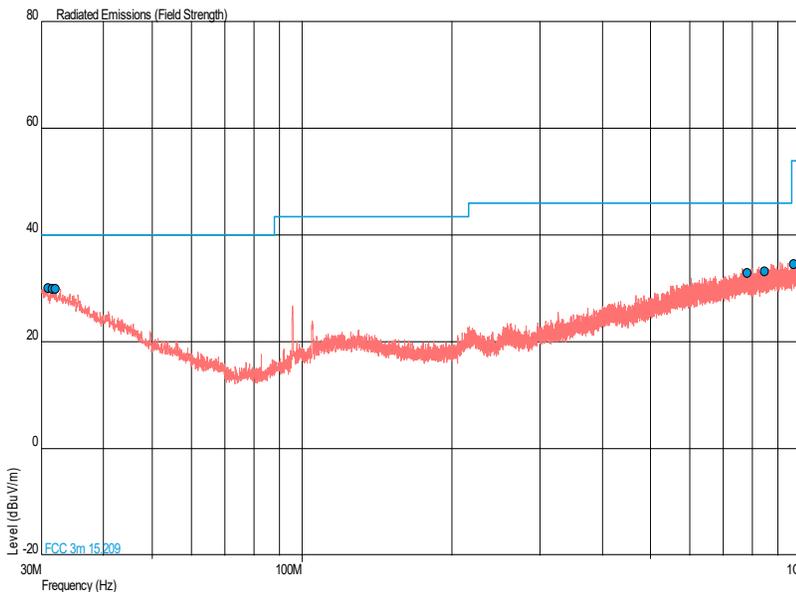




Product Service

Bluetooth, 2441 MHz, DH5, 1 GHz to 25 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (µV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
*							

*No emissions were detected within 10 dB of the limit.

Bluetooth, 2441 MHz, DH5, 1 GHz to 3 GHz, Spurious Radiated Emissions Plot

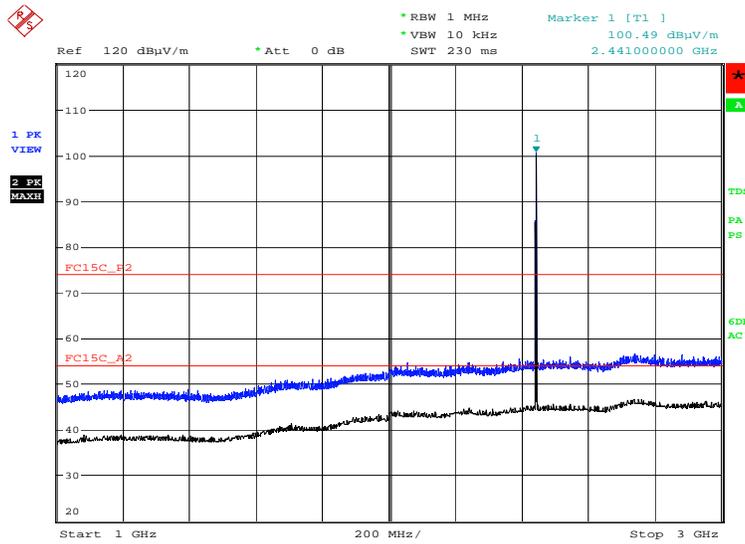


Date: 24.AUG.2016 22:28:02




Product Service

Bluetooth, 2441 MHz, DH5, 3 GHz to 8 GHz, Spurious Radiated Emissions Plot

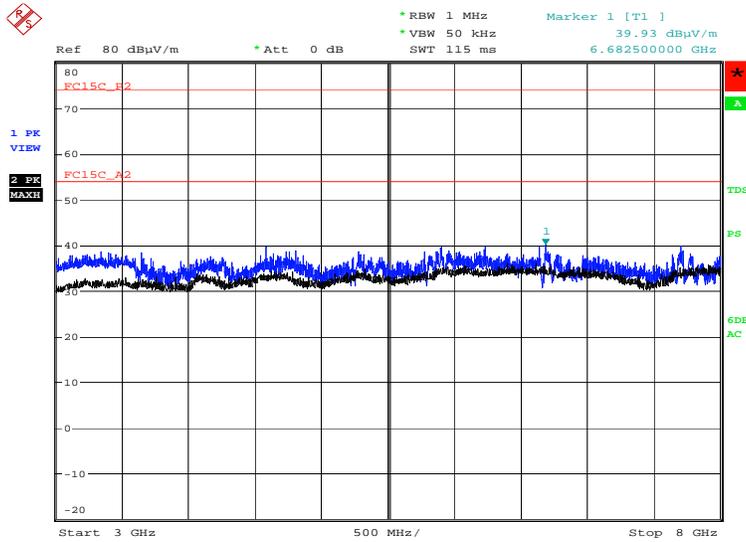

Date: 28.AUG.2016 11:53:12

Bluetooth, 2441 MHz, DH5, 8 GHz to 18 GHz, Spurious Radiated Emissions Plot

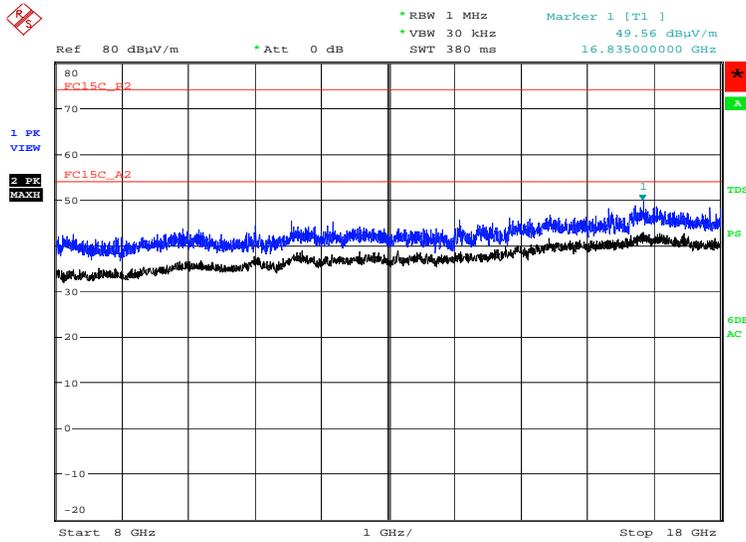


Date: 28.AUG.2016 16:03:39



Product Service

Bluetooth, 2441 MHz, DH5, 18 GHz to 25 GHz, Spurious Radiated Emissions Plot

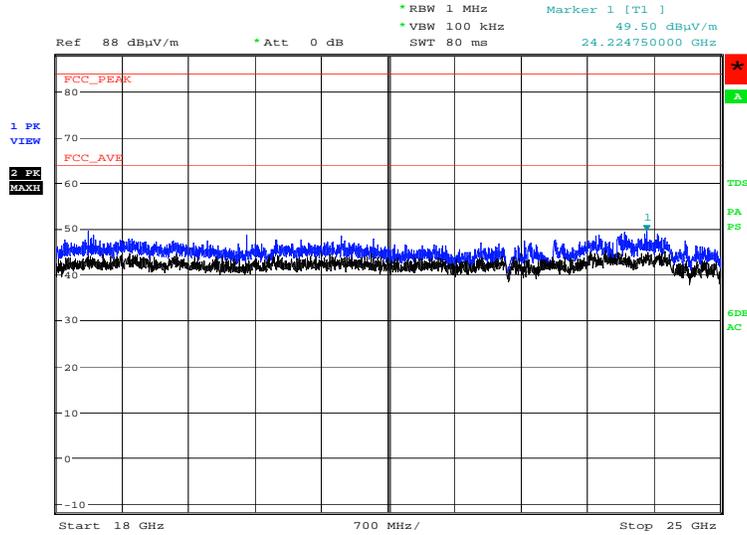

Date: 4.SEP.2016 10:41:28




Product Service

Bluetooth, 2480 MHz, DH5, 30 MHz to 1 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	QP Level (dBµV/m)	QP Margin (dBµV/m)	QP Level (µV/m)	QP Margin (µV/m)	Angle (°)	Height (m)	Polarisation
30.049	30.3	-9.7	32.7	-67.3	270	1.00	Vertical
30.194	30.4	-9.6	33.1	-66.9	270	1.00	Vertical
33.444	29.7	-10.3	30.5	-69.5	270	1.00	Vertical
752.747	33.0	-13.0	44.7	-155.3	180	1.00	Vertical
812.645	33.2	-12.8	45.7	-154.3	90	1.00	Vertical
944.235	33.8	-12.2	49.0	-151.0	90	1.00	Vertical

Bluetooth, 2480 MHz, DH5, 30 MHz to 1 GHz, Spurious Radiated Emissions Plot

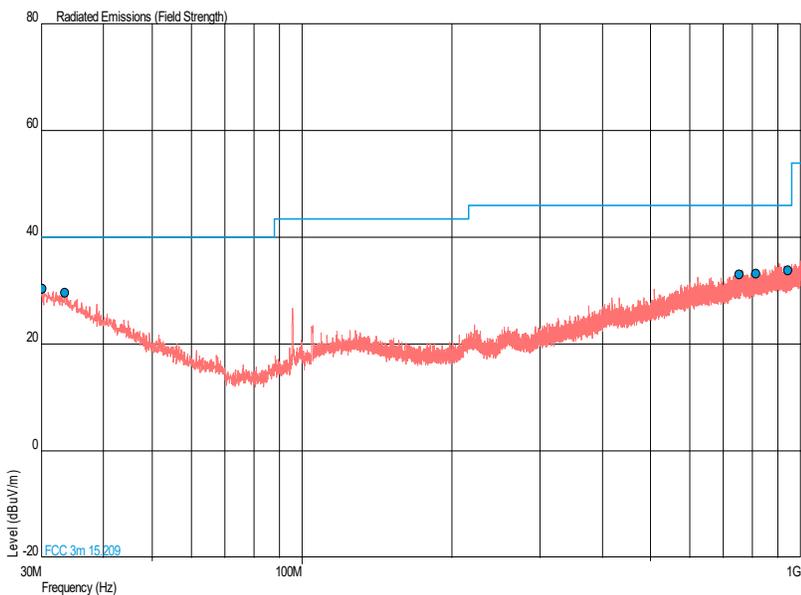




Product Service

Bluetooth, 2480 MHz, DH5, 1 GHz to 25 GHz, Spurious Radiated Emissions Results

Frequency (MHz)	Final Peak (dBµV/m)	Final Average (dBµV/m)	Final Peak (µV/m)	Final Average (µV/m)	Angle (°)	Height (m)	Polarisation
*							

*No emissions were detected within 10 dB of the limit.


Bluetooth, 2480 MHz, DH5, 1 GHz to 3 GHz, Spurious Radiated Emissions Plot

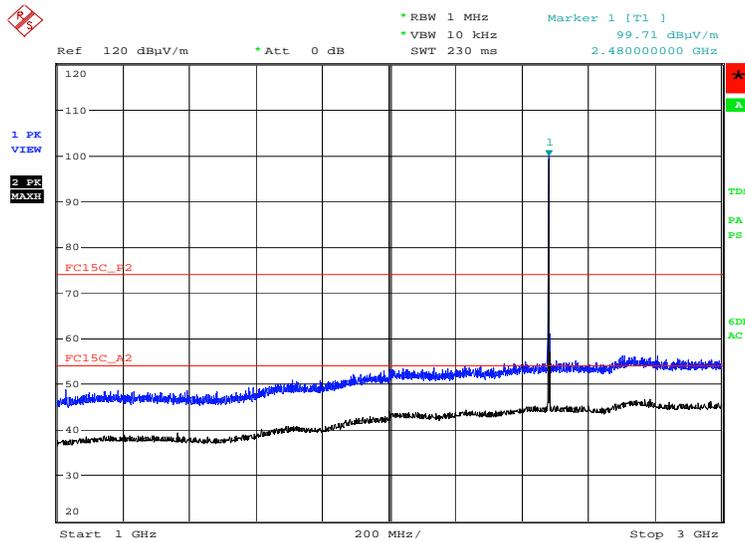

Date: 24.AUG.2016 22:31:51




Bluetooth, 2480 MHz, DH5, 3 GHz to 8 GHz, Spurious Radiated Emissions Plot

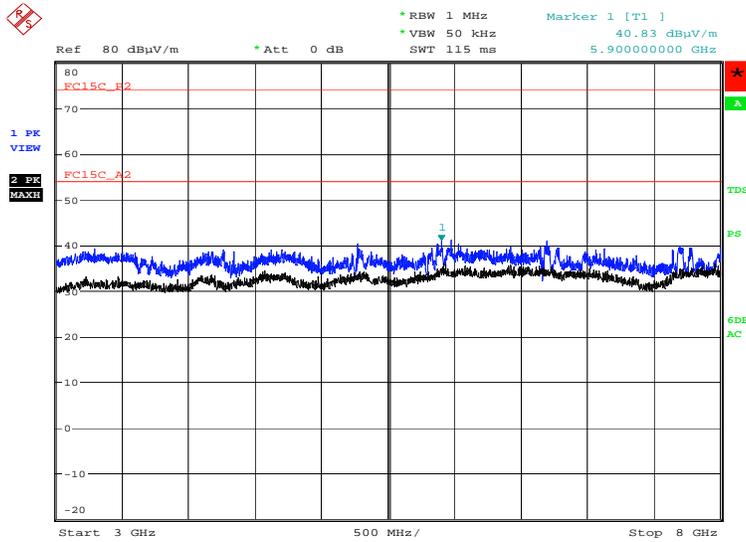

Date: 28.AUG.2016 11:59:41


Bluetooth, 2480 MHz, DH5, 8 GHz to 18 GHz, Spurious Radiated Emissions Plot

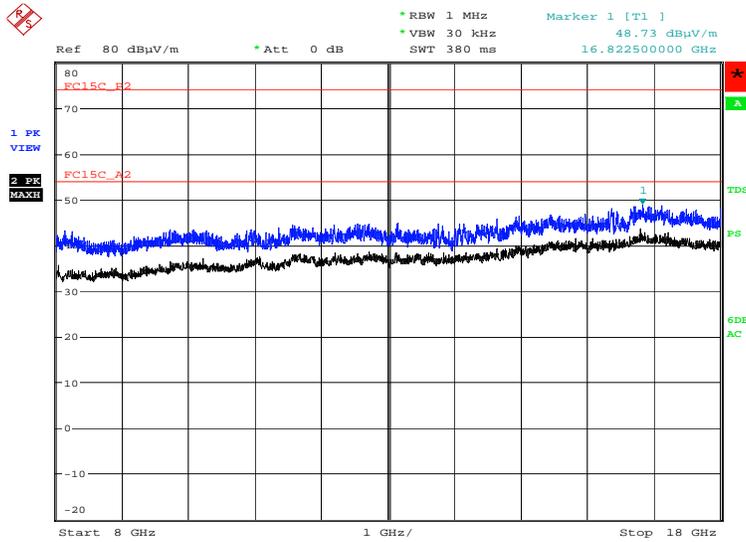

Date: 28.AUG.2016 16:11:49



Bluetooth, 2480 MHz, DH5, 18 GHz to 25 GHz, Spurious Radiated Emissions Plot

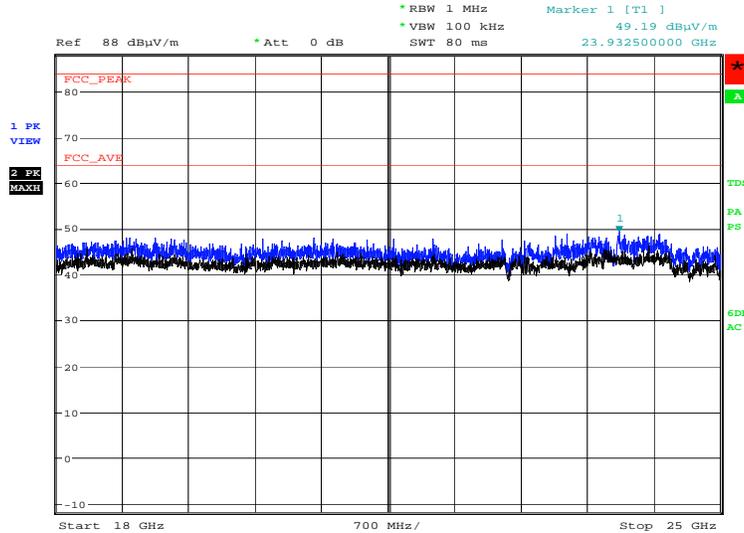

Date: 4.SEP.2016 10:47:54

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

Emissions outside the restricted bands shall be at least 20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBμV/m)	Average (dBμV/m)
Restricted Bands of Operation	74	54

FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength			Measurement Distance (m)
	(μV/m)	Average (dBμV/m)	Peak (dBμV/m)	
30-88	100	40.0	60.0	3
88-216	150	43.5	63.5	3
216-960	200	46.0	66.0	3
Above 960	500	54.0	74.0	3



Product Service

2.8 RESTRICTED BAND EDGES**2.8.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.205

2.8.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905446 - Modification State 0

2.8.3 Date of Test

24 August 2016 & 28 August 2016

2.8.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.5 Test Procedure

Testing was performed in accordance with ANSI C63.10, clause 6.10.5

Remarks

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.3.
Final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2.

2.8.6 Environmental Conditions

Ambient Temperature	19.6 - 20.9°C
Relative Humidity	65.0 - 69.0%



Product Service

2.8.7 Test Results


4.0 V DC Supply

Hopping Mode

Bluetooth, GFSK, Restricted Band Edges Results

2402 MHz		2480 MHz	
Measured Frequency 2390 MHz		Measured Frequency 2483.5 MHz	
dBµV/m		dBµV/m	
Final Peak	Final Average	Final Peak	Final Average
61.72	46.28	62.12	46.28

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, GFSK, Final Peak, Restricted Band Edges Plot

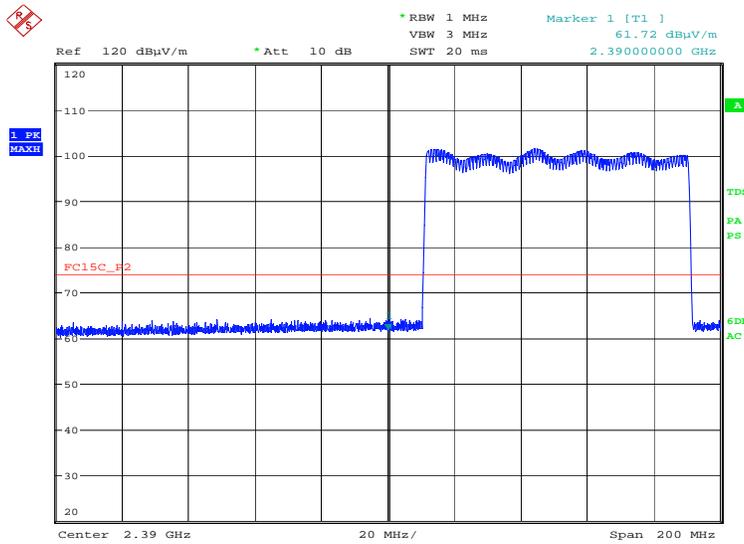


Date: 28.AUG.2016 08:49:04




Product Service

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, GFSK, Final Average, Restricted Band Edges Plot

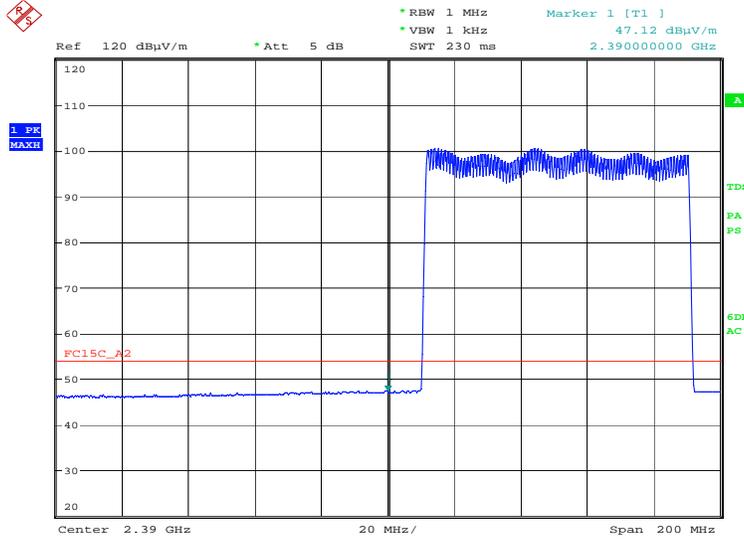

Date: 28.AUG.2016 10:15:26

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, GFSK, Final Peak, Restricted Band Edges Plot

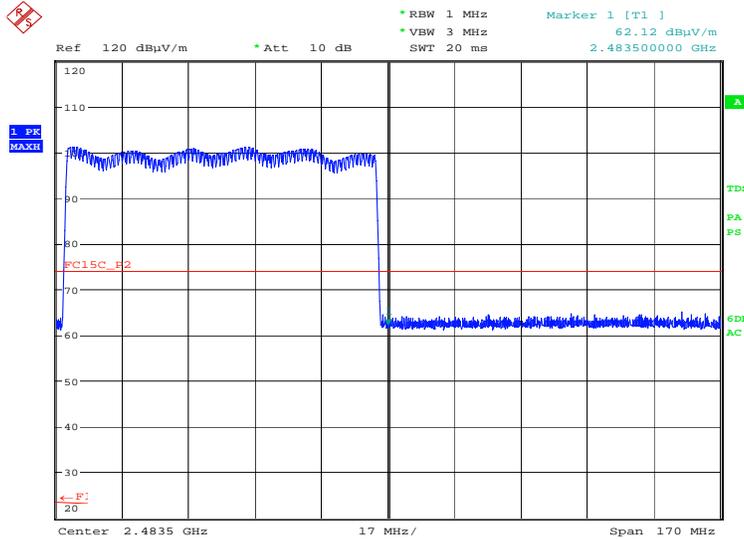


Date: 28.AUG.2016 09:05:56



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, GFSK, Final Average, Restricted Band Edges Plot

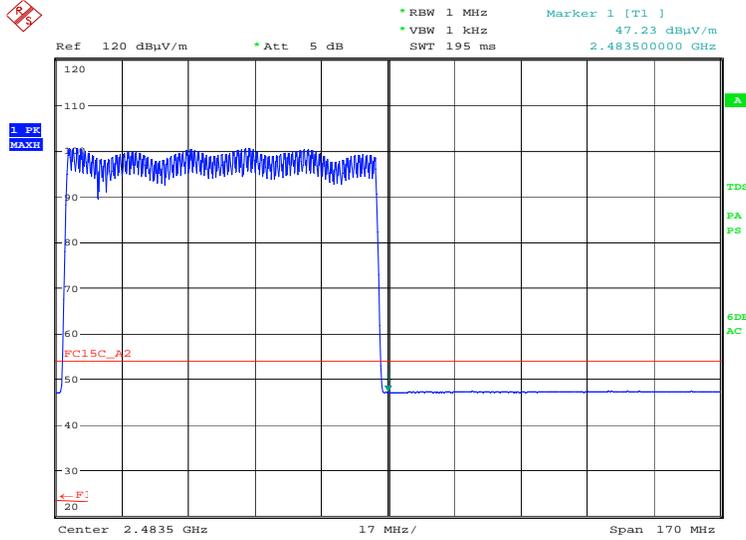

Date: 28.AUG.2016 09:07:56




Product Service

Bluetooth, pi/4 DQPSK, Restricted Band Edges Results

2402 MHz		2480 MHz	
Measured Frequency 2390 MHz		Measured Frequency 2483.5 MHz	
dBµV/m		dBµV/m	
Final Peak	Final Average	Final Peak	Final Average
62.18	46.27	61.80	46.26

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, pi/4 DQPSK, Final Peak, Restricted Band Edges Plot

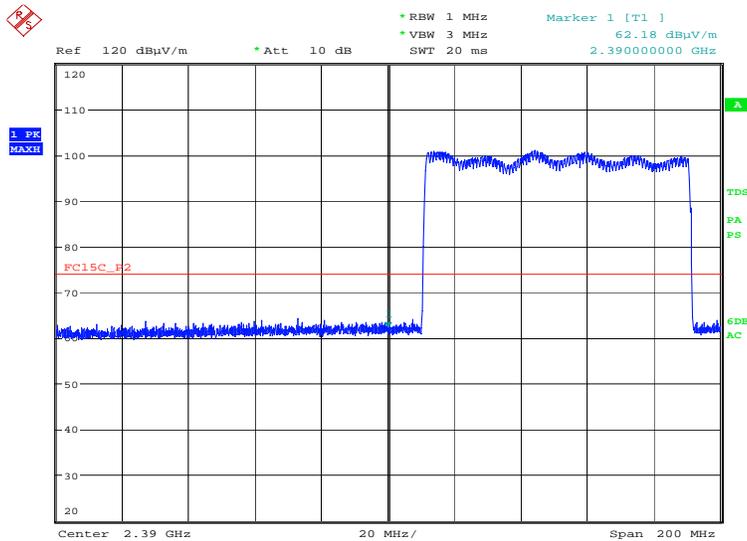


Date: 28.AUG.2016 10:06:30




Product Service

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, pi/4 DQPSK, Final Average, Restricted Band Edges Plot

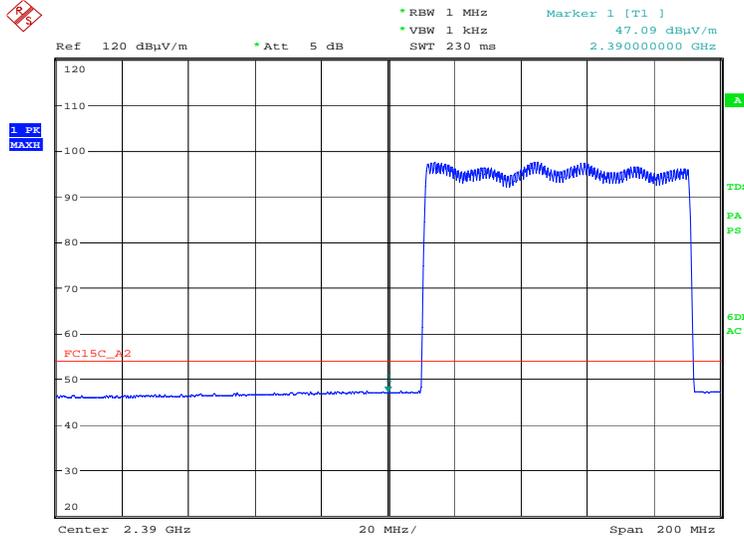

Date: 28.AUG.2016 10:02:20

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, pi/4 DQPSK, Final Peak, Restricted Band Edges Plot

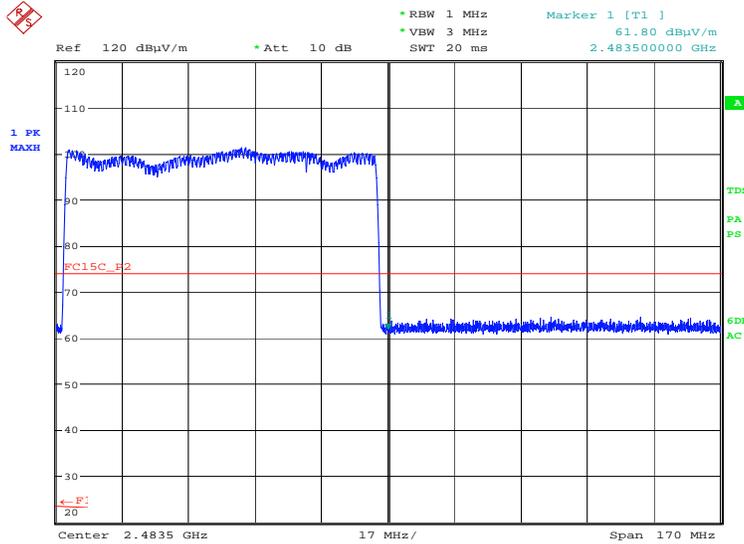


Date: 28.AUG.2016 09:21:20



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, pi/4 DQPSK, Final Average, Restricted Band Edges Plot

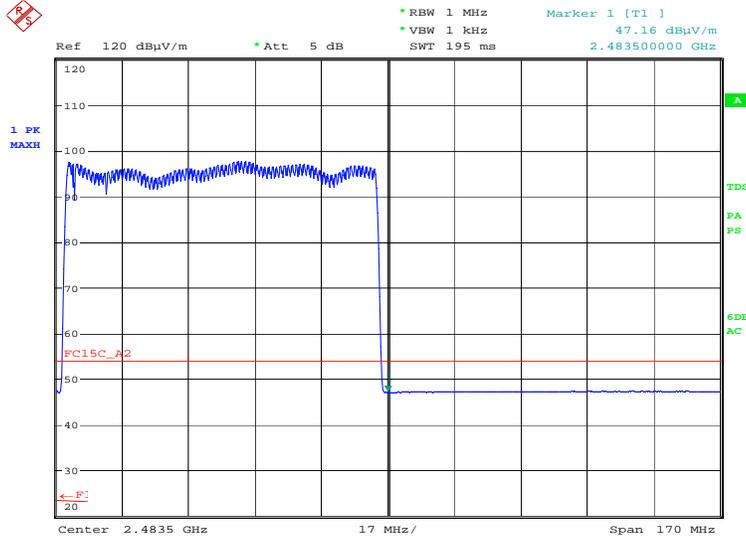

Date: 28.AUG.2016 09:19:59




Product Service

Bluetooth, 8-DPSK, Restricted Band Edges Results

2402 MHz		2480 MHz	
Measured Frequency 2390 MHz		Measured Frequency 2483.5 MHz	
dBµV/m		dBµV/m	
Final Peak	Final Average	Final Peak	Final Average
61.92	46.20	61.48	46.22


Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, 8-DPSK, Final Peak, Restricted Band Edges Plot

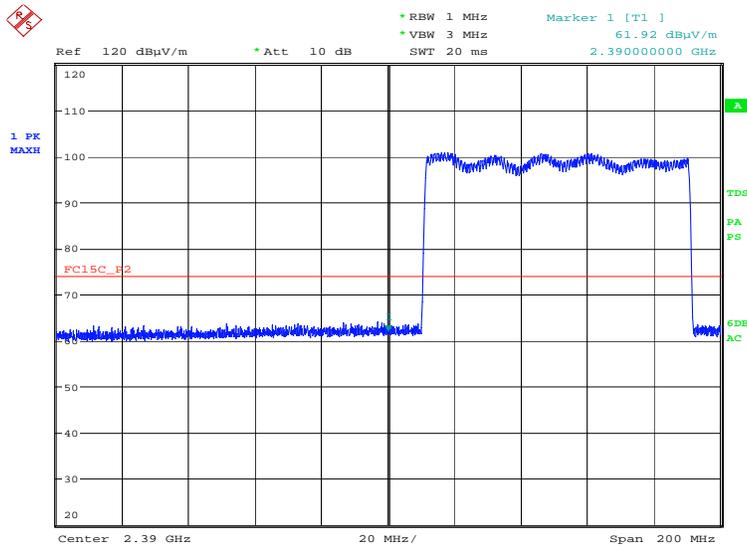

Date: 28.AUG.2016 10:52:55




Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, 8-DPSK, Final Average, Restricted Band Edges Plot

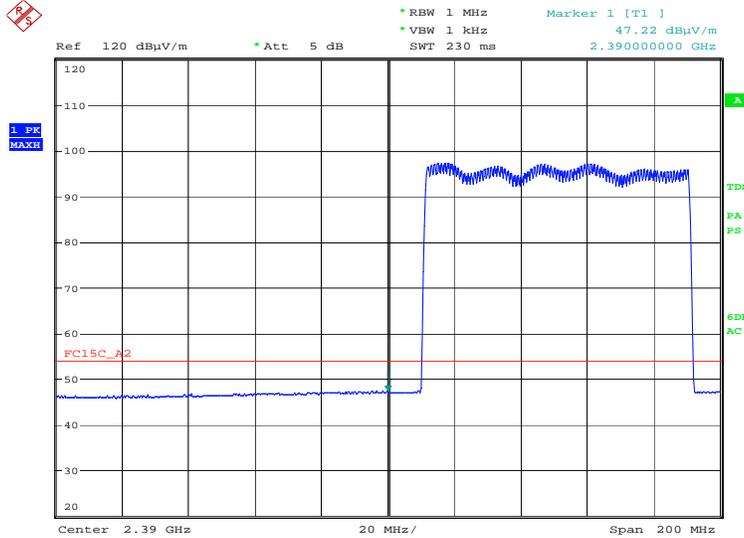

Date: 28.AUG.2016 10:55:39

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, 8-DPSK, Final Peak, Restricted Band Edges Plot

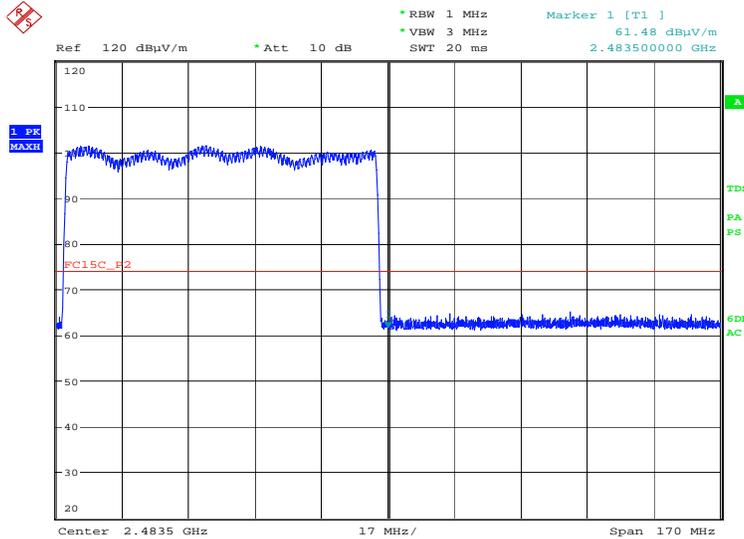


Date: 28.AUG.2016 11:04:37



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, 8-DPSK, Final Average, Restricted Band Edges Plot

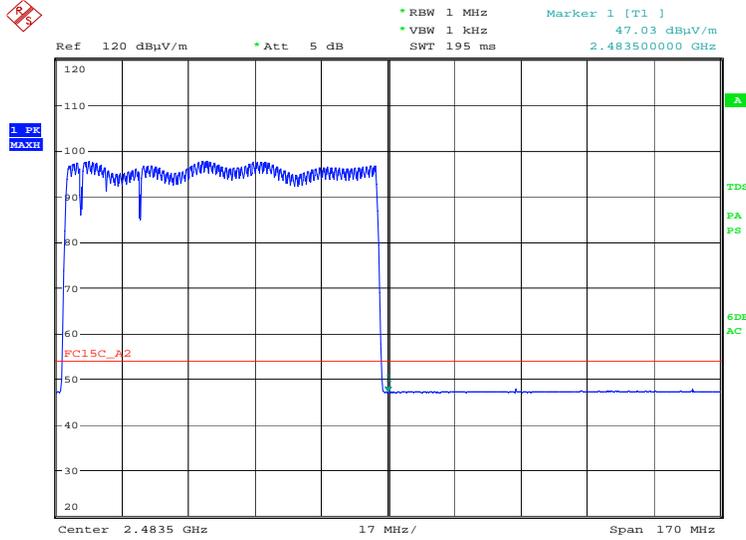

Date: 28.AUG.2016 11:03:17




Static Mode

Bluetooth, GFSK, Restricted Band Edges Results

2402 MHz		2480 MHz,	
Measured Frequency 2390 MHz		Measured Frequency 2483.5 MHz	
dBµV/m		dBµV/m	
Final Peak	Final Average	Final Peak	Final Average
62.06	46.22	61.96	46.46

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, GFSK, Final Peak, Restricted Band Edges Plot

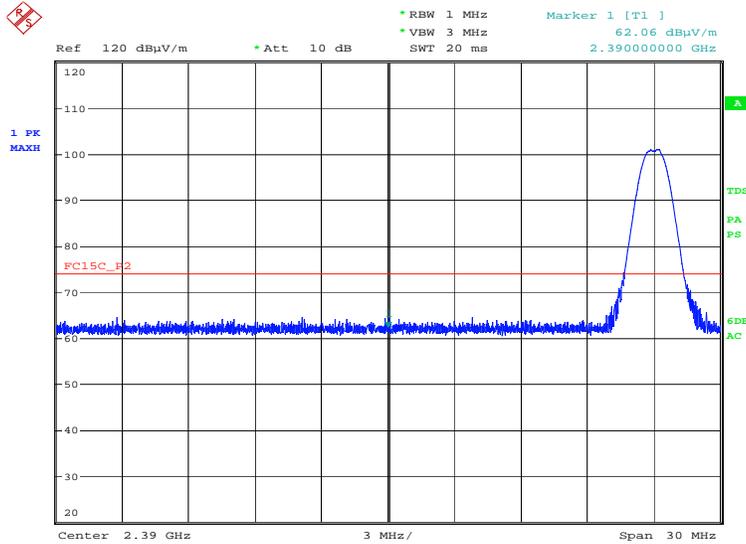


Date: 24.AUG.2016 22:52:21




Product Service

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, GFSK, Final Average, Restricted Band Edges Plot

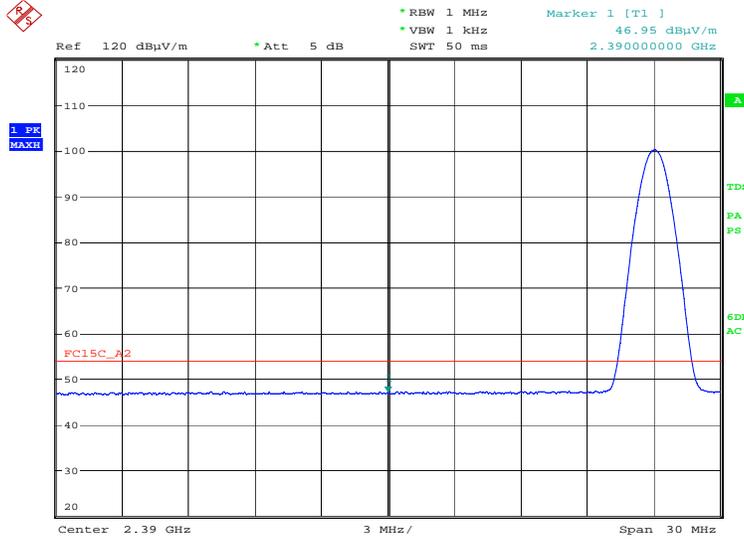

Date: 24.AUG.2016 22:53:41

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, GFSK, Final Peak, Restricted Band Edges Plot

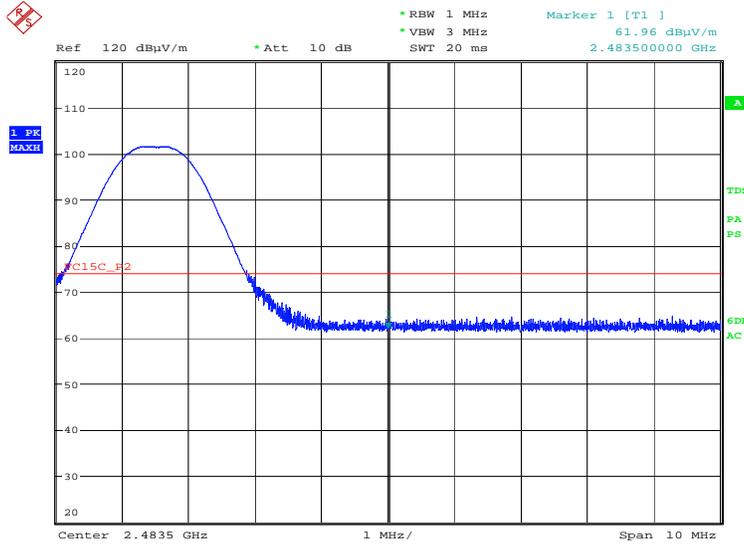


Date: 24.AUG.2016 22:43:21



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, GFSK, Final Average, Restricted Band Edges Plot

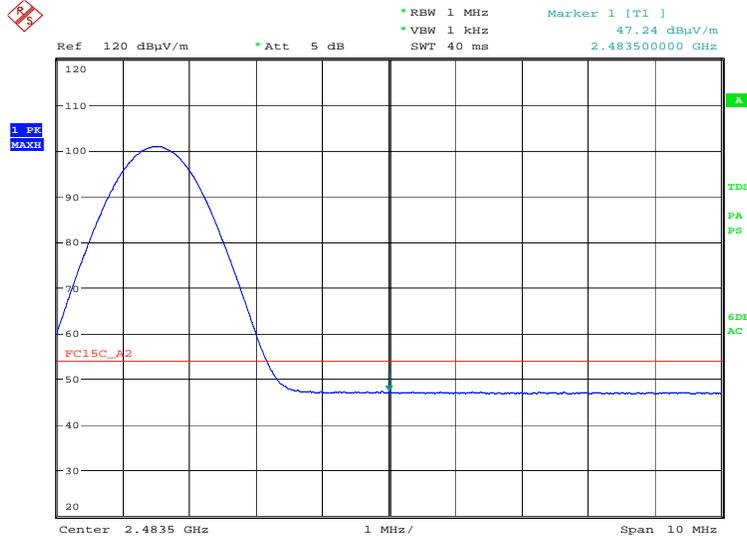

Date: 24.AUG.2016 22:43:52




Product Service

Bluetooth, pi/4 DQPSK, Restricted Band Edges Results

2402 MHz		2480 MHz,	
Measured Frequency 2390 MHz		Measured Frequency 2483.5 MHz	
dBµV/m		dBµV/m	
Final Peak	Final Average	Final Peak	Final Average
61.42	46.25	61.99	46.48

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, pi/4 DQPSK, Final Peak, Restricted Band Edges Plot

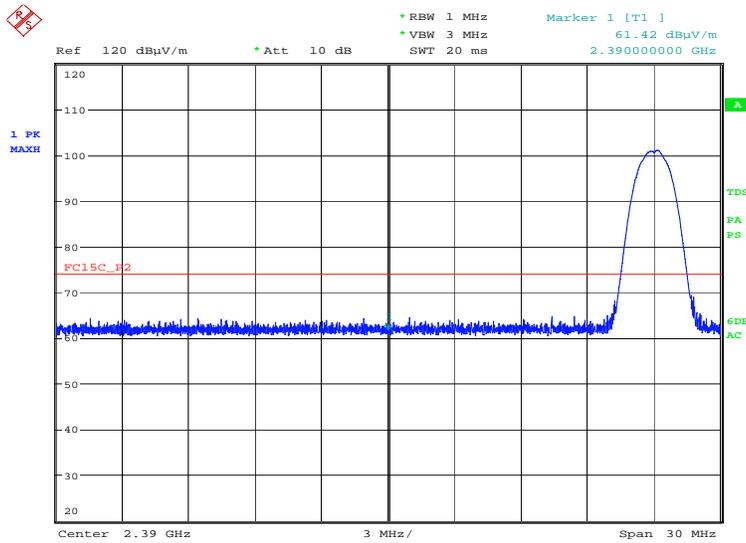


Date: 24.AUG.2016 23:01:05




Product Service

Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, pi/4 DQPSK, Final Average, Restricted Band Edges Plot

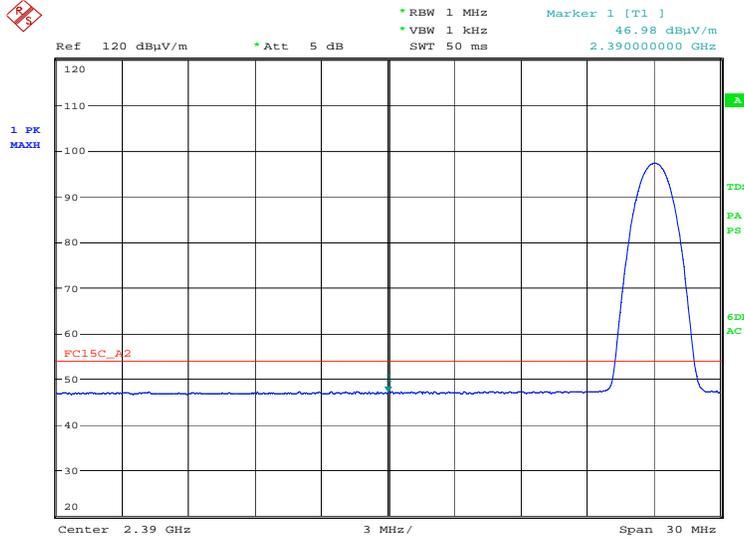

Date: 24.AUG.2016 22:59:55

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, pi/4 DQPSK, Final Peak, Restricted Band Edges Plot

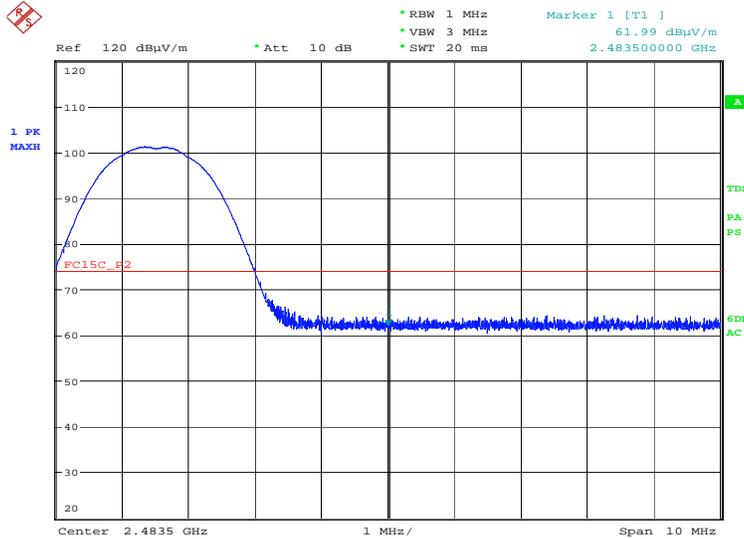


Date: 24.AUG.2016 23:06:42



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, pi/4 DQPSK, Final Average, Restricted Band Edges Plot

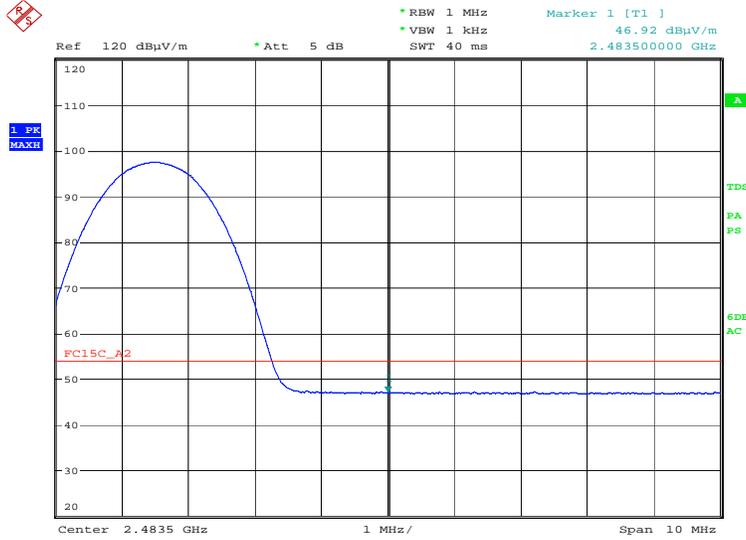

Date: 24.AUG.2016 23:07:21




Product Service

Bluetooth, 8-DPSK, Restricted Band Edges Results

2402 MHz		2480 MHz	
Measured Frequency 2390 MHz		Measured Frequency 2483.5 MHz	
dBµV/m		dBµV/m	
Final Peak	Final Average	Final Peak	Final Average
61.57	46.20	61.54	46.47


Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, 8-DPSK, Final Peak, Restricted Band Edges Plot

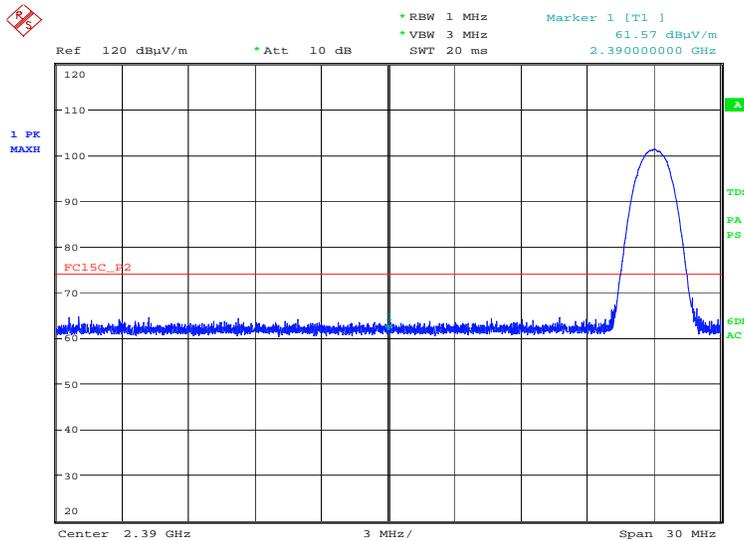

Date: 24.AUG.2016 23:19:12




Bluetooth, 2402 MHz, Measured Frequency 2390 MHz, 8-DPSK, Final Average, Restricted Band Edges Plot

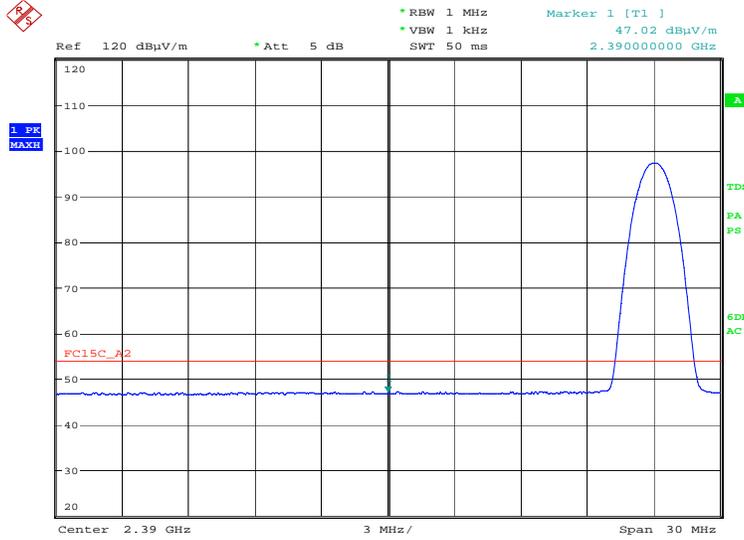

Date: 24.AUG.2016 23:19:43

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, 8-DPSK, Final Peak, Restricted Band Edges Plot

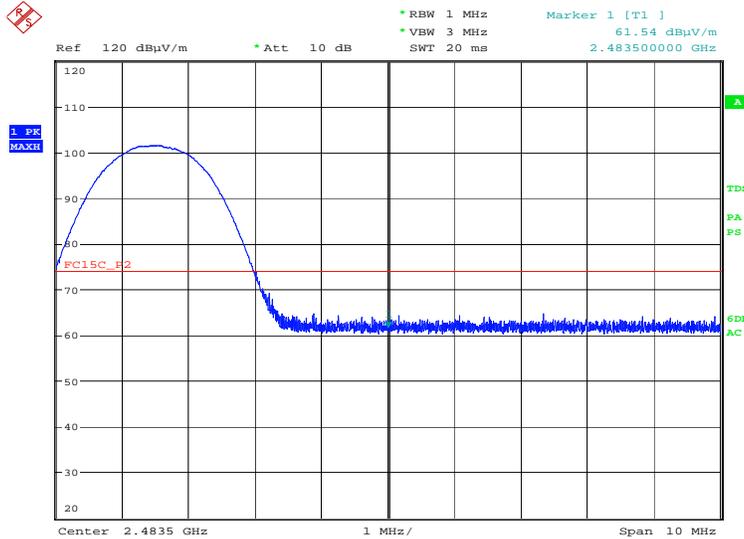


Date: 24.AUG.2016 23:23:48



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.5 MHz, 8-DPSK, Final Average, Restricted Band Edges Plot

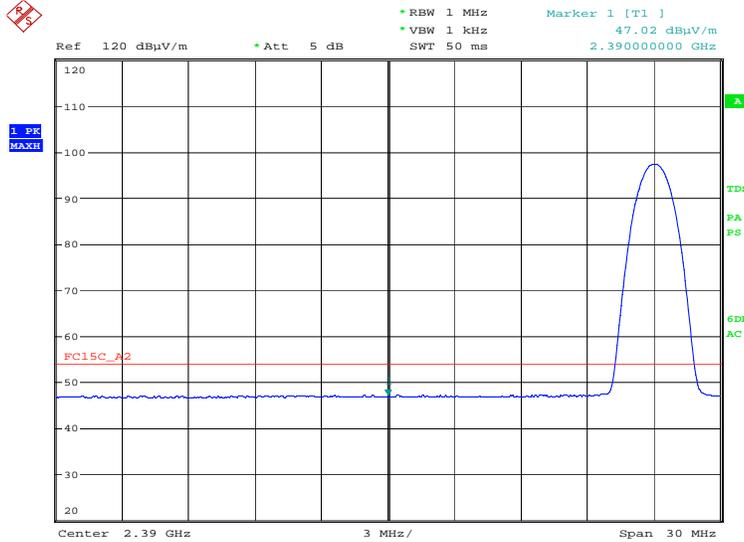

Date: 24.AUG.2016 23:19:43

Remarks

Final average results shown in the tables above were recorded using a CISPR average detector as described in ANSI C63.10 clause 4.1.2. In order to determine the maximum emissions with the restricted band near the band edge, the method described in ANSI C63.10 clause 6.10.5.2 has been used and these plots are included in the report

Testing was performed on the bottom and top channels using GFSK modulation because this was the modulation which produced the highest level of conducted average power.

Testing was performed on the bottom channel using pi/4 DQPSK modulation because this was the modulation which produced the widest value of 20 dB bandwidth.

Testing was performed on the top channel using 8-DPSK modulation because this was the modulation which produced the widest value of 20 dB bandwidth.

FCC 47 CFR Part 15, Limit Clause 15.205

	Peak (dBuV/m)	Average (dBuV/m)
Restricted Bands of Operation	74	54



Product Service

2.9 AUTHORISED BAND EDGES

2.9.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (d)

2.9.2 Equipment Under Test and Modification State

S/N: IMEI 004401115905446 - Modification State 0

2.9.3 Date of Test

24 August 2016 & 28 August 2016

2.9.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.9.5 Test Procedure

Testing was performed in accordance with ANSI C63.10, clause 6.10.4.

2.9.6 Environmental Conditions

Ambient Temperature	19.6 - 20.9°C
Relative Humidity	65.0 - 69.0%



Product Service

2.9.7 Test Results


4.0 V DC Supply

Hopping Mode

Bluetooth, GFSK, Authorised Band Edges Results

2402 MHz	2480 MHz
Measured Frequency 2400.00 MHz	Measured Frequency 2483.50 MHz
dBµV/m	dBµV/m
Final Peak	Final Peak
51.71	52.38

Bluetooth, 2402 MHz, Measured Frequency 2400.00 MHz, GFSK, Final Peak, Authorised Band Edges Plot

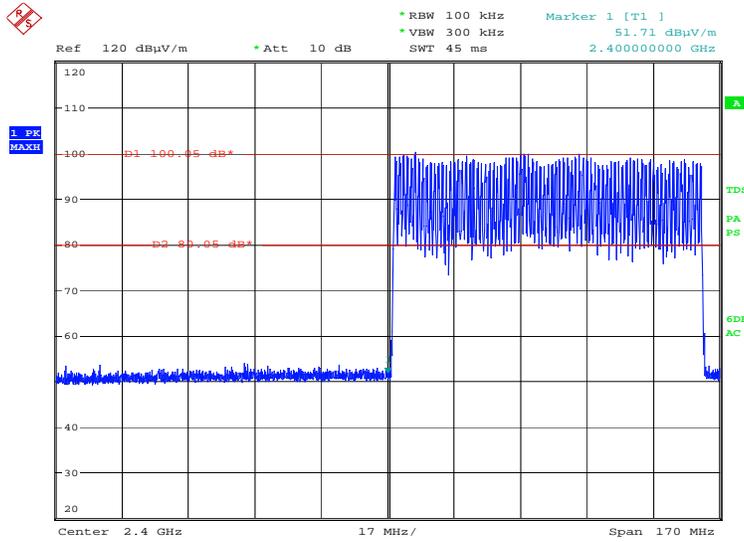

Date: 28.AUG.2016 10:22:10




Product Service

Bluetooth, pi/4 DQPSK, Authorised Band Edges Results

2402 MHz	2480 MHz
Measured Frequency 2400.00 MHz	Measured Frequency 2483.50 MHz
dBµV/m	dBµV/m
Final Peak	Final Peak
52.96	51.56

Bluetooth, 2402 MHz, Measured Frequency 2400.00 MHz, pi/4 DQPSK, Final Peak, Authorised Band Edges Plot

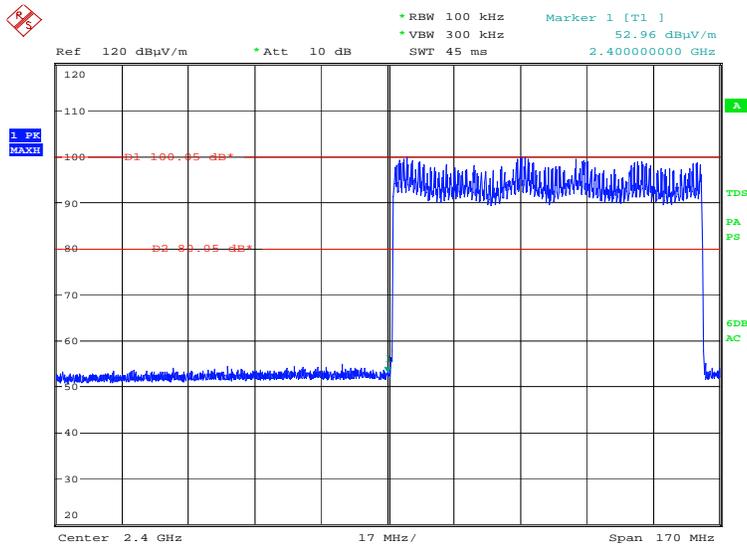


Date: 28.AUG.2016 10:39:30



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.50 MHz, pi/4 DQPSK, Final Peak, Authorised Band Edges Plot

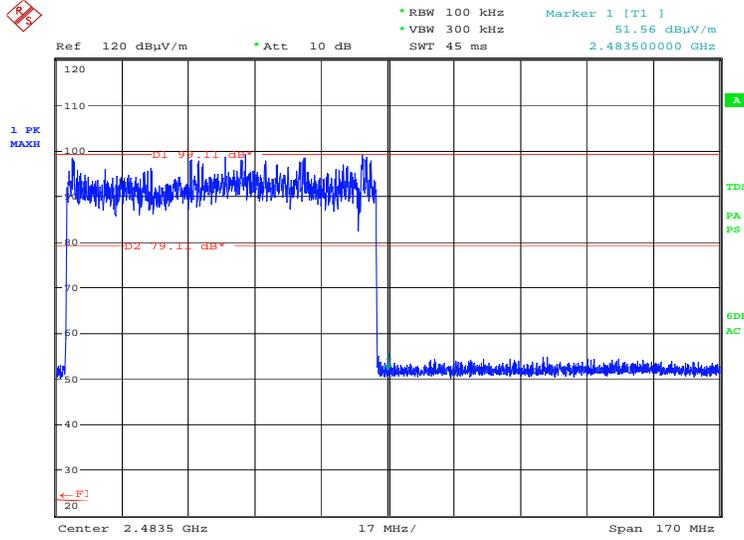

Date: 28.AUG.2016 09:23:05




Product Service

Bluetooth, 8-DPSK, Authorised Band Edges Results

2402 MHz	2480 MHz
Measured Frequency 2400.00 MHz	Measured Frequency 2483.50 MHz
dBµV/m	dBµV/m
Final Peak	Final Peak
51.48	52.22

Bluetooth, 2402 MHz, Measured Frequency 2400.00 MHz, 8-DPSK, Final Peak, Authorised Band Edges Plot

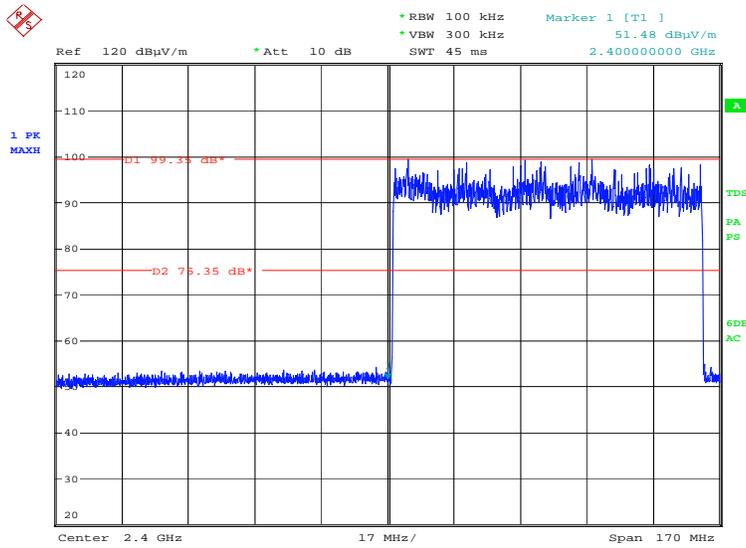


Date: 28.AUG.2016 10:51:40



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.50 MHz, 8-DPSK, Final Peak, Authorised Band Edges Plot

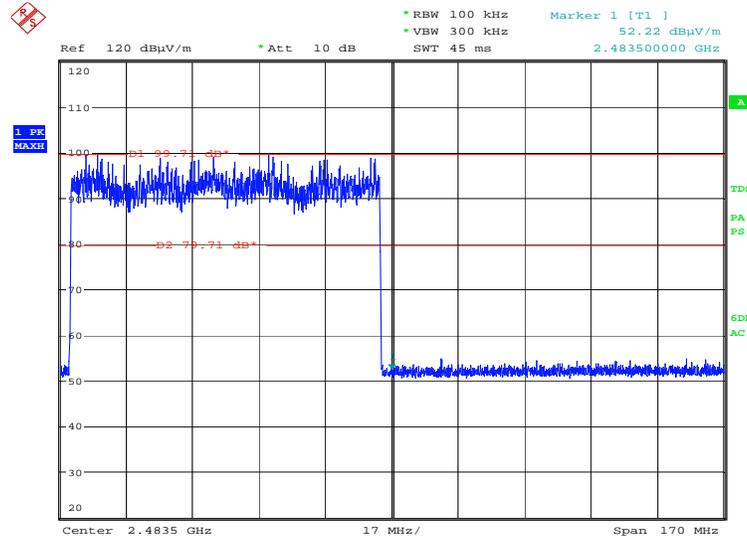

Date: 28.AUG.2016 11:06:57




Product Service

Static Mode

Bluetooth, GFSK, Authorised Band Edges Results

2402 MHz	2480 MHz
Measured Frequency 2400.00 MHz	Measured Frequency 2483.50 MHz
dBµV/m	dBµV/m
Final Peak	Final Peak
51.04	51.32

Bluetooth, 2402 MHz, Measured Frequency 2400.00 MHz, GFSK, Final Peak, Authorised Band Edges Plot

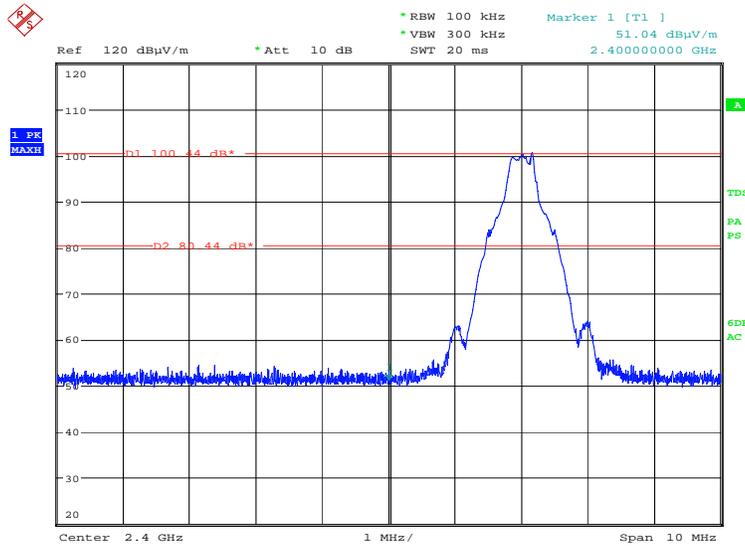


Date: 24.AUG.2016 22:51:00



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.50 MHz, GFSK, Final Peak, Authorised Band Edges Plot

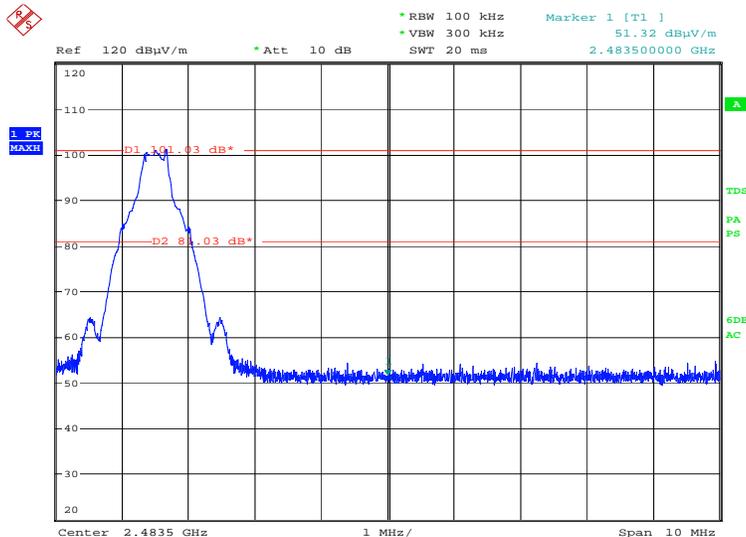

Date: 24.AUG.2016 22:45:45




Product Service

Bluetooth, pi/4 DQPSK, Authorised Band Edges Results

2402 MHz	2480 MHz
Measured Frequency 2400.00 MHz	Measured Frequency 2483.50 MHz
dBµV/m	dBµV/m
Final Peak	Final Peak
51.42	51.21

Bluetooth, 2402 MHz, Measured Frequency 2400.00 MHz, pi/4 DQPSK, Final Peak, Authorised Band Edges Plot

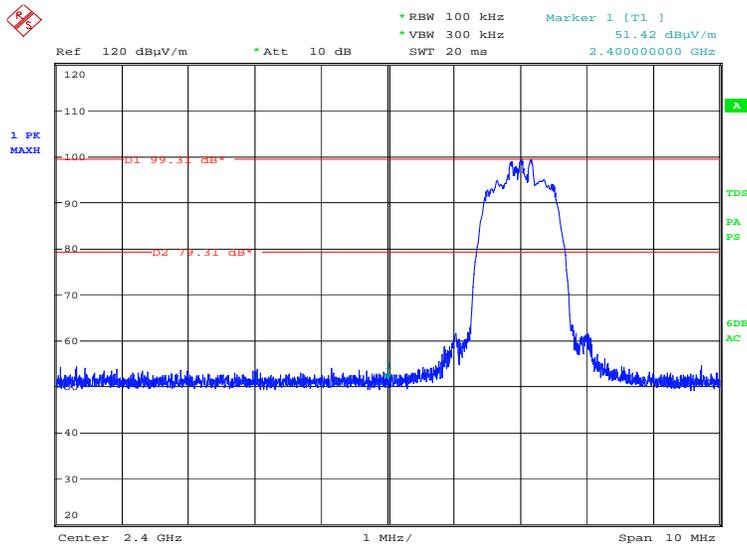


Date: 24.AUG.2016 23:02:11



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.50 MHz, pi/4 DQPSK, Final Peak, Authorised Band Edges Plot

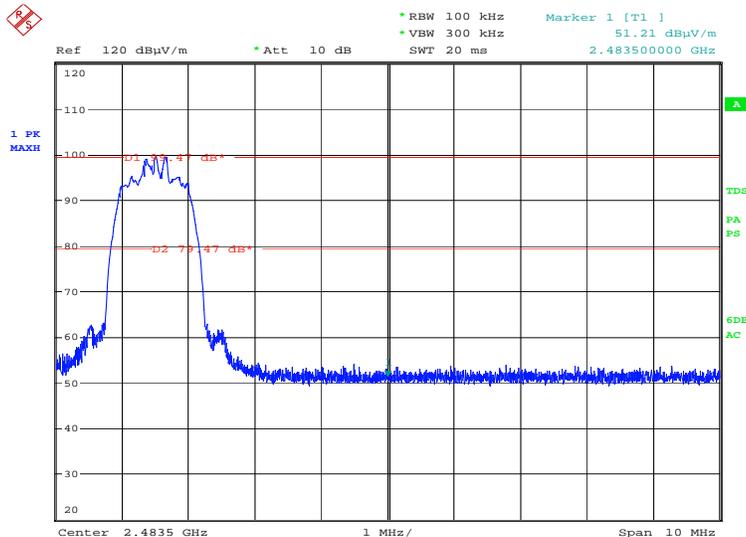

Date: 24.AUG.2016 23:05:30




Product Service

Bluetooth, 8-DPSK, Authorised Band Edges Results

2402 MHz	2480 MHz
Measured Frequency 2400.00 MHz	Measured Frequency 2483.50 MHz
dBµV/m	dBµV/m
Final Peak	Final Peak
50.99	50.86

Bluetooth, 2402 MHz, Measured Frequency 2400.00 MHz, 8-DPSK, Final Peak, Authorised Band Edges Plot

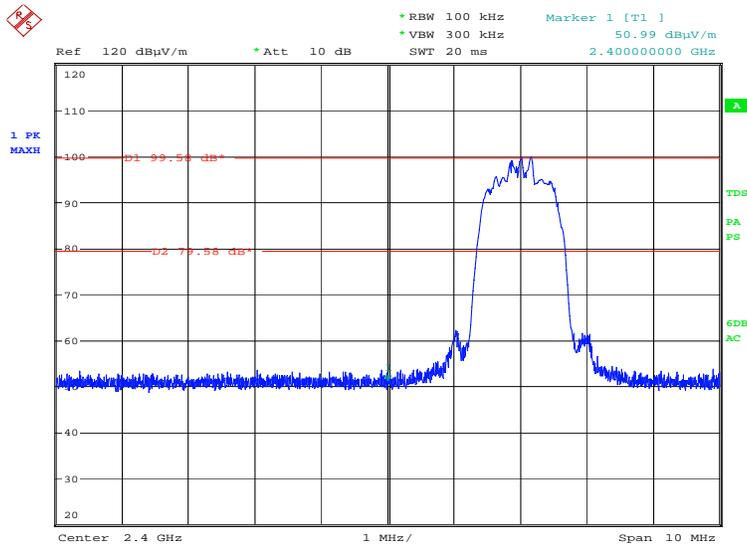


Date: 24.AUG.2016 23:18:10



Product Service

Bluetooth, 2480 MHz, Measured Frequency 2483.50 MHz, 8-DPSK, Final Peak, Authorised Band Edges Plot

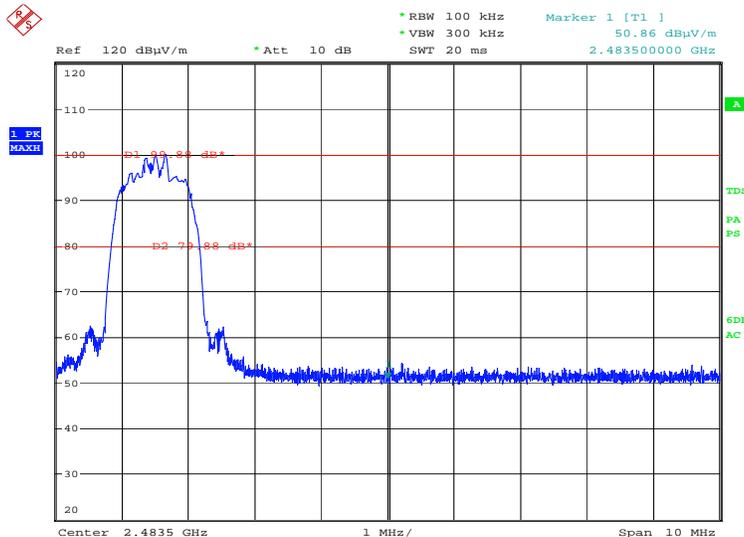

Date: 24.AUG.2016 23:25:05

Remark

Testing was performed on the bottom and top channels using GFSK modulation because this was the modulation which produced the highest level of conducted average power.

Testing was performed on the bottom channel using pi/4 DQPSK modulation because this was the modulation which produced the widest value of 20 dB bandwidth.

Testing was performed on the top channel using 8-DPSK modulation because this was the modulation which produced the widest value of 20 dB bandwidth.

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 – AC Line Conducted Emissions					
LISN	Rohde & Schwarz	ESH2-Z5	17	12	11-Feb-2017
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Transient Limiter	Hewlett Packard	11947A	2378	12	6-Jul-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
Digital thermo Hygrometer	Radio Spares	1260	4300	12	23-Aug-2017
2 metre SMA Cable	Florida Labs	SMS-235SP- 78.8-SMS	4517	12	16-Feb-2017
Section 2.2 - Frequency Hopping Systems - Number of Hopping Channels					
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Attenuator (20dB, 1W)	Seaelectro	60-674-1020-89	1506	-	TU
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	27-Apr-2017
1 metre K-Type Cable	Florida Labs	KMS-180SP- 39.4-KMS	4519	12	16-Feb-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4654	12	8-Oct-2016
2 Channel PSU	Rohde & Schwarz	HMP2020	4735	-	TU
Section 2.3 - Frequency Hopping Systems - 20 dB Bandwidth					
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Hygrometer	Rotronic	I-1000	3220	12	23-Aug-2017
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
2 metre SMA Cable	Florida Labs	SMS-235SP- 78.8-SMS	4518	12	16-Feb-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4654	12	8-Oct-2016
Section 2.4 - Frequency Hopping Systems - Channel Separation					
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Attenuator (20dB, 1W)	Seaelectro	60-674-1020-89	1506	-	TU
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
1 metre K-Type Cable	Florida Labs	KMS-180SP- 39.4-KMS	4519	12	16-Feb-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4654	12	8-Oct-2016



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.5 - Frequency Hopping Systems - Average Time of Occupancy					
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Attenuator (20dB, 1W)	Seaelectro	60-674-1020-89	1506	-	TU
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
1 metre K-Type Cable	Florida Labs	KMS-180SP- 39.4-KMS	4519	12	16-Feb-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4654	12	8-Oct-2016
2 Channel PSU	Rohde & Schwarz	HMP2020	4735	-	TU
Section 2.6 - Maximum Conducted Output Power					
Radio Communications Test Set	Rohde & Schwarz	CMU 200	442	12	18-Jan-2017
Multimeter	Fluke	75 Mk3	455	12	10-Sep-2016
20dB/2W Attenuator	Narda	4772-20	462	-	TU
Rubidium Standard	Rohde & Schwarz	XSRM	1316	6	3-Sep-2016
Hygrometer	Rotronic	I-1000	3220	12	19-Aug-2016
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	2-Sep-2016
Combiner/Splitter	Weinschel	1506A	3878	12	7-Jun-2017
P-Series Power Meter	Agilent Technologies	N1911A	3980	12	25-Sep-2016
50 MHz-18 GHz Wideband Power Sensor	Agilent Technologies	N1921A	3982	12	25-Sep-2016
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	7-Sep-2016
Frequency Standard	Spectracom	Secure Sync 1200-0408-0601	4393	6	3-Sep-2016
Wideband Radio Test Set	Rohde & Schwarz	CMW500	4546	12	3-Feb-2017
PXA Signal Analyser	Keysight Technologies	N9030A	4653	12	8-Oct-2016
2 Channel PSU	Rohde & Schwarz	HMP2020	4735	-	TU



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.7 - Spurious Radiated Emissions					
Antenna 18-40GHz (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	12-Feb-2018
Pre-Amplifier	Phase One	PS04-0086	1533	12	29-Jul-2017
18GHz - 40GHz Pre-Amplifier	Phase One	PSO4-0087	1534	12	23-Dec-2016
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	11-Jun-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Digital thermo Hygrometer	Radio Spares	1260	4300	12	23-Aug-2017
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	6-Oct-2016
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	27-Apr-2017
Suspended Substrate Highpass Filter	Advance Power Components	11SH10-3000/X18000-O/O	4411	12	23-Mar-2017
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	-	TU
Cable (Rx, SMAm-SMAm 0.5m)	Scott Cables	SLSLL18-SMSM-00.50M	4528	6	3-Feb-2017
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016
Section 2.8 - Restricted Band Edges					
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	matur GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	matur GmbH	NCD	3917	-	TU
Digital thermo Hygrometer	Radio Spares	1260	4300	12	23-Aug-2017
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	27-Apr-2017
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	-	TU
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016



Product Service

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.9 - Authorised Band Edges					
Screened Room (5)	Rainford	Rainford	1545	36	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	2-Nov-2016
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturu GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturu GmbH	NCD	3917	-	TU
Digital thermo Hygrometer	Radio Spares	1260	4300	12	23-Aug-2017
Hygropalm Temperature and Humidity Meter	Rotronic	HP21	4410	12	27-Apr-2017
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	-	TU
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	29-Dec-2016

TU – Traceability Unscheduled



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Frequency Hopping Systems - 20 dB Bandwidth	± 16.74 kHz
Frequency Hopping Systems - Number of Hopping Channels	-
Frequency Hopping Systems - Average Time of Occupancy	-
AC Line Conducted Emissions	± 3.2 dB
Maximum Conducted Output Power	± 0.70 dB
Authorised Band Edges	Conducted: ± 3.08 dB Radiated: 30 MHz to 1 GHz: ± 5.1 dB Radiated: 1 GHz to 40 GHz: ± 6.3 dB
Restricted Band Edges	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.1 dB 1 GHz to 40 GHz: ± 6.3 dB
Frequency Hopping Systems - Channel Separation	± 16.74 kHz



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2016 TÜV SÜD Product Service